W-L-00111/20
April 21, 1975

# INTERIM FEDERAL SPECIFICATION SHEET

## LAMP, INCANDESCENT, SUB-MINIATURE

## TRADE NO. 6833, T-3/4 CLEAR BULB, INTEGRAL LIGHTING, WIRE TERMINAL, C-2R FILAMENT.

## (DETAIL SPECIFICATION)

The complete requirements for Lamp, Incandescent described herein shall consist of this document and W-L-00111D.

This Interim Federal Specification Sheet was developed by General Services Administration, Federal Supply Service, Mechanical and Electrical Division, Washington, D. C. 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for change to the preparing activity at the address shown above.

The General Services Administration has authorized the use of this Interim Federal specification sheet as a valid exception to W-L-111C, dated February 11, 1958.

I. REQUIREMENTS:

| Trade No. | Rated volts | Rated Current (amperes) | Current tolerance % | Initial spherical candle-power (SCP) | Initial SCP tolerance % | Minimum required life (hours) | Design life (hours) * |
|---|---|---|---|---|---|---|---|
| 6833 | 5.0 | .060 | ± 10 | .05 | ± 15 | 4,000 | 100,000 |

A. Dimensions:

(SEE DRAWING ON REVERSE SIDE) (ALL DIMENSIONS ARE IN INCHES)

B. Electrical and Photometris Test Voltage - 5.0 Volts DC.

C. Life Test Voltage - 5.0 Volts AC.


D. The maintained SCP at 1,000 hours for each individual lamp shall be not less than 80% of the initial SCP.

E. Acceptance Criteria Code - Code B.

* For information only

FSC 6240

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:23Z
Check the source to verify that this is the current version before use.

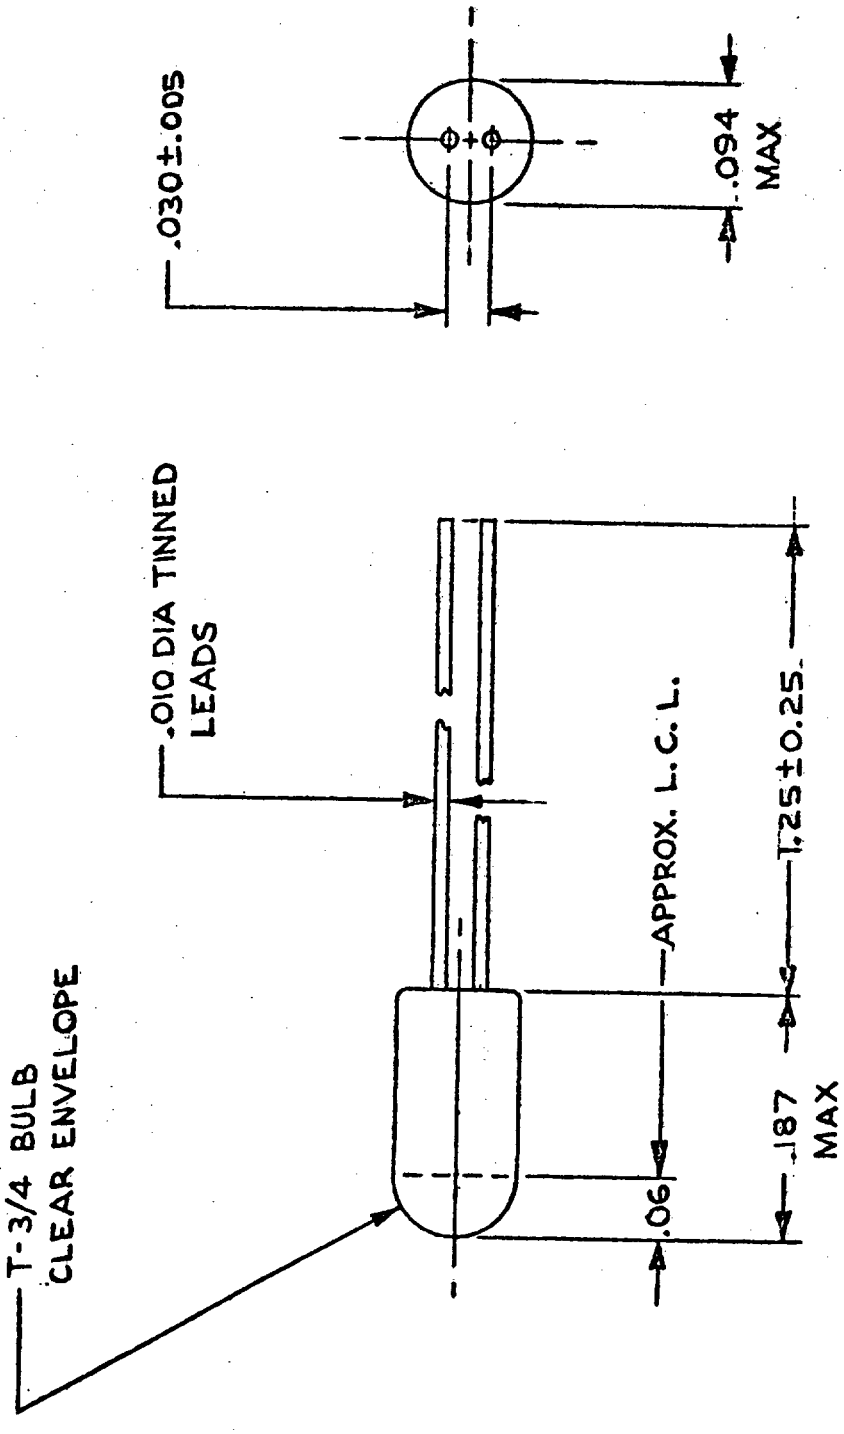


44



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:23Z
Check the source to verify that this is the current version before use.