W-L-00111/2
April 21, 1975

INTERIM FEDERAL SPECIFICATION SHEET

LAMP, INCANDESCENT, SUB-MINIATURE

TRADE NO. 327R, T-1 3/4 CLEAR RED BULB, SINGLE CONTACT MIDGET FLANGED BASE, C-2F FILAMENT

(DETAIL SPECIFICATION)

The complete requirements for Lamp, incandescent described herein shall consist of this document and W-L-00111D.

This Interim Federal Specification Sheet was developed by General Services Administration, Federal Supply Service, Mechanical and Electrical Division, Washington, D. C. 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for change to the preparing activity at the address shown above.

The General Services Administration has authorized the use of this Interim Federal specification Sheet as a valid exception to W-L-111C, dated February 11, 1958.

I. REQUIREMENTS:

Trade No.	Design volts	Design current (amperes)	Current Tolerance %	Initial spherical candle-power (SCP)	Initial SCP Tolerance %	Average Life (hours)
327R	28.0	.04	+10	.03	±50	1,000

A. Dimensions:

(SEE DRAWING ON REVERSE SIDE) (ALL DIMENSIONS ARE IN INCHES)

B. Electrical and Photometric Test Voltage - 28.0 Volts DC.


C. Life Test Voltage - 28.0 Volts AC.

D. Light emitted by this lamp shall conform to Mil-C-25050A for instrument and panel lighting red except that it shall not be paler or yellower than NBS No.3215 Filter. The color may be attained by either colored glass or a coating on the glass.

E. Acceptance Criteria Code - B.

FSC 6240

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:23Z
Check the source to verify that this is the current version before use.

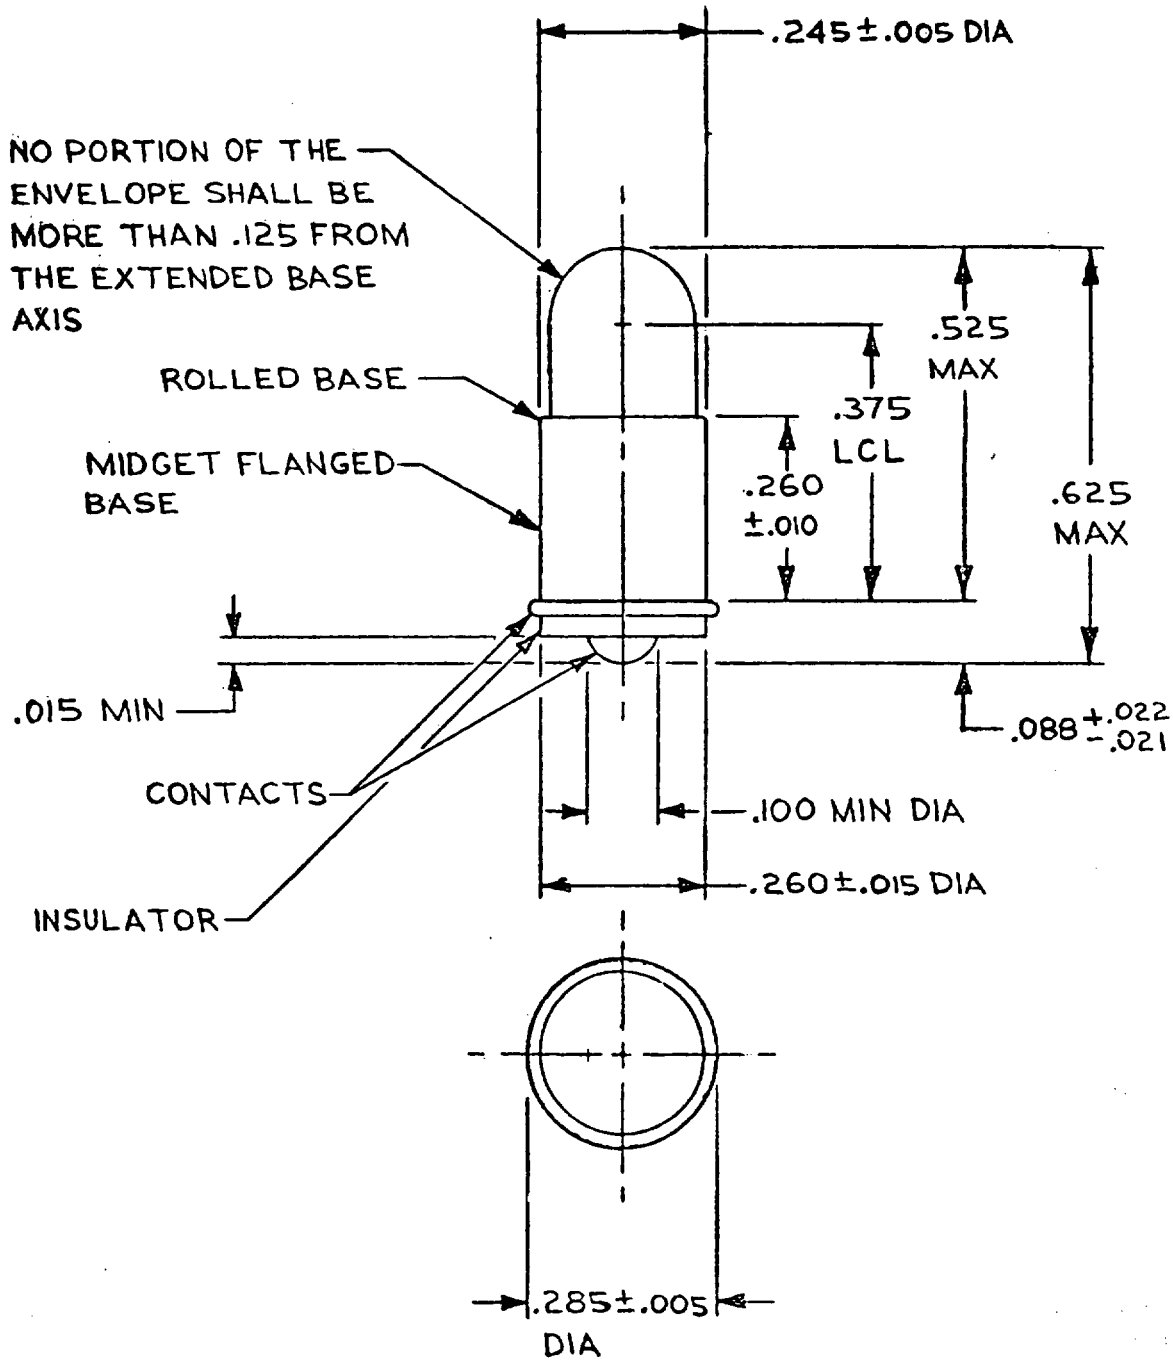

12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:23Z
Check the source to verify that this is the current version before use.