INCH-POUND

MIL-B-87258 (USAF)
2 AUGUST 1991
SUPERSEDING
A-A-50783A
22 October 1984

MILITARY SPECIFICATION
BAG, SLEEPING, ARCTIC SURVIVAL, PRESSURE/VACUUM PACKED

This specification is approved for use within the Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a mummy shaped, arctic survival sleeping bag used in cold weather aircraft survival kits. The pressure/vacuum packed sleeping bags are available in one size, 12 x 12 x 1-1/2 inches with a +1/8 inch tolerance.

2. APPLICABLE DOCUMENTS

2.1 Government documents

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks for a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-50199	Thread, Polyester Core, Cotton- or Polyester-Covered
V-F-106	Fastener, Slide, Interlocking
DDD-L-20	Label: For Clothing, Equipage, and Tentage, (General Use)
PPP-B-636	Boxes, Shipping, Fiberboard

MILITARY

MIL-C-5040	Cord, Fibrous, Nylon

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: SA-ALC/TIRDM, Kelly AFB TX 78241-5000 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8465

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:54Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-191	Textile Test Methods
FED-STD-595	Colors Used In Government Procurements
FED-STD-751	Stitches, Seams, and Stitching

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-147	Palletized Unit Loads
MIL-STD-810	Environmental Test Methods and Engineering Guidelines
MIL-STD-1189	Standard Department of Defense Bar Code Symbology
MIL-STD-2073-1	DoD Materiel Procedures for Development and Application of Packaging Requirements
MIL-STD-2073-2	Packaging Requirement Codes

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Bldg 4D, 700 Robbins Ave., Philadelphia PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

FEDERAL TRADE COMMISSION

FTC 148A	Guides for the Feather and Down Products Industry

(Application for copies should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington DC 20402-0001.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D 3951	Standard Package for Commercial Packaging (DoD adopted)

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia PA 19103-1187.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:54Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 4.4) in accordance with (6.3).

3.2 Materials. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

3.2.1 Shell material. The inner and outer shell fabric shall be a 1.1 ±0.2 oz/yd^2 ripstop, 30 denier, 10 filament warp and fill with 7.5 ±0.5 repeats per inch nylon woven fabric laminated with a microporous polytetrafluoroethylene (PTFE) film of a maximum of 0.7 oz/yd^2. Maximum weight of the fabric shall be 2.2 oz/yd^2. The fabric shall be treated with Zepel or equal .

3.2.2 Baffling material. The baffling material shall be a 1.0 ±0.1 oz/yd^2, 20 denier, single-warp-knit stitch tricot knit fabric with 190 yarns per inch minimum in the warp direction and 32 yarns per inch width in the filling direction.

3.2..3 Insulating material. The filling material shall be prime goose down with 80 percent or better down density cluster count and have a filling power rating of 600 or greater per Feather and Down Association, Inc., and Federal Trade Commission Guidelines. The insulating material shall provide the environmental protection required in 3.10. Alternate materials may be used providing all other provisions of this document are met.

3.2.4 Slide fastener. The slide fastener shall be a #10 continuous monofilament nylon coil type with double reversible metal sliders conforming to V-F-106. The zipper shall be free running for emergency exit. The length of the slide fastener shall be a minimum of 65 inches.

3.2.5 Thread. The thread for seaming and stitching shall be No. 50, 2 ply, conforming to A-A-50199.

3.2.6 Nylon cord. The nylon drawcord shall conform to type II of MIL-C-5040 and the color shall be sage green.

3.2.7 Instruction sheets. The user instructions shall be legibly printed on a white, pressure sensitive vinyl label with black printing, attached to the outside of the inner container. The container shall include necessary instructions for opening, fluffing, and general use/care of the sleeping bag and also have some type of protective cover made of durable cloth or plastic. The instructions shall be as follows:

USER INSTRUCTIONS

1. KEEP THE BAG DRY:

a. SELECT THE DRIEST GROUND AND IF POSSIBLE, KEEP THE BAG OUT OF THE RAIN.

b. BREATHE THROUGH FACE OPENING TO PREVENT MOISTURE FROM WETTING THE BAG. IF FACE IS COLD, REDUCE FACE OPENING BY TIGHTENING UP DRAWSTRING.

c. DO NOT WEAR DAMP CLOTHING AND AVOID SWEATING IN BAG. IF TOO WARM, OPEN ZIPPER FOR VENTILATION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:54Z
Check the source to verify that this is the current version before use.

d. OPEN THE BAG COMPLETELY AND AIR THOROUGHLY EACH DAY.

e. IF POSSIBLE, USE A GROUND CLOTH UNDER THE SLEEPING BAG. A LIFE RAFT OR PARACHUTE CAN BE USED FOR THIS, IF AVAILABLE.

2. TO KEEP WARM:

a. FLUFF BAG THOROUGHLY BEFORE USING.

b. IF POSSIBLE, GIVE THE BAG ENOUGH TIME TO LOFT OR EXPAND AFTER IT HAS BEEN FLUFFED.

3. PRECAUTIONS:

a. BE CAREFUL OF SPARKS FROM CAMPFIRES LANDING ON THE SLEEPING BAG.

b. DO NOT SMOKE IN THE SLEEPING BAG.

c. AVOID TEARING OF SLEEPING BAG SHELL BY DRAGGING ACROSS SHARP OBJECTS SUCH AS BRANCHES, STONES, OR SURVIVAL EQUIPMENT. DOWN LEAKAGE WILL OCCUR WITH SUBSEQUENT LOSS IN INSULATING PROPERTIES.

4. ZIPPER OPERATION:

a. WHEN CLOSING ZIPPER, CARE MUST BE TAKEN TO PREVENT THE NYLON SHELL MATERIAL FROM BEING CAUGHT IN ZIPPER TEETH.

5. SECONDARY METHOD OF ENTRY:

a. THE SLEEPING BAG CAN BE ENTERED FROM THE TOP OPENING IF THE ZIPPER BECOMES JAMMED SHUT.

3.2.7.1 Identification marking. The bottom of the label shall contain identification markings conforming to type VI, class 5 of DDD-L-20 and shall include the lot number.

3.3 Design. The arctic sleeping bag shall be a mummy shaped bag with slide fastener closure. The sleeping bag shall be equipped with a quick release locking device for keeping the hood closed. The sleeping bag shall be zipper opened from the inside or outside with a zipper pull tab of approximately 2 inches. The sleeping bag shall be pressure-vacuum packed and packed into a passive container. The passive container shall consist of vacuum packaging inside two envelopes of heat sealable transparent material with a pull tab on each layer for easy opening. The instruction sheet (see 3.2.7) shall be located between layers.

3.4 Color. The color of the sleeping bag shall be Sage Green, No. 34158 of FED-STD-595.

3.5 Construction. The sleeping bag shall be differential-cut construction with all baffling seams, both internal and external, turned and finished to the inside. The bag shall have protective flap(s) secured the length of the zipper.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:54Z
Check the source to verify that this is the current version before use.

3.5.1 Insulation distribution. The sleeping bag shall be insulated with the insulating material evenly distributed throughout the bag with each channel (as formed by the baffling) containing equal and proportionate amounts of the total amount of the insulating material.

3.5.2 Stitches, seams, and stitching. Stitches, seams, and stitching shall conform to FED-STD-751. Stitch type shall be 301; seam type shall be SSa-1; and stitches per inch shall be 8-10.

3.5.2.1 Type 301 stitching. Ends of all stitching shall be backstitched or overstitched 1/2 inch minimum, except when caught in other stitching or turned under in a hem. Thread tension shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread, or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be embedded in the materials sewn.

3.5.2.1.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks or bobbin run-outs occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch back of the end of the stitching (see NOTE).

b. Thread breaks of two or more consecutive skipped or run-off stitches noted during inspection of the item (in-process or end item) shall be repaired by overstitching. The stitching shall start a minimum of 1/2 inch in back of the defective area, and continue a minimum of 1/2 inch beyond the defective area on to the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching, without damaging the materials, and restitching in the required manner.

NOTE: When making the above repairs the ends of the stitching are not required to be backstitched.

3.5.2.1.2 Trimming. All thread ends shall be trimmed to a maximum length of 1 inch.

3.6 Use of automated equipment. Automated equipment may be used to perform any of the operations specified, providing that the seam and stitch types are as specified and the finished component conforms to the requirements specified herein.

3.7 Finished measurements. The measurements of the finished sleeping bag shall be a minimum of 89 inches long by 33 inches wide at the widest point and the minimum width at the bottom shall be 15 inches (see figure 1). The bag shall be laid out flat and the dimensions shall be measured on the outside of the bag. The length shall be measured from the foot to the top of the hood and the width at the chest shall be measured at the widest point with the slide fastener closed.

3.8 Weight. The total weight for the pressure/vacuum packed sleeping bag shall be 6-1/2 pounds avoirdupois weight or less.

3.9 Pressure/vacuum packing. The pressure-vacuum packing process and packing material shall provide packaging capable of passing the temperature/altitude and ease of opening test lists specified in 4.6.2 and 4.6.4. The maximum dimensions, length, width, and depth, shall be as specified in 1.1. While wearing aircrew-type mittens, user must be able to easily remove the sleeping bag from the container, then open, fluff, and enter the sleeping bag. Container opening forces should not exceed 20 pounds.

3.10 Environmental protection. After removal from the packing, the sleeping bag shall have a minimum clo value of 6.2 when tested as specified in 4.6.5.

3.11 Workmanship. The finished sleeping bag shall conform to the quality of product established by this document and the occurrence of defects shall not exceed the applicable acceptable quality levels. Vacuum packing shall not show any sign of loss of vacuum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:54Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Certificate of compliance. When certificates of compliance are submitted, the Government reserves the right to check test such items to determine the reliability of certification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).

b. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified herein.

4.4 First article inspection. When a first article is required (see 3.1 and 6.2), it shall be examined for the defects specified in 4.5.2 and 4.5.3 and tested as specified in 4.5.4. The presence of any defect shall be cause for rejection of the first article.

4.5 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be in accordance with MIL-STD-105.

4.5.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:54Z
Check the source to verify that this is the current version before use.

4.5.2 Intermediate inspection. Prior to pressure/vacuum packing the sleeping bag, it shall be inspected as specified below. The sample unit shall be one sleeping bag, the inspection level shall be S-4 and the acceptable quality level (AQL) shall be 2.5, expressed in defects per hundred units (dhu):

Examine	Defect
Design	Sleeping bag not mummy style with integral hood.
Slide fastener	Less than 65 inches long. Does not have double reversible metal sliders. Not free running.
Color	Not as specified.
Dimensions	Less than 89±0.5 inches long. Less than 33±0.5 inches wide at widest point. Less than 15±0.5 inches wide at the bottom.
Construction and workmanship	Drawstring or drawstring locking device missing. Drawstring locking device not quick release type. Any hole or tear in the sleeping bag fabric. Any piecing, splicing, or repair in materials. Any thread breaks not overstitched. Baffling seam not finished to bag's interior. Any open seam which will allow down to escape. Any open seam more than 1/4 inch which will not allow down to escape. Any spot or stain. Any component missing or not as specified.

4.5.3 Examination of the end item. The end item shall be examined for the defects listed below. The sample unit shall be one complete pressure/vacuum packed sleeping bag. The inspection level shall be S-4 and the AQL shall be 2.5 dhu:

Examine	Defect
Dimensions	Length, width or depth exceeds maximum specified.
Weight	Not as specified.
Instruction sheet and label	Missing, incorrect, incomplete, or illegible. Not located between layers as specified.
Construction and workmanship	Easy opening pull tab missing from either layer of the plastic film container. Not packed in two layers of material. Any visual indications of loss of vacuum, i.e., looseness of the packing materials. Protective cover omitted.
Color	Not as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:54Z
Check the source to verify that this is the current version before use.

4.5.4 End item testing. The end item shall be tested as specified in 4.6.1, 4.6.2, 4.6.3, 4.6.4 and 4.6.5. A certificate of compliance shall be submitted for these tests. The sample unit shall be one complete pressure/vacuum packed sleeping bag. Each sample unit shall be subjected to all the tests and failure of any sample unit to pass all tests shall be cause for rejection of the lot. The lot and sample sizes shall be as follows:

Lot size	Sample size
1 to 50	2
51 to 500	3
501 to 35000	5

4.5.5 Packaging examination. The fully packaged end item shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units (dhu), shall be 2.5.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete sealing or closure of flap, improper taping, loose strapping, or inadequate stapling. Bulged or distorted container.
Content	Number per container is more or less than required.

4.5.6 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 and the AQL shall be 6.5 dhu.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:54Z
Check the source to verify that this is the current version before use.

4.6 Tests

4.6.1 Vibration test. Place a pressure/vacuum packed sleeping bag in the survival kit of an F-15 aircraft, along with the other survival equipment included in the kit. Attach the survival kit solidly to a vibrating machine. Vibrate in accordance with method 514.4, procedure I of MIL-STD-810. The time schedule for each axis X, Y, and Z, without vibration isolators, shall be as follows:

a. Dwell time at each resonance	30 minutes
b. Sinusoidal cycling time	3 hours less dwell time
c. Sweep time	10-500 Hz

After completion of the vibration test, the pressure/vacuum packed sleeping bag shall be removed from the survival kit and examined for any damage. Any damage to the packing material shall constitute failure of the test.

4.6.2 Temperature/altitude test. Place the packed survival kit (with the sleeping bag package installed) in a temperature/altitude chamber. Reduce the air pressure to simulate 50,000 feet and reduce the temperature to -60 °F. Hold at these conditions for 4 hours. At the end of this time, increase the pressure to sea level, increase the temperature to +160 °F and hold for 4 hours. At the end of this 8 hour period (total time elapsed) remove the survival kit from the chamber. Remove the sleeping bag from the survival kit and inspect the sleeping bag packing for any sign of temperature or altitude related damage. Any damage to the sleeping bag package or any damage to the packing material shall constitute failure of the test

4.6.3 Leakage (immersion) test. Inspect the pressure/vacuum packed sleeping bag to verify the integrity of the item. The package shall be at ambient temperature and the temperature of the water shall be +40 °F ±5 °F. The packed sleeping bag shall be placed in the water for a period of 1 hour. At the end of this time, remove the package and verify that no water has entered through the packing material. Any water leaking into the sleeping bag shall constitute failure of the test.

4.6.4 Sleeping bag container opening test. After the temperature/altitude and leakage testing the sleeping bag shall be cold soaked for 4 hours at -60 °F. At the end of this time the sleeping bag shall be opened by pulling firmly with one hand. If the opening force exceeds 20 pounds, it shall constitute failure of the test.

4.6.5 Insulation clo value test. After removal from the pack, the sleeping bag shall be tested for clo value using the single circuit Copper Man G.E. Cat PX15A4. Inability of any individual sleeping bag to meet the minimum insulating characteristics, or inability to meet the test sample average insulating characteristics shall constitute failure of the test. The test shall be performed as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:54Z
Check the source to verify that this is the current version before use.

a. Locations and numbers of the individual thermocouples are as follows:

Thermocouple No.	Location
1	Back of head
2	Top of head
3	Right breast
4	Left shoulder blade
5	Left kidney
6	Right abdomen
7	Right buttock
8	Front right thigh
9	Back right thigh
10	Right calf
11	Front left thigh
12	Back left thigh
13	Left calf
14	Right instep
15	Left instep
16	Right tricep
17	Right forearm (front)
18	Back of right hand
19	Left tricep
20	Left forearm (rear)
21	Back of left hand

b. Experimental conditions:

(1) Mannikin temperature (average of thermocouples 1 to 21 computed as described below) of 88 to 90 °F, hand and foot voltages adjusted to produce hand and foot temperatures of 75 °F ±5 °F

(2) Ambient temperature (measured by thermocouple at 1 foot height, 1 foot from bag) between 0 °F and 30 °F. Select a temperature which will produce a heat loss of approximately 80 watts from the mannikin.

(3) Air movement 50 to 60 feet per minute, turbulent.

(4) Relative humidity not controlled.

c. Sizes and dressing details:

(1) Bag size as provided.

(2) Mannikin dressed in 50% cotton, 50% wool pajama-type underwear, standard issue, medium-regular size, and standard socks, wool, cushion sole (approximately 1 clo.)

(3) Fluff bag by shaking violently for two minutes prior to placing mannikin in bag.

(4) Position mannikin so that sides and ends of bag are not compressed. Secure all closures. Cover mannikin completely, including face. If bag cannot be drawn over face, cover with one inch of wool pile insulation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:54Z
Check the source to verify that this is the current version before use.

d. Operating procedures:

(1) Position bag (and mannikin) in center of elevated support plate. Insure that the sleeping bag covers all five thermocouples attached to the support plate.

(2) Connect all thermocouple leads and the set of leads from five common plate thermocouples to two separate points on temperature recorder. Connect mannikin thermocouples to same recorder.

(3) Energize YSI Model 72 temperature controller and adjust to heat mannikin to required operating temperature.

(4) Equilibrate system for four hours or more.

(5) Make three separate 10 minute determinations of insulation, spaced one hour apart. Record mannikin, air, and plate temperatures and power input to mannikin (from thermal convertor) continuously during each observation. The final reading shall be made within 8 hours after removal of the sleeping bag from the packing.

e. Calculations:

(1) Calculate mannikin surface temperature (Ts) by simple arithmetic average of 21 individual temperatures. If recorder has insufficient points to accommodate all thermocouples (total of 23), common the thermocouples at comparable locations on left and right arms, hands and/or feet (i.e., left and right forearms) to reduce the number of points to be recorded. Multiply the recorded average for each common set by 2 in computing Ts. Obtain an average Ts for the entire observation by selecting 3–4 sets of temperatures at regular intervals; calculate Ts for each; and then average the individual values of Ts.

(2) Calculate an environmental temperature (Te). Average all values of air temperature, average all plate temperature readings. Compute Te as 75% of mean air temperature plus 25% of mean plate temperature.

(3) Calculate wattage input, average.

$$\text{Watts (average)} = \text{average converter output (mv)} \times \text{converter constant } \frac{\text{(Watts)}}{\text{(mv)}}$$

(4) Calculate insulating value of the bag, including boundary air layer insulation.

$$\text{clo} = \frac{3.09\,(Ts-Te)\,(1186)}{0.86\,(\text{watts})}$$

f. Inability of the bag to meet the minimum insulating characteristics shall constitute failure of the test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:54Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packing. In accordance with the requirements of MIL-STD-2073-1 and MIL-STD-2073-2, packing shall be level A, B, C, or Commercial, as specified (see 6.2).

5.1.1 Level A. Ten vacuum packaged, containerized sleeping bags shall be packed flat, two in length, one in width, and five in depth in a fiberboard shipping container conforming to style FOL-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Inside dimensions of each shipping container shall approximate 26-1/2 inches in length, 13-3/4 inches in width, and 12-1/2 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method III and reinforced as specified in the appendix of PPP-B-636.

5.1.2 Level B. Ten vacuum packaged, containerized sleeping bags shall be packed flat, two in length, one in width, and five in depth in a fiberboard shipping container conforming to style FOL-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Inside dimensions of each shipping container shall approximate 26-1/2 inches in length, 13-3/4 inches in width, and 12-1/2 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636.

5.1.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of the container specification.

5.1.3 Level C. Vacuum packaged, containerized sleeping bags shall be packed in accordance with MIL-STD-2073-1 requirements for this level.

5.1.4 Commercial. Ten vacuum packaged, containerized sleeping bags shall be packed in accordance with the applicable requirements of ASTM D 3951.

5.2 Palletization. When specified (see 6.2), sleeping bags, packed as specified, shall be palletized in accordance with load type Ia of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C and D or film bonding means F or G. Pallet patterns shall be in accordance with the appendix of MIL-STD-147.

5.3 Markings. In addition to any special marking required by the contract or purchase order, shipping containers shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable. Bar code markings are required and shall be in accordance with MIL-STD-1189 and MIL-STD-129 (see 6.2).

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The vacuum packed sleeping bag is intended for installation in the seat survival kit which is an integral part of the aircraft ejection seat system.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:54Z
Check the source to verify that this is the current version before use.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of the specification.

b. Issue of DoDISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1 and 2.2).

c. When a first article is required (see 3.1).

d. Selection of applicable levels of packing (see 5.1).

e. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.1.2.1).

f. When palletization is required (see 5.2).

g. When bar code markings are required (see 5.3).

6.3 First article. When first article inspection is required, the contracting officer should provide specific guidance to offerors whether the item(s) should be a preproduction sample, a first article sample, a first production item, a sample selected from the first production items, a standard production item from the contractor's current inventory (see 3.1), and the number of items to be tested as specified in 4.4. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results, and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

6.4 Subject term (key word) listing.

Copper Man G.E. Cat PX15A4
goose down insulating material
passive container
mummy shaped bag
survival kit

Custodian:
Air Force - 99

Review activity:
Air Force - 11

Preparing activity:
Air Force - 82

(Project No. 8465-F091)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:54Z
Check the source to verify that this is the current version before use.

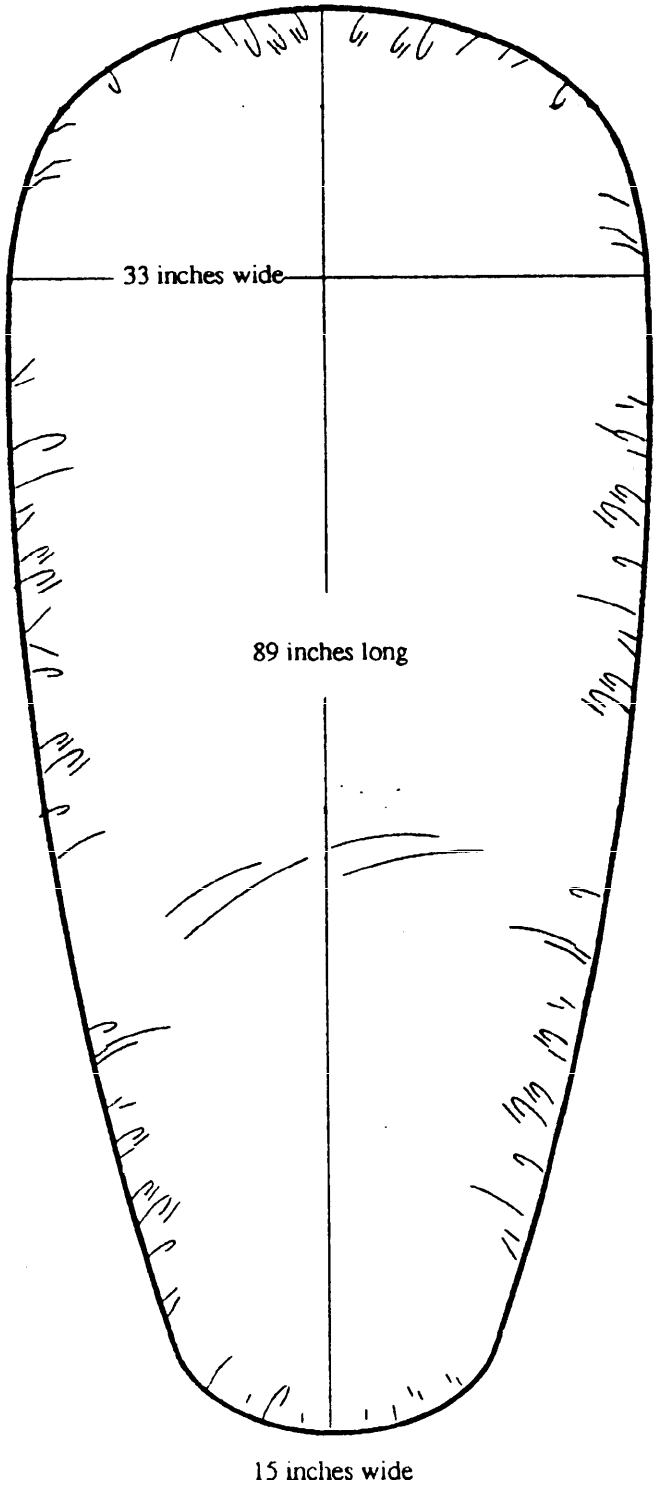


Figure 1. Dimensions and locations (see 3.7).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:54Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, not to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractural requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-B-87258 (USAF)	2. DOCUMENT DATE (YYMMDD) 91 08 02

3. DOCUMENT TITLE
BAG, SLEEPING, ARCTIC SURVIVAL, PRESSURE/VACUUM PACKED

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE *(Include Area Code)* (1) Commercial (2) AUTOVON *(If applicable)*	7. DATE SUBMITTED *(YYMMDD)*

8. PREPARING ACTIVITY

A. NAME SA-ALC/TIRDM	B. TELEPHONE *(Include Area Code)* (1) Commercial: (512) 925-6314 (2) AUTOVON *(If applicable)*: 945-6314
C. ADDRESS *(Include Zip Code)* KELLY AFB TX 78241-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:54Z
Check the source to verify that this is the current version before use.