
FED. SUP CLASS
5935

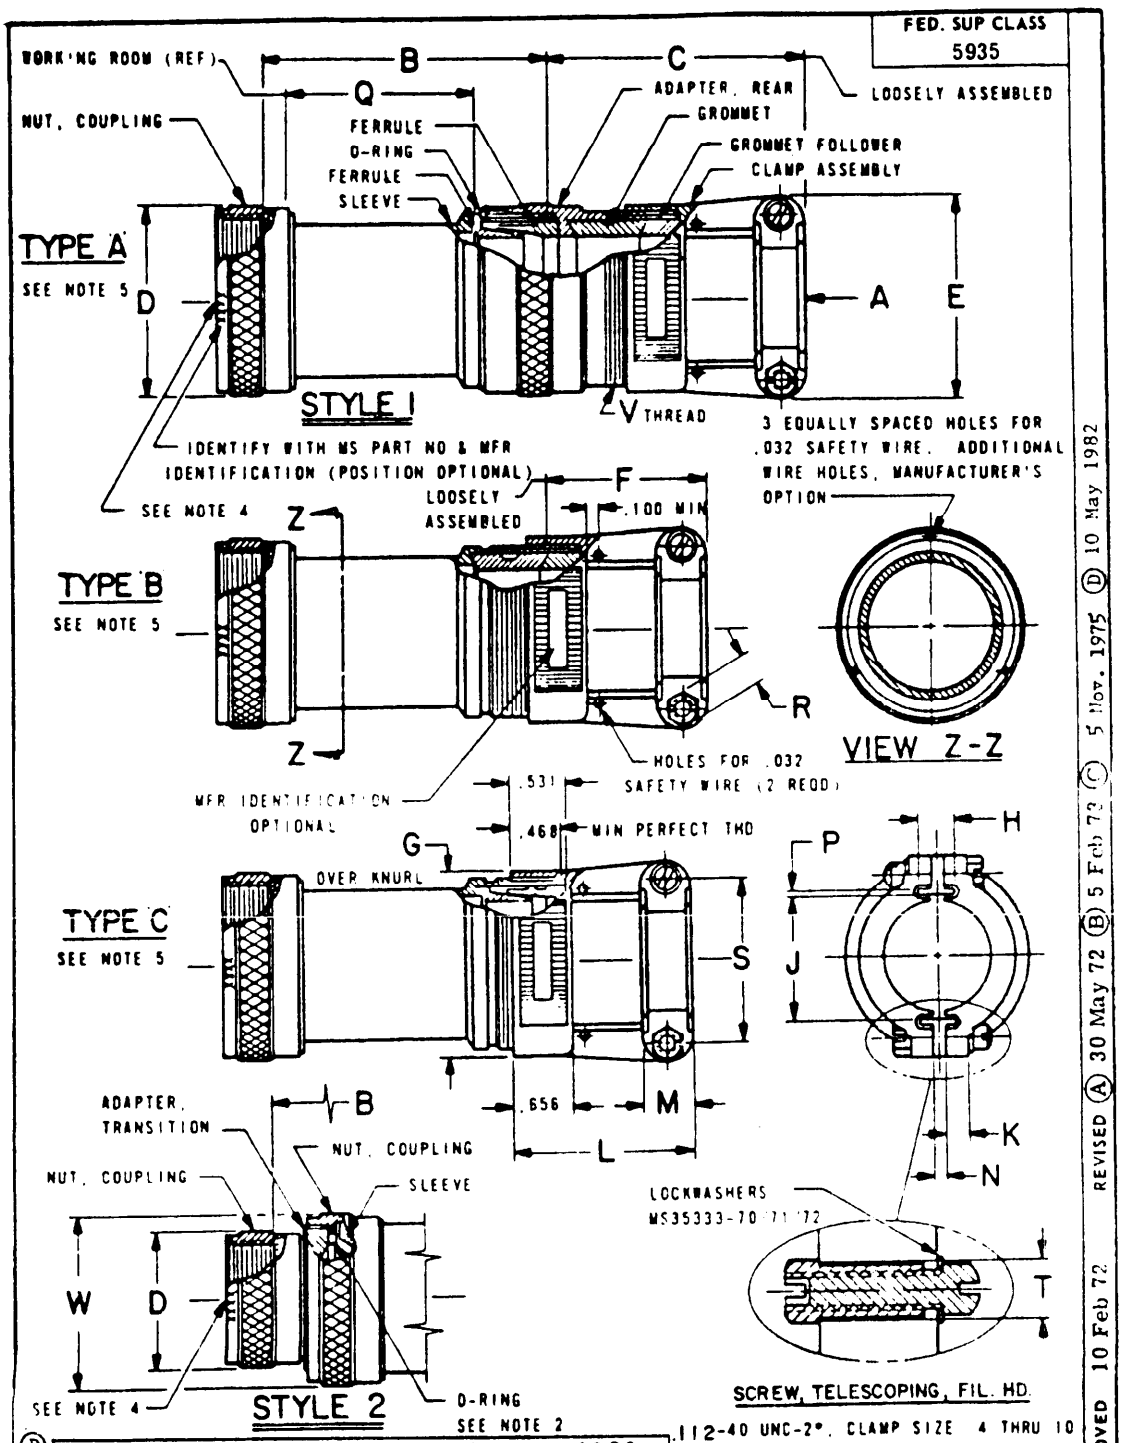

(D) INACTIVE FOR DESIGN AFTER 1 JULY 1982. DOCUMENT WILL BE CANCELLED AFTER 1 JULY 1984, USE MIL-C-85049/10,/11,/25.

(D) DENOTES CHANGES

APPROVED 10 Feb 72 REVISED (A) 30 May 72 (B) 5 Feb 73 (C) 5 Nov. 1975 (D) 10 May 1982

This military standard is approved by the NAVAL AIR SYSTEMS COMMAND, NAVY - AS. Department of the NAVY and shall be used by that activity. All other military activities are required to employ this standard where suitable.

P.A. Navy - AS Other Cust	INTERNATIONAL INTEREST	TITLE BACKSHELL, STRAIGHT, CABLE SEALING AND SHIELD TERMINATION, CONNECTOR, ELECTRIC	MILITARY STANDARD MS3437(NAVY)
Procurement Specifications	SUPERSEDES:		SHEET 1 OF 14

DD FORM 672 (LIMITED COORDIVATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE PROJECT NO. 5935-N203-08 DATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:57Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5935

DASH NO	FITS SHELL OF CONNECTOR MIL-C-81703 SER 3	MIL-C-0026482 SER 2	MIL-C-005015 CRIMP	MIL-C-83723 SER 1/3	CLAMP SIZE	A CABLE RANGE MIN	A CABLE RANGE MAX	STYLE	B ±.062	C REF	D DIA MAX	E ±.020	F REF	G DIA MAX	H ±.010
01	3	X	X	X	4	.125	.250	1	2.00	1.544	.689	.937	1.027	.937	.218
02									3.00						
03					6	.250	.437	2	2.75	1.544	.689	1.125	1.027	1.031	.281
04									3.75						
05	X	8	8S	8	4	.125	.250	1	2.00	1.544	.817	.937	1.027	.937	.218
06									3.00						
07					6	.250	.437	2	2.75	1.544	.817	1.125	1.027	1.031	.281
08									3.75						
09		10	10S,10SL	10	4	.125	.312	1	2.00	1.544	.734	.937	1.027	.937	.218
10									3.00						
11					6	.250	.437	2	2.75	1.544	.734	1.125	1.027	1.031	.281
12									3.75						
13	7	12	12,12S	12	6	.250	.437	1	2.00	1.544	.858	1.125	1.027	1.031	.281
14									3.00						
15					10	.350	.625	2	2.75	1.844	.858	1.312	1.027	1.250	.312
16									3.75						
17	12	14	14,14S	14	10	.350	.575	1	2.00	1.844	.984	1.612	1.027	1.250	.312
18									3.00						
19					12	.500	.750	2	2.75	1.916	.984	1.531	1.059	1.437	.375
20									3.75						

DASH NO	J DIA ±.010	K ±.010	L ±.020	M ±.010	N ±.010	P ±.010	Q REF	R +.000 -.007	S ±.010	T DIA ±.005	V THREAD CLASS 2A	W DIA MAX
01	.322	.156	1.281	.312	.109	.062	1.06	.250	.637	.166	.625-24 UNEF	–
02							2.06					
03	.447	.175	1.281	.375	.125	.062	1.81	.250	.763	.166	.750-20 UNEF	.858
04							2.81					
05	.322	.156	1.281	.312	.109	.062	1.06	.250	.637	.166	.625-24 UNEF	–
06							2.06					
07	.447	.175	1.281	.375	.125	.062	1.81	.250	.763	.166	.750-20 UNEF	.858
08							2.81					
09	.322	.156	1.281	.312	.109	.062	1.06	.250	.637	.166	.625-24 UNEF	–
10							2.06					
11	.447	.175	1.281	.375	.125	.062	1.81	.250	.763	.166	.750-20 UNEF	.858
12							2.81					
13	.447	.175	1.281	.375	.125	.062	1.06	.250	.763	.166	.750-20 UNEF	–
14							2.06					
15	.635	.218	1.281	.437	.125	.062	1.67	.250	.964	.166	1.000-20 UNEF	1.112
16							2.67					
17	.635	.218	1.281	.437	.125	.062	0.92	.250	.964	.166	1.000-20 UNEF	–
18							1.92					
19	.760	.250	1.312	.437	.156	.062	1.67	.250	1.130	.192	1.187-18 UNEF	1.218
20							2.67					

APPROVED 10 Feb 72 REVISED Ⓓ FOR CHANGES SEE SHEET 1

This military standard is approved by the NAVAL AIR SYSTEMS COMMAND, NAVY-AS, Department of the NAVY and shall be used by that activity. All other military activities are required to employ this standard where suitable.

P.A. Navy - AS Other Cust	INTERNATIONAL INTEREST	TITLE BACKSHELL, STRAIGHT, CABLE SEALING AND SHIELD TERMINATION, CONNECTOR, ELECTRIC	MILITARY STANDARD MS3437(NAVY)
Procurement Specifications	SUPERSEDES		SHEET 2 OF 14

DD FORM 672 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:57Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

DASH NO	FITS SHELL OF CONNECTOR MIL C-81703 SER 3	MIL-C-0026482 SER 2	MIL-C-305015 CRIMP	MIL-C 83723 SER 1/3	CLAMP SIZE	A CABLE RANGE MIN	A CABLE RANGE MAX	STYLE	B ±.062	C REF	D DIA MAX	E ±.020	F REF	G DIA MAX	H ±.010
21	19	16	16.165	16	12	.500	.700	1	2.00	1.916	1.112	1.531	1.059	1.437	.375
22									3.00						
23					16	.625	.937	2	2.75	2.000	1.112	1.750	1.156	1.688	.375
24									3.75						
25	27	18	18	18	10	.350	.625	1	2.00	1.844	1.218	1.312	1.027	1.250	.312
26									3.00						
27					12	.500	.750	1	2.00	1.916	1.218	1.531	1.059	1.437	.375
28									3.00						
29					16	.625	.937	2	2.75	2.000	1.218	1.750	1.156	1.688	.375
30									3.75						
31	37	20	20	20	10	.350	.625	1	3.00	1.844	1.345	1.312	1.027	1.250	.312
32									4.00						
33					12	.500	.750	1	3.00	1.916	1.345	1.531	1.059	1.437	.375
34									4.00						
35					16	.625	.937	2	3.75	2.000	1.345	1.750	1.156	1.688	.375
36									4.75						
37					20	.875	1.250	2	3.75	2.230	1.345	2.093	1.375	2.000	.475
38									4.75						
39	X	22	22	22	10	.350	.825	1	3.00	1.844	1.468	1.312	1.027	1.250	.312
40									4.00						

DASH NO	J DIA ±.010	K ±.010	L ±.020	M ±.010	N ±.010	P ±.010	Q REF	R +.000 -.007	S ±.010	T DIA ±.005	V THREAD CLASS 2A	W DIA MAX
21	.760	.250	1.312	.437	.156	.062	0.92	.250	1.130	.192	1.187-18 UNEF	–
22							1.92					
23	.947	.250	1.406	.531	.188	.062	1.67	.250	1.375	.192	1.437-18 UNEF	1.468
24							2.67					
25	.635	.218	1.281	.437	.125	.062	0.92	.250	.964	.166	1.000-20 UNEF	–
26							1.92					
27	.760	.250	1.312	.437	.156	.062	0.92	.250	1.130	.192	1.187-18 UNEF	–
28							1.92					
29	.947	.250	1.406	.531	.188	.062	1.67	.250	1.375	.192	1.437-18 UNEF	1.468
30							2.67					
31	.635	.218	1.281	.437	.125	.062	1.92	.250	.964	.166	1.000-20 UNEF	–
32							2.92					
33	.760	.250	1.312	.437	.156	.062	1.92	.250	1.130	.192	1.187-18 UNEF	–
34							2.92					
35	.947	.250	1.406	.531	.188	.062	2.67	.250	1.375	.192	1.437-18 UNEF	1.468
36							3.67					
37	1.260	.312	1.593	.531	.188	.078	2.67	.312	1.703	.217	1.750-18 UNS	1.969
38							3.67					
39	.635	.218	1.281	.437	.125	062	1.92	.250	.964	.166	1.000-20 UNEF	–
40							2.92					

APPROVED 10 Feb 72 REVISED Ⓓ FOR CHANGES SEE SHEET 1

This military standard is approved by the NAVAL AIR SYSTEMS COMMAND, NAVY-AS, Department of the NAVY and shall be used by that activity. All other military activities are required to employ this standard where suitable

P.A. Navy - AS Other Cust	INTERNATIONAL INTEREST	TITLE BACKSHELL, STRAIGHT, CABLE SEALING AND SHIELD TERMINATION, CONNECTOR, ELECTRIC	MILITARY STANDARD MS3437(NAVY)
Procurement Specifications	SUPERSEDES:		SHEET 3 OF 14

DD FORM 672 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE DATE

Source: https://assist.dla.mil -- Downloaded: 20260-26T04:57Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5935

DASH NO	FITS SHELL OF CONNECTOR MIL-C-81703 SER 3	MIL-C-0026482 SER 2	MIL-C-005015 CRIMP	MIL-C-83723 SER 1/3	CLAMP SIZE	A CABLE RANGE MIN	A CABLE RANGE MAX	STYLE	B ±.062	C REF	D DIA MAX	E ±.020	F REF	G DIA MAX	H ±.010
41		22	22	22	12	.500	.750	1	3.00	1.916	1.468	1.531	1.059	1.437	.375
42									4.00						
43					16	.625	.937	1	3.00	2.000	1.468	1.750	1.156	1.688	.375
44									4.00						
45					20	.875	1.250	2	3.75	2.230	1.468	2.093	1.375	2.000	.475
46									4.75						
47		24	24	24	12	.500	.750	1	3.00	1.916	1.593	1.531	1.059	1.437	.375
48									4.00						
49					16	.625	.812	1	3.00	2.000	1.593	1.750	1.156	1.688	.375
50									4.00						
51					16	.625	.937	1	3.00	2.000	1.593	1.750	1.156	1.688	.375
52									4.00						
53					20	.875	1.250	2	3.75	2.230	1.593	2.093	1.375	2.000	.475
54									4.75						
55		28	28	28	12	.500	.750	1	3.00	1.916	1.969	1.531	1.059	1.437	.375
56									4.00						
57					16	.625	.937	1	3.00	2.000	1.969	1.750	1.156	1.688	.375
58									4.00						
59					20	.875	1.250	1	3.00	2.230	1.969	2.093	1.375	2.000	.475
60									4.00						

DASH NO	J DIA ±.010	K ±.010	L ±.020	M ±.010	N ±.010	P ±.010	Q REF	R +.000 -.007	S ±.010	T DIA ±.005	V THREAD CLASS 2A	W DIA MAX
41	.760	.250	1.312	.437	.156	.062	1.92	.250	1.130	.192	1.187-18 UNEF	–
42							2.92					
43	.947	.250	1.406	.531	.188	.062	1.92	.250	1.375	.192	1.437-18 UNEF	–
44							2.92					
45	1.260	.312	1.593	.531	.188	.078	2.67	.312	1.703	.217	1.750-18 UNS	1.969
46							3.67					
47	.760	.250	1.312	.437	.156	.062	1.92	.250	1.130	.192	1.187-18 UNEF	–
48							2.92					
49	.947	.250	1.406	.531	.188	.062	1.92	.250	1.375	.192	1.437-18 UNEF	–
50							2.92					
51	.947	.250	1.406	.531	.188	.062	1.92	.250	1.375	.192	1.437-18 UNEF	–
52							2.92					
53	1.260	.312	1.593	.531	.188	.078	2.67	.312	1.703	.217	1.750-18 UNS	1.969
54							3.67					
55	.760	.250	1.312	.437	.156	.062	1.92	.250	1.130	.192	1.187-18 UNEF	–
56							2.92					
57	.947	.250	1.406	.531	.188	.062	1.92	.250	1.375	.192	1.437-18 UNEF	–
58							2.92					
59	1.260	.312	1.593	.531	.188	.078	1.92	.312	1.703	.217	1.750-18 UNS	–
60							2.92					

APPROVED 10 Feb 72 REVISED (D) FOR CHANGES SEE SHEET 1

This military standard is approved by the NAVAL AIR SYSTEMS COMMAND, NAVY-AS, Department of the NAVY and shall be used by that activity. All other military activities are required to employ this standard where suitable.

P.A. Navy - AS Other Cust	INTERNATIONAL INTEREST	TITLE BACKSHELL, STRAIGHT, CABLE SEALING AND SHIELD TERMINATION, CONNECTOR, ELECTRIC	MILITARY STANDARD MS3437(NAVY)
Procurement Specifications	SUPERSEDES:		SHEET 4 OF 14

DD FORM 672 (MAY 73) (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE DATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:57Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

DASH NO	FITS SHELL OF CONNECTOR MIL-C-81703 SER 3	MIL-C-0026482 SER 2	MIL-C-005015 CRIMP	MIL-C-83723 SER 1/3	CLAMP SIZE	A CABLE RANGE MIN	A CABLE RANGE MAX	STYLE	B ±.062	C REF	D DIA MAX	E ±.020	F REF	G DIA MAX	H ±.010
61			28		24	1.000	1.375	1	3.00 / 4.00	2.024	1.969	2.343	1.500	2.250	.500
62															
63			32		16	.625	.937	1	3.00 / 4.00	2.000	2.219	1.750	1.156	1.688	.375
64															
65					20	.875	1.250	1	3.00 / 4.00	2.230	2.219	2.093	1.375	2.000	.475
66															
67					24	1.000	1.375	1	3.00 / 4.00	2.024	2.219	2.343	1.500	2.250	.500
68															
69					28	1.250	1.625	1	3.00 / 4.00	2.550	2.219	2.750	1.781	2.500	.625
70															
71			36		20	.875	1.250	1	4.00 / 5.00	2.230	2.469	2.093	1.375	2.000	.475
72															
73					24	1.000	1.375	1	4.00 / 5.00	2.024	2.469	2.343	1.500	2.250	.500
74															
75					28	1.250	1.625	1	4.00 / 5.00	2.550	2.469	2.750	1.781	2.500	.625
76															
77					32	1.437	1.875	2	4.88 / 5.88	2.600	2.469	3.000	1.830	2.750	.675
78															
79			40		20	.875	1.250	1	4.00 / 5.00	2.230	2.719	2.093	1.375	2.000	.475
80															

DASH NO	J DIA ±.010	K ±.010	L ±.020	M ±.010	N ±.010	P ±.010	Q REF	R +.000 -.007	S ±.010	T DIA ±.005	V THREAD CLASS 2A	W DIA MAX
61	1.385	.312	1.625	.531	.250	.093	1.92 / 2.92	.312	1.906	.217	2.000-18 UNS	-
62												
63	.947	.250	1.406	.531	.188	.062	1.92 / 2.92	.250	1.375	.192	1.437-18 UNEF	-
64												
65	1.260	.312	1.593	.531	.188	.078	1.92 / 2.92	.312	1.703	.217	1.750-18 UNS	-
66												
67	1.385	.312	1.625	.531	.250	.093	1.92 / 2.92	.312	1.906	.217	2.000-18 UNS	-
68												
69	1.635	.312	1.900	.812	.375	.093	1.92 / 2.92	.312	2.218	.217	2.250-16 UN	-
70												
71	1.260	.312	1.593	.531	.188	.078	2.92 / 3.92	.312	1.703	.217	1.750-18 UNS	-
72												
73	1.385	.312	1.625	.531	.250	.093	2.92 / 3.92	.312	1.906	.217	2.000-18 UNS	-
74												
75	1.635	.312	1.900	.812	.375	.093	2.92 / 3.92	.312	2.218	.217	2.250-16 UN	-
76												
77	1.885	.312	1.900	.812	.375	.125	3.80 / 4.80	.312	2.500	.217	2.500-16 UN	2.719
78												
79	1.260	.312	1.593	.531	.188	.078	2.92 / 3.92	.312	1.703	.217	1.750-18 UNS	-
80												

APPROVED 10 Feb 72 REVISED (D) FOR CHANGES SEE SHEET 1

This military standard is approved by the NAVAL AIR SYSTEMS COMMAND, NAVY-AS, Department of the NAVY and shall be used by that activity. All other military activities are required to employ this standard where suitable.

P.A. Navy - AS Other Cust	INTERNATIONAL INTEREST	TITLE BACKSHELL, STRAIGHT, CABLE SEALING AND SHIELD TERMINATION, CONNECTOR, ELECTRIC	MILITARY STANDARD MS3437(NAVY)
Procurement Specifications	SUPERSEDES:		SHEET 5 OF 14

DD FORM (MAY 73) 672 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE DATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:57Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

DASH NO	FITS SHELL OF CONNECTOR MIL-C-81703 SER 3	MIL-C-0026482 SER 2	MIL-C-005015 CRIMP	MIL-C-83723 SER 1 / 3	CLAMP SIZE	A CABLE RANGE MIN	A CABLE RANGE MAX	STYLE	B ±.062	C REF	D DIA MAX	E ±.020	F REF	G DIA MAX	H ±.010
81					24	1.000	1.375	1	4.00 / 5.00	2.024	2.719	2.343	1.500	2.250	.500
82															
83			40		28	1.250	1.625	1	4.00 / 5.00	2.550	2.719	2.750	1.781	2.500	.625
84															
85					32	1.437	1.875	1	4.00 / 5.00	2.600	2.719	3.000	1.830	2.750	.675
86															
87					20	.875	1.250	1	4.00 / 5.00	2.230	2.969	2.093	1.375	2.000	.475
88															
89					24	1.000	1.375	1	4.00 / 5.00	2.024	2.969	2.343	1.500	2.250	.500
90			44												
91					28	1.250	1.625	1	4.00 / 5.00	2.550	2.969	2.750	1.781	2.500	.625
92															
93					32	1.437	1.875	1	4.00 / 5.00	2.600	2.969	3.000	1.830	2.750	.675
94															
95					20	.875	1.250	1	4.00 / 5.00	2.230	3.219	2.093	1.375	2.000	.475
96															
97			48		24	1.000	1.375	1	4.00 / 5.00	2.024	3.219	2.343	1.500	2.250	.500
98															
99					28	1.250	1.625	1	4.00 / 5.00	2.550	3.219	2.750	1.781	2.500	.625
100															

DASH NO	J DIA ±.010	K ±.010	L ±.020	M ±.010	N ±.010	P ±.010	Q REF	R ±.000 -.003	S ±.010	T DIA ±.005	V THREAD CLASS 2A	W DIA MAX
81	1.385	.312	1.625	.531	.250	.093	2.92 / 3.92	.312	1.906	.217	2.000-18 UNS	-
82												
83	1.635	.312	1.900	.812	.375	.093	2.92 / 3.92	.312	2.218	.217	2.250-16 UN	-
84												
85	1.885	.312	1.900	.812	.375	.125	2.92 / 3.92	.312	2.500	.217	2.500-16 UN	-
86												
87	1.260	.312	1.593	.531	.188	.078	2.92 / 3.92	.312	1.703	.217	1.750 18 UNS	-
88												
89	1.385	.312	1.625	.531	.250	.093	2.92 / 3.92	.312	1.906	.217	2.000 18 UNS	-
90												
91	1.635	.312	1.900	.812	.375	.093	2.92 / 3.92	.312	2.218	.217	2.250 16 UN	-
92												
93	1.885	.312	1.900	.812	.375	.125	2.92 / 3.92	.312	2.500	.217	2.500-16 UN	-
94												
95	1.260	.312	1.593	.531	.188	.078	2.92 / 3.92	.312	1.703	.217	1.750 18 UNS	-
96												
97	1.385	.312	1.625	.531	.250	.093	2.92 / 3.92	.312	1.906	.217	2.000 18 UNS	-
98												
99	1.635	.312	1.900	.812	.375	.093	2.92 / 3.92	.312	2.218	.217	2.250 16 UN	-
100												

APPROVED 10 Feb 72 REVISED (D) FOR CHANGES SEE SHEET 1

This military standard is approved by the NAVAL AIR SYSTEMS COMMAND, NAVY-AS, Department of the NAVY and shall be used by that activity. All other military activities are required to employ this standard where suitable.

P A: Navy - AS; Other Cust	INTERNATIONAL INTEREST	TITLE: BACKSHELL, STRAIGHT, CABLE SEALING AND SHIELD TERMINATION, CONNECTOR, ELECTRIC	MILITARY STANDARD MS3437(NAVY)
Procurement Specifications	SUPERSEDES:		SHEET 6 OF 14

DD FORM 672 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:57Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

DASH NO	FITS SHELL OF CONNECTOR MIL-C-81703 SER 3	MIL-C 0026482 SER 2	MIL-C-005015 CRIMP	MIL-C-83723 SER I/3	CLAMP SIZE	A CABLE RANGE MIN	A CABLE RANGE MAX	STYLE	B ±.062	C REF	D DIA MAX	E ±.020	F REF	G DIA MAX	H ±.010
101			48		32	.437	1.875	1	4.00 / 5.00	2.600	3.219	3.000	1.830	2.750	.675
102															
103					12	.500	.750	1	3.00 / 4.00	1.916	1.653	1.531	1.059	1.437	.375
104															
105					16	.625	.937	1	3.00 / 4.00	2.000	1.653	1.750	1.156	1.688	.375
106	61														
107					20	.875	1.250	2	3.75 / 4.75	2.230	1.653	2.093	1.375	2.000	.475
108															
109					24	1.000	1.375	2	3.75 / 4.75	2.024	1.653	2.343	1.500	2.250	.500
110															
111	7	12	12.12S	12	10	.350	.500	1	2.00	1.844	.858	1.312	1.027	1.250	.312
112	19	16	16.16S	16	6	.250	.437	1	2.00 / 3.00	1.544	1.112	1.125	1.027	1.031	.281
113															
114	7	12	12.12S	12	4	.125	.312	1	2.00 / 3.00	1.544	.858	.937	1.027	.937	.218
115															
116	12	14	14.14S	14	6	.250	.437	1	2.00 / 3.00	1.544	.984	1.125	1.027	1.031	.281
117															
118	19	16	16.16S	16	10	.350	.625	1	2.00 / 3.00	1.844	1.112	1.312	1.027	1.250	.312
119															

DASH NO	J DIA ±.010	K ±.010	L ±.020	M ±.010	N ±.010	P ±.010	Q REF	R +.000 -.007	S ±.010	T DIA ±.005	V THREAD CLASS 2A	W DIA MAX
101	1.885	.312	1.900	.812	.375	.125	2.82 / 3.92	.312	2.500	.217	2.500-16 UN	–
102												
103	.760	.250	1.312	.437	.156	.062	1.92 / 2.92	.250	1.130	.192	1.187-18 UNEF	–
104												
105	.947	.250	1.406	.531	.188	.062	1.92 / 2.92	.250	1.375	.192	1.437-18 UNEF	–
106												
107	1.260	.312	1.593	.531	.188	.078	2.67 / 3.67	.312	1.703	.217	1.750-18 UNS	1.969
108												
109	1.385	.312	1.625	.531	.250	.093	2.67 / 3.67	.312	1.806	.217	2.000-18 UNS	1.969
110												
111	.635	.218	1.281	.437	.125	.062	1.00	.250	.964	.166	1.000-20 UNEF	–
112	.447	.175	1.281	.375	.125	.062	1.00 / 2.00	.250	.763	.166	.750-20 UNEF	–
113												
114	.322	.156	1.281	.312	.109	.062	1.00 / 2.00	.250	.637	.166	.625-24 UNEF	–
115												
116	.447	.175	1.281	.375	.125	.062	1.00 / 2.00	.250	.763	.166	.750-20 UNEF	–
117												
118	.635	.218	1.281	.437	.125	.062	0.92 / 1.92	.250	.964	.166	1.000-20 UNEF	–
119												

APPROVED 10 Feb 72 REVISED (D) FOR CHANGES SEE SHEET 1

This military standard is approved by the NAVAL AIR SYSTEMS COMMAND, NAVY-AS, Department of the NAVY and shall be used by that activity. All other military activities are required to employ this standard where suitable

P.A. Navy - AS Other Cust	INTERNATIONAL INTEREST	TITLE BACKSHELL, STRAIGHT, CABLE SEALING AND SHIELD TERMINATION, CONNECTOR, ELECTRIC	MILITARY STANDARD MS3437(NAVY)
Procurement Specifications	SUPERSEDES:		SHEET 7 OF 14

DD FORM 1 MAY 73 672 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE DATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:57Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5935

DASH NO	FITS SHELL OF CONNECTOR MIL-C-81703 SER 3	MIL-C-0026482 SER 2	MIL-C-005015 CRIMP	MIL-C-83723 SER 1/3	CLAMP SIZE	A CABLE RANGE MIN	A CABLE RANGE MAX	STYLE	B ±.062	C REF	D DIA MAX	E ±.020	F REF	G DIA MAX	H ±.010
120	27	18	18	18	4	.125	.312	1	2.00	1.544	1.218	.937	1.027	.937	.218
121									3.00						
122					6	.250	.437	1	2.00	1.544	1.218	1.125	1.027	1.031	.281
123									3.00						
124	37	20	20	20	6	.250	.437	1	3.00	1.544	1.345	1.125	1.027	1.031	.281
125									4.00						
126		22	22	22	4	.125	.312	1	3.00	1.544	1.468	.937	1.027	.937	.218
127									4.00						
128					6	.250	.437	1	3.00	1.544	1.468	1.125	1.027	1.031	.281
129									4.00						
130		24	24	24	10	.350	.625	1	3.00	1.844	1.593	1.312	1.027	1.250	.312
131									4.00						
132			36		12	.500	.750	1	4.00	1.916	2.469	1.531	1.059	1.437	.375
133									5.00						
134			40		12	.500	.750	1	4.00	1.916	2.719	1.531	1.059	1.437	.375
135									5.00						
136		10	10S, 10SL	10	6	.250	.375	1	2.00	1.544	.734	1.125	1.027	1.031	.281
137									3.00						
138	7	12	12, 12S	12	10	.350	.500	1	2.00	1.844	.858	1.312	1.027	1.250	.312
139									3.00						

DASH NO	J DIA ±.010	K ±.010	L ±.020	M ±.010	N ±.010	P ±.010	Q REF	R +.000 -.007	S ±.010	T DIA ±.005	V THREAD CLASS 2A	W DIA MAX
120	.322	.156	1.281	.312	.109	.062	0.92	.250	.637	.166	.625-24 UNEF	-
121							1.92					
122	.447	.175	1.281	.375	.125	.062	0.92	.250	.763	.166	.750-20 UNEF	-
123							1.92					
124	.447	.175	1.281	.375	.125	.062	1.92	.250	.763	.166	.750-20 UNEF	-
125							2.92					
126	.322	.156	1.281	.312	.109	.062	1.92	.250	.637	.166	.625-24 UNEF	-
127							2.92					
128	.447	.175	1.281	.375	.125	.062	1.92	.250	.763	.166	.750-20 UNEF	-
129							2.92					
130	.635	.218	1.281	.437	.125	.062	1.92	.250	.964	.166	1.000-20 UNEF	-
131							2.92					
132	.760	.250	1.312	.437	.156	.062	2.92	.250	1.130	.192	1.187-18 UNEF	-
133							3.92					
134	.760	.250	1.312	.437	.156	.062	2.92	.250	1.130	.192	1.187-18 UNEF	-
135							3.92					
136	.447	.175	1.281	.375	.125	.062	1.06	.250	.763	.166	.750-20 UNEF	-
137							2.06					
138	.635	.218	1.281	.437	.125	.062	1.06	.250	.964	.166	1.000-20 UNEF	-
139							2.06					

APPROVED 10 Feb 72 REVISED (D) FOR CHANGES SEE SHEET 1

This military standard is approved by the NAVAL AIR SYSTEMS COMMAND, NAVY-AS, Department of the NAVY and shall be used by that activity. All other military activities are required to employ this standard where suitable.

P.A. Navy - AS Other Cust	INTERNATIONAL INTEREST	TITLE BACKSHELL, STRAIGHT, CABLE SEALING AND SHIELD TERMINATION, CONNECTOR, ELECTRIC	MILITARY STANDARD MS3437(NAVY)
Procurement Specifications	SUPERSEDES:		SHEET 5 OF 14

DD FORM 1 MAY 73 672 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE DATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:57Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

DASH NO	FITS SHELL OF CONNECTOR MIL-C-81703 SER 3	MIL-C-0026482 SER 2	MIL-C-005015 CRIMP	MIL-C-83723 SER 1/3	CLAMP SIZE	A CABLE RANGE MIN	A CABLE RANGE MAX	STYLE	B ±.062	C REF	D DIA MAX	E ±.020	F REF	G DIA MAX	H ±.010
140	37	20	20	20	16	.625	.904	1	3.00	2.000	1.345	1.750	1.156	1.688	.375
141									4.00						
142		22	22	22	20	.875	1.029	1	3.00	2.230	1.468	2.093	1.375	2.000	.475
143									4.00						
144		24	24	24	20	.875	1.144	1	3.00	2.230	1.593	2.093	1.375	2.000	.475
145									4.00						
146			36		32	1.437	1.840	1	4.00	2.600	2.469	3.000	1.830	2.750	.675
147									5.00						
148					16	.625	.937	1	4.00	2.000	2.469	1.750	1.156	1.688	.375
149									5.00						
150	12	14	14,14S	14	4	.125	.312	1	2.00	1.544	.984	.937	1.027	.937	.218
151									3.00						
152	19	16	16,16S	16	4	.125	312	1	2.00	1.544	1.112	.937	1.027	.937	.218
153									3.00						
154			44		16	.625	.937	1	4.00	2.000	2.969	1.750	1.156	1.688	.375
155									5.00						
156			40		16	.625	.937	1	4.00	2.000	2.719	1.750	1.156	1.688	.375
157									5.00						

DASH NO	J DIA ±.010	K ±.010	L ±.020	M ±.010	N ±.010	P ±.010	Q REF	R +.000 -.007	S ±.010	T DIA ±.005	V THREAD CLASS 2A	W DIA MAX
140	.947	.250	1.406	.531	.188	.062	1.92	.250	1.375	.192	1.437 18 UNEF	-
141							2.92					
142	1.260	.312	1.593	.531	.188	.078	1.92	312	1.703	.217	1.750-18 UNEF	-
143							2.92					
144	1.260	.312	1.593	.531	.188	.078	1.92	312	1.703	217	1.750-18 UNEF	-
145							2.92					
146	1.885	.312	1.900	.812	.375	.125	2.92	312	2.500	.217	2.500-16 UNEF	-
147							3.92					
148	.947	.250	1.406	.531	.188	.062	2.92	250	1.375	.192	1.437-18 UNEF	-
149							3.92					
150	322	.156	1.281	.312	.109	.062	0.92	.250	.637	166	625-24 UNEF	-
151							1.92					
152	.322	.156	1.281	.312	.109	.062	0.92	.250	.637	.166	.625 24 UNEF	-
153							1.92					
154	.947	.250	1.406	.531	.188	.062	2.92	.250	1.375	.192	1.437-18 UNEF	-
155							3.92					
156	.947	250	1.406	.531	.188	.062	2.92	.250	1.375	.192	1.437-18 UNEF	-
157							3.92					

APPROVED 10 Feb 72 REVISED (D) FOR CHANGES SEE SHEET 1


This military standard is approved by the NAVAL AIR SYSTEMS COMMAND, NAVY-AS, Department of the NAVY and shall be used by that activity. All other military activities are required to comply this standard where suitable

P A	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Navy - AS		BACKSHELL, STRAIGHT, CABLE SEALING AND SHIELD TERMINATION, CONNECTOR, ELECTRIC	MS3437(NAVY)
Other Cust			
Procurement Specifications	SUPERSEDES		SHEET 9 OF 14

DD FORM 1 MAY 73 672 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE DATE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:57Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

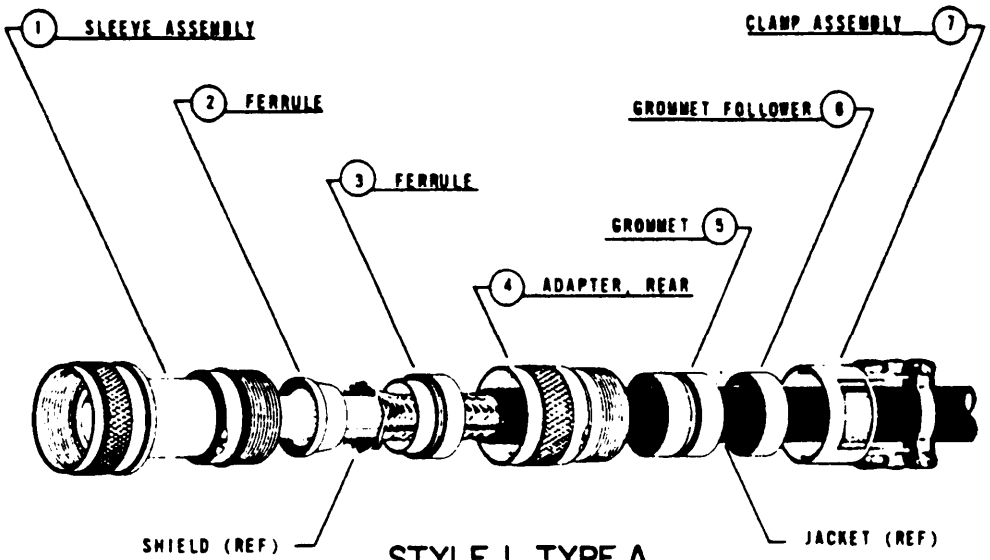

STYLE I_TYPE A
SHIELD, ENVIRONMENTAL

(SEE NOTE 5)

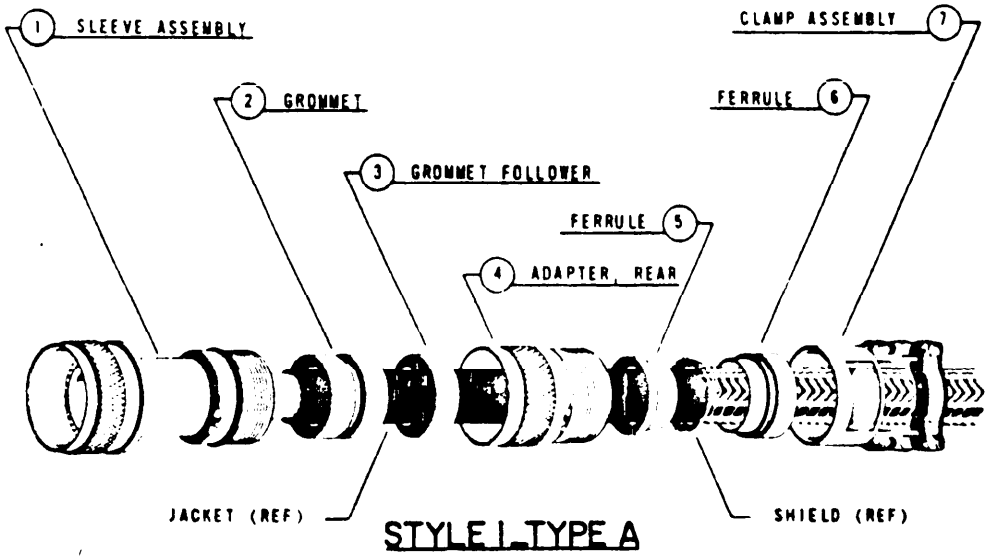

STYLE I_TYPE A
ARMOR, ENVIRONMENTAL

(SEE NOTE 5)

APPROVED 10 Feb 72 REVISED (D) FOR CHANGES SEE SHEET 1

This military standard is approved by the NAVAL AIR SYSTEMS COMMAND, NAVY-AS, Department of the NAVY and shall be used by that activity. All other military activities are required to employ this standard where suitable.


P.A. Navy - AS Other Cust	INTERNATIONAL INTEREST	TITLE BACKSHELL, STRAIGHT, CABLE SEALING AND SHIELD TERMINATION, CONNECTOR, ELECTRIC	MILITARY STANDARD MS3437(NAVY)
Procurement Specifications	SUPERSEDES:		SHEET 10 OF 14

DD FORM 1 MAY 73 672 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DATE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:57Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

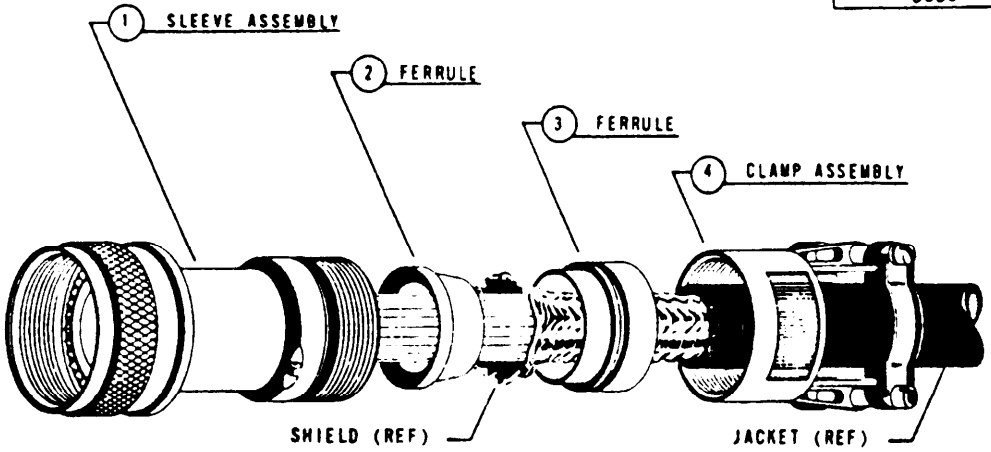


STYLE 1_TYPE C
SHIELD

(SEE NOTE 5)

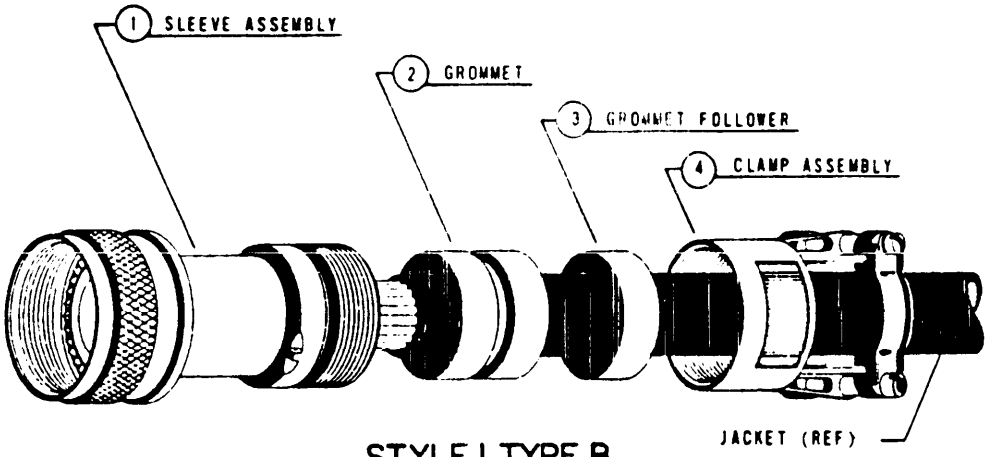

STYLE 1_TYPE B
ENVIRONMENTAL

(SEE NOTE 5)

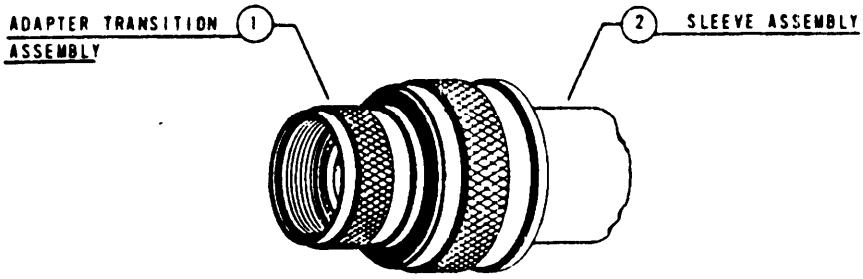

STYLE 2

(SEE NOTE 5)

APPROVED 10 Feb 72 REVISED (D) FOR CHANGES SEE SHEET 1

P.A. Navy - AS Other Cust	INTERNATIONAL INTEREST	TITLE BACKSHELL, STRAIGHT, CABLE SEALING AND SHIELD TERMINATION, CONNECTOR, ELECTRIC	MILITARY STANDARD MS3437(NAVY)
Procurement Specifications	SUPERSEDES:		SHEET 11 OF 14

DD FORM 1 MAY 73 672 *(LIMITED COORDINATION)* PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE DATE

This military standard is approved by the NAVAL AIR SYSTEMS COMMAND, NAVY-AS, Department of the NAVY and shall be used by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:57Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

REQUIREMENTS:

1. UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE .XX = ±.01, .XXX = ±.005. ANGULAR: X° = ±1° 00', X° XX' = ±0° 30'.

2. MATERIAL: BACKSHELL COMPONENTS SHALL BE IN ACCORDANCE WITH THE TABLE BELOW.
   GROMMET AND O-RINGS — SILICONE, PER ZZ-R-765, CLASS 3A OR 3B
   CLAMP ASSEMBLY SCREWS — 300 SERIES STAINLESS STEEL

3. FINISH: FINISH SHALL BE ELECTRICALLY CONDUCTIVE AND IN ACCORDANCE WITH THE TABLE BELOW.

DESIGNATOR	MATERIAL	FINISH
A	ALUMINUM ALLOY	CADMIUM PLATE, PER QQ-P-416, TYPE □, CLASS 3, OVER NICKEL; COLOR - OLIVE DRAB
C		CADMIUM PLATE, PER QQ-P-416, TYPE □, CLASS 3, COLOR - OLIVE DRAB
N		ELECTROLESS NICKEL, PER MIL-C-26074, CLASS 3 OR 4, GRADE B
D	NON-MAGNETIC CORROSION RESISTING STEEL, PER QQ-S-763, 300 SERIES CLASSES	CADMIUM PLATE, PER QQ-P-416, TYPE □, CLASS 3, COLOR - BLACK
S		PASSIVATE

4. THIS REAR ACCESSORY SHALL CONFORM TO MS3155 (DESIGN STANDARD). MS3155 TAKES PRECEDENCE OVER THIS STANDARD.

5. APPLICATIONS:
   A. TYPE A BACKSHELLS ARE FOR SHIELD TERMINATION AND ENVIRONMENTAL APPLICATIONS. ARMOR SHIELD TERMINATION AND ENVIRONMENTAL APPLICATIONS MAY BE ACHIEVED BY REVERSING THE FERRULES AND GROMMETS.
   B. TYPE B BACKSHELLS ARE FOR ENVIRONMENTAL APPLICATIONS ONLY AND ARE TYPE A LESS THE REAR ADAPTER AND FERRULES AND WITH THE GROMMET REPLACING THE FERRULES.
   C. TYPE C BACKSHELLS ARE FOR SHIELD TERMINATION APPLICATIONS ONLY AND ARE TYPE A LESS THE REAR ADAPTER AND GROMMET.
   D. STYLE 2 APPLIES WHEN THE CABLE DIAMETER EXCEEDS E DIAMETER OF MS3155.
   E. SEE SHEETS 10 AND 11 FOR ASSEMBLY SEQUENCE.

6. QUALIFICATION
   ONE SAMPLE OF TYPE A IN EACH SHELL SIZE RANGE (SEE TABLE I) FOR WHICH QUALIFICATION IS DESIRED SHALL BE TESTED. EACH SAMPLE SHALL BE ASSEMBLED TO AN APPROPRIATE CONNECTOR OR DUMMY CONNECTOR WHICH DUPLICATES THE CONNECTOR INTERFACING FEATURES. THE BACKSHELL SHALL BE ASSEMBLED WITH A 6 FOOT MINIMUM LENGTH CABLE APPROACHING THE DESIGNATED MINIMUM DIAMETER. CABLE SHALL BE IN ACCORDANCE WITH M L-C-915. TESTING SHALL BE AS FOLLOWS AND SHALL BE PERFORMED IN THE SEQUENCE LISTED.

   A. EXAMINATION OF PRODUCT.
   B. MAGNETIC PERMEABILITY -
      THE RELATIVE MAGNETIC PERMEABILITY SHALL BE LESS THAN 2.0 WHEN CHECKED WITH AN INDICATOR CONFORMING TO M L-I-17214. WIRED ASSEMBLIES SHALL NOT BE CARRYING CURRENT.
   C. SHELL CONDUCTIVITY -
      ASSEMBLIES SHALL BE ELECTRICALLY CONDUCTIVE FROM THE CONNECTOR BODY TO THE TERMINATED CABLE SHIELD AT A POINT LOCATED 1.0 INCH ±.25 INCH TO REAR OF ADAPTER. THE OVERALL D.C. RESISTANCE SHALL NOT EXCEED 0.05 OHMS WHEN MEASURED BY THE VOLTMETER-AMMETER METHOD. THE APPLIED POTENTIAL SHALL BE 1.5 VOLTS MAXIMUM. A RESISTANCE SHALL BE INSERTED IN THE CIRCUIT TO LIMIT THE CURRENT TO .100 ±.010 AMPERES.
   D. VIBRATION -
      A COUNTERPART RECEPTACLE CONNECTOR SHALL BE MOUNTED ON A SUITABLE FIXTURE, WHICH IN TURN SHALL BE ATTACHED TO THE VIBRATION TABLE. A SUITABLE SENSOR SHALL MONITOR THE VIBRATION OF THE RECEPTACLE AT A POINT ON OR NEAR THE RECEPTACLE. THE PLUG CONNECTOR AND BACKSHELL ASSEMBLY SHALL BE ENGAGED WITH THE RECEPTACLE BY NORMAL LOCKING MEANS. NO SAFETY WIRE SHALL BE USED. THE CABLE SHALL BE CLAMPED TO NON-VIBRATING POINTS AT LEAST 8 INCHES FROM

APPROVED 10 Feb 72 REVISED (D) FOR CHANGES SEE SHEET 1

NAVAL AIR SYSTEMS COMMAND, NAVY-AS, Department ... by that activity. All other military activities are ... required to ... Cable

P A: Navy - AS; Other Cust	INTERNATIONAL INTEREST	TITLE: BACKSHELL, STRAIGHT, CABLE SEALING AND SHIELD TERMINATION, CONNECTOR, ELECTRIC	MILITARY STANDARD: MS3437(NAVY)
Procurement Specifications	SUPERSEDES:		SHEET 12 OF 14

DD FORM 672 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE DATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:57Z
Check the source to verify that this is the current version before use.

REQUIREMENTS (CONTINUED)

6. QUALIFICATION (CONTINUED)

D. VIBRATION - (CONTINUED)

THE REAR OF THE ASSEMBLY. THE CLAMPING LENGTH SHALL BE CHOSEN TO AVOID RESONANCE OF THE CABLE. THE ASSEMBLY SHALL THEN BE SUBJECTED TO THE VIBRATION REQUIREMENTS OF MIL-STD-1678 (SHIPS), PARAGRAPH 5.1.3.3.3 AND METHOD 204, CONDITION B, OF MIL-STD-202. THERE SHALL BE NO LOOSENING OF PARTS OR EVIDENCE OF DAMAGE DUE TO VIBRATION.

E. SHOCK -

A COUNTERPART RECEPTACLE CONNECTOR SHALL BE MOUNTED ON FIXTURES IN ACCORDANCE WITH MIL-S-901, LIGHTWEIGHT. THE PLUG CONNECTOR AND BACKSHELL ASSEMBLY SHALL BE ENGAGED WITH THE RECEPTACLE BY NORMAL LOCKING MEANS. NO SAFETY WIRE SHALL BE USED. CABLES SHALL BE SUPPORTED ON A STATIONARY FRAME A MINIMUM DISTANCE OF 36 INCHES FROM THE ASSEMBLY. THE ASSEMBLY SHALL THEN BE SUBJECTED TO THE REQUIREMENTS OF MIL-S-901, GRADE A. THERE SHALL BE NO LOOSENING OF PARTS OR EVIDENCE OF DAMAGE DUE TO SHOCK.

F. MOISTURE RESISTANCE -

THE CONNECTOR AND BACKSHELL ASSEMBLY SHALL BE MOUNTED HORIZONTALLY WITH THE CABLE DESCENDING INTO THE BACKSHELL WITH NO DRIP LOOPS OR SPLICES WITHIN THE CHAMBER. THE CABLE SHALL LEAVE THE CHAMBER THROUGH VAPOR-TIGHT SEALS. THE FACE OF THE CONNECTOR SHALL BE PROTECTED FROM THE TEST ENVIRONMENT. THE TEST SHALL BE IN ACCORDANCE WITH METHOD 106 OF MIL-STD-202 (EXCEPT VIBRATION). THERE SHALL BE NO EVIDENCE OF MOISTURE ENTRANCE INTO THE BACKSHELL.

G. WATER PRESSURE -

THE CONNECTOR AND BACKSHELL ASSEMBLY SHALL BE ASSEMBLED WITH A CABLE OR TEST PLUG INSTALLED TO SIMULATE JACKETED CABLE. THE FACE OF THE CONNECTOR SHALL BE PROTECTED FROM THE TEST ENVIRONMENT. THE ASSEMBLY SHALL BE IMMERSED IN TAP WATER TO A DEPTH OF 6 FEET FOR A PERIOD OF 48 HOURS. ASSEMBLY SHALL SHOW NO EVIDENCE OF WATER ENTRANCE.

H. CORROSION -

SALT SPRAY TEST IN ACCORDANCE WITH METHOD 1001 OF MIL-STD-1344. THERE SHALL BE NO EXPOSURE OF BASIS METAL DUE TO CORROSION WHICH WILL AFFECT PERFORMANCE.

J. CABLE PULL-OUT -

A SOLID POLYCHLOROPRENE TEST PLUG OF SUITABLE LENGTH WITH O.D. CONFORMING TO TABLE I AND A SHORE A DUROMETER OF 75-85, SHALL BE INSTALLED IN THE ADAPTER IN LIEU OF CABLE. TO FACILITATE THE APPLICATION OF LOADS, THE POLYCHLOROPRENE TEST PLUG MAY BE PROVIDED WITH A METAL CORE. THE APPLICABLE TENSILE LOAD SPECIFIED IN TABLE I SHALL BE APPLIED TO THE TEST PLUG IN THE DIRECTION TENDING TO DISPLACE IT TOWARD THE REAR OF THE ADAPTER. THE LOAD SHALL BE APPLIED FOR A PERIOD OF ONE HOUR AND THE AMOUNT OF SLIPPAGE SHALL BE MEASURED. CABLES SHALL NOT PULL OUT WHEN SPECIFIED LOADS ARE APPLIED, NOR SHALL THE SLIPPAGE EXCEED 1/8 INCH.

K. POST EXAMINATION OF PRODUCT.

7. QUALITY ASSURANCE PROVISION:

A. EXAMINATION OF PRODUCT.

8. APPLICATION FOR QUALIFICATION:

A. THE ACTIVITY RESPONSIBLE FOR THE QUALIFIED PRODUCTS LIST (QPL) FOR MS3188 IS THE NAVAL AIR SYSTEMS COMMAND. THE NAVAL WEAPONS SUPPORT CENTER, CRANE, INDIANA, HAS BEEN DESIGNATED BY THE NAVAL AIR SYSTEMS COMMAND AS AGENT FOR THE ESTABLISHMENT OF THE QPL. REQUESTS FOR INFORMATION PERTAINING TO AND APPLICATIONS FOR QUALIFICATION SHOULD BE ADDRESSED TO:

COMMANDING OFFICER
NAVAL WEAPONS SUPPORT CENTER
CRANE, INDIANA 47522
ATTN: CODE 3074

APPROVED 10 Feb 72 REVISED (D) FOR CHANGES SEE SHEET 1

This military standard is approved by the NAVAL AIR SYSTEMS COMMAND, NAVY-AS, Department of the NAVY and shall be used by that activity. All other military activities are required to employ this standard where suitable.

P.A. Navy - AS / Other Cust	INTERNATIONAL INTEREST	TITLE BACKSHELL, STRAIGHT, CABLE SEALING AND SHIELD TERMINATION, CONNECTOR, ELECTRIC	MILITARY STANDARD MS3437(NAVY)
Procurement Specifications	SUPERSEDES:		SHEET 13 OF 14

DD FORM 1 MAY 72 672 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE DATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:57Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

TABLE I

DASH NUMBER	CABLE SEALING RANGE		TEST PLUG DIAMETER (INCHES)		PULL-OUT LOAD (POUNDS)	SHELL SIZE RANGE
	MINIMUM DIA (INCHES)	MAXIMUM DIA (INCHES)	MIN	MAX		
02	.125	.250	.109	.125	25	1
06	.125	.250	.109	.125		
10	.125	.312	.109	.125		
14	.250	.437	.234	.250		
18	.350	.575	.334	.350	50	
22	.500	.700	.484	.500		
26	.350	.625	.334	.350		2
32	.350	.625	.334	.350	75	
40	.350	.625	.334	.350		
48	.500	.750	.484	.500		
56	.500	.750	.484	.500		
64	.625	.937	.609	.625	100	3
72	.875	1.250	.859	.875		
80	.875	1.250	.859	.875		
88	.875	1.250	.859	.875		
96	.875	1.250	.859	.875		

PART NUMBER DEVELOPMENT

EXAMPLE: MS3437 C 06 C

BASIC NO.

TYPE (A, B OR C)

DASH NO.

MATERIAL & FINISH DESIGNATOR
A, C, N, D, OR S
(SEE NOTES 2 & 3)

APPROVED 10 Feb 72 REVISED (D) FOR CHANGES SEE SHEET 1

This military standard is approved by the NAVAL AIR SYSTEMS COMMAND, NAVY-AS, Department of the NAVY and shall be used by that activity. All other military activities are required to employ this standard where suitable.

P.A. Navy - AS Other Cust	INTERNATIONAL INTEREST	TITLE BACKSHELL, STRAIGHT, CABLE SEALING AND SHIELD TERMINATION, CONNECTOR, ELECTRIC	MILITARY STANDARD MS3437(NAVY)
Procurement Specifications	SUPERSEDES:		SHEET 14 OF 14

DD FORM 1 MAY 73 672 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE DATE

☆ U.S. GOVERNMENT PRINTING OFFICE 1982—508-022/3987

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:57Z
Check the source to verify that this is the current version before use.