MILITARY SPECIFICATION
CONTROL, INTEGRATED ELECTRONIC CENTRAL
C-4850/ASQ-85

This amendment forms a part of Military Specification MIL-C-23768A(AS), dated 1 May 1970 and has been approved by the Naval Air Systems Command, Department of the Navy.

Page 3, add paragraph 3.3.7.1 to read as follows:

"3.3.7.1 Selector Switch Protection - Provisions shall be made for the protection of the selector switch assemblies when the dust cover is removed."

Page 4, paragraph 3.4.1.3: Delete the first sentence and substitute:

"An edge lighted front panel in accordance with the applicable requirements of MIL-P-7788 for Type IV, Class 1-R shall be provided. The panel shall operate from a 5-volt power source."

Page 6, paragraph 3.4.1.5: After the last sentence, add the following:

"Provision shall be made to protect exposed switch contacts of S7 when access door is open."

Page 7, paragraph 3.4.1.10: Delete and substitute:


"3.4.1.10 Torque Requirements - (1) The torque requirements to activate the switches of 3.4.1.4.(2), 3.4.1.4.1(5), and 3.4.1.4.2(2) shall be 8.0 inch pounds maximum. The minimum torque shall be consistent with providing a positive detent action. (2) The torque requirements to activate the switches of 3.4.1.4.1(1), 3.4.1.4.1(6), and 3.4.1.4.2(1) shall be 3.0 inch pounds maximum. The minimum torque shall be consistent with providing a positive detent action.

Page 18, Figure 1: Delete and substitute the attached Figure 1 reflecting revised configuration.

FSC 5895

Project Number 5895-N180

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:51Z
Check the source to verify that this is the current version before use.

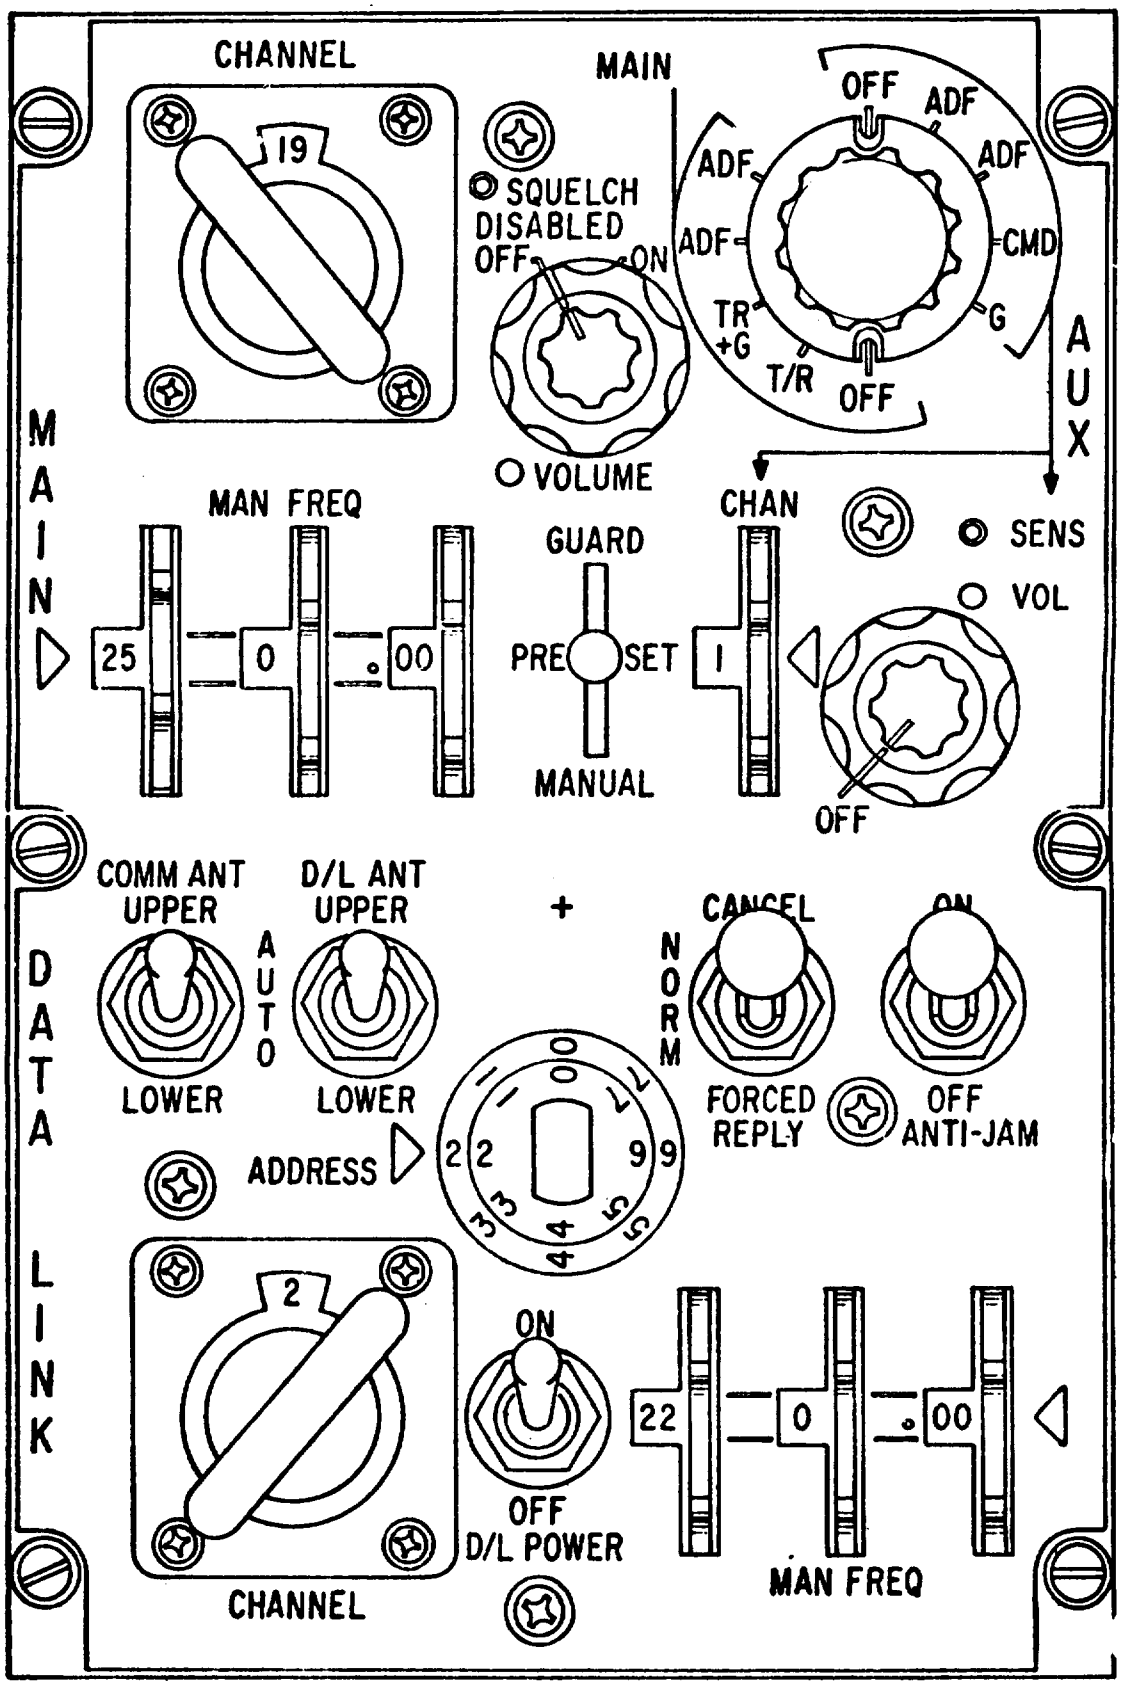

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:51Z
Check the source to verify that this is the current version before use.