
MIL-C-23806/3B(EC)
23 June 1969
SUPERSEDING
MIL-C-23806/3A(SHIPS)
9 February 1965

MILITARY SPECIFICATION SHEET

CABLE, RADIO FREQUENCY, COAXIAL, SEMIRIGID, FOAM DIELECTRIC, 3/4 INCH, 50 OHM, JACKETED (RG-360/U)

The complete requirements for procuring the cable described herein shall consist of this document and the latest issue of MIL-C-23806.

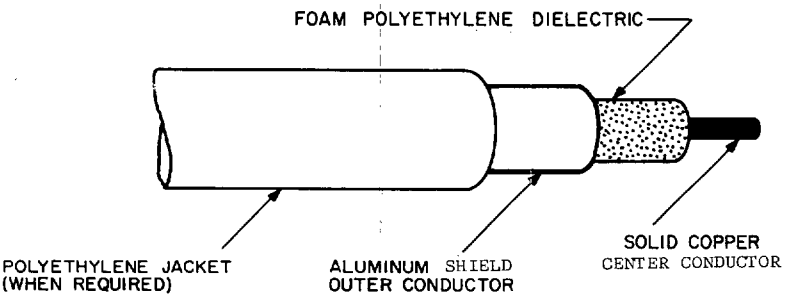

EC 303

Figure 1. Construction.

Characteristic	Construction details
Inner conductor (O.D.)	0.243 ± 0.003 inch
Outer conductor	± .004 inch
Inside diameter	0.676 ± 0.003 inch
Outside diameter	0.750 ± 0.003 inch ± .005
Jacket	
Nominal wall thickness	0.038 inch
Outside diameter	0.825 ± 0.010 inch
Minimum bending radius	7.5 inch

REQUIREMENTS:

Impedance (ohms)	50 ± 1
Capacitance (picofarad/ft) (nominal)	25
Velocity of propagation (percent)	81 ± 3
Dielectric strength (at 60 hertz rms test voltage)	5.3 kv.
Dielectric constant (nominal)	1.5
Average power at operating frequency	See figure 2
Attenuation	See figure 3

FSC 6145

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:58Z
Check the source to verify that this is the current version before use.

Attenuation measurements shall be made at the test frequencies of 30, 400, and 3,000 megahertz for each second; the maximum attenuation shall not exceed .33, 1.52, and 65 db per 100 feet respectively.

For each of the following frequency ranges, the VSWR shall not exceed the values at any specific frequency as measured in accordance with MIL-C-23806.

VSWR[1/]

Frequency range (megahertz)	Initial	After temperature cycling	After coiling
500 to 2000	1.2	1.3	1.25
2000 to 5000	1.3	1.4	1.45

1/ When the sweep frequency method is used for determining VSWR, values less than 1.4 before or after bend test or temperature cycling shall not be considered as failures provided the width of the area exhibiting such values does not exceed 5 megahertz.

Temperature cycling and bending: The coiling mandrel required shall be 24 inches in diameter.

Preparing activity:
Navy—EC

(Project 6145-N093-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:58Z
Check the source to verify that this is the current version before use.

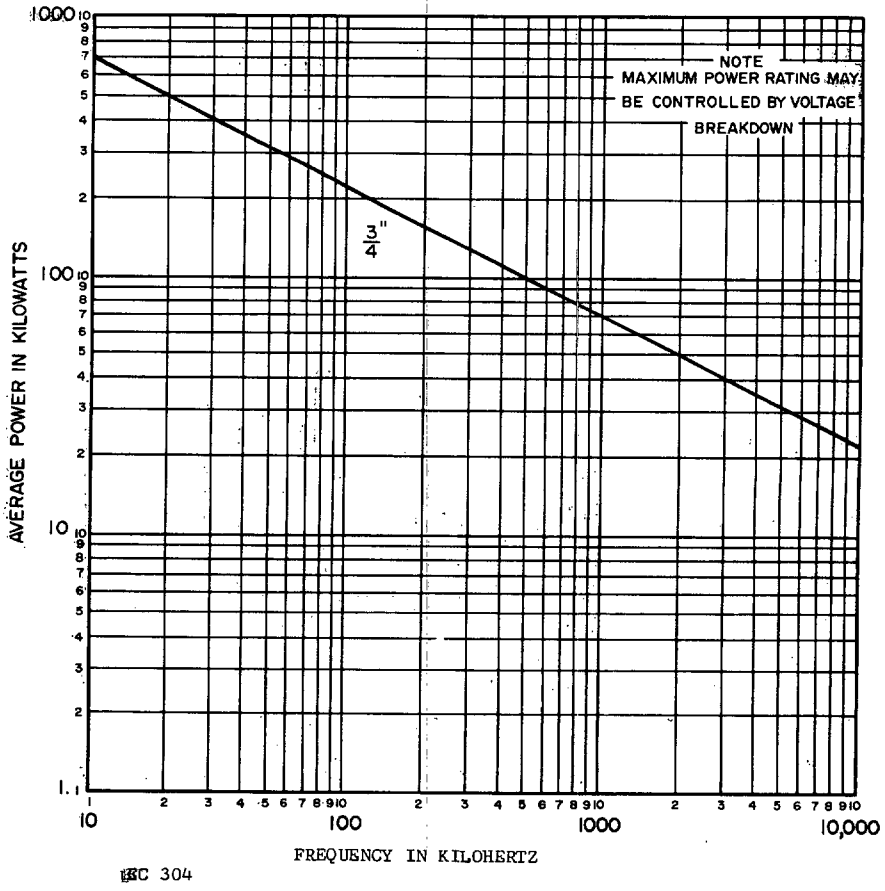


Figure 2. Average power at operating frequency.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:58Z
Check the source to verify that this is the current version before use.

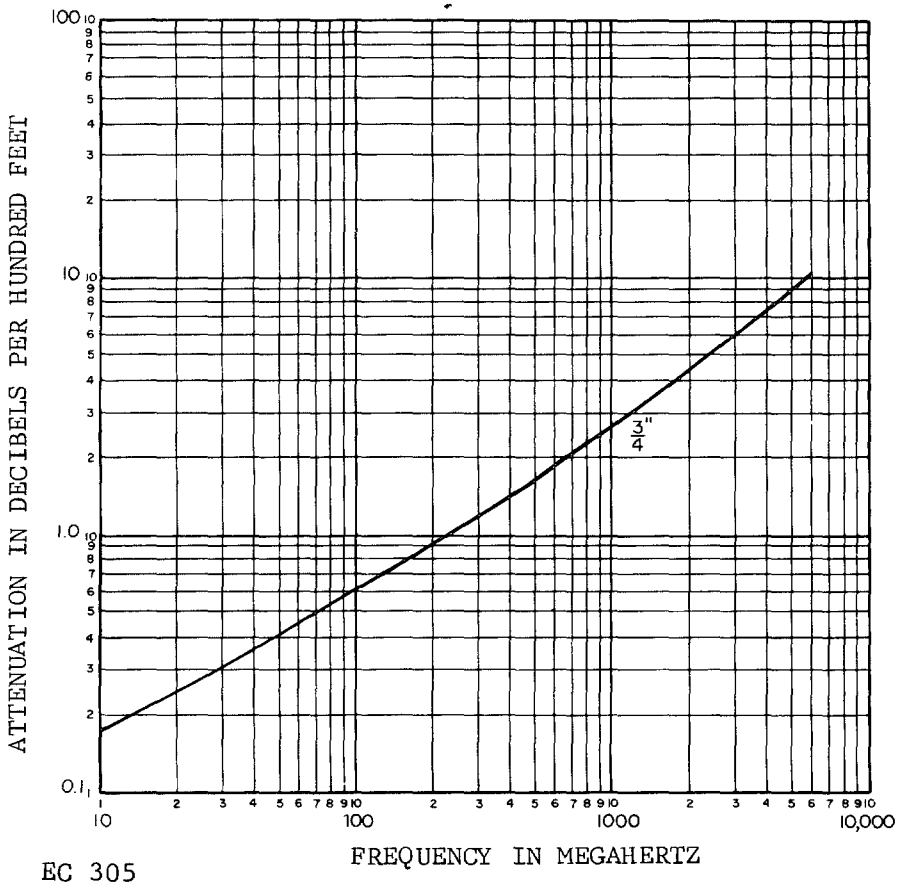


Figure 3. Attenuation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:58Z
Check the source to verify that this is the current version before use.