INCH-POUND


MIL-C-23806/3C
20 February 1990
SUPERSEDING
MIL-C-23806/3B(EC)
23 June 1969

MILITARY SPECIFICATION SHEET

CABLE, RADIO FREQUENCY, COAXIAL, SEMIRIGID, FOAM DIELECTRIC, 3/4 INCH, 50 OHM, JACKETED (RG-360/U)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-23806.

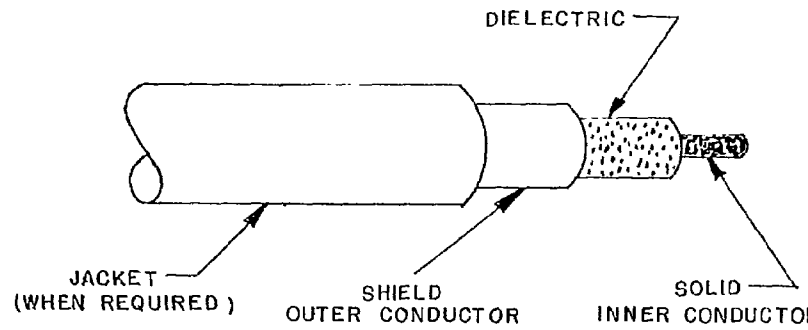

Inches	mm
.003	0.08
.004	0.10
.010	0.25
.038	0.97
.243	6.17
.676	17.17
.750	19.05
.825	20.96
7.5	190.

Characteristics	Construction details
Inner conductor (O.D.)	0.243 ± 0.004 inch
Outer conductor	
Inside diameter	0.676 ± 0.003 inch
Outside diameter	0.750 ± 0.005 inch
Jacket	
Nominal wall thickness	0.038 inch
Outside diameter	0.825 ± 0.010 inch
Minimum bending radius	7.5 inch

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are for general information only.

FIGURE 1. Construction.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:58Z
Check the source to verify that this is the current version before use.

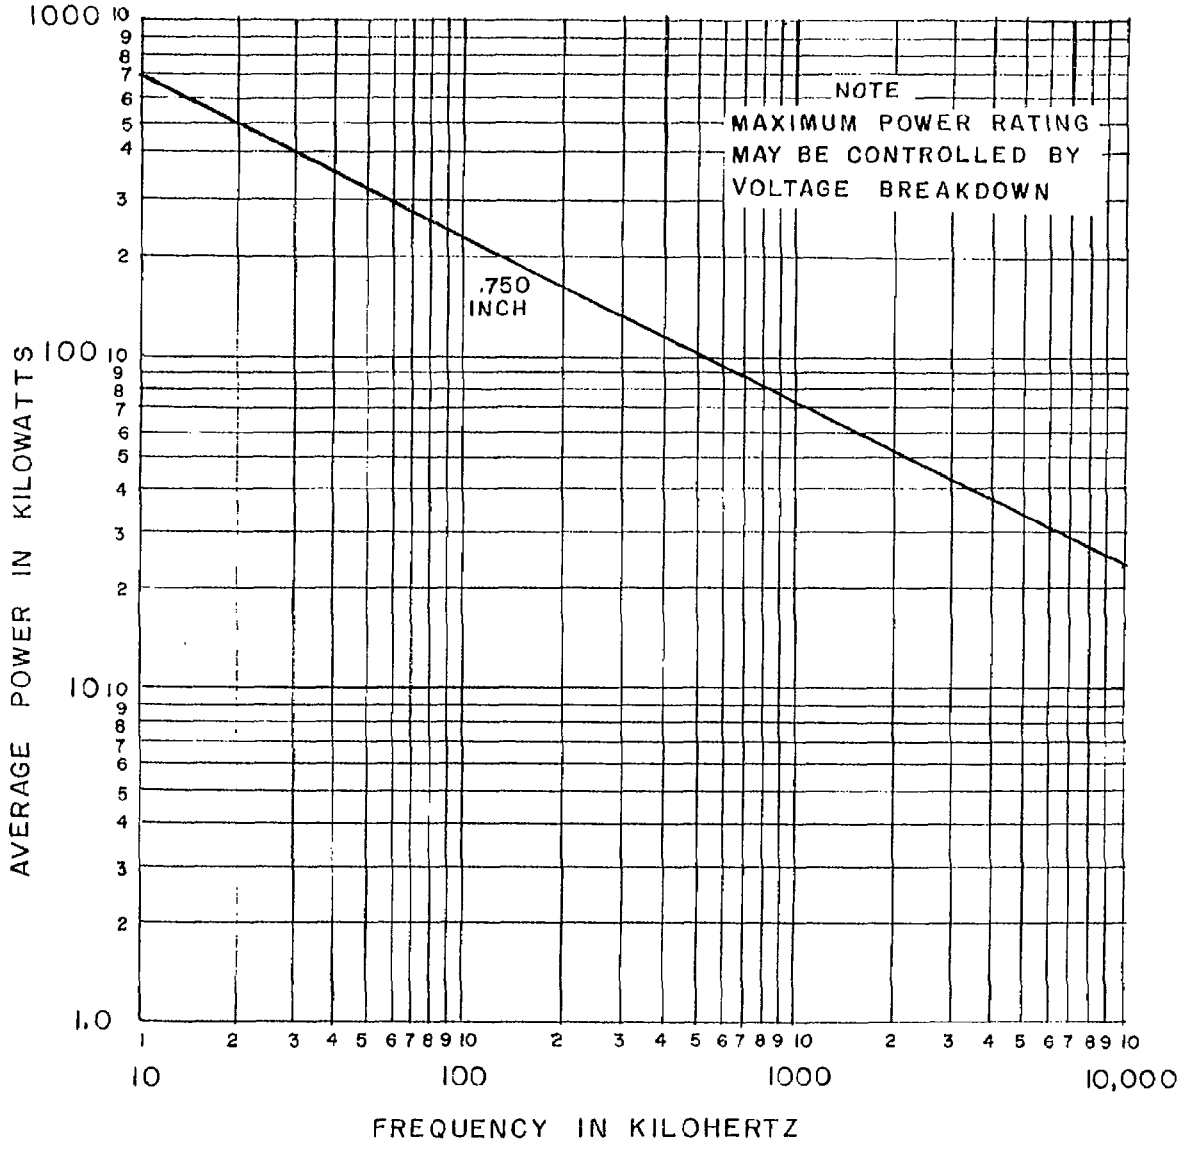


FIGURE 2. Average power at operating frequency.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:58Z
Check the source to verify that this is the current version before use.

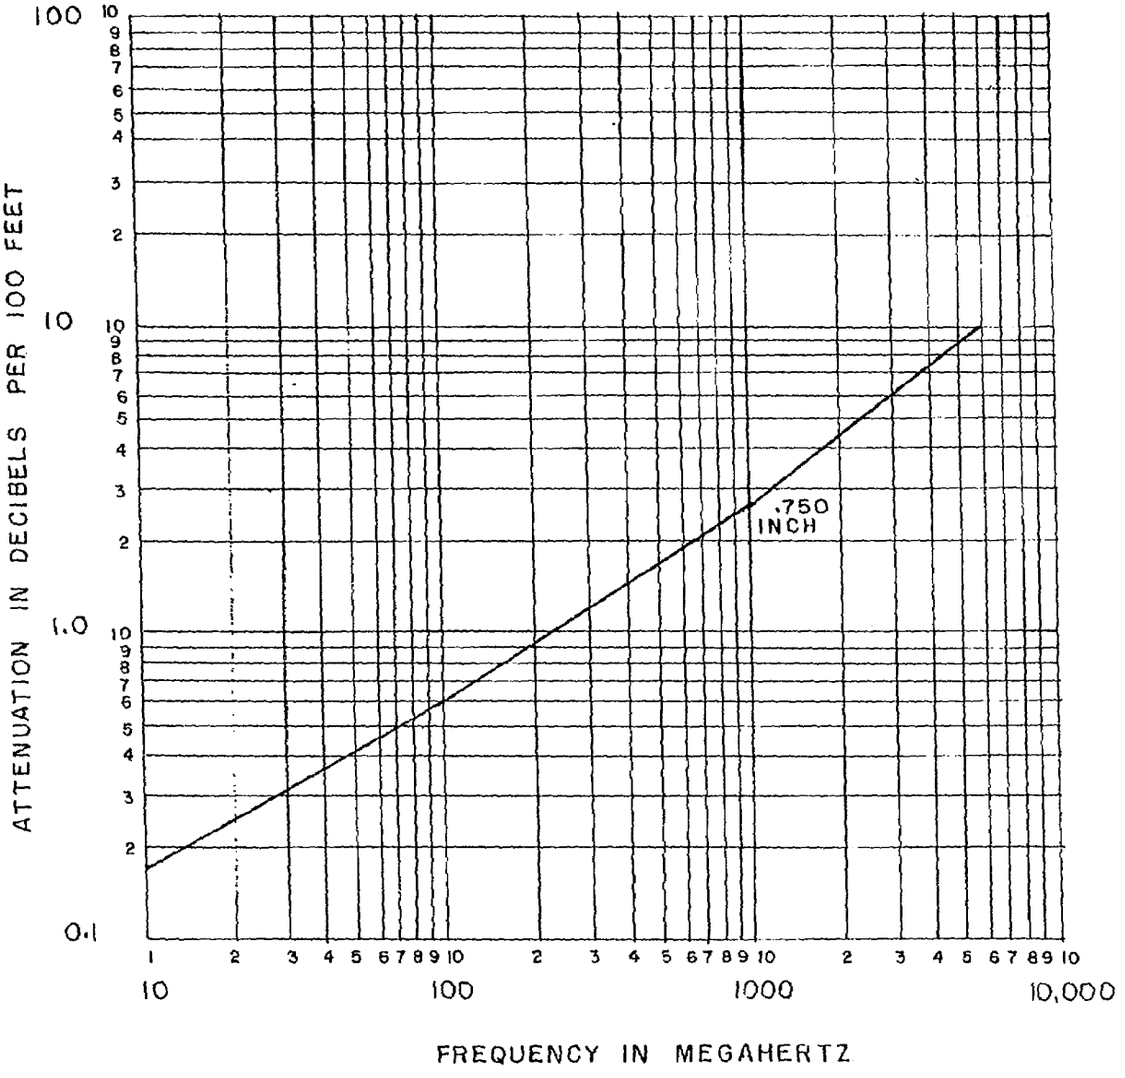


FIGURE 3. Attenuation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:58Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Impedance (ohms):	50 ± 1
Capacitance (picofarads/ft) (nominal):	25
Velocity of propagation (percent):	81 ± 3
Dielectric strength (at 60 Hertz rms test voltage):	5.3 kv.
Dielectric constant (nominal):	1.5
Average power at operating frequency:	See figure 2
Attenuation:	See figure 3

Attenuation measurements shall be made at the test frequencies of 30, 400, and 3,000 megahertz; the maximum attenuation not to exceed .33, 1.52, and 6.5 db per 100 feet, respectively.

For each of the following frequency ranges, the VSWR shall not exceed the values at any specific frequency as measured in accordance with MIL-C-23806.

VSWR 1/

Frequency range (megahertz)	Initial	After temperature cycling	After cooling
500 to 2000	1.2	1.3	1.25
2000 to 5000	1.3	1.4	1.45

1/ When the sweep frequency method is used for determining VSWR, values less than 1.4 before or after bend test or temperature cycling shall not be considered as failures provided the width of the area exhibiting such values does not exceed 5 megahertz.

Temperature cycling and bending test: The coiling mandrel shall be 24 inches in diameter.

CONCLUDING MATERIAL

Custodians:
Air Force - 85
Navy - EC

Review activities:
Air Force - 99
DLA - ES, IS

User activity:
Army - AR

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 6145-1172-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:58Z
Check the source to verify that this is the current version before use.