INCH-POUND


MIL-C-23806/2C
20 February 1990
SUPERSEDING
MIL-C-23806/2B(EC)
23 June 1969

MILITARY SPECIFICATION SHEET

CABLE, RADIO FREQUENCY, COAXIAL, SEMIRIGID, FOAM DIELECTRIC, 7/8 INCH, 50 AND 75 OHM, (RG-332/U, RG-333/U, RG-336/U, AND RG-306A/U)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-23806.

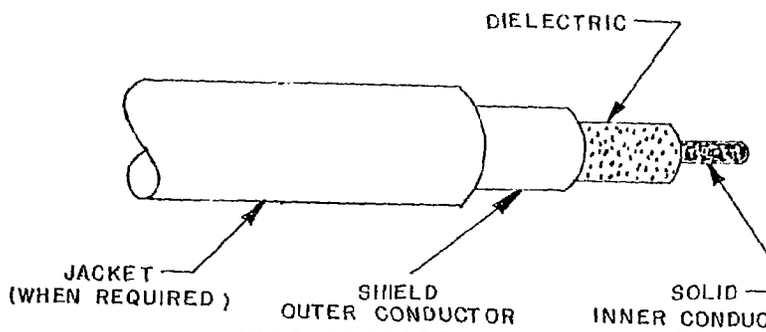

Inches	mm
.002	0.05
.003	0.08
.004	0.10
.006	0.15
.058	1.47
.173	4.39
.288	7.32
.801	20.35
.875	22.23
1.052	26.72
9.	229.

Characteristics	50-ohm		75-ohm	
	Type I RG-332/U	Type II RG-333/U	Type I RG-336/U	Type II RG-306A/U
	Constructional details			
	(Inch)	(Inch)	(Inch)	(Inch)
Inner conductor (O.D.)	0.288 ±0.003	0.288 ±0.003	0.173 ±0.002	0.173 ±0.002
Outer conductor				
Inside diameter	0.801 ±0.004	0.801 ±0.004	0.801 ±0.004	0.801 ±0.004
Outside diameter	0.875 ±0.006	0.875 ±0.006	0.875 ±0.006	0.875 ±0.006
Jacket				
Minimum wall thickness		.058		.058
Maximum O.D.		1.052		1.052
Minimum bending radius	9	9	9	9
Weight (pounds per 1000 ft. (approximate))	480	545	306	376

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are for general information only.

FIGURE 1. Construction.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:58Z
Check the source to verify that this is the current version before use.

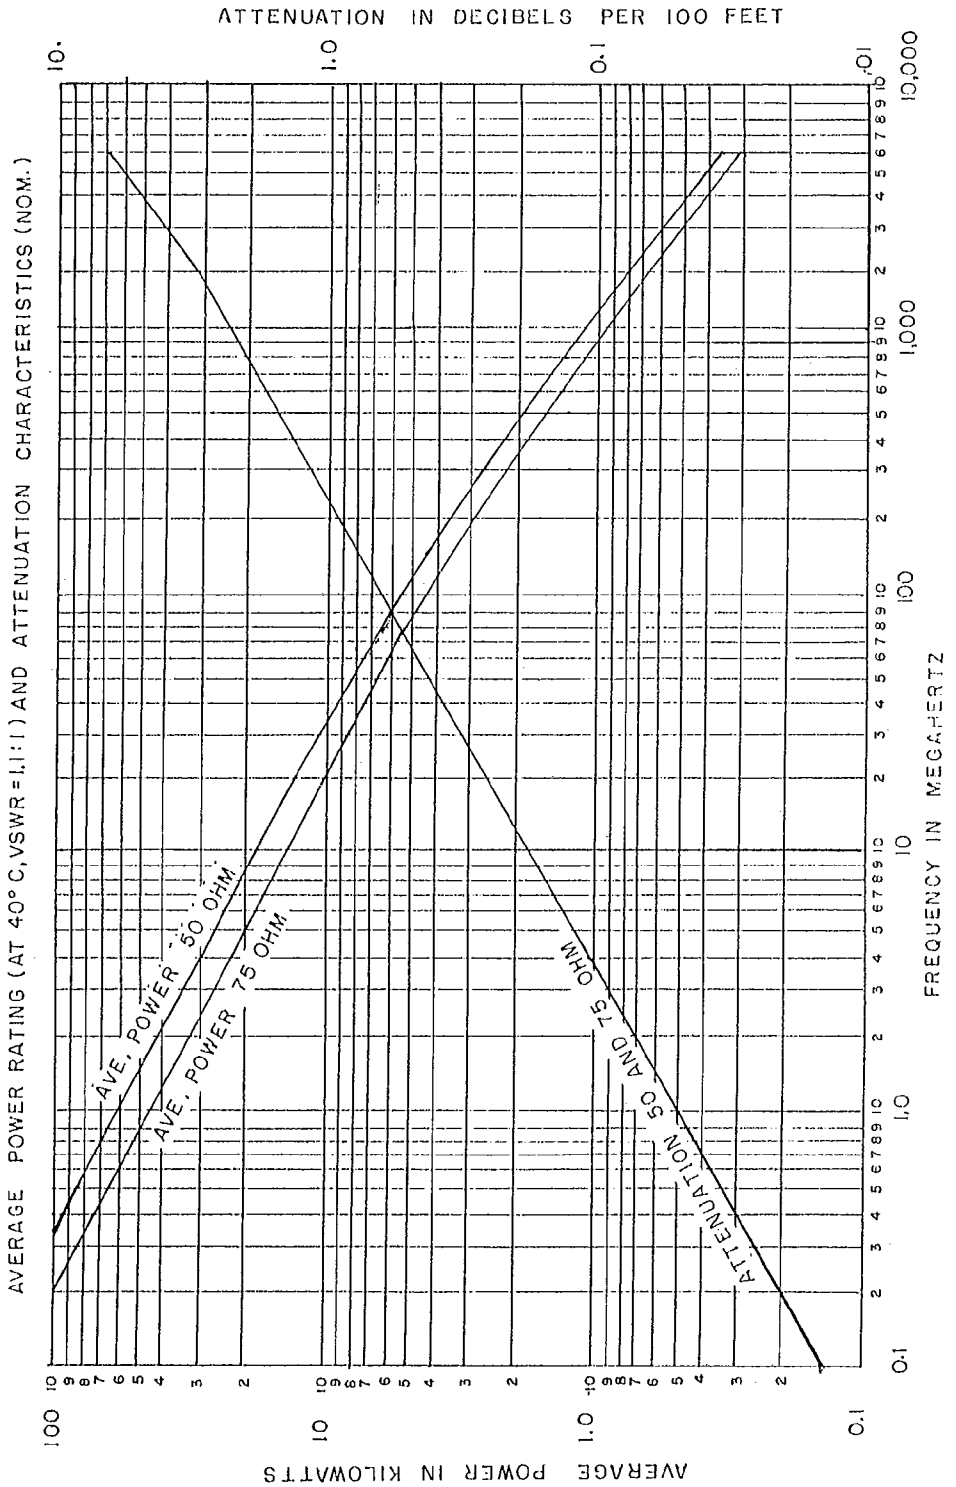


FIGURE 2. .875 inch foam dielectric coaxial cable (50 and 75 ohm).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:58Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

	RG-332/U RG-333/U	RG-336/U RG-306A/U
Impedance (ohms)	50 ± 1	75 ± 2
Capacitance (nominal) (picofarads/ft)	25	16.5
Velocity of propagation (percent)	81 ± 3	81 ± 3
Dielectric strength (at 60 Hertz rms test voltage)	6.2 kv	5.5 kv
Dielectric constant (nominal)	1.5	1.5
Average power at operating frequency	See figure 2	See figure 2
Attenuation	See figure 2	See figure 2

Attenuation measurement at test frequencies of 30, 400, and 3,000 megahertz; maximum attenuation not to exceed 0.30, 1.2, and 5.0 db per 100 feet, respectively.

Voltage standing wave ratio: For each of the following frequency ranges, the VSWR shall not exceed the values at any specific frequency as measured in accordance with MIL-C-23806.

Frequency range (megahertz)	Initial	After temperature cycling	After cooling
500 to 2000	1.15	1.18	1.18
2000 to 5000	1.20	1.25	1.25

Temperature cycling and bending test: Coiling mandrel shall be 27 inches in diameter.

CONCLUDING MATERIAL

Custodians:
Air Force - 85
Navy - EC

Review activities:
Air Force - 99
DLA - ES, IS

User activities:
Army - AR

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 6145-1172-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:58Z
Check the source to verify that this is the current version before use.