MILITARY SPECIFICATION
SWITCH, HYDROSTATIC, MARK 63 MOD 0 AND MOD 1

This amendment forms a part of Military Specification MIL-S-23772 (Wep), dated 25 June 1963, and has been approved by the Naval Ordnance Systems Command, Department of the Navy.

* Page 4, para 3.4.1, rewrite para 3.4.1 as follows:

"3.4.1 Pressure adjustment and response.-The hydrostatic switch after adjustment shall close when a pressure of 6 psi maximum is applied to the sea side orifice and shall open again when the pressure is reduced to 3 psi minimum. Testing shall be in accordance with 4.5.4.1."

Page 5, para 3.4.4, Change: 4.5.4.5
To: 4.5.4,4

* Page 9, para 4.5.4.1, rewrite para as follows:

"4.5.4.1 Pressure adjustment and response.-The pressure adjustment of the switch and the response test shall be accomplished in the following manner:

1. The adjusting screw (Dwg. 1827312) shall be sealed in place in accordance with Dwg. 2419851 Note 5.

2. Connect external source of air to the stem of the hydrostatic switch.

3. Connect suitable indicating means across the electrical leads of the hydrostatic switch.

4. Adjust the switch by means of the adjusting screw (Dwg. 1827312) to close at a pressure of 6 psi maximum and to open at a pressure of 3 psi minimum. (Adjustment of the switch to close at 5 psi is recommended) .
CAUTION : Do not overtighten the adjusting screw (Dwg. 1827312) during adjustment as this may cause damage to the spring (Dwg. 1827313), contact plate assembly (Dwg. 2418498) or body (Dwg. 2419874).

5. .A hydrostatic switch which after adjustment fails to indicate closure of the contacts at 6 psi maximum or fails to indicate contacts open at 3 psi minimum shall be regarded as defective and rejected."

FSC 1350

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:52Z
Check the source to verify that this is the current version before use.

* Page 9, para 4.5.4.2, subpara. 1, line 1, delete:

"or hydraulic" from sentence.

Page 14, para 6.3, Change: 1635169
To: 2419851

Delete: Last two sentences of paragraph in their entirety,

Add: The total crimping force used shall not exceed 2,000 pounds dead load; but shall be adjusted so that the requirements of Paragraph 3.4.4 are met.

* Pages 15 and 16, delete Figures 1 and 2 and substitute the attached sheets.

Page 17, Add: "Custodian
Navy-NAVORDSYSCOM/NAVMINENGRFAC (Code GE)

Review Activity
Navy-NAVORDSYSCOM/NAVMINENGRFAC (Code GE)

User Activity
Navy-NAVORDSYSCOM/NAVMINENGRFAC (Code GE)

Preparing Activity
Navy-NAVORDSYSCOM/NAVMINENGRFAC (Code GE)

Project No. 1350-N012

* Added by previous amendments

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:52Z
Check the source to verify that this is the current version before use.

NOTES:

1. ENTIRE LEAK TEST APPARATUS OF THIS FIGURE SHALL WITHSTAND WITHOUT LEAKAGE 5 PSIG AIR PRESSURE FOR 2 TO 5 MINUTES.
2. (A) TO USE THIS LEAK TEST APPARATUS, OIL SLUG SHALL BE 3 DROPS OF MINERAL OIL, VISCOSITY 20-30 CENTISTOKES @ 25°C, COLORED WITH RED OIL SOLUBLE DYE. (B) SURFACE Ⓒ OF MANOMETER SHALL BE MAINTAINED IN LEVEL POSITION DURING TEST. (C) DURING TEST, TRAILING EDGE OF OIL SLUG SHALL MOVE BEYOND DATUN [-X-] BEFORE TIMING IS BEGUN. (D) MANOMETER VALVE "A" SHALL BE FULLY OPENED TO ATMOSPHERE UNTIL TEST PRESSURE ON PRESSURE SIDE OF SWITCH HAS BEEN ATTAINED, AND FULLY CLOSED TO ATMOSPHERE BEFORE TIMING OF OIL SLUG BEGINS.


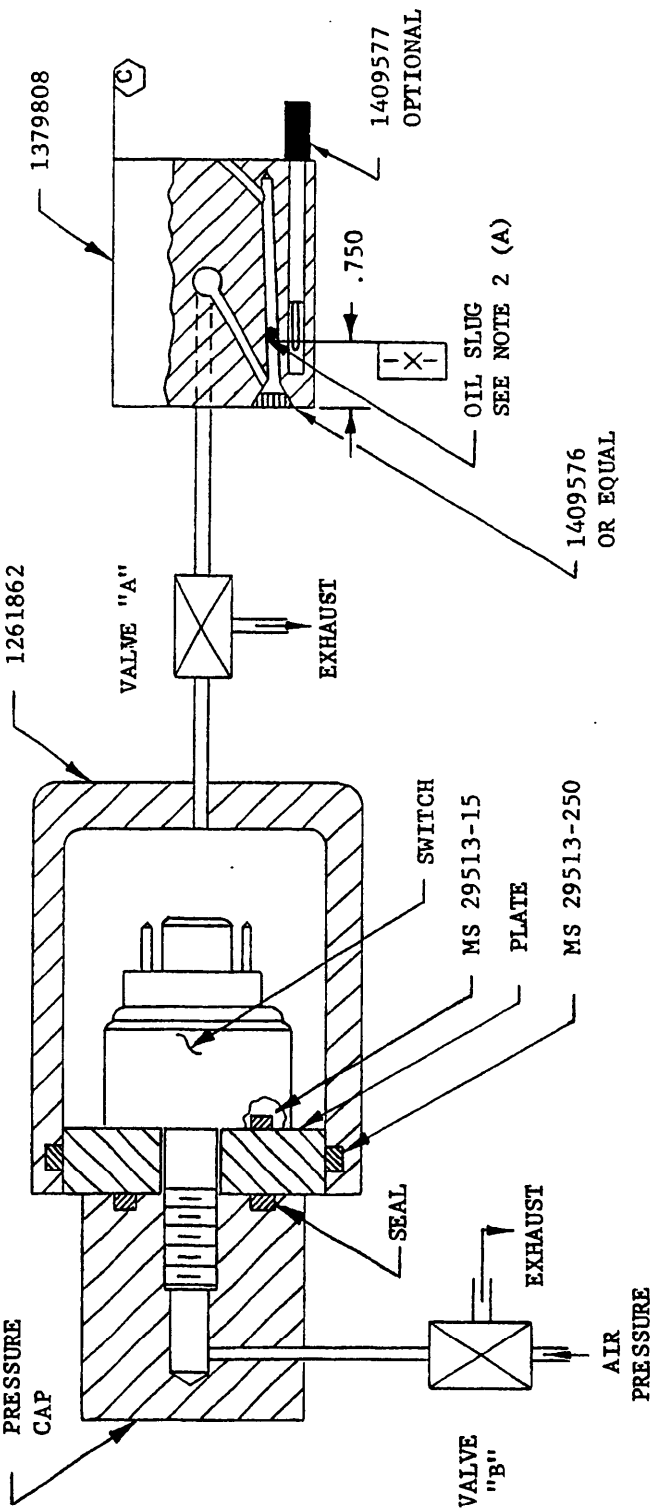


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 202610-19T17:52Z
Check the source to verify that this is the current version before use.

INSIDE CORNERS .005 R MAX.
UNLESS OTHERWISE SPECIFIED:
250 ALL OVER

FIGURE 2

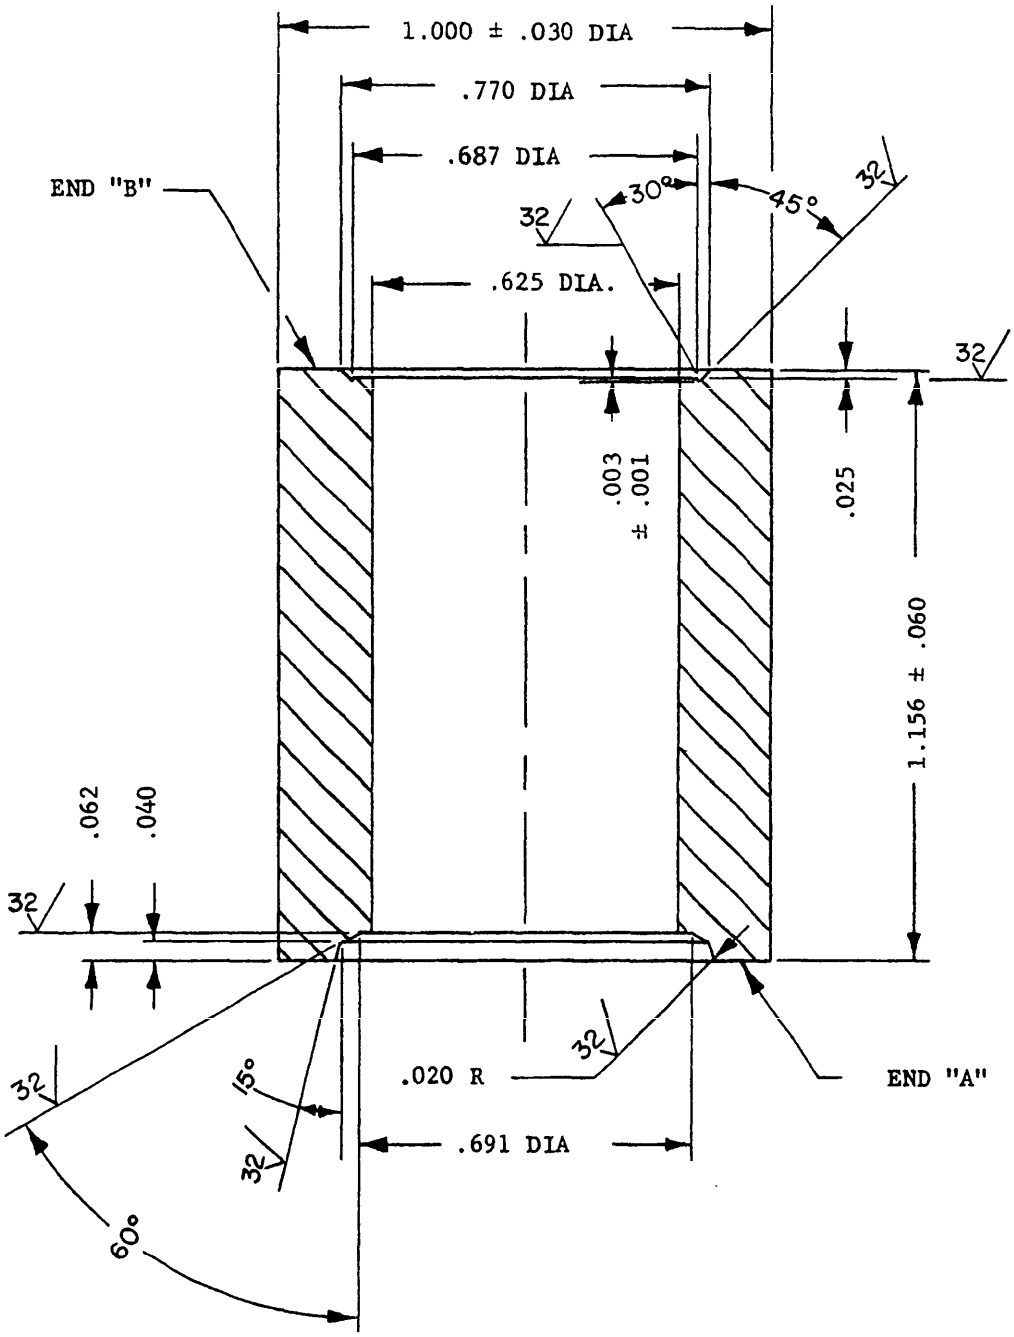

TOL. DECIMALS ± .002
TOL. ANGLES ± 1°

MATL: TOOL STEEL
HEAT TREAT TO
ROCKWELL C 45-55

Source: https://assist.dla.mil -- Downloaded: 202610-19T17:52Z
Check the source to verify that this is the current version before use.