SUPERSEDING
OS 7685E
28 May 1963

MILITARY SPECIFICATION

SWITCH, HYDROSTATIC, MARK 63 MOD 0 AND MOD 1

This specification has been approved by the Bureau of Naval Weapons, Department of the Navy

1. SCOPE

1.1 This specification covers the Switch Hydrostatic Mark 63 Mod 0, Bureau of Naval Weapons LD 479921 and Mark 63 Mod 1, Bureau of Naval Weapons ID 48490, for test and evaluation purposes. The Switch, Hydrostatic, Mark 63 Mod 0 is an integral art of and initiates the switch delay action of the Switch Delay, Mark 64 Mod 0 and 2 Bureau of Naval Weapons LD 479599 and LD 496474. The Switch Hydrostatic Mark 63 Mod 1 is a similar device and is an integral part of the Switch Delay Mark 64 Mod 3,

2. APPLICABLE DOCUMENTS

2.1 The following standards, drawings, and publications or such portions thereof as designated herein of the issue in effect on the date of invitation for bids form a part of this specification.

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-354	Temperature and Humidity Test for Use in Production of Fuzes

FSC 1350

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:52Z
Check the source to verify that this is the current version before use.

DRAWINGS

BUREAU OF NAVAL WEAPONS

ID 548490	Switch, Hydrostatic, Mark 63 Mod 1
LD 479921	Switch, Hydrostatic, Mark 63 Mod 0
LD 480202	Container (Inner) for Switch, Hydrostatic, Mark 63 Mod 0 Type
LD 480203	Container (Outer) for Switch, Hydrostatic, Mark 63 Mod 0 Type
1476194	Marking Instructions for Storage and Shipping Containers

And all drawings, standards and specifications listed thereon. In the following specification, all referenced drawing numbers are listed on BUWEPS LD 479921 or LD 548490 unless otherwise designated.

CLASSIFICATION OF DEFECTS

BUREAU OF NAVAL WEAPONS

CD 1635169	Switch, Hydrostatic, Mark 63 Mod O
CD 2419851	Switch, Hydrostatic, Mark 63 Mod 1

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer,)

2.2 Other publications. - The following publications form a part of this document, Unless otherwise indicated, the issue in effect on the date of invitation for bids shall apply.

NATIONAL BUREAU OF STANDARDS PUBLICATIONS

Handbook H28	Screw Thread Standards for the Federal Services

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington 25, D. C.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:52Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 **Description.** - The Switch, Hydrostatic, Mark 63 Mod 0 or Mod 1 is a single circuit switch closed by water pressure at approximately ten feet of depth and completes the electrical circuit in the Switch Delay Mark 64 Mods 0, 2 or 3. It is a small housed switch with a threaded stem having a small orfice for sea water entry. Pressure from sea water acting on a diaphragm within the switch closes the switch contacts.

3.2 General requirements.

3.2.1 **Preproduction samples.** - Unless otherwise specified in the contract or order preprodction samples of the Switch, Hydrostatic, Mark 63 Mod 0 or Mod 1 shall be manufactured using the methods and procedures proposed for the production lot. These samples will be tested as specified in section 4 herein and are for the purpose of determining that the production item meets the requirements of this specification and the design. Provision of samples shall be in accordance with 4.1.2.

3.2.2 **Materials, finishes, coatings, construction and dimensions.** - Materials, finishes, coatings, construction and dimensions for the Switch, Hydrostatic Mark 63 Mod 0 or Mod 1 shall meet the requirements of LD 479921 or LD 548490 and this specification. Examination shall be in accordance with 4.5.1.

3.2.3 **Marking.** - Marking of assemblies sub-assemblies and parts shall be in accordance with the applicable drawings listed in BUORD LD No. 479921 or LD 548490.

3.2.4 **Interchangeability.** - Component parts of assembled units (unless otherwise specified on the applicable drawings) fabricated in strict agreement with their applicable drawings shall be interchangeable and shall assemble with mating components of the unit without selection or fitting. If, during assembly of the fabricated parts of a unit, selection or fitting is required and changes in dimensions are necessary, no changes in the parts as delineated on applicable drawings will be made without prior revisions and correction of the applicable drawings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:52Z
Check the source to verify that this is the current version before use.

3.2.5 Gages. - The contractor shall provide himself with whatever gages are necessary and adequate to insure that the material to which this specification applies will meet the dimensional requirements shown on the applicable drawings. If so stipulated in the contract, order, or requisition, the Government will furnish drawings of pertinent Navy Final Inspection Gages for guidance in the design of the contractor's inspection gages. However, such procedure shall not serve to relieve the 'contractor of his responsibility, in the design and manufacture of such gages as may be required in the satisfactory fulfillment of the contract requirements, but is intended to facilitate acceptan ce of all components and assemblies by Navy Final Inspection Gages.

3.2.6 Threads. - Unless otherwise specified, all threads shall be in accordance with the National Bureau of Standards Handbook H28. The class or fit for threads shall be as specified on the applicable drawings, and the NOT-GO gaging practice shall be as set forth in the aforementioned Handbook H28.

3.2.7 Conflicting requirements. - Conflicting requirements arising between this specification or any specifications, publications, or drawings listed herein shall be referred in writing to the procuring agency or appointed agent for interpretation and clarification.

3.3 Definitions. - The following terms will be used thoroughout this specification on the Switch, Hydrostatic, Mark 63 Mod 0 or Mod 1 and are here defined for clarity.

3.3.1 Hydrostatic switch. - Reference to the hydrostatic switch shall mean the Switch, Hydrostatic Mark 63 Mod 0 or Mod 1 as covered by BUORD LD 479921 or LD 548490 respectively.

3.4 Performance requirements and product characteristics. - The Switch, Hydrostatic, Mark 63 Mod 0 shall meet the following perfor - mance requirements and product characteristics:

3.4.1 Pressure response. - The hydrostatic switch shall close when a pressure of 6 psi maximum is applied to the sea side orifice and shall open again when pressure is reduced to 3 psi minimum as tested in accordance with 4.5.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:52Z
Check the source to verify that this is the current version before use.

3.4.2 Contact resistance. - The electrical resistance of the closed contacts of the hydrostatic switch shall not exceed 0.2 ohms as measured under a maximum potential of 1.5 volts d-c as tested in accordance with 4.5.4.2.

3.4.3 Insulation resistance. - The insulation resistance of the hydrostatic switch shall be 50 megohms or greater when measured at 500 volts d-c and tested in accordance with 4.5.4.3. This resistance value shall be met after conditioning the switch for 24 hours at a relative humidity of 70 ± 20 percent at a temperature of 85°F ± 15°F.

3.4.4 Leakage. - The hydrostatic switch shall withstand an operating pressure as indicated in the schedule below, when applied to the sea side without leakage when tested as specified in 4.5.4.5.

MOD	PRESSURE
0	60 + 5 - 0 psi
1	300 + 30 - 0 psi

3.5 Environmental requirements.

3.5.1 Vibration, transportation, storage and handling.- The hydrostatic switch, packed and packaged as defined in 5, mounted as specified in 4.6.1 shall be subjected to tests as specified in 4.6.1 and thereafter shall show no damage and shall meet all the performance requirements and product characteristics of this specification.

3.5.2 Vibration, ready-non-operating, or ready condition. - The hydrostatic switch less pack or packaging shall be mounted and subjected to the vibration tests specified in 4.6.2 and thereafter shall show no damage and shall meet all performance requirements and product characteristics of this specification.

3.5.3 Shock, free fall drop. - The hydrostatic switch, packaged and packed as called for in 5, shall meet acceptably all performance requirements and product characteristics of this specification after being subjected to the free fall drop test of 4.6.3.

3.5.4 Shock, transporation, storage and handling. - The hydrostatic switch, packed and packaged as specified in 5, shall be subjected to tests as specified in 4.6.4 and thereafter shall show no damage and shall meet all performance requirements and product characteristics of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:52Z
Check the source to verify that this is the current version before use.

3.5.5 Shock, ready-non-operating, or ready condition.- The hydrostatic switch less pack or packaging shall be mounted and subjected to the shock tests specified in 4.6.5 and thereafter shall show no damage and shall meet all performance and product characteristics of this specification.

3.5.6 Temperature and humidity. - The hydrostatic switch shall be subjected to the temperature and humidity conditions specified in 4.6.6 and thereafter shall show no corrosion or damage and meet the performance requirements and product characteristics of this specification.

3.6 Crimping (Applicable to Mod 1 only). - Crimping of the circumferential lip on the Cup, Drawing 2419852, shall be performed in accordance with the crimping procedure of 6.3.

3.7 Workmanship. - The equipment, including all parts and accessories, shall be constructed and finished in a manner to assure compliance with all requirements of this specification. Particular attention shall be paid to neatness and thoroughness of assemblage, and freedom of parts from foreign materials, burrs and sharp edges. The workmanship exhibited in the preproduction samples will be evaluated to determine acceptability. The approved standards of workmanship will thereby become a minimum production requirement of all units offered for acceptance.

4. QUALITY ASSURANCE PROVISIONS

4.1 Government inspection. - The Government representative will examine the contractor's records and processes and will witness or perform examinations deemed necessary to assure that components and assemblies of the Switch, Hydrostatic, Mark 63 Mod 0 are in accordance with all applicable requirements.

4.1.1 Sampling. - Unless otherwise specified and when applicable, the sampling plans and procedures used in determination of acceptability of product shall be conducted in accordance with MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 202610-19T17:52Z
Check the source to verify that this is the current version before use.

4.1.2 Preproduct ion sample. - Unless otherwise specified for each contract or order, a representative sample of 12 Hydrostatic Switches, Mark 63 Mod 0 or Mod 1 shall be manufactured using the methods and procedures proposed for the production lot. These shall be submitted to the Government inspectoe for preproduction tests at an activity designated in the contract or by the Bureau of Naval Weapons, for purposes of determining compliance with the requirements of the contract, specifications and drawings. Further production; of the item by the contractor prior to approval of the contracting activity or the completion of tests on preproduction samples shall be at the contractor's risk.

4.1.3 Lot size - As applied to Government inspection of units of product the term "lot" shall mean "Inspection lot", i.e., a collection of units of product submitted by a supplier for Government inspection. Unless otherwise specified, the number of units of product in "inspection lots" will be as determined by the Government Inspector and may differ from the uantity designated in the contract or order in a lot for production, shipment or other purpose.

4.1.4 Periodic production samples. - From each succeeding lot or grand lot of three hundred (300) or less, a random sample of six (6) hydrostatic switches will be selected by the Government inspector for submission to a Bureau of Naval Weapons designated activity to determine compliance of the samples with the requirements of the contract, specification and drawings. The sample shall be considered satisfactory only if each unit meets the performance requirements and product characteristics of 3.4 and the environmental requirements of 3.5.

4.2 Contractor s inspection. - Unless otherwise required by the procuring activity, the contractor is responsible for the performance of all tests and examinations to assure that Switch, Hydrostatic, Mk 63 Mod 0 or Mod 1, delivered to the Government, is in full accordance with all applicable requirements. In addition, the contractor is required to maintain records of all tests and examinations and to make' these records available to the Government representative upon request.

4.3 Classification of tests. - The inspection and testing of the hydrostatic switch shall be classified as fol lows:

4..3.1 Acceptance tests. - These tests arc to be accompl i shed on hydrostatic switches being submitted for acceptance under contract. Inspection and test procedures shall be

Source: https://assist.dla.mil -- Downloaded: 2026t10-19T17:52Z
Check the source to verify that this is the currentversion before use.

submitted for Government approval prior to commencement of production. Acceptance tests shall be performed by the manufacturer, These tests are defined in 4.5.

4.3.2 Preproduction and periodic production tests. - Preproduction and periodic production tests are those which are accomplished on samples selected as specified in 4.1.2 and 4.1.4 which are representative of the Production of the hydrostatic switch after the award of the contract to determine that the lot and production meet the requirements of this specification. These tests are detailed in 4.6, Acceptance shall be based on no defects in a sample. Failure of a sample to comply with these requirements will l result in the rejection of the lot or the cessation of production as determined by the procuring activity.

4.4 Test equipment. - The following items of special test equipment are require to perform the acceptance tests set forth in this specification:

Equipment for supplying up to 300 psi air pressure to stem orifice of hydrostatic switch.

4.5 Acceptance tests.

4.5.1 Examination. - The Switch, Hydrostatic, Mark 63 Mod 0 or Mod l-shall be examined to determine conformance with this specification and LD 479921 or LD 544890 and all drawings listed thereon. Exam inat ion shall be conducted as specified in CD 1635169 for the Mod 0 and in CD 2419851 for the Mod 1, Sampling shall be in accordance with MIL-STD-105 and the Acceptable Quality Level (AQL) as specified in the applicable CD. In regard to Critical defects, inspection lot sizes of 150 or less shall be examined 100%. For inspection lot sizes of 151 to 3200, use a sample of 150 units, acceptance number zero. For inspection lot sizes greater than 3200, use the sample size as indicated in MIL-STD-105, acceptance number zero.

4.5.2 Test conditions. - Unless otherwise specified the test procedures of 4.5.4 shall be accomplished under the following-conditions:

4.5.2.1	Temperature:	Room ambient 65 degrees F to 95 degrees F. (18.33 degrees C to 35.00 degrees C)
4.5.2.2	Altitude:	Normal ground.
4.5.2.3	Vibration:	None.
4.5.2.4	Humidity:	Room ambient to 95 percent relative maximum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:52Z
Check the source to verify that this is the current version before use.

4.5.3 Test and inspection equipment and facilities. - The manufacturer shall furnish and maintain all necessary test equipment, facilities and personnel for performing all acceptance tests. The test equipment shall be adequate in quantity, and when definite requirements are not specified they shall be of sufficient accuracy and quality to permit performance of the required acceptance tests.

4.5.4 Test procedure.

4.5.4.1 Pressure response. - The pressure response test shall be accomplished in the following manner:

1. Connect external source of air or hydraulic pressure to the stem of the hydrostatic switch.

2. Connect suitable indicating means across the electrical leads of the hydrostatic switch.

3. Apply pressure of 6 psi maximum to the stem orifice of the hydrostatic switch. -

4. Reduce pressure to 3 psi minimum.

Any hydrostatic switch which fails to indicate closure of the contacts at 6 psi maximum or which fails to indicate contacts open at 3 psi minimum shall be regarded as defective.

4,5.4.2 Contact resistance. - The contact resistance test shall be accomplished in the following manner:

1. Connect external source of air or hydraulic pressure to the stem of the hydrostatic switch.

2. connect suitable meter across the electrical leads of the hydrostatic switch.

3. Apply pressure of 6 psi maximum to the stem orifice of the hydrostatic switch and measure resistance of circuit through electrical leads.

4. Reduce pressure of 3 psi minimum.

Any hydrostatic switch which indicates a resistance of greater than 0.2 ohms at 6 psi maximum or which fails to open upon reduction of pressure to 3 psi minimum shall be regarded as defective.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:52Z
Check the source to verify that this is the current version before use.

4.5.4.3 Insulation resistance. - The insulation resistance tests shall be accomplished as specified in MIL-STD-202, Method 302 Test Condition A. The insulation resistance shall be checked between the following points:

1. Between the two electrical leads.

2. Between each of the two electrical leads and the body of the switch.

Any hydrostatic switch which indicates an insulation resistance of less than 50 megohms between any of the above points, shall be regarded as defective.

4.5.4.4 Leakage - The hydrostatic switch shall be tested for leakage by application of air pressure as indicated below to the orifice in the sea side of the switch, for a period of 30 seconds minimum. The test fixture of Figure 1 shall be used for this purpose. Any hydrostatic switch which shows evidence of leakage, as indicated by a movement of the oil slug for more than 1 inch in the 30 second timing period, shall be regarded as defective.

MOD	PRESSURE
0	60 + 5 - 0
1	300 + 30 - 0

4.6 Preproduction and periodic production tests.- These tests are to be performed by a Bureau of Naval Weapons designated activity and are not to be performed by the contractor unless authorized by the procuring activity.

Source: https://assist.dla.mil -- Downloaded: 202610-19T17:52Z
Check the source to verify that this is the current version before use.

4.6.1 Vibration, transportation, storage and handling.- The hydrostatic switch packaged and packed in shipping containers as indicated in 5, shall be mounted on a vibration platform equipped with barriers s) as to allow free movement of the container relative to the platform but prevent the devices from falling off the platform. The motion of the platform shall be such that any point on the platform moves in a circular path one inch in diameter with the plane of the circle perpendicular to the platform. The frequency shall be within the range of 240 to 300 cycles per minute, The package of units shall be vibrated for a period of one half hour on each face of the container. After completing the above vibration test, the hydrostatic switch shall be capable of meeting acceptably all performance requirements and product characteristics of this specification.

4.6.2 Vibration, ready-non-operating, or ready condition. - Mount the hydrostatic switch rigidly to the vibration table by means simulating the actual method of mounting used on service. The vertical displacement component of the vibration shall be simple harmonic motion. The samples shall be mounted on the vibration table so that equal quantities of devices experience vibration perpendicular to the plane of mounting and vibration parallel to the plane of mounting. The units shall be vibrated through a range of frequencies from 700 to 3000 cycles per minutes in 100 cycles per minute increments. The duration of the vibration of each increment shall be one hour. The amplitude of the vibration shall be in accordance with the following schedule.

Source: https://assist.dla.mil -- Downloaded: 202610-19T17:52Z
Check the source to verify that this is the current version before use.

FREQUENCY (cycles per minute)	AMPLITUDE (inches)
700 to 1500	0.030 ± 0.002
1600 to 2000	0.020 ± 0.002
2100 to 2500	0.013 ± 0.001
2600 to 3000	0.009 ± 0.001

After completing the above vibration test the hydrostatic switch shall be capable of meeting acceptably all performance requirements and product characteristic of this specification,

4.6.3 Shock, free fall drop test. - The hydrostatic switch packaged and packed as designated in 5, shall be subjected to a free fall drop shock from a height of thirty inches to a concre te or hard steel surface. This test shall be applied to each corner of the packaged unit, Upon completion of the test the hydrostatic switch shall be capable of meeting acceptably all performance requirements and product characteristics of this specification.

4.6.4 Shock, transportation, storage and handling. - The hydrostatic switch packaged and packed as indicated in 5, shall be subjected to three mutually perpendicular shocks of equal magnitude, each shock to be applied normally to one of the faces of the shipping containes. In each test the container is to be accelerated in such a manner that during the first three milliseconds the minimum average acceleration is seventy-fi ve (75) gravity units. The peak acceleration shall be between 125 and 175 gravity units. Upon completion of the above test the hydrostatic switch shall be capable of meeting acceptably all performance requirements and product characteristics of this specification.

4.6.5 Shock, ready-non-operating or ready condition. - The hydrostatic switch shall be subjected to a continuous two-phase shock applied in any direction with respect to the mechanism.

A. The first (impact) phase shall consist of a cha ge of velocity of 5.5 to 7,0 feet per second taking place in from 0.2 to 0.4 millisecond.

B. During the second (drag) phase, the hydrostatic switch shall be accelerated for a minimum time of 15 milliseconds in such a manner that during this time the minimum average acceleration is 100 gravity units. The peak acceleration shall be between 125 and 150 gravity units. Upon completion of the above test the hydrostatic switch shall be capable of meeting acceptably all performance requirements and product characteristics of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:52Z
Check the source to verify that this is the current version before use.

4.6.6 Temperature and humidity. - The hydrostatic switch shall be subjected to the temperature and humidity test procedure of MIL-STD-354. After completion of the above test, the hydrostatic switch shall be capable of meeting acceptably all performance requirements and product characteristics of this specification.

4.7 Acceptance criteria.

4.7.1 Preproduction. - Failure of any switch assembly to meet any of the requirements and tests of this specification shall be cause for regarding the switch assembly as defective and shall result in the rejection of the preproduction sample.

4.7.2 Production acceptance. - Failure of any switch assembly to meet any of the requirements and tests of this specification shall be cause for regarding the switch assembly as defective and shall result in rejection of the lot, based on the AQL as noted in CD 1635169 for the Hydrostatic Switch Mark 63 Mod 0, and CD 2419851 for the Hydrostatic Switch Mark 63 Mod 1.

4.7.3 Periodic. - Failure of any switch assembly to meet any of the requirements and tests of this specification shall be cause for regarding the switch assembly as defective and shall result in the rejection of the lot from which the sample was taken.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging.

5.1.1 Level A.

5.1.1.1 Cleaning and drying. - (Not applicable)

5.1.1.2 Preservative application. - (Not applicable)

5.1.1.3 Unit packaging. - Twenty (20) switch assemblies shall be unit packaged in accordance with the requirements of Bureau of Naval Weapons LD 480202.

Source: https://assist.dla.mil -- Downloaded: 202610-19T17:52Z
Check the source to verify that this is the currentversion before use.

5.1.2 Level B. - (Not applicable)

5.1.3 Level C. - (Not applicable)

5.2 Packing.

5.2.1 Level A.

5.2.1.1 Exterior container. - Twelve (12) unit containers shall be packed in accordance with the requirements of Bureau of Naval Weapons LD 480203.

5.2.2 Level B. - (Not applicable)

5.2.3 Level C. - (Not applicable)

5.3 Marking.

5.3.1 Normal markings. - In addition to the markings required by contract or order, unit packages, intermediate-packages (when used) and shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

5.3.1.1 For detailed marking instructions, see Bureau of Naval Weapons Drawing No. 1476194.

6. NOTES

6.1 Intended use. - The Hydrostatic Switch Mark 63 Mod 0 is intended for use in the Switch, Delay Mark 64 Mod 0 or 1. The Hydrostatic Switch Mark 63 Mod 1 is intended for use in the Switch, Delay Mark 64 Mod 3.

6.2 Ordering data. - Unless otherwise specified, procurement documents shall specify Level A packaging and packing requirements for all shipments.

6.3 Mandatory crimping procedure.(Applicable to Mod 1 only). - The use of a crimping tool constructed substantially as shown in Figure 2 shall be used to crimp the Hydrostatic Switch Mark 63 Mod 1. The crimping shall be done in a press with suitably guided and parallel platens. The crimping tool shall be suitably guided during the crimping to insure adequate centering of the crimp and parallelness of the faces of the crimping tool with surface "S" denoted on the Assembly Dwg. 1635169. End "A" of the crimping tool shall be used first. The total crimping force shall be 2,000 ± 200 pounds dead load. Then end "B" shall be used and a force of 3,000 ± 250 pounds dead load shall be applied.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:52Z
Check the source to verify that this is the current version before use.


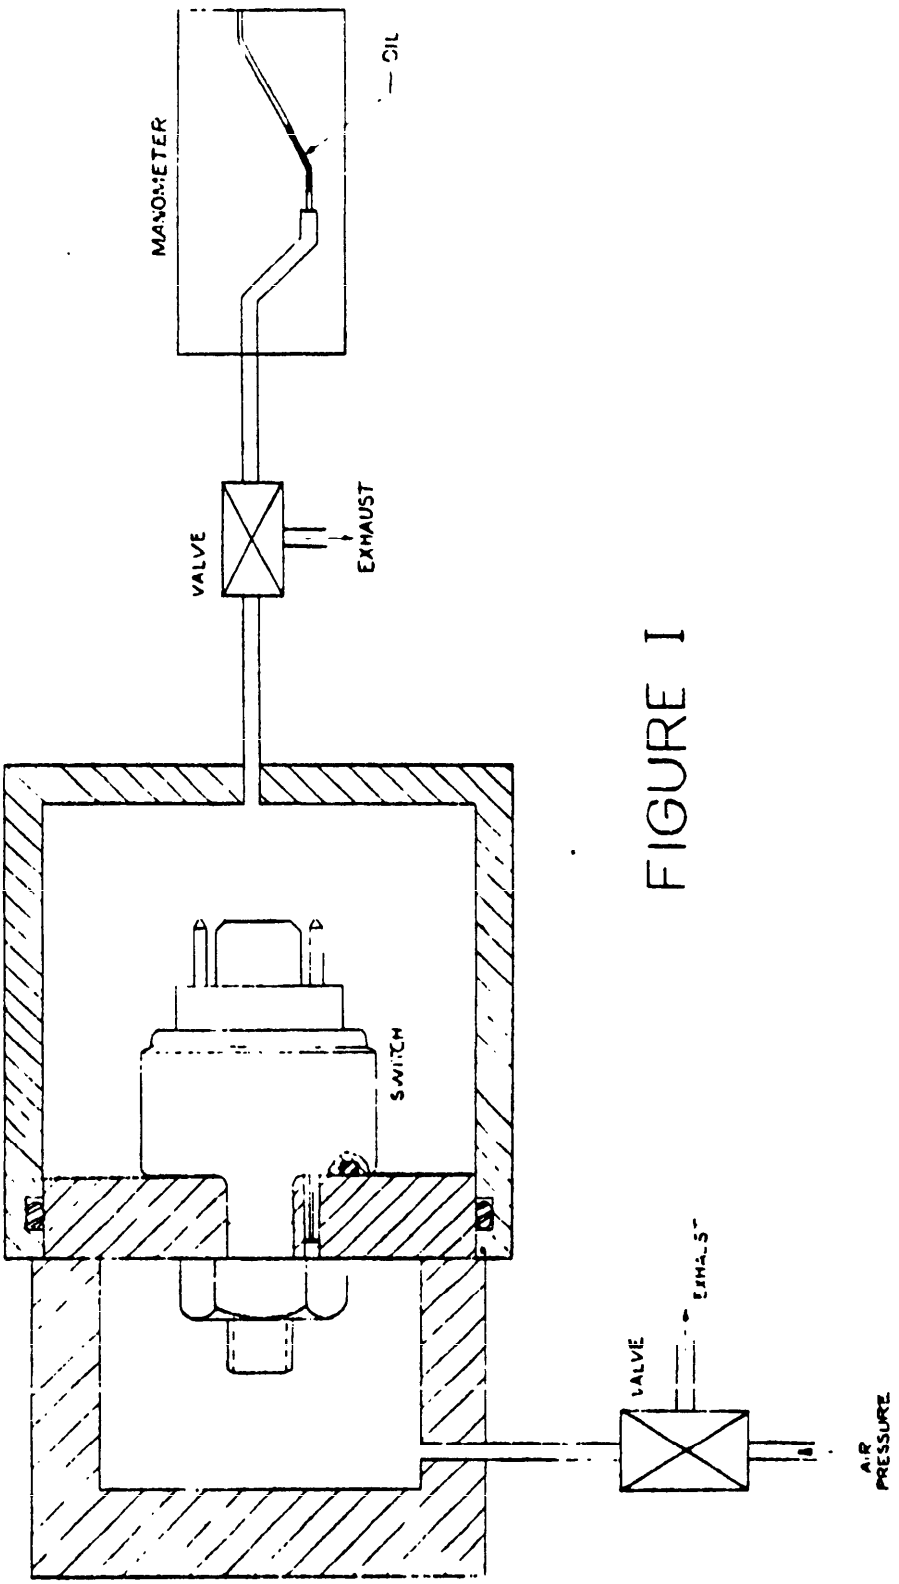


FIGURE I

Source: https://assist.dla.mil -- Downloaded: 202610-19T17:52Z
Check the source to verify that this is the current version before use.

INSIDE CORNERS .005 R MAX
UNLESS OTHERWISE SPECIFIED:
250 √ ALL OVER

FIG. 2

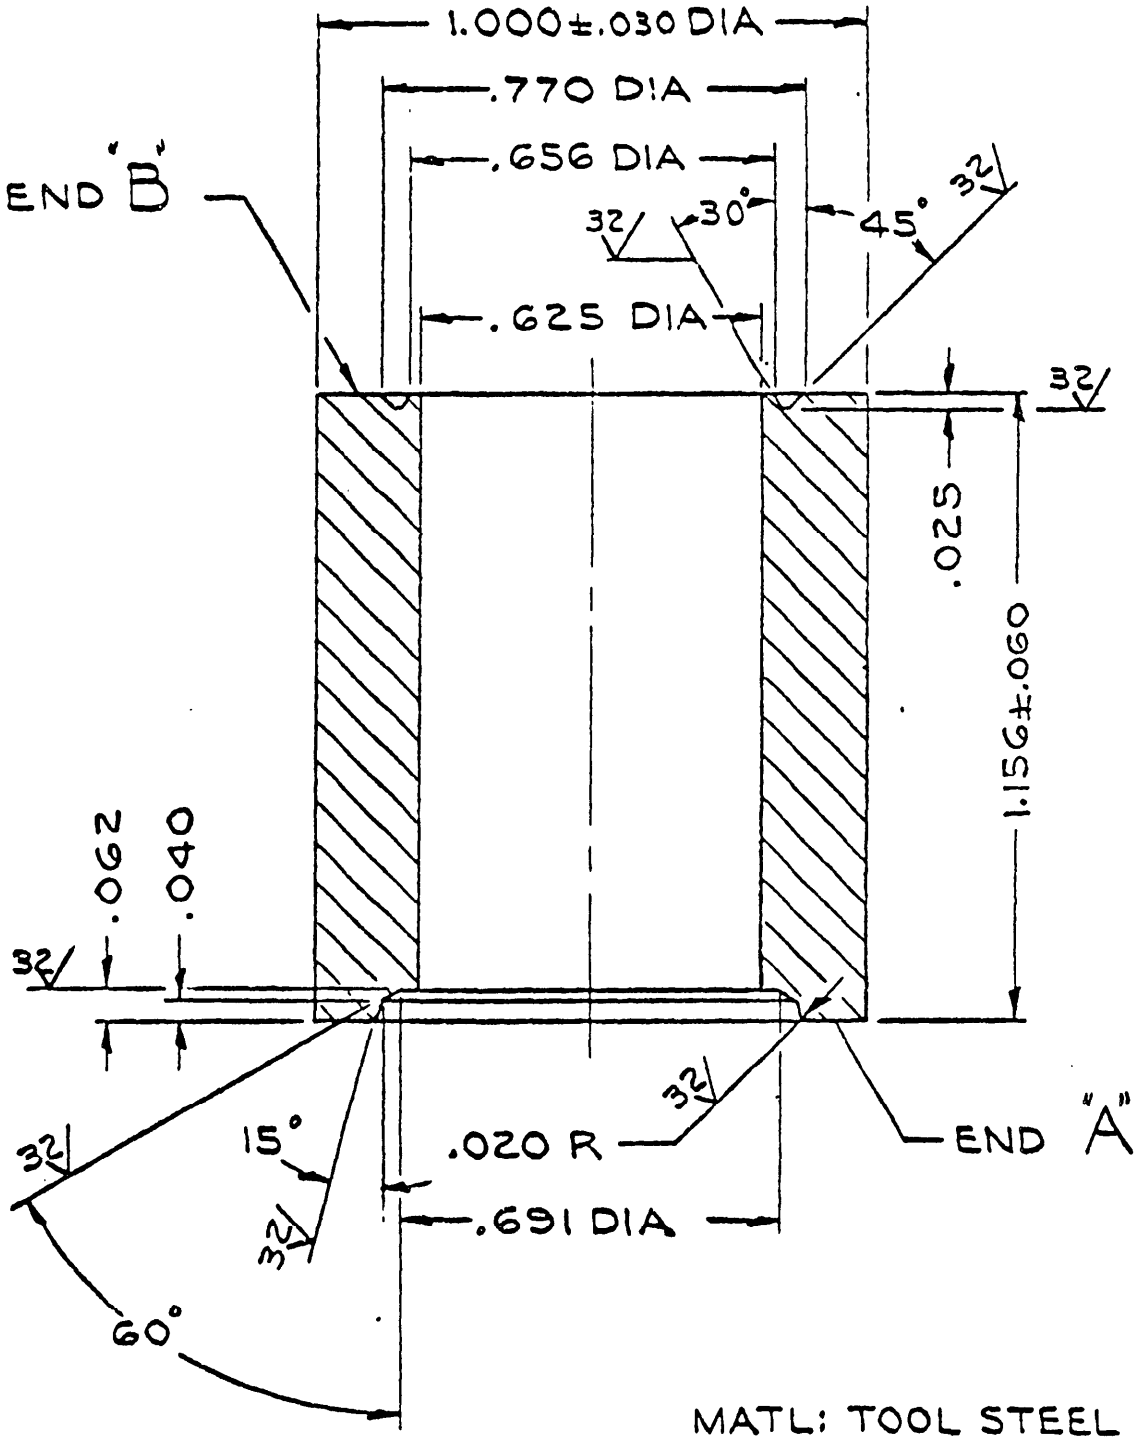

TOL DECIMALS ±.002
TOL ANGLES ±1°

MATL: TOOL STEEL
HEAT TREAT TO
ROCKWELL C 45-55

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:52Z
Check the source to verify that this is the current version before use.

NOTE: It is recommended that to meet the requirement of 4.5.4.4 the following test be conducted prier to assembling the diaphragm into the switch.

6.4 Advisory diaphragm test (Applicable to Mod 1 only). - Nount the diaphragm in a fixture simulating the mounting in the hydrostatic switch cup, except that the force used to hold the body against the diaphragm shall be 1200 ± 100 pounds. Using the test set up of Figure 1, subject the diaphragm to an air pressure of 300 + 0 - 0 psi.

Notice. - When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way suppl ied the said drawings, specifications, or other data is not to be regarded by implication or therwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture use or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:52Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:52Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET
NAVWEPS FORM 4121/3 (8-62)

FORM APPROVED
BUDGET BUREAU NO. 48-R300

INSTRUCTIONS

This sheet is to be filled out by Government or contractor personnel involved in the use of this specification in procurement of products for ultimate use by the activity shown on the reverse of this sheet.

This sheet is provided for obtaining information which will aid the activity shown in insuring that through use of this specification suitable products can be procured with a minimum amount of delay and at the least cost.

Comments and the return of this sheet will be appreciated.

Fold on dotted lines on reverse side, staple in corner, and send to the activity shown.

SPECIFICATION (No. and ab. ev. title)

ORGANIZATION	CITY	STATE

CONTRACT NUMBER	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A DIRECT GOVERNMENT CONTRACT ☐ OR A SUBCONTRACT ☐

1. HAS ANY PART OF THIS SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
(If so, give paragraph number and wording, and recommendations for correcting the deficiencies.)

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?
☐ YES ☐ NO IF YES, IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If additional papers are attached, send this form and papers in an envelope. This form is addressed for use in window envelope when appropriate.)*

SUBMITTED BY (Print name and title)	DATE

Source: https://assist.dla.mil -- Downloaded: 202610-19T17:52Z
Check the source to verify that this is the current version before use.

Fold

DEPARTMENT OF THE NAVY
BUREAU OF NAVAL WEAPONS
WASHINGTON 25, D.C.

OFFICIAL BUSINESS

POSTAGE AND FEES PAID
NAVY DEPARTMENT

Chief, Bureau of Naval Weapons (RREN-5)

Navy Department

Washington 25, D. C.

Fold

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:52Z
Check the source to verify that this is the current version before use.