DOD-STD-35-36B(MI)
20 February 1979
SUPERSEDING
MIL-STD-35-36AMI)
10 AUGUST 1976

MILITARY STANDARD

SEALS, GASKETS, AND PACKING

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

FSC EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Seals, Gaskets, and Packing
Automated Engineering
Document Preparation System

DOD-STD-35-36B(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Ccmnander, U.S. Army Missile Research and Development Command, ATTN : DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this documenter by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-36B(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for Seals, Gaskets, and Packing.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DoD-NTJ-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	14
	2.1	Issues of documents	14
	2.2	Other publications-	15
	3.	DEFINITIONS - - - - -	18
	4.	GENERAL REQUIREMENTS	19
	4.1	Introduction- - - -	19
	4.2	Specification Requirement Sheet (SRS)	19
	4.3	Configuration - -	19
	4.3.1	Dimensions- - - - -	19
	4.3.2	Illustrations - - -	19
	4.4	Units of measure- -	19
	5.	DETAILED REQUIREMENTS	20
	5.1	Introduction- - - -	20
	5.2	MSE Formats - - - -	20
	5.3	Referenced documents-	20
	5.4	Test matrix - - - - -	20
	5.5	Tabulation- - - - - -	21
	5.6	Keyword Code Index (KCI) and Standard Paragraphs - - - -	23
	5.6.1	Interrelationship of Codes-	23
	5.6.2	Automatic MSE Data- -	23
	5.6.3	DOD-STD-35 Tables - -	23

TABLES

Table	I.	Title Index - - - - - -	2
	II.	Test matrix - - - - - -	21
	III.	Tabulation candidates -	22

APPENDICES

Appendix	A.	Illustrations - - - - -	156
	B.	Characteristic Code Index	179
		Index	185

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:56Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:56Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for Seals, Gaskets, and Packing.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. It is recommended that MIL-HDBK-692 A Guide to the Selection of Rubber O-rings, be reviewed prior to using this dash-numbered part book.

The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE'S for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

The MSE title mayor may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
GASKET	216ØØ9	HH-G-76	CLOTH, ASB-MTLC
		HH-G-101	ASB, OR.CORK MTLC
		HH-P-96	PAPER, FBR SHEET
		MIL-G-432	RBR, SYNTH, NM
		MIL-G-13210	RBR, GAS MASK CSTR
		MIL-G-14243	MET AND ASB
		MIL-G-15342	MET AND ASB, SPIRAL WOUND
		MIL-G-16265	MET ASB, SPIRAL WOUND
		MIL-G-16959	MTLC, BLR ECON AND SUPHTR HH
		MIL-G-17553	MTLC O-RING
		MIL-G-17927	MTLC ASB COVER, RBR CORE
		MIL-G-19769	RBR, SYNTH OIL RESISTANT
		MIL-G-20078	RBR, MET INSR, ARMD HATCH
		MIL-G-21032	MTLC ASB, SPL WND
		MIL-G-21569	RBR, SYNTH, CYL LINER SEAL
		MIL-G-21610	RBR, SYNTH, HE, VARIOUS CROSS SEC
		MIL-G-29170	SYNTH RBR, REINFORCED
		MIL-G-46875	RFI SHIELDING
		MIL-G-47197	SHLD, ELEK ORIENTED WIRES EMBEDDED
		MIL-G-50954	XM5, XM9, AT DML

Source: https://assist.dla.mil -- Downloaded: 2026Ø10-23T20:56Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
GASKET	216ØØ9 (CONT)	MIL-G-50955	XM2, XM16, ANT ASSY
		MIL-G-50960	IND HUM, PLUG
		MS3322	CNDCT, ELEC CONN, JAM NUT MOUNT
		MS9134	TYPE X OR XV
		MS9135	TYPE XI
		MS9136	TYPE XII, XIV-A, XIV-B. XIV-E, XVII-A, XVII-B
		MS9137	TYPE XIII
		MS9138	TYPE XIV-C AND XIVB
		MS91139	TYPE XVI, XVII-C, -D, -E AND F
		MS9141	MTL, O-RING, l 035 TUBE X .O06 WALL, CRES
		MS9142	MTL, O-RING, .062 TUBE X .006 WALL, CRES
		MS9144	TYPE XX
		MS9202	MTL, O-RING, .062 TUBE X .010 WALL CRES
		MS9203	MTL, O-RING, .094 TUBE X .O06 WALL CRES
		MS9204	MTL, O-RING, .094 TUBE X .O1O WALL CRES
		MS9205	MTL, O-RING, .094 TUBE X .O1O WALL CRES
		MS9371	MTL, O-RING, .035 TUBE X .006 WALL, SIL PLD
		MS9372	MTL, O-RING, .062 TUBE X .006 WALL, SIL PLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	COVERAGE
GASKET	216ØØ9 (CONT)	MS9373	MTL, O-RING, .062 TUBE X .O1O WALL, SIL PLD
		MS9374	MTL, O-RING, .094 TUBE X .006 WALL SIL PLD
		MS9375	MTL O-RING, .094 TUBE X .O1O WALL, SIL PLD
		MS9376	MTL O-RING, .125 TUBE X .010 WALL, SIL PLD
		MS9377	ASB, ENG ACCESS
		MS17840	COP, SPARK PLUG
		MS26577	RBR, APRT MKR LIGHT BASE
		MS27030	RBR, CPLG HALF, QUICK DISC
		MS27196	RBR, FLUID RES, SYNTH OILS AND FUELS
		MS29524	CLOTH, ADPTR LKG FLANGE
		MS29537	CMPSN, CAP, OUTLET FTG
		MS35347	NONMTLC, FLTR, FL, PRESS
		MS35643	SYNTH RUBR, CAP FUEL TANK
		MS35769	COP AND ASB, MTLC ENCASED
		MS3591O	STL, SPARK PLUG
		MS51O07	RBR, SYNTH, BLK
		MS51091	SYNTH RBR, FLTR ELEMENT, FL
		MS51092	COP, FLTR, FL, PRESS, AUTO
		MS52000	RBR, SYNTH, CONN, ELEC

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
GASKET	216ØØ9 (CONT)	MS90484	FLG MT, CONN, ELEC
		MS91607	RBR, SERIES LC CONN
		AN763	CMPSN, SWIVEL FIG FLGD
		AN887	CMPSN, CIRC FORM LT COVER
		AN889	CMPSN, WING POSN LT COVER
		AN899	HIDE, FUSLG LT COVER SCREW
		AN901	AL OR COP, MET TUBE CONN SEAL
		AN904	CORK AND RBR, UPWD RCNDT LT COVER
		AN3119	CMPSN, COM TAIL POSITION LIGHT
		AN6230	RBR, O-RING HYD
		AN6238	CMPSN, HYD FILTER ELEMENT
		AN123020 THRU AN123119	ASB, ANNULAR
GASKET MATERIAL	216ØØ8	HH-G-156	RBR, GENL PRP, SHEET, STRIPS, SHAPES
		HH-C-576	CORK, SHEET AND STRIP
		ZZ-R-710	RBR, 35 DUROMETER HDNS
		MIL-R-900	RBR, 45 DUROMETER HDNS
		MIL-G-1086	SYNTH RBR, FUEL RES
		MIL-G-1149	SYNTH RBR, 50 AND 65 DUROMETER HDNS
		MIL-R-2765	SYNTH RBR, OIL RES, SH, STRIP, EXTR AND MOLDED SHP

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
GASKET MATERIAL	216ØØ8 (CONT)	MIL-R-2778	RBR SH, SOLID, VULC, GPH
		MIL-R-3533	SYNTH RBR, SH, STRIP AND MOLDED
		MIL-C-6183	CORK AND RBR, AROM FUEL AND OIL RES
		MIL-C-6855	SYNTH RBR, OIL AND FUEL RES
		MIL-A-7021	ASBS SH, CPRS, HIGH TEMP RES
		MIL-R-7362	SYNTH RBR, DIESTER SYNTH OIL RES, SH, STRIP, SOLID AND FAB
		MIL-G-12803	NONMETALLIC
		MIL-R-14328	RBR SH, SYNTH MED GP
		MIL-G-20092	FOAMED LATEX, CELLULAR
		MIL-G-20241	WOOL FELT, IMPGRG, ADH PRESS SENS
		MIL-R-21252	RBR SH, SOLID SYNTH SHIPBOARD WATER EVAP
		MIL-G-22050	RBR, POLAR FLUIDS STEAM AND AIR
		MIL-G-23652	RBR, PETRO PHOS ESTER FLUID RES
		MIL-G-23983	SYNTH RBR, OIL RES ACCESS HULL
		MIL-A-24058	ASB PKG IMPGRG
		MIL-R-25988	FLUOROSILICONE RBR ELAS, OIL AND FUEL RES
		MIL-G-38426	RBR, TETFLEYNE RESIN, GLASS FILLED
		MIL-G-46873	MTLC MESH, CYL

Source: https://assist.dla.mil -- Downloaded: 2026Ø1-23T20:56Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
GASKET MATERIAL	216ØØ8 (CONT)	MIL-R-83248	SYNTH RBR FLUOROCARBON ELAS, HI TEMP
		MIL-G-46898	GASKETING, RF AND PRESS
		MS15217	RBR, MOLDED, OIL RES
		MS16720	RBR, MOLDED, OIL RES
PACKING ASSEMBLY	216ØØ2	MIL-P-2911	HYDR, CONICAL AND V TYPES
		MIL-P-21099	HYDR, CONICAL AND V TYPES FIRE RES
		NAS-1523	PKG, WITH RTNR
PACKING, HYDRAULIC	216ØØ3	MIL-G-5514	GLAND DESIGN, GEN REQT FOR
		MS28772	D-RING, SHOCK STRUT
PACKING MATERIAL	21J6ØØ4	HH-P-31	ASB, MTLC CLOTH AND TAPE
		HH-P-41	ASB, ROPE AND WICK
		HH-P-46	ASB, SH, COMPRESSED
		HH-P-106	FLAX OR HEMP
		HH-P-118	ASB, LUBRICATED
		HH-P-I19	CELLULOSE FIBRE ASPHALT SATURATED
		HH-P-125	WICK, COTTONS ROUND
		HH-P-131	METALLIC AND NONMETALLIC
		HH-P-151	RBR SH, CLOTH INSERT
		HH-P-166	SEMIMETALLIC
		MIL-P-1342	LEAD SHREDDED
		MIL-P-2693	DOOR GASKETING, COLD STORAGE, NONWATERTIGHT

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
PACKING MATERIAL	216ØØ4 (CONT)	MIL-P-14574	SYNTH RBR, CLOTH IMPGRG ASB
		MIL-P-16404	ASBESTOS
		MIL-P-37303	MELC AND NONMETALLIC, PLSTC
		MIL-P-17416	MTLC, FLEXIBLE
		MIL-P-17578	PLSTC, WTRTT CLOS
		MIL-P-19152	HYDR HIGH PRESS
		MIL-P-19918	V-RING
		MIL-P-24293	LEATHER, CATTLE HIDE, MINERAL TANNED, HYDR
		MIL-P-24377	BRD, TFE, IMPRG
		MIL-P-24396	BRD, TFE
PACKING PREFORMED	216ØØ1	MIL-P-2863	CONDENSER TUBE
		MIL-P-5315	HYDROCARBON FUEL RESISTANT
		MS29512	HYDROCARBON FUEL RES, TUBE FTG, O-RING
		MS29513	HYDROCARBON FUEL RES, O-RING
		MIL-P-5510	STR THD TUBE FTG BOSS
		MS28778	STR THD TUBE FTG BOSS
		AN6238	CMPSN, HYDR FILTER ELEMENT
		MS24690	HIGH PRESS AIR VALVE
		MIL-P-11719	D-RING SHOCK STRUT
		MIL-P-16685	ROUNDED AND BULK
		MIL-P-17553	PACKING, PREFMD O-RING SYNTH RBR

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX, (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	COVERAGE
PACKING PREFORMED	216ØØ1 (CONT)	MIL-P-18493	CARBON AND CARBON STOCK
		MIL-P-25732	PETRO, HYD, FL RES, 275 DEG F
		MS28775	HYD +275 DEG F, O-RING
		MIL-P-48005	M500 CONTAINER
		MIL-P-48011	XM454 AND XM455 PROJECTILES
		MIL-P-81716	HYDR, +275 DEG F, O-RING
		MIL-P-83461	PETRO, HYDR FLUID RES, IMPROVED PRFM AT 275°F (135°C)
		MS3393	STR THD TUBE FTG BOSS, HYDR -65 DEG F TO +275 DEG F
		MS9020	O-RING, AMS7271
		MS9021	O-RING, AMS7271
		MS9068	O-RING, AMS3304
		MS9241	O-RING. AMS7272
		MS9355	O-RING, AMS7272
		MS9385	O-RING. AMS7267
		MS9386	O-RING, AMS7267
		MS9387	O-RING, AMS7278
		MS9388	O-RING, AMS7278
		MS9770	O-RING, AMS3650
		MS9771	SEAL, AMS3650
		MS9772	O-RING, AMS3617
		MS9773	SEAL, AMS3617
		MS9955	O-RING, AMS3668
		MS9956	SEAL, AMS3668
		MS9966	SEAL, AMS7273
		MS9967	O-RING, AMS7273
		MS9970	O-RING, AMS7279
		MS28900	FOR ELECTRICAL USE
		MS29561	O-RING, SYNTH LUBT RES
		MS33666	AERO, ELAS, RANGE OF SIZES

Source: https://assist.dla.mil -- Downloaded: 2026Ø1-23T20:56Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX= (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
PACKING PREFORMED	216ØØ1 (CONT)	MS33668	ELAS, TUBE FTG, RANGE OF SIZES
		MS35748	AIR BRAKE CPLG
		MS90064	ROUND (WAVE GUIDE FLANGES AND DUMMY LOAD)
		AMS7277	RINGS, SEALING, SYNTH RBR, BUTYL TYPE
		AN6227 AN12385L THRU AN123950	O-RING, HYDR O-RING, AMS7274
		NAS-617	STR THD TUBE FTG BOSS, SYNTH RES
RETAINER, PACKING	216022	MIL-R-8791	HYDR, AND PNEU, TFE RESIN
SEAL	216Ø26	HH-G-156	RBR, GEN PURPOSE, SH, STRIPS, SHAPES
		MIL-R-2765	SYNTH RBR, OIL RES, SH, STRIPS EXTRUDED OR MOLDED SHAPES
		MIL-S-21558	SEAL, PLAIN RADIAL, OIL
		MIL-S-45ØØ5	PLAIN, RADIAL, FLUID, SGL OR MULT SEG MEMBER
		MIL-S-45351	ENGINE SHROUD
		MIL-S-46874	RF AND PRESSURE
		MIL-S-47133	RF, CELLULAR RBR, WIRE MESH EMBEDDED
		MIL-S-47147	RBR EXTRUSIONS? NONCELLULAR
		MIL-S-47180	STEEL, GLASS TO METAL
		MIL-S-51346	RING, SILICON
		MS21205	COVER BOLT, CPRSN TYPE

Source: https://assist.dla.mil -- Downloaded: 2026Ø1-23T20:56Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
SEAL	216Ø26 (CONT)	MS25196	BUSHING, EXTERNAL
		MS27194	PLAIN, RBR, (FUEL RES -65 TO +160°F) MOLD-IN-GROOVE
		MS27195	PLAIN, RBR, (SYNTH OIL RES, -65 TO +275°F) MOLD-IN-GROOVE
		MS27197	PLAIN, RBR, (HOT AIR RES, 400°F) MOLD-IN-GROOVE
		MS27198	PLAIN, RBR, (FUEL RES -65 TO +350°F)
		MS27860	METAL FLUID CONN FTG LOW PRESS
		MS51OO1	PLAIN, SINGLE SEALING MEMBER, NONSPR LOADED
SEAL ASSEMBLY	216ØØ5	MIL-S-52506	SHAFT, MECH, LOW PRESS SELF LUBR
		AN3067	0.375 INCH CONDUIT BOSS
SEALING MATERIAL	216Ø11	MIL-S-21481	WEATHER RES, MOLDED OR EXTRUDED NPRM
SEALING MATERIAL, METAL	2116Ø12	MIL-S-11388	METAL CONTAINER SEAMS
		MIL-S-47180	SEAL, STEEL, GLASS TO METAL
SEAL, PLAIN ENCASED	216Ø16	MIL-S-21558	RADIAL, OIL
		MIL-S-45005	RADIAL, FLUID
		MS27605	ACFT WHEEL BRG, (LARGE DIA)

Source: https://assist.dla.mil -- Downloaded: 2026Ø1-23T20:56Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
SEAL, PLAIN ENCASED	216Ø16 (CONT)	MS51000	SGL SEG MBR, SPR LOADED
		MS51001	SGL SEG MBR, NONSPR LOADED
		MS51906	DUAL SEG MBRS, SPRG LOADED
		MS51907	DUAL SEG MBRS, OPPOSED, SPRG LOADED
		MS51908	SGL SEG MBR FLANGED TYPE
		MS51909	SGL SEG MBR, SHOULDERED CASE
		MS51910	SGL SEG MBR, EXT TYPE
		MS51911	DUAL SEG MBRS, INT SEAL SPR LOADED
		MS51912	DUAL SEG MBRS, ONE SEAL, SPR LOADED
		MS51913	DUAL SEG MBRS, EXT SEAL, SPR LOADED
		MS51914	DUAL SEG MBRS, ONE SEAL, SPR LOADED, SHOULDERED CASE
		MS51915	SEG MBRS, FELT, LEATHER, OR ELASTOMER, SPR LOADED
		MS51916	DUAL SEG MBRS, FELT AND ELASTOMER SPR LOADED SHOULDERED CASE
		MS51917	SEG MBR, FELT, INT TYPE
		MS51918	SGL SEG MBR, FELT, EXT TYPE
		MS51919	SGL SEG MBR, FELT, INT TYPE, SHOULDERED CASE

Source: https://assist.dla.mil -- Downloaded: 2026Ø10-23T20:56Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	COVERAGE
SEAL, PLAIN ENCASED	216Ø16 (CONT)	MS51920	SGL SEG MBR, LEATHER OR ELASTOMER EXTENDED CASE
		MS51921	SGL SEG MBR, LEATHER OR ELASTOMER FACE TYPE
PAD, SILICON RUBBER	236Ø27	ZZR765	SILICON RUBBER

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-P-5315	Packing, Preformed, Hydrocarbon Fuel Resistant
MIL-H-5606	Hydraulic Fluid, Petroleum Base, Aircraft, Missile and Ordnance
MIL-W-12332	Welding, Resistance, Spot, Seam, and Projection, for Fabricating Assemblies of Low Carbon Steel
MIL-F-17111	Fluid, Power Transmission
MIL-S-21558	Seals, Plain or Plain Encased, Oil
MIL-P-25732	Packing, Preformed, Petroleum Hydraulic Fluid Resistant, 275 Deg. F.
MIL-P-81716	Packing, Preformed, Straight Thread Tube Fitting Boss, Type II Hydraulic (-65°F to +275°F)

STANDARDS

FEDERAL

FED-STD-H28	Screw Thread Standards for Federal Services
FED-STD-66	Steel, Chemical Composition and Hardenability
FED-STD-151	Metals, Test Methods
FED-STD-191	Textile Test Methods
FED-STD-595	Colors
FED-STD-6ol	Rubber: Sampling and Testing

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

STANDARDS (Cent)

MILITARY

DOD-STD-35	Automated Engineering Document Preparation system
MIL-STD-130	Identification Marking of U.S. Property
MIL-STD-177	Rubber Products, Terms for Visible Defects Of
MIL-STD-417	Rubber Composition, Vulcanized General Purpose, Solid (Symbols and Tests)
MIL-STD-810	Environmental Test Methods
MIL-STD-1523	Marking and Age Controls for Synthetic Rubber Parts

HANDBOOKS

MILITARY

MIL-HDBK-212	Gasket Materials, Nonmetallic
MIL-HDBK-692	A Guide to the Selection of Rubber O-rings
MIL-HDBK-695	Rubber Products, Shelf Storage Life

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ANSIB46.1	Surface Texture, Surface Roughness, Waviness and Lay
ASTMA370	Mechanical Testing of Steel Products, Methods and Definitions For
ASTMB117	Standard Method of Salt Spray (Fog) Testing
ASTMD297	Chemical Analysis of Rubber Products

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

ASTMD380	Standard Methods of Testing Rubber Hose
ASTMD395	Compression Set of Vulcanized Rubber
ASTMD412	Tension Testing of Vulcanized Rubber
ASTMD413	Standard Methods of Test for Adhesion of Vulcanized Rubber (Friction Test)
ASTMD471	Standard Method of Test for Change in Properties of Elastomeric Vulcanizates Resulting from Imnersion in Liquids
ASTMD572	Standard Method of Test for Accelerated Aging of Vulcanized Rubber by the Oxygen-Pressure Method
ASTMD573	Accelerated Aging of Vulcanized Rubber by the Oven Method
ASTMD750	Recommended Practice for Operating Light- and Weather-Exposure Apparatus (Carbon - Arc Type) for Artificial Weather Testing of Rubber Compounds
ASTMD792	Standard Methods of Test for Specific Gravity and Density of Plastics by Displacement
ASTMD1081	Standard Method of Test for Evaluating Pressure Sealing Properties of Rubber and Rubber-Like Materials
ASTMD1149	Standard Method of Test for Accelerated Ozone Cracking of Vulcanized Rubber
ASTMD1415	Method of Test for International Hardness of Vulcanized Rubber
ASTMD2240	Standard Method of Test for Indentation Hardness of Rubber and Plastics by Means of a Durometer
ASTME10	Method of Test for Brinell Hardness of Metallic Materials

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

ASTME18	Rockwell Hardness and Rockwell Superficial Hardness of Metallic Materials, Test For
ASTME92	Method of Test for Vickers Hardness of Metallic Materials
ASTME110	Induction Hardness of Metallic Materials by Portable Hardness Tester
ASTME228	Linear Thermal Expansion of Rigid Solids with Vitreous Silica Dilatometer (Tentative), Method of Test For
ASTME380	Metric Practice Guide
ASTME384	Microhardness of Materials, Test For
ASTMF36	Standard Method of Test for Compressibility and Recovery of Gasket Materials

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, PA. 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Seals, Gaskets, and Packing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Seals, Gaskets, and Packing, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Seals, Gaskets, and packing

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Seals, Gaskets, and Packing.

4.3.2 Illustrations. Illustrations applicable to Seals, Gaskets, and Packing are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Test matrix. A test matrix is supplied as a guide for selecting documents to specify tests (see table II). The test matrix presents documents most applicable for use to satisfy the statement "TEST PER (DOC DES)". Any document listed in the Title Index may be used to satisfy the statement. However, the selected document from the Title Index must contain the desired test. Government test method documents and approved industry standards such as ASTM test methods may also be used to satisfy the statement "TEST PER (DOC DES)".

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

TABLE II. TEST MATRIX.

DOCUMENT	CODE	TEST									
	3208	Aging, Oil									
	3404		Change in Weight								
	1738			Chemical Composition							
	1752				Finish Conformance						
	3565					Impulse					
	3566						Impulse				
	1904							Liquid Immersion			
	2162								Bonding Agent		
	3782									Thermal Expansion	
	3504										Test Media, Endurance
MIL-H-5606		X									
MIL-F-17111		X									
FED-STD-601			X					X			
ASTMD471		X						X			
ASTMD573			X	X							
MIL-STD-417				X							
ASTMD750					X						
ASTMD1149					X						
MIL-P-81716						X	X				
MMM-A-1617									X		
ASTMD228										X	
MIL-S-47180										X	
MIL-P-25732											X

5.5 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table I II provides codes for column headings which" may be used for seal, gasket, or packing characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1560	COLOR NUMBER	2030	NUMBER OF PLIES	2126	MESH PER INCH
2128	MESH PER MILLIMETER	1620	NOM SHAFT DIA INCHES	1624	NOM SHAFT DIAMETER MILLIMETER
2164	MIN WARP YARNS PER INCH	2268	MIN WARP YARNS PER MILLIMETER	2266	MIN FILL YARNS PER INCH
2270	MIN FILL YARNS PER MILLIMETER	7022	MAX UNIT WEIGHT OUNCES	7023	MAX UNIT WEIGHT POUNDS
7021	MAX UNIT WEIGHT GRAMS	7024	MAX UNIT WEIGHT KILOGRAMS	7043	MAX WEIGHT PER 1OO OUNCES
7042	MAX WEIGHT PER 1OO POUNDS	7043	MAX WEIGHT PER 100 GRAMS	7035	NOM WEIGHT PER 1OO OUNCES
7036	NOM WEIGHT PER 1OO POUNDS	7037	NOM WEIGHT PER 100 GRAMS	7038	NOM WEIGHT PER 100 KILOGRAMS
7047	NOM WEIGHT PER FOOT OUNCES	6927	NOM WEIGHT PER METER GRAMS		

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T20:56Z
Check the source to verify that this is the currentversion before use.

5.6 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.6.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.6.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.6.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT	0700
ONE SECTION DOCUMENT	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 30050
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN,
1008	SYSTEM APPLICATION 1008-
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	S o u r c e
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER (S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM Described

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE : REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE : THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	69411
S1.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6874 THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

0107

0108 0108.

SCOPE.

SCOPE- THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER-

PART NUMBER- THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

69411 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.

6942 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED*

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION	
TYPE (DESIGNATION)	1520
GRADE (DESIGNATION)	1522
CLASS (DESIGNATION)	1524
STYLE (DESIGNATION)	1526
COMPOSITION (DESIGNATION)	1528
ALTITUDE RATING	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5060
SEA LEVEL TO (METERS)	5061
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5062
SEA LEVEL TO (METERS)	5063

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CLASSIFICATION.
1520	TYPE. TYPE 1520 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1522	GRADE. GRADE 1522 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1524	CLASS. CLASS 1524 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1526	STYLE. STYLE 1526 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1528	COMPOSITION. COMPOSITION 1528 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
	ALTITUDE RATING.
5060	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5060 FEET.
5061	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5061 METERS.
5062	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5062 FEET.
5063	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5063 METERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OPERATING PRESSURE RATING	
MINIMUM OPERATING PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	7581
(KILOPASCALS)	7582
MAXIMUM OPERATING PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	7583
(KILOPASCALS)	7584
NOMINAL OPERATING PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	7585
(KILOPASCALS)	7506
PROOF PRESSURE RATING	
MINIMUM PROOF PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	7587
(KILOPASCALS)	7588

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	OPERATING PRESSURE RATING.
7581	THE MINIMUM OPERATING PRESSURE RATING SHALL BE 7581 POUNDS PER SQUARE INCH.
7582	THE MINIMUM OPERATING PRESSURE RATING SHALL BE 7582 KILOPASCALS.
7583	THE MAXIMUM OPERATING PRESSURE RATING SHALL BE 7583 POUNDS PER SQUARE INCH.
7584	THE MAXIMUM OPERATING PRESSURE RATING SHALL BE 7584 KILOPASCALS.
7585	THE NOMINAL OPERATING PRESSURE RATING SHALL BE 7585 POUNDS PER SQUARE INCH.
7586	THE NOMINAL OPERATING PRESSURE RATING SHALL BE 7586 KILOPASCALS.
	PROOF PRESSURE RATING.
7587	THE MINIMUM PROOF PRESSURE RATING SHALL BE 7587 POUNDS PER SQUARE INCH.
7588	THE MINIMUM PROOF PRESSURE RATING SHALL BE 7588 KILOPASCALS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
BURST PRESSURE RATING	
MINIMUM BURST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	7589
(KILOPASCALS)	7590
TEMPERATURE RATING	
MAXIMUM OPERATING (DEGREES CELSIUS)	5069
MAXIMUM NONOPERATING (DEGREES CELSIUS)	5071
MAXIMUM STORAGE (DEGREES CELSIUS)	7302
MAXIMUM SERVICE (DEGREES-CELSIUS)	4905
MAXIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5054
MINIMUM OPERATING (DEGREES CELSIUS)	5068
MINIMUM NONOPERATING (DEGREES CELSIUS)	5070
MINIMUM STORAGE (DEGREES CELSIUS)	7301
MINIMUM SERVICE (DEGREES CELSIUS)	4904

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	BURST PRESSURE RATING.
7589	THE MINIMUM BURST PRESSURE RATING SHALL BE 7589 POUNDS PER SQUARE INCH.
7590	THE MINIMUM BURST PRESSURE RATING SHALL BE 7590 KILOPASCALS.
	TEMPERATURE. RATING.
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
5071	THE MAXIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5071 DEGREES CELSIUS.
7302	THE MAXIMUM STORAGE TEMPERATURE RATING SHALL BE 7302 DEGREES CELSIUS.
4905	THE MAXIMUM SERVICE TEMPERATURE RATING SHALL BE 4905 DEGREES CELSIUS.
5054	THE MAXIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5054 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
5070	THE MINIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5070 DEGREES CELSIUS.
73011	THE MINIMUM STORAGE TEMPERATURE RATING SHALL BE 7301 DEGREES CELSIUS.
4904	THE MINIMUM SERVICE TEMPERATURE RATING SHALL BE 4904 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

-CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE RATING (CONT)	
MINIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5052
NOMINAL OPERATING (DEGREES CELSIUS)	5046
NOMINAL STORAGE (DEGREES CELSIUS)	5048
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
*UNITS (SELECT ONE)	
U.S. (SELECT ONE)	
INCHES.	7572
FEET.	7573
YARDS.	7574
SI (SELECT ONE)	
Centimeters	7576
MILLIMETERS.	7577
METERS.	7578

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
5052	THE MINIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5052 DEGREES CELSIUS.
5046	THE NOMINAL OPERATING TEMPERATURE RATING SHALL BE ~~5046~~ DEGREES CELSIUS*
5048	THE NOMINAL STORAGE TEMPERATURE RATING SHALL BE ~~5048~~ DEGREES CELSIUS.
	Configuration
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7573	ALL Dimensions UNLESS OTHERWISE SPECIFIED' **SHALL** BE IN FEET OR DEGREES.
7574	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, sHALL BE IN YARDS OR DEGREES.
7576	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN CENTIMETERS OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED? SHALL BE IN MILLIMETERS OR DEGREES.
7578	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN METERS OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950
NOTE : THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.	
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE : AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	
METALS	
DISSIMILAR METALS.	7580

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4950	ILLUSTRATION(S). ILLUSTRATION (S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.
	Material MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	FINISH (S)- FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY*)
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION* CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL,

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION	
COLOR	
COLOR (NAME)	1560
(DESIGNATION)	1562
PER DOCUMENT (DOC DES)	1564
CLASS (NUMBER)	1566
FORMING METHOD (SELECT ONE)	
MOLDING*	1570
EXTRUDING.	1572
BONDING.	1574
Vulcanizing	1576
DRAWING.	1578
ROLLING.	1590
KNITTING.	1592
WEAVING.	1594
DIE CUTTING.	1588
PLIES	
NUMBER OF PLIES (NUMBER)	2030

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	DESIGN AND CONSTRUCTION.
	COLOR.
1560	THE COLOR SHALL BE 1560.
1562	COLOR DESIGNATION 1562 SHALL APPLY.
1564	THE COLOR SHALL BE IN ACCORDANCE WITH 1564
1566	COLOR CLASS NUMBER 1566 SHALL APPLY.
	FORMING METHOD.
1570	THE ITEM SHALL BE FORMED BY MOLDING.
1572	THE ITEM SHALL BE FORMED BY EXTRUDING.
1574	THE ITEM SHALL BE FORMED BY BONDING.
1576	THE ITEM SHALL BE FORMED BY VULCANIZING-
1578	THE ITEM SHALL BE FORMED BY DRAWINGS.
1590	THE ITEM SHALL BE FORMED BY ROLLING*
1592	THE ITEM SHALL BE FORMED BY KNITTING.
1594	THE ITEM SHALL BE FORMED BY WEAVING.
1588	THE ITEM SHALL BE FORMED BY DIE CUTTING.
	PLIES-
2030	THE MATERIAL DESCRIBED HEREIN SHALL CONSIST OF 2030 PLIES-

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
JOINTS (SELECT ONE)	
NO JOINTS.	1580
JOINTS WITH EQUAL STRENGTH AND FINISH TO BASIC MATERIAL.	1582
PACKING BRAID (SELECT ONE)	
BRAID OVER BRAID.	2040
REGULAR BRAID.	2042
WIRE INSERTS.	2044
SEAL SPRING WIRE DIAMETER (SELECT ONE)	
(INCHES)	1584
(MILLIMETERS)	1586
NOMINAL COMPRESSION LOADING (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2082
TOLERANCE (POUNDS PER SQUARE INCH)	2084
(NEWTONS PER SQUARE METER)	2086
TOLERANCE (NEWTONS PER SQUARE METER)	2088

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	JOINTS.
1580	EXTRUDED ITEMS. SHALL BE ONE CONTINUOUS LENGTH WITHOUT JOINTS.
1582	JOINTS SHALL HAVE FINISH AND STRENGTH EQUAL TO THAT OF THE BASIC MATERIAL.
	PACKING BRAID.
2040	THE PACKING BRAID SHALL BE BRAID OVER BRAID.
2042	THE PACKING BRAID SHALL BE REGULAR BRAID.
044	THE PACKING BRAID SHALL BE FURNISHED WITH WIRE INSERTS.
	SEAL SPRING WIRE DIAMETER.
1584	THE SEAL SPRING WIRE SHALL HAVE A DIAMETER OF 1584 INCH(S).
1586	THE SEAL SPRING WIRE SHALL HAVE A DIAMETER OF 1586 MILLIMETER(S).
	NOMINAL COMPRESSION LOADING.
2082	THE NOMINAL COMPRESSION LOADING SHALL BE 2082 POUNDS PER SQUARE INCH.
2084	THE COMPRESSION TOLERANCE SHALL BE 2084 POUNDS PER SQUARE INCH.
2086	THE NOMINAL COMPRESSION LOADING SHALL BE 2086 NEWTONS PER SQUARE METER,
2088	THE COMPRESSION TOLERANCE SHALL BE 2088 NEWTONS PER SQUARE METER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
EMBEDDED MATERIAL (SELECT ONE)	
WIRE.	2114
SHEET-	2116
CLOTH.	2118
SPACING	
SPACING OF LAYERS, STRANDS, PLIES, SHEETS OR WIRES (SELECT ONE)	
(INCHES)	212o
(MILLIMETERS)	2121
WEAVE TYPE (SELECT ONE)	
PLAIN.	21122
BASKET.	2124
MESH (SELECT ONE)	
(COUNT PER INCH)	2126
(COUNT PER MILLIMETER)	2128
WIRE STRAND DIRECTION	
DIRECTION THROUGH MATERIAL (SPECIFY)	2160
LAYER BONDING AGENT	
PER DOCUMENT (DOC DES)	2162
TYPE ____	2164

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

EMBEDDED MATERIAL.

2114 THE EMBEDDED MATERIAL SHALL BE IN THE FORM OF WIRE.

2116 THE EMBEDDED MATERIAL SHALL BE IN THE FORM OF SHEET.

2118 THE EMBEDDED MATERIAL SHALL BE IN THE FORM OF CLOTH.

SPACING.

2120 THE DISTANCE BETWEEN LAYERS, STRANDS, PLIES, SHEETS, OR WIRES SHALL BE 2120 INCH(S).

2121 THE DISTANCE BETWEEN LAYERS, STRANDS, PLIES, SHEETS, OR WIRES SHALL BE 2121 MILLIMETER(S).

WEAVE TYPE.

2122 THE MATERIAL SHALL BE OF THE PLAIN WEAVE TYPE.

2124 THE MATERIAL SHALL BE OF THE BASKET WEAVE TYPE.

MESH.

2126 THE MESH OF THE MATERIAL SHALL BE 2126 PER INCH.

2128 THE MESH OF THE MATERIAL SHALL BE 2128 PER MILLIMETER.

2160 WIRE STRAND DIRECTION. THE DIRECTION OF WIRE STRANDS THROUGH THE MATERIAL SHALL BE 2160.

2162 LAYER BONDING AGENT. THE LAYER BONDING AGENT SHALL BE IN ACCORDANCE WITH 2162.

2164 THE BONDING AGENT SHALL BE TYPE 2164.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
OPERATING MEDIA	
MEDIA (NAME)	2090
MEDIA DOCUMENT (DOC DES)	2092
_SEALING ELEMENTS	
NOMINAL SHAFT DIAMETER (SELECT ONE)	
(INCHES)	1620
TOLERANCE (INCH)	1622
(MILLIMETERS)	1624
TOLERANCE (MILLIMETERS)	1626
SHAFT CHARACTERISTICS	
MAXIMUM SHAFT SURFACE ROUGHNESS (SELECT ONE)	
(MICROINCHES)	1628
(MICROMETERS)	1630
SHAFT HARDNESS	
TESTER (NAME)	1632
SCALE (DESIGNATION)	1634
VALUE (NUMBER)	1636

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

OPERATING MEDIA.

2090 THE OPERATING MEDIA SHALL BE 2090.

2092 THE OPERATING MEDIA DOCUMENT SHALL BE 2092.

SEALING ELEMENTS.

1620 SEALING ELEMENTS SHALL BE OF SUITABLE DESIGN TO SEAL ON A SHAFT 1620 INCH(S) NOMINAL DIAMETER.

1622 THE SHAFT DIAMETER TOLERANCE SHALL BE 1622 INCH.

1624 SEALING ELEMENTS SHALL BE OF SUITABLE DESIGN TO SEAL ON A SHAFT 1624 MILLIMETER (S) NOMINAL DIAMETER.

1626 THE SHAFT DIAMETER TOLERANCE SHALL BE 1626 MILLIMETER(S).

SHAFT CHARACTERISTICS.

1628 SEALS SHALL PERFORM SATISFACTORILY ON A SHAFT HAVING A SURFACE ROUGHNESS OF NOT GREATER THAN 1628 MICROINCHES.

1630 SEALS SHALL PERFORM SATISFACTORILY ON A SHAFT HAVING A SURFACE ROUGHNESS OF NOT GREATER THAN 1630 MICROMETERS.

1632 THE 1632 HARDNESS TESTER SHALL BE USED.

1634 THE 1634 HARDNESS SCALE SHALL BE USED.

1636 SEALS SHALL PERFORM SATISFACTORILY ON A SHAFT HAVING A HARDNESS VALUE OF 1636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
SHAFT CHARACTERISTICS (CONT)	
MAXIMUM SHAFT ECCENTRICITY, TOTAL-INDICATOR READING (SELECT ONE)	
(INCH)	1638
(MILLIMETERS)	1640
MAXIMUM SHAFT ROTATIONAL SPEED (RPM)	1642
ENCASING COMPONENTS WHICH SEAL ON A HOUSING BORE DIAMETER (SELECT ONE)	
(INCHES)	1644
TOLERANCE (INCH)	1646
(MILLIMETERS)	1648
TOLERANCE (MILLIMETERS)	1650

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1638	SEALS SHALL PERFORM SATISFACTORILY WITH A SHAFT HAVING AN ECCENTRICITY NOT GREATER THAN 1638 INCH TOTAL INDICATOR READING.
1640	SEALS SHALL PERFORM SATISFACTORILY WITH A SHAFT HAVING AN ECCENTRICITY NOT GREATER THAN 1640 MILLIMETERS TOTAL INDICATOR READING.
1642	THE ITEM SHALL BE DESIGNED TO OPERATE ON A SHAFT WITH A ROTATIONAL SPEED OF 1642 REVOLUTIONS PER MINUTE*
1644	SEAL ENCASING COMPONENTS SHALL BE OF SUITABLE DESIGN TO PROVIDE A SEAL AT THE HOUSING INTERFACE WITH A BORE 1644 INCH(S) DIAMETER.
1646	THE BORE MEASUREMENT TOLERANCE SHALL BE 1646 INCH.
1648	SEAL ENCASING COMPONENTS SHALL BE OF SUITABLE DESIGN TO PROVIDE A SEAL AT THE HOUSING INTERFACE WITH A BORE 1648 MILLIMETER(S) DIAMETER.
1650	THE BORE MEASUREMENT TOLERANCE SHALL BE 1650 Millimeters

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024
MAXIMUM WEIGHT PER 100 (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7041
(POUNDS)	7042
SI (SELECT ONE)	
(GRAMS)	7043
(KILOGRAMS)	7044

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

7022 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).

7023 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).

7021 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).

7024 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).

7041 MAXIMUM WEIGHT PER 100. THE WEIGHT PER 100 UNITS SHALL BE NOT GREATER THAN 7041 OUNCE(S).

7042 MAXIMUM WEIGHT PER 100. THE WEIGHT PER 100 UNITS SHALL BE NOT GREATER THAN 7042 POUND(S).

7043 MAXIMUM WEIGHT PER 100. THE WEIGHT PER 100 UNITS SHALL BE NOT GREATER THAN 7043 GRAM(S).

7044 MAXIMUM WEIGHT PER 1OO. THE WEIGHT PER 100 UNITS SHALL BE NOT GREATER THAN 7044 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
WEIGHT (CONT)	
MAXIMUM WEIGHT PER UNIT LENGTH (SELECT ONE) .	
U.S. (SELECT ONE)	
PER FOOT (SELECT ONE) ,	
(OUNCES)	7050
(POUNDS)	7051
SI (SELECT ONE)	
PER METER (SELECT ONE)	
(GRAMS)	7400
(KILOGRAMS)	7401
NOMINAL WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	6996
(POUNDS)	6997

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

7050 MAXIMUM WEIGHT PER FOOT. THE WEIGHT PER FOOT SHALL BE NOT GREATER THAN 7,050 OUNCE(S).

7053 MAXIMUM WEIGHT PER FOOT, THE WEIGHT PER FOOT SHALL BE NOT GREATER THAN 7051 POUND(S).

7400 MAXIMUM WEIGHT PER METER. THE WEIGHT PER METER SHALL BE NOT GREATER THAN 7400 GRAM(S).

7401 MAXIMUM WEIGHT PER METER. THE WEIGHT PER METER SHALL BE NOT GREATER THAN 7401 KILOGRAM(S).

6996 NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6996 OUNCE (S).

6997 NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6997 POUND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
NOMINAL WEIGHT PER UNIT (CONT)	
SI (SELECT ONE)	
(GRAMS)	6998
(KILOGRAMS)	6999
NOMINAL WEIGHT PER 100 (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7035
(POUNDS)	7036
SI (SELECT ONE)	
(GRAMS)	7037
(KILOGRAMS)	7038
NOMINAL WEIGHT PER UNIT LENGTH (SELECT ONE)	
U.S. (SELECT ONE)	
PER FOOT (SELECT ONE)	
(OUNCES)	7047
(POUNDS)	7049

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6998	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6998 GRAM(S).
6999	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6999 KILOGRAM(S).
7035	NOMINAL WEIGHT PER 100. THE WEIGHT PER 1OO UNITS SHALL BE 7035 OUNCE(S).
7036	NOMINAL WEIGHT PER 1OO. THE WEIGHT PER 1OO UNITS SHALL BE 7036 POUND(S).
7037	NOMINAL WEIGHT PER 100, THE WEIGHT PER 1100 UNITS SHALL BE 7037 GRAM(S).
7038	NOMINAL WEIGHT PER 100. THE WEIGHT PER 100 UNITS SHALL BE 7038 Kilogram
7047	NOMINAL WEIGHT PER FOOT. THE WEIGHT PER FOOT SHALL BE 7047 OUNCE(S),
7049	NOMINAL WEIGHT PER FOOT, THE WEIGHT PER FOOT SHALL BE 7049 POUND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
NOMINAL WIEGHT PER UNIT LENGTH (CONT)	
SI (SELECT ONE)	
PER METER (SELECT ONE)	
(GRAMS)	6927
(KILOGRAMS)	7344
ADHERENCE TO METALS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	1692
AS FOLLOWS:	1691
NO ADHERENCE OR STICKING OF SEALING ELEMENT AND SHELL OR CASE OF SEAL TO THE METAL PARTS.	1694
NO CAUSE OF CORROSION OR PITTING OF THE METAL PARTS.	1696
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	1658

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6927 NOMINAL WEIGHT PER METER. THE WEIGHT PER METER SHALL BE 6927 GRAM(S).

7344 NOMINAL WEIGHT PER METER. THE WEIGHT PER METER SHALL BE 7344 KILOGRAM(S)-

1692 ADHERENCE TO METALS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1692.

1691 ADHERENCE TO METALS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

1694 THE SEALING ELEMENT AND THE SHELL OR CASE OF THE SEAL SHALL NOT ADHERE OR STICK TO THE METAL PART WITH WHICH IT IS IN CONTACT.

1696 THE SEALING ELEMENT AND THE SHELL OR CASE SHALL NOT CAUSE CORROSION OR PITTING OF THE METAL PARTS.

1658 ADHERENCE TO METALS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1658.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADHERENCE TO METALS (CONT)	
TEST METHODS (CONT)	
PER MIL-S-21558.	1660
FIRST TEST PERIOD	
SEALING ELEMENT LOAD (SELECT ONE)	
(POUNDS PER SQUARE INCH)	1662
(KILOPASCALS)	1664
NOMINAL OVEN TEMPERATURE (DEGREES CELSIUS)	1668
TEMPERATURE DURATION (HOURS)	1670
LOAD APPLICATION DURATION (HOURS)	1672
SECOND TEST PERIOD	
FLUID AGING OF SPECIMEN	
MEDIA (NAME)	1674
MEDIA SPECIFICATION (NUMBER)	1676
IMMERSION TIME (HOURS)	1678
MEDIA TEMPERATURE (DEGREES CELSIUS)	1680

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1660 ADHERENCE TO METALS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-21558.

1662 FIRST TEST PERIOD LOAD SHALL BE 1662 POUNDS PER SQUARE INCH.

1664 FIRST TEST PERIOD LOAD SHALL BE 1664 KILOPASCALSe

1668 FIRST TEST PERIOD NOMINAL OVEN TEMPERATURE SHALL BE 1668 DEGREES CELSIUS.

1670 FIRST TEST PERIOD TEMPERATURE DURATION SHALL BE 1670 HOUR (S).

1672 FIRST TEST PERIOD LOAD APPLICATION DURATION SHALL BE 1672 HOUR (S).

1674 SECOND TEST PERIOD MEDIA SHALL BE 1674.

1676 SECOND TEST PERIOD MEDIA SPECIFICATION SHALL BE 1676.

1678 SECOND TEST PERIOD IMMERSION TIME SHALL BE 1678 HOUR (S).

1680 SECOND TEST PERIOD MEDIA TEMPERATURE SHALL BE 1680 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADHERENCE TO METALS (CONT)	
SECOND TEST PERIOD (CONT)	
SEALING ELEMENT LOAD (SELECT ONE)	
(POUNDS PER SQUARE INCH)	1682
(KILOPASCALS)	1684
NOMINAL OVEN TEMPERATURE (DEGREES CELSIUS)	1686
TEMPERATURE DURATION (HOURS)	1688
ADHESION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _	2720
NO FAILURE OF BOND,	2722
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2730
PER FED-STD-601, METHOD 8031.	2732

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1682 SECOND TEST PERIOD SEALING ELEMENT LOAD SHALL BE 1682 POUNDS PER SQUARE INCH.

1684 SECOND TEST PERIOD SEALING ELEMENT LOAD SHALL BE 1684 KILOPASCALS.

1686 SECOND TEST PERIOD NOMINAL OVEN TEMPERATURE SHALL BE 1686 DEGREES CELSIUS.

1688 SECOND TEST PERIOD TEMPERATURE DURATION SHALL BE 1688 HOUR(S).

2720 ADHESION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2720.

2722 ADHESION. THERE SHALL BE NO FAILURE OF THE ADHESION BOND.

2730 ADHESION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2730.

2732 ADHESION- TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 8031 OF FED-STD-601.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME –	CHAR CODE
AGING, AIR (OVEN)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	1702
AS FOLLOWS:	1701
CONFORM TO SPECIFIED ULTIMATE ELONGATION REQUIREMENTS.	1704
CONFORM TO SPECIFIED TENSILE STRENGTH REQUIREMENTS.	1706
CONFORM TO SPECIFIED PERMANENT SET Requirements	1708
CONFORM TO SPECIFIED HARDNESS REQUIREMENTS–	1710
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	3162
PER ASTMD573.	3163
AGING TEMPERATURE (DEGREES CELSIUS)	3166
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	3167
AGING DURATION (HOURS)	3170
DURATION TOLERANCE (HOURS)	3173

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1702	AGING, AIR (OVEN). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1702.
1701	AGING, AIR (OVEN)- THE MATERIAL PROPERTIES AFTER TESTING SHALL BE AS FOLLOWS:
1704	THE ITEM SHALL CONFORM TO SPECIFIED ULTIMATE ELONGATION REQUIREMENTS,
1706	THE ITEM SHALL CONFORM TO SPECIFIED TENSILE STRENGTH REQUIREMENTS.
1708	THE ITEM SHALL CONFORM TO SPECIFIED PERMANENT SET Requirements
1710	THE ITEM SHALL CONFORM TO SPECIFIED HARDNESS Requirements
3162	AGING, AIR (OVEN). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3162.
3163	" AGING, AIR (OVEN). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD573.
3166	THE AGING TEMPERATURE SHALL BE 3166 DEGREES CELSIUS.
3167	THE TEMPERATURE TOLERANCE SHALL BE 3167 DEGREES CELSIUS.
3170	THE AGING DURATION SHALL BE 3170 HOUR (S).
3173	THE DURATION TOLERANCE SHALL BE 3173 HOUR (S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
AGING, LIGHT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	1726
AS FOLLOWS:	1725
MATERIAL SHALL NOT CRACK OR CRAZE.	1728
MINIMUM TENSILE STRENGTH PERCENT OF INITIAL VALUE (PERCENT)	1730
MINIMUM ULTIMATE ELONGATION PERCENT OF INITIAL VALUE (PERCENT)	1732
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	1714
PER ASTMD750.	1716
HOURS EXPOSURE (HOURS)	1718
EXPOSURE TEMPERATURE (DEGREES CELSIUS)	1720
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1722

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1726 AGING, LIGHT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1726.

1725 AGING, LIGHT* THE REQUIREMENT(S) AFTER TESTING SHALL BE AS FOLLOWS:

1728 THE MATERIAL SHALL SHOW NO CRACKING OR CRAZING AS A RESULT OF THE TEST.

1730 THE MINIMUM TENSILE STRENGTH SHALL BE 1730 PERCENT OF INITIAL VALUE.

732 THE MINIMUM ULTIMATE ELONGATION SHALL BE 1732 PERCENT OF INITIAL VALUE.

1714 AGING, LIGHT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1714.

17L6. AGING, LIGHT- TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD750.

1718 THE LIGHT EXPOSURE TIME SHALL BE 1718 HOUR (S).

1720 THE EXPOSURE TEMPERATURE SHALL BE 1720 DEGREES CELSIUS.

1722 THE EXPOSURE TEMPERATURE TOLERANCE SHALL BE 1722 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
AGING, OIL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2202
AS FOLLOWS:	2201
CONFORM TO SPECIFIED ULTIMATE ELONGATION REQUIREMENTS AFTER TEST.	2204
CONFORM TO SPECIFIED TENSILE STRENGTH REQUIREMENTS AFTER TEST.	2206
CONFORM TO SPECIFIED TENSILE STRESS REQUIREMENTS AFTER TEST.	2208
CONFORM TO SPECIFIED HARDNESS REQUIREMENTS AFTER TEST.	2210
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	3182
PER MIL-P-81716.	3184

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2202	AGING, OIL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2202.
22011	AGING, OIL. THE REQUIREMENT(S) AFTER TESTING SHALL BE AS FOLLOWS:
2204	THE ITEM SHALL CONFORM TO SPECIFIED ULTIMATE ELONGATION REQUIREMENTS AFTER TEST.
2206	THE ITEM SHALL CONFORM TO SPECIFIED TENSILE STRENGTH REQUIREMENTS AFTER TEST.
2208	THE ITEM SHALL CONFORM TO SPECIFIED TENSILE STRESS REQUIREMENTS AFTER TEST.
2210	THE ITEM SHALL CONFORM TO SPECIFIED HARDNESS REQUIREMENTS AFTER TEST.
3182	AGING, OIL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3182.
3184	AGING, OIL. TEST SHALL BE PERFORMED IN ACCORDANCE WITH MIL-P-81716.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
AGING, OIL (CONT)	
PER NIL-P-81716. (CONT)	
FIRST TEST MEDIA (NAME)	31186
MEDIA DOCUMENT (DOC DES)	3188
MINIMUM COOL-DOWN PERIOD (MINUTES)	3189
COOL-DOWN TEMPERATURE (DEGREES CELSIUS)	3190
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	3193
AGING MEDIA TEMPERATURE (DEGREES CELSIUS)	3196
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	31199
AGING DURATION (HOURS)	3200
DURATION TOLERANCE (HOURS)	3203
SECOND TEST MEDIA (NAME)	3204
SECOND MEDIA DOCUMENT (DOC DES)	3208
THE SECOND TEST SHALL INCLUDE AN EXTRUSION TEST.	3207
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	3210
TOLERANCE (DEGREES CELSIUS)	3213
SECOND TEST DURATION (HOURS)	3214
DURATION TOLERANCE (HOURS)	3215

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3186	THE FIRST TEST MEDIA SHALL BE 3186.
3188	THE TEST MEDIA SHALL CONFORM TO 3188.
3189	THE COOL-DOWN PERIOD SHALL BE NOT LESS THAN 3189 MINUTE(S)-
3190	THE COOL-DOWN TEMPERATURE SHALL BE 3190 DEGREES CELSIUS.
3193	TEMPERATURE TOLERANCE SHALL BE 3193 DEGREES CELSIUS.
3196	THE AGING TEMPERATURE SHALL BE 3196 DEGREES CELSIUS.
3199	TEMPERATURE TOLERANCE SHALL BE 3199 DEGREES CELSIUS.
3200	THE AGING DURATION SHALL BE 3200 HOUR (S).
3203	DURATION TOLERANCE SHALL BE 3203 HOUR (S),
3204	"THE SECOND TEST MEDIA SHALL BE 3204.
3208	THE SECOND TEST MEDIA SHALL CONFORM TO 3208.
3207	THE SECOND TEST SHALL INCLUDE AN EXTRUSION TEST.
3210	THE SECOND TEST TEMPERATURE SHALL BE 3210 DEGREES CELSIUS.
3213	TEMPERATURE TOLERANCE SHALL BE 3213 DEGREES CELSIUS.
3214	THE SECOND TEST DURATION SHALL BE 3214 HOUR(S).
3215	DURATION TOLERANCE SHALL BE 3215 HOUR (S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
AGING, OXYGEN PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ,_,	2222
AS FOLLOWS:	2221
CONFORM TO SPECIFIED ULTIMATE ELONGATION REQUIREMENTS.	2224
CONFORM TO SPECIFIED TENSILE STRENGTH Requirements	2226
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	3232
PER ASTMD572.	3231
AGING TEMPERATURE (DEGREES CELSIUS)	3236
TOLERANCE (DEGREES CELSIUS)	3239
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	3242
TOLERANCE (POUNDS PER SQUARE INCH)	3233
(KILOPASCALS)	3235
TOLERANCE (KILOPASCALS)	3237

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2222	AGING, OXYGEN PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 22220
2221	AGING, OXYGEN PRESSURE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2224	THE ITEM SHALL CONFORM TO SPECIFIED ULTIMATE ELONGATION REQUIREMENTS.
2226	THE ITEM SHALL CONFORM TO SPECIFIED TENSILE STRENGTH REQUIREMENTS.
3232	AGING, OXYGEN PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 32320
3231	AGING, OXYGEN PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD572.
3236	AGING TEMPERATURE SHALL BE 3236 DEGREES CELSIUS.
3239	AGING TEMPERATURE TOLERANCE SHALL BE 3239 DEGREES CELSIUS.
3242	TEST PRESSURE SHALL BE 3242 POUNDS PER SQUARE INCH.
3233	PRESSURE TOLERANCE SHALL BE 3233 POUNDS PER SQUARE INCH.
3235	TEST PRESSURE SHALL BE 3235 KILOPASCALS.
3237	PRESSURE TOLERANCE SHALL BE 3237 KILOPASCALS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
AGING OXYGEN PRESSURE (CONT)	
PER ASTMD572, (CONT)	
TEST DURATION (HOURS)	3248
TOLERANCE (HOURS)	3249
ASBESTOS CONTENT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2292
MINIMUM PERCENT BY WEIGHT OF ASBESTOS IN YARN (PERCENT)	2294
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	3292
PER FED-STD-601, METHOD 16651.	3294
CHANGE IN WEIGHT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2472
MAXIMUM CHANGE IN WEIGHT (PERCENT)	2474

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

3248 THE TEST DURATION SHALL BE 3248 HOUR(S).

3249 DURATION TOLERANCE SHALL BE 3249 HOUR(S).

2292 ASBESTOS CONTENT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2292.

2294 ASBESTOS CONTENT. THE YARN SHALL HAVE AN ASBESTOS CONTENT OF NOT LESS THAN 2294 PERCENT BY WEIGHT.

3292 ASBESTOS CONTENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3292.

3294 ASBESTOS CONTENT. TESTING SHALL BE IN ACCORDANCE WITH METHOD 16651, FED-STD-601.

2472 CHANGE IN WEIGHT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2472.

2474 CHANGE IN WEIGHT. THE CHANGE IN WEIGHT CAUSED BY FLUID AGING SHALL BE NOT GREATER THAN 2474 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

	CHAR CODE
CHANGE IN WEIGHT (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	3401
PER FED-STD-60L, METHOD 6261.	3402
MEDIA (NAME)	3403
MEDIA DOCUMENT (DOC DES)	3404
TEST TEMPERATURE (DEGREES CELSIUS)	3405
TOLERANCE (DEGREES CELSIUS)	3436
TEST DURATION (HOURS)	3408
TOLERANCE (HOURS)	3409
CHEMICAL COMPOSITION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	1742

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
34011	CHANGE IN WEIGHT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3401.
3402	CHANGE IN WEIGHT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 6261 OF FED-STD-601.
3403	THE TEST MEDIA SHALL BE 34030
3404	THE TEST MEDIA SHALL CONFORM TO 3404.
3405	THE TEST TEMPERATURE SHALL BE 3405 DEGREES CELSIUS.
3416	THE TEST TEMPERATURE TOLERANCE SHALL BE 3416 DEGREES CELSIUS.
3408	THE TEST DURATION SHALL BE 3408 HOUR (S).
3409	THE DURATION TOLERANCE SHALL BE 3409 HOUR(S).
1742	CHEMICAL COMPOSITION- THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1742.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CHEMICAL COMPOSITION (CONT)	
REQUIREMENTS (CONT)	
PER CHEMICAL COMPOSITION TABLE.	
SUPPLIERS CERTIFICATION.	1746

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

CHEMICAL COMPOSITION* THE REQUIREMENTS SHALL BE IN ACCORDANCE WITH THE CHEMICAL COMPOSITION TABLE.

CHEMICAL COMPOSITION TABLE

ELEMENT NAME	PERCENT MINIMUM	PERCENT MINIMUM
4140	4141	4142
41143	4144	4145
4146	4147	4148
4149	4150	4151
4152	4153	4154
4155	4156	4157
4158	4159	4160
4161	4162	4163
4164	4165	4166
4167	4168	4169
4170	4171	4172
4173	4174	4175
4176	4177	4178
4179	4180	4181
4182	4183	4184
4185	4186	4187

1746 SUPPLIERS CERTIFICATION OF COMPLIANCE MAY BE ACCEPTED IN LIEU OF A SPECIFIC TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CHEMICAL COMPOSITION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	11736
PER DOCUMENT (DOC DES)	1738
TEST NUMBER (NUMBER)	1739
CLOTH CONSTRUCTION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2262
AS FOLLOWS:	2261
MINIMUM WARP YARNS (SELECT ONE)	
(INCH)	2264
(MILLIMETER)	2268
MINIMUM FILL YARNS (SELECT ONE)	
(INCH)	2266
(MILLIMETER)	2270

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1736 CHEMICAL COMPOSITION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1736.

1738 CHEMICAL COMPOSITION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1738.

1739 TEST NUMBER 1739 SHALL APPLY.

2262 CLOTH CONSTRUCTION- THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2262.

22611 CLOTH CONSTRUCTION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2264 THE WARP SHALL CONTAIN NOT LESS THAN 2264 YARNS PER LINEAR INCH.

2268 THE WARP SHALL CONTAIN NOT LESS THAN 2268 YARNS PER LINEAR Millimeter

2266 THE FILL SHALL CONTAIN NOT LESS THAN 2266 YARNS PER LINEAR INCH.

2270 THE FILL SHALL CONTAIN NOT LESS THAN 2270 YARNS PER LINEAR Millimeter

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLOTH CONSTRUCTION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	3262
PER FED-STD-191, METHOD 5050.	3264
COMPRESSIBILITY AND RECOVERY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	3772
AS FOLLOWS:	3771
MAXIMUM COMPRESSIBILITY (PERCENT)	3774
MINIMUM RECOVERY (PERCENT)	3776
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	3742
PER ASTMF36,	3743
PROCEDURE (LETTER)	3744

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3262	CLOTH Construction TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3262.
3264	CLOTH CONSTRUCTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 5050 OF FED-STD-191.
3772	COMPRESSIBILITY AND RECOVERY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3772.
3771	COMPRESSIBILITY AND RECOVERY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3774	THE SPECIMEN THICKNESS SHALL DECREASE NOT GREATER THAN 3774 PERCENT DUE TO COMPRESSION LOADING.
3776	THE SPECIMEN THICKNESS AFTER RECOVERY SHALL BE NOT LESS THAN 3776 PERCENT OF PRETEST THICKNESS.
3742	COMPRESSIBILITY AND RECOVERY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3742.
3743	COMPRESSIBILITY AND RECOVERY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMF36.
3744	PROCEDURE LETTER 3744 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COMPRESSIBILITY AND, RECOVERY (CONT)	
PER ASTMF36. (CONT)	
PENETRATOR DIAMETER (SELECT ONE)	
(INCHES)	3746
(MILLIMETERS)	3747
PRELOAD WEIGHT (SELECT ONE)	
(POUNDS)	3748
(NEWTONS)	3749
MAJOR LOAD WEIGHT (SELECT ONE)	
(POUNDS)	3750
(NEWTONS)	375%
PRECONDITIONING	
TEMPERATURE (DEGREES CELSIUS)	3752
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	3753
DURATION (HOURS)	3758
RELATIVE HUMIDITY (PERCENT)	3760

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3746	THE PENETRATOR DIAMETER SHALL BE 3746 INCH (S).
3747	THE PENETRATOR DIAMETER SHALL BE 3747 MILLIMETER(S).
3748	THE PRELOAD WEIGHT SHALL BE 3748 POUND (S).
3749	THE PRELOAD WEIGHT SHALL BE 3749 Newton
3750	THE MAJOR LOADING WEIGHT SHALL BE 3750 POUND(S).
3751	THE MAJOR LOADING WEIGHT SHALL BE 3751 Newton
3752	THE PRECONDITIONING TEMPERATURE SHALL BE 3752 DEGREES CELSIUS.
3753	THE TEMPERATURE TOLERANCE SHALL BE 3753 DEGREES CELSIUS.
3758	THE PRECONDITIONING DURATION SHALL BE 3758 HOUR(S).
3760	THE PRECONDITIONING RELATIVE HUMIDITY SHALL BE 3760 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CORROSION AND ADHESION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2462
NO ADHESION OF MATERIAL TO TEST METALS NOR EVIDENCE OF PITTING, EROSION OR CORROSION.	2464
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	3382
PER MIL-P-81716.	3384
IMMERSION TIME (HOURS)	3386
MINIMUM APPLIED FORCE (SELECT ONE)	
(POUNDS)	3395
(NEWTONS)	3397
MAXIMUM APPLIED FORCE (SELECT ONE)	
(POUNDS)	3396
(NEWTONS)	3398

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2462	CORROSION AND ADHESION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2462.
2464	CORROSION AND ADHESION. THERE SHALL BE NO ADHESION OF THE MATERIAL TO THE TEST METALS OR EVIDENCE OF PITTING, EROSION, OR CORROSION.
3382	CORROSION AND ADHESION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3382.
3384	CORROSION AND ADHESION. TESTING SHALL BE PERFORMED.IN ACCORDANCE WITH MIL-P-81716,
3386	THE IMMERSION TIME SHALL BE 3386 HOUR(S).
3395	THE APPLIED FORCE SHALL BE NOT LESS THAN 3395 POUND(S)*
3397	THE APPLIED FORCE SHALL BE NOT LESS THAN 3397 NEWTON(S)-
3396	THE APPLIED FORCE SHALL BE NOT GREATER THAN 3396 POUND(S),
3398	THE APPLIED FORCE SHALL BE NOT GREATER THAN 3398 NEWTON(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC. NAME	CHAR CODE
CRUSH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2512
AS FOLLOWS:	2511
NO CRACKING OR DISINTEGRATION-	2514
MINIMUM PERCENT OF MANUFACTURED SIZE AFTER RECOVERY (PERCENT)	2516
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	3462
PER MIL-P-81716.	3464
COMPRESSION LOAD (SELECT ONE)	
(POUNDS)	3466
(NEWTONS)	3467
TEST DURATION (HOURS)	3470
TOLERANCE (HOURS)	3471
FREE CONDITION RECOVERY TIME (HOURS)	3476

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2512	CRUSH, THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENTS EXCEPT 2512.
2511	CRUSH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2514	NO CRACKING OR DISINTEGRATION SHALL BE EVIDENT.
2516	THE CROSS-SECTIONAL DIMENSIONS AT THE THINNEST SECTION SHALL BE NOT LESS THAN 2516 PERCENT OF THE MANUFACTURED SIZE AFTER RECOVERY.
3462	CRUSH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3462.
3464	CRUSH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-P-81716.
3466	THE CONSTANT AXIAL COMPRESSION LOAD SHALL BE 3466 POUND(S).
3467	THE CONSTANT AXIAL COMPRESSION LOAD SHALL BE 3467 NEWTON(S).
3470	TEST DURATION SHALL BE 3470 HOUR (S).
3471	THE DURATION TOLERANCE SHALL BE 3471 HOUR(S).
3476	THE FREE CONDITION RECOVERY TIME SHALL BE 3476 HOUR (S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CUT RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2830
AS FOLLOWS:	2832
INITIAL CUT RESISTANCE (SELECT ONE)	
(POUNDS)	2834
(NEWTONS)	2836
CUT RESISTANCE AFTER AGING (SELECT ONE)	
(POUNDS)	2838
(NEWTONS)	2840
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	1840
PER MIL-P-17553. ,	1842
AGING TIME (HOURS)	1844
AGING TEMPERATURE (DEGREES CELSIUS)	1846
CONDITIONING TIME (HOURS)	1848
CONDITIONING TEMPERATURE (DEGREES CELSIUS)	1850

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2830	CUT RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2830.
2832	CUT RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2834	THE INITIAL CUT RESISTANCE SHALL BE 2834 POUND(S).
2836	THE INITIAL CUT RESISTANCE SHALL BE 2836 Newton
2838	THE CUT RESISTANCE AFTER AGING SHALL BE 2838 POUND(S).
2840	THE CUT RESISTANCE AFTER AGING SHALL BE 2840 Newton
2840	CUT Resistance TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1840,
1842	CUT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-P-17553.
1844	AGING TIME SHALL BE 1844 HOUR (S).
1846	AGING TEMPERATURE SHALL BE 1846 DEGREES CELSIUS.
1848	CONDITIONING TIME SHALL BE 1848 HOUR (S).
1850	CONDITIONING TEMPERATURE SHALL BE 1850 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DELAMINATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	1873
NO EVIDENCE OF LAYER SEPARATION OR VISIBLE DAMAGE.	1877
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	1865
PER FED-STD-601, METHOD 6311.	1869
EFFECT OF STEAM	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2482
NO DISTORTION OF CROSS SECTION OR FLOWING, CRACKING, MATERIAL HARDENING OR DISINTEGRATION OF FRICTION COMPOUND.	2404
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	3412

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1873	DELAMINATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1873.
1877	DELAMINATION* THERE SHALL BE NO SEPARATION WHEN ATTEMPTING TO SEPARATE INTO LAYERS BY HAND AND THERE SHALL BE NO OTHER VISUAL DAMAGE.
1865	DELAMINATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1865.
1869	Delamination TESTING SHALL BE PERFORMED IN ACCORDANCE WITH FED-STD-601, METHOD 6311.
2482	EFFECT OF STEAM. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2482.
2484	EFFECT OF STEAM. THE ITEM SHALL NOT SHOW DISTORTION OF CROSS SECTION, FLOWING, CRACKING, HARDENING, OR DISINTEGRATION OF FRICTION COMPOUND.
3412	EFFECT OF STEAM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT? EXCEPT 3412a

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
EFFECT OF STEAM (CONT)	
TEST METHODS (CONT)	
PER ASTMD380.	3413
TEST PRESSURE (POUNDS PER SQUARE INCH GAGE)	3418
TOLERANCE (POUNDS PER SQUARE INCH GAGE)	3420
TEST PRESSURE (KILOPASCALS)	3421
TOLERANCE (KILOPASCALS)	3427
TEST DURATION (HOURS)	3430
TOLERANCE (HOURS)	3433
ELECTRICAL CONDUCTIVITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1932
MINIMUM CONDUCTIVITY (MHOS PER SQUARE INCH)	1934
MINIMUM CONDUCTIVITY (MHOS PER SQUARE MILLIMETER)	1936

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3413	EFFECT OF STEAM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD380.
3418	THE TEST PRESSURE SHALL BE 3418 POUNDS PER SQUARE INCH GAGE.
3420	THE PRESSURE TOLERANCE SHALL BE 3420 POUNDS PER SQUARE INCH GAGE.
3421	THE TEST PRESSURE SHALL BE 3421 KILOPASCALS.
3427	THE PRESSURE TOLERANCE SHALL BE 3427 KILOPASCALS.
3430	THE PRESSURE TEST DURATION SHALL BE 3430 HOUR (S).
3433	THE DURATION TOLERANCE SHALL BE 3433 HOUR (S).
1932	ELECTRICAL Conductivity THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1932.
1934	ELECTRICAL CONDUCTIVITY- THE ELECTRICAL CONDUCTIVITY SHALL BE NOT LESS THAN 1934 MHOS PER SQUARE INCH.
1936	ELECTRICAL CONDUCTIVITY. THE ELECTRICAL CONDUCTIVITY SHALL BE NOT LESS THAN 1936 MHOS PER SQUARE MILLIMETER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELECTRICAL CONDUCTIVITY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	3784
PER MIL-G-47190.	3706
ENDURANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ._,	2532
AS FOLLOWS:	2531
MAXIMUM AVERAGE LEAKAGE PER GLAND DURING ENTIRE CYCLING TEST (CUBIC CENTIMETERS)	2533
MAXIMUM LEAKAGE OVER LAST NUMBER OF CYCLES OF TEST	
(NUMBER)	2544
*(CUBIC CENTIMETERS)	2540
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3501
PER MIL-P-25732.	3517

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3784	ELECTRICAL CONDUCTIVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3784.
3786	ELECTRICAL CONDUCTIVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH SPECIFICATION MIL-G-47190.
2532	Endurance THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2532.
2531	Endurance THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2533	THE AVERAGE LEAKAGE DURING THE ENTIRE CYCLING TEST SHALL BE NOT GREATER THAN 2533 CUBIC CENTIMETERS PER GLAND.
2544 2540	LEAKAGE DURING THE LAST 2544 TEST CYCLES SHALL BE NOT GREATER THAN 2540 CUBIC CENTIMETERS.
3501	ENDURANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3501.
3517	Endurance TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-P-25732.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE (CONT)	
PER MIL-P-25732. (CONT)	
TEST MEDIA (NAME)	3503
MEDIA DOCUMENT (DOC DES)	3504
TEST TEMPERATURE (DEGREES CELSIUS)	3505
TOLERANCE (DEGREES CELSIUS)	3518
TOTAL TEST CYCLES (QUANTITY)	3508
MINIMUM DRIVING PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	3509
(KILOPASCALS)	3510
MAXIMUM DRIVING PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	**3511**
(KILOPASCALS)	**3512**
MINIMUM LOADING PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	3513
(KILOPASCALS)	3514

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

3503 THE TEST MEDIA SHALL BE 3503.

3504 THE TEST MEDIA SHALL BE IN ACCORDANCE WITH 3504.

3505 THE TEST TEMPERATURE SHALL BE 3505 DEGREES CELSIUS.

3518 THE TEMPERATURE TOLERANCE SHALL BE 3518 DEGREES CELSIUS.

3508 THERE SHALL BE A TOTAL OF 3508 TEST CYCLES.

3509 THE DRIVING PRESSURE SHALL BE NOT LESS THAN 3509 POUNDS PER SQUARE INCH.

3510 THE DRIVING PRESSURE SHALL BE NOT LESS THAN 3510 KILOPASCALS.

3511 THE DRIVING PRESSURE SHALL BE NOT GREATER THAN 3511 POUNDS PER SQUARE INCH.

3512 THE DRIVING PRESSURE SHALL BE NOT GREATER THAN 3532 KILOPASCALS.

3533 THE LOADING PRESSURE SHALL BE NOT LESS THAN 3513 POUNDS PER SQUARE INCH.

3514 THE LOADING PRESSURE SHALL BE NOT LESS THAN 3514 KILOPASCALS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE (CONT)	
PER MIL-P-25732. (CONT)	
MAXIMUM LOADING PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	3515
(KILOPASCALS)	3516
EXTRACTION, BOILING WATER	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2492
MAXIMUM PERCENT OF WATER SOLUBLE MATERIAL (PERCENT)	2494
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	3442
PER FED-STD-601, METHOD 6621.	3444
DRYING TEMPERATURE (DEGREES CELSIUS)	3446
TOLERANCE (DEGREES CELSIUS)	3447

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

3515 THE LOADING PRESSURE SHALL BE NOT GREATER THAN 3515 POUNDS PER SQUARE INCH.

35116 THE LOADING PRESSURE SHALL BE NOT GREATER THAN 3516 KILOPASCALS.

2492 EXTRACTION, BOILING WATER. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2492.

2494 EXTRACTION, BOILING WATER. THE WATER SOLUBLE MATERIAL SHALL BE NOT GREATER THAN 2494 PERCENT.

3442 EXTRACTION, BOILING WATER. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3442.

3444 EXTRACTION, BOILING WATER. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH FED-STD-601, METHOD 6621.

3446 THE DRYING TEMPERATURE SHALL BE 3446 DEGREES CELSIUS.

3447 THE DRYING TEMPERATURE TOLERANCE SHALL BE 3447 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
EXTRUSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2622
NO EVIDENCE OF CRACKING, DISINTEGRATION, EXCESSIVE EXTRUSION OR LEAKAGE.	2624
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	3702
PER MIL-P-8176.	3704
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH GAGE)	3706
TOLERANCE (POUNDS PER SQUARE INCH GAGE)	3708
(KILOPASCALS)	37115
TOLERANCE (KILOPASCALS)	3716
TEST TEMPERATURE (DEGREES CELSIUS)	3718
TOLERANCE (DEGREES CELSIUS)	3721
TEST DURATION (HOURS)	3724
TOLERANCE (HOURS)	3727
FITTING USED (SIZE DESIGNATION)	3733
BOSS USED (SIZE DESIGNATION)	3734

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2622	EXTRUSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 26220
2624	Extrusion THERE SHALL BE NO EVIDENCE OF CRACKING, DISINTEGRATION, EXCESSIVE EXTRUSION OR LEAKAGE,
3702	EXTRUSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3702,
3704	Extrusion TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-P-81716.
3706	THE TEST PRESSURE SHALL BE 3706 POUNDS PER SQUARE INCH GAGE.
3708	THE PRESSURE TOLERANCE SHALL BE 3708 POUNDS PER SQUARE INCH GAGE l
3715	THE TEST PRESSURE SHALL BE 3715 KILOPASCALS.
3716	THE PRESSURE TOLERANCE SHALL BE 3716 KILOPASCALS.
3718	THE TEST TEMPERATURE SHALL BE 3718 DEGREES CELSIUS.
3721	THE TEMPERATURE TOLERANCE SHALL BE 3721 DEGREES CELSIUS.
3724	THE TEST DURATION SHALL BE 3724 HOUR(S).
3727	THE DURATION TOLERANCE SHALL BE 3727 HOUR (S).
3733	THE FITTING USED SHALL BE SIZE 37330
3734	THE BOSS USED SHALL BE SIZE 37340

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T20:56Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
EXTRUSION (CONT)	
PER MIL-P-81716. (CONT)	
FEELER GAGE DIMENSION (SELECT ONE)	
(INCHES)	3735
(MILLIMETERS)	3737
FATIGUE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2552
MINIMUM HOURS OF ROTATION WITHOUT FAILURE (HOURS)	2554
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	3522
PER MIL-P-25732.	3523
TEST ROTATION (REVOLUTIONS PER MINUTE)	3526
TOLERANCE (REVOLUTIONS PER MINUTE)	3529

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

3735 THE FEELER GAGE DIMENSION SHALL BE 3735 INCH(S).

3737 THE FEELER GAGE DIMENSION SHALL BE 3737 MILLIMETER(S).

2552 FATIGUE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2552.

2554 FATIGUE. THE PACKING SHALL BE CAPABLE OF BEING ROTATED NOT LESS THAN 2554 HOURS WITHOUT SIGNS OF CRACKING, FLAKING, WEAR, OR OTHER DETERIORATION, OR FAILURE.

3522 FATIGUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 35220

3523 FATIGUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-P-25732.

3526 THE TEST ROTATION SHALL BE 3526 REVOLUTIONS PER MINUTE.

3529 THE ROTATION TOLERANCE SHALL BE 3529 REVOLUTIONS PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FINISH CONFORMANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1756
AS FOLLOWS:	1755
MAXIMUM PERCENT DETERIORATION AFTER TEST (PERCENT)	1758
MAXIMUM PERCENT SURFACE BLEMISHES (PERCENT)	1760
EDGES CLEAN CUT.	1762
EDGES ROUNDED AND FREE OF BURRS.	1764
TREATED TO PREVENT ADHESION TO MATING SURFACES, AND COATING COMPATIBLE WITH BASE MATERIAL WITH NO DETERIORATION.	1766
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	1750
PER DOCUMENT (DOC DES)	1752

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1756 FINISH CONFORMANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT? EXCEPT 1756.

1755 FINISH CONFORMANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

1758 DETERIORATION AFTER TEST SHALL BE NOT GREATER THAN 1758 PERCENT.

1760 SURFACE BLEMISHES SHALL BE NOT GREATER THAN 1760 PERCENT.

1762 THE EDGES SHALL BE CLEAN CUT.

1764 THE EDGES SHALL BE ROUNDED AND FREE OF BURRS.

1766 THE SEALING SURFACES SHALL BE SUITABLY TREATED TO PREVENT ADHESION TO METAL OR MATING SURFACES, AND COATING SHALL BE COMPATIBLE WITH THE BASE MATERIAL AND NOT CAUSE DETERIORATION.

1750 FINISH CONFORMANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1750.

1752 FINISH Conformance TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1752.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLEXIBILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2522
AS FOLLOWS:	2521
MAXIMUM LOAD TO DEFLECT (SELECT ONE)	
SPECIMEN ONE INCH (GRAMS)	2524
SPECIMEN 25.4 MILLIMETERS (GRAMS)	2525
SPECIMEN TWO INCHES (GRAMS)	2526
SPECIMEN 50.8 MILLIMETERS (GRAMS)	2527
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	3482
PER FED-STD-601, METHOD 5211.	3484
TEST TEMPERATURE (DEGREES CELSIUS)	3486
TOLERANCE (DEGREES CELSIUS)	3487
EXPOSURE TIME (HOURS)	3492
TOLERANCE (HOURS)	3493

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2522 FLEXIBILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2522.

2521 FLEXIBILITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2524 THE LOAD REQUIRED TO DEFLECT THE SPECIMEN ONE INCH SHALL BE NOT GREATER THAN 2524 GRAMS.

2525 THE LOAD REQUIRED TO DEFLECT THE SPECIMEN 25.4 MILLIMETERS SHALL BE NOT GREATER THAN 2525 GRAMS.

2526 THE LOAD REQUIRED TO DEFLECT THE SPECIMEN TWO INCHES SHALL BE NOT GREATER THAN 2526 GRAMS.

2527 THE LOAD REQUIRED TO DEFLECT THE SPECIMEN 50.8 MILLIMETERS SHALL BE NOT GREATER THAN 2527 GRAMS.

3482 FLEXIBILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3482.

3484 FLEXIBILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 5211, FED-STD-601.

3486 THE TEST TEMPERATURE SHALL BE 3486 DEGREES CELSIUS.

3487 THE TEST TEMPERATURE TOLERANCE SHALL BE 3487 DEGREES CELSIUS.

3492 THE EXPOSURE TIME SHALL BE 3492 HOUR (S).

3493 THE TIME TOLERANCE SHALL BE 3493 HOUR (S),

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FRICTION (PLY SEPARATION)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2502
MINIMUM FRICTION BETWEEN LAYERS AND INSERTS (SELECT ONE)	
(POUNDS PER INCH OF WIDTH)	2504
(KILOPASCALS PER MILLIMETER OF WIDTH)	2506
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	3452
PER ASTMD413.	3455
FRICTION TORQUE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	1816
AS FOLLOWS:	1815

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2502	FRICTION (PLY SEPARATION). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2502.
2504	FRICTION (PLY SEPARATION). FRICTION BETWEEN LAYERS AND INSERTS SHALL BE NOT LESS THAN 2504 POUNDS PER INCH OF WIDTH.
2506	FRICTION (PLY SEPARATION). FRICTION BETWEEN LAYERS AND INSERTS SHALL BE NOT LESS THAN 2506 KILOPASCALS PER MILLIMETER OF WIDTH.
3452	FRICTION (PLY SEPARATION). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3452.
3455	FRICTION (PLY SEPARATION). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD413.
1816	FRICTION TORQUE, THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1816.
1815	FRICTION TORQUE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FRICTION TORQUE (CONT)	
AS FOLLOWS: (CONT)	
FRICTION TORQUE AT ROOM TEMPERATURE (SELECT ONE)	
(POUND-INCH)	1818
(NEWTON-METER)	1820
FRICTION TORQUE AT LOW TEMPERATURE (SELECT ONE)	
(POUND-INCH)	1822
(NEWTON-METER)	1824
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1802
PER MIL-S-21558.	1804
ROOM TEMPERATURE (DEGREES CELSIUS)	1806
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1808
LOW TEMPERATURE (DEGREES CELSIUS)	1810
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1812

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1818	FRICTION TORQUE SHALL BE 1818 POUND-INCH AT ROOM TEMPERATURE.
1820	FRICTION TORQUE SHALL BE 1820 NEWTON-METER AT ROOM TEMPERATURE.
1822	FRICTION TORQUE SHALL BE 1822 POUND-INCH AT LOW TEMPERATURE.
1824	FRICTION TORQUE SHALL BE 1824 NEWTON-METER AT LOW TEMPERATURE.
1802	FRICTION TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT. EXCEPT 1802.
1804	FRICTION TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-21558.
1806	ROOM TEMPERATURE SHALL BE 1806 DEGREES CELSIUS.
1808	ROOM TEMPERATURE TOLERANCE SHALL BE 1808 DEGREES CELSIUS.
1810	LOW TEMPERATURE SHALL BE 1810 DEGREES CELSIUS.
1812	LOW TEMPERATURE TOLERANCE SHALL BE 1812 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	4760
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761
NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED.	4762
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	4754
PER MIL-STD-810, METHOD 508.	4755
TEST PERIOD (DAYS)	4756
HARDNESS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2402

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4760 FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.

4761 FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED, THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.

4762 FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.

4754 FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.

4755 FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.

4756 TEST PERIOD SHALL BE 4756 DAY(S).

2402 HARDNESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2402.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HARDNESS (CONT)	
REQUIREMENTS (CONT)	
PER HARDNESS TABLE.	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	3342
TEST DESIGNATION PER HARDNESS TABLE.	3343
NUMBER OF READINGS (QUANTITY)	3346
NUMBER OF CENTERED READINGS (QUANTITY)	3348

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

HARDNESS, THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE MATERIAL HARDNESS TABLE.

MATERIAL HARDNESS TABLE

MATERIAL	TESTER AND SCALE	HARDNESS VAL MIN	HARDNESS VAL MAX	TEST DESIG-NATION	TEST DOCUMENT
4030	4031	4032	4033	4034	4035
4036	4037	4038	4039	4040	4041
4042	4043	4044	4045	4046	4047
4048	4049	4050	4051	4052	4053
4054	4055	4056	4057	4058	4059
4060	4061	4062	4063	4064	4065
4066	4067	4068	4069	4070	4071
4072	4073	4074	4075	4076	4077
4078	4079	4080	4081	4082	4083
4084	4085	4086	4087	4088	4089

3342 HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3342.

3343 HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE HARDNESS TABLE.

3346 THERE SHALL BE 3346 READINGS TAKEN.

3348 THERE SHALL BE 3348 CENTERED READINGS TAKEN.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMPULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2572
MAXIMUM ALLOWABLE LEAKAGE DURING ENTIRE TEST PERIOD (CUBIC CENTIMETERS)	2574
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	3562
PER MIL-P-81716.	3564
TEST FITTING (DOC DES)	3565
TEST FITTING BOSS (DOC DES)	3566
NOMINAL TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	3568
(KILOPASCALS)	3569
PEAK TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	3572
(KILOPASCALS)	3573
MINIMUM IMPULSE PRESSURE RATE (CYCLES PER MINUTE)	3574

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2572	IMPULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2572.
2574	IMPULSE. THE TOTAL LEAKAGE DURING THE ENTIRE TEST SHALL BE NOT GREATER THAN 2574 CUBIC CENTIMETERS.
3562	IMPULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3562.
3564	IMPULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-P-81716.
3565	THE TEST FITTING SHALL BE IN ACCORDANCE WITH 3565.
3566	THE TEST FITTING BOSS SHALL BE IN ACCORDANCE WITH 3566.
3568	NOMINAL TEST PRESSURE SHALL BE 3568 POUNDS PER SQUARE INCH.
3569	NOMINAL TEST PRESSURE SHALL BE 3569 KILOPASCALS.
3572	PEAK TEST PRESSURE SHALL BE 3572 POUNDS PER SQUARE INCH.
3573	PEAK TEST PRESSURE SHALL BE 3573 KILOPASCALS.
3574	IMPULSE PRESSURE RATE SHALL BE NOT LESS THAN 3574 CYCLES PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMPULSE (CONT)	
PER MIL-P-81716. (CONT)	
MAXIMUM IMPULSE PRESSURE RATE (CYCLES PER MINUTE)	3575
TOTAL IMPULSE CYCLES (QUANTITY)	3579
INSTALLATION STRETCH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2612
NO EVIDENCE OF CRACKING OR BREAKING.	2614
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	3672
PER MIL-P-81716.	3674
STRETCH CONDITION DURATION AT AMBIENT TEMPERATURE (HOURS)	3676
DURATION TOLERANCE (HOURS)	3679

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

3575 IMPULSE PRESSURE RATE SHALL BE NOT GREATER THAN 3575 CYCLES PER MINUTE,

3579 THERE SHALL BE A TOTAL OF 3579 IMPULSE CYCLES.

2612 INSTALLATION STRETCH, THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2612.

2614 INSTALLATION STRETCH, THERE SHALL BE NO EVIDENCE OF CRACKING OR BREAKING,

3672 INSTALLATION STRETCH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3672.

3674 INSTALLATION STRETCH. TESTING SHALL BE IN ACCORDANCE WITH MIL-P-81726,

"3676 THE STRETCH CONDITION SHALL BE MAINTAINED FOR 3676 HOUR(S) AT AMBIENT TEMPERATURE.

3679 DURATION TOLERANCE SHALL BE 3679 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSTALLATION STRETCH (CONT)	
PER MIL-P-81716. (CONT)	
STRETCH CONDITION DURATION AT LOW TEMPERATURE (HOURS)	36811
DURATION TOLERANCE (HOURS)	3683
LOW TEMPERATURE (DEGREES CELSIUS)	3687
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	3688
LIQUID IMMERSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	1912
AS FOLLOWS:	1910
PERCENT OF INITIAL VALUE	
MINIMUM TENSILE STRENGTH (PERCENT)	1914
MINIMUM ULTIMATE ELONGATION (PERCENT)	1916
MINIMUM VOLUME (PERCENT)	1918
MAXIMUM VOLUME (PERCENT)	1920

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

3681 THE STRETCH CONDITION SHALL BE MAINTAINED FOR 3681 HOUR(S) AT LOW TEMPERATURE.

3683 DURATION TOLERANCE SHALL BE 3683 HOUR (S).

3687 LOW TEMPERATURE SHALL BE 3687 DEGREES CELSIUS.

3688 LOW TEMPERATURE TOLERANCE SHALL BE 3688 DEGREES CELSIUS.

1912 LIQUID IMMERSION, THE REQUIREMENT(S) SHALL BE IN ACCORDAN(WITH THE BASE DOCUMENT, EXCEPT 1912,

1910 LIQUID IMMERSION. THE MATERIAL PROPERTIES AFTER TEST SHALL BE AS FOLLOWS:

1914 TENSILE STRENGTH SHALL BE NOT LESS THAN 1914 PERCENT OF INITIAL VALUE.

1916 ULTIMATE ELONGATION SHALL BE NOT LESS THAN 1916 PERCENT OF INITIAL VALUE.

1918 VOLUME DECREASE SHALL BE NOT LESS THAN 1918 PERCENT OF INITIAL VALUE.

1920 VOLUME DECREASE SHALL BE NOT GREATER THAN 1920 PERCENT OF INITIAL VALUE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LIQUID IMMERSION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	11902
PER DOCUMENT (DOC DES)	1904
PER LIQUID IMMERSION TABLE.	
PERFORMANCE, HIGH TEMPERATURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2562
MAXIMUM LEAKAGE FROM EACH GLAND (CUBIC CENTIMETERS)	2564
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	3532

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1902 LIQUID IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1902.

1904 LIQUID IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1904.

LIQUID IMMERSION TEST TABLE

LIQUID MEDIA	TEMPERATURE DEGREES CELSIUS	IMMERSION TIME (HOURS)	LIGHT CONDITION
4200	4201	4202	4203
4204	4205	4206	4207
4208	4209	4210	4211
4212	4213	4214	4215

2562 PERFORMANCE, HIGH TEMPERATURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2562.

2564 PERFORMANCE, HIGH TEMPERATURE, THE TOTAL LEAKAGE DURING THE ENTIRE TEST SHALL BE NOT GREATER THAN 2564 CUBIC CENTIMETERS.

3532 PERFORMANCE, HIGH TEMPERATURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3532.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PERFORMANCE, HIGH TEMPERATURE (CONT)	
TEST METHODS (CONT)	
PER MIL-P-25732.	3535
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	3536
TOLERANCE (POUNDS PER SQUARE INCH)	3538
(KILOPASCALS)	35411
TOLERANCE (KILOPASCALS)	3543
TEST TEMPERATURE (DEGREES CELSIUS)	3548
TOLERANCE (DEGREES CELSIUS)	3553
MAXIMUM TIME TO REACH TEST TEMPERATURE (MINUTES)	3554
TEST DURATION (HOURS)	3556
PERFORMANCE, LOW TEMPERATURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2582
MAXIMUM LEAKAGE FROM EACH GLAND (CUBIC CENTIMETERS)	2584

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3535	PERFORMANCE, HIGH TEMPERATURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-P-25732.
3536	TEST PRESSURE SHALL BE 3536 POUNDS PER SQUARE INCH.
3538	TEST PRESSURE TOLERANCE SHALL BE 3538 POUNDS PER SQUARE INCH.
3541	TEST PRESSURE SHALL BE 3541 KILOPASCALS.
3543	TEST PRESSURE TOLERANCE SHALL BE 3543 KILOPASCALS.
3548	TEST TEMPERATURE SHALL BE 3548 DEGREES CELSIUS.
3551	TEST TEMPERATURE TOLERANCE SHALL BE 3551 DEGREES CELSIUS.
3554	THE TEST TEMPERATURE SHALL BE REACHED WITHIN 3554 MINUTE(S).
3556	THE TEST DURATION SHALL BE 3556 HOUR(S).
2582	PERFORMANCE? LOW TEMPERATURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2582.
2584	PERFORMANCE? LOW TEMPERATURE. THE TOTAL LEAKAGE DURING THE ENTIRE TEST SHALL BE NOT GREATER THAN 2584 CUBIC CENTIMETERS FROM EACH GLAND.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PERFORMANCE, LOW TEMPERATURE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	3582
PER MIL-P-25732.	3585
TEST PRESSURE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	3586
TOLERANCE (POUNDS PER SQUARE INCH)	3587
SI	
(KILOPASCALS)	3588
TOLERANCE (KILOPASCALS)	3589
TEST TEMPERATURE (DEGREES CELSIUS)	3598
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	3593
MAXIMUM TIME TO ATTAIN TEST TEMPERATURE (MINUTES)	3604
TEST DURATION (HOURS)	3606

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

3582 Performance LOW TEMPERATURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3582.

3585 PERFORMANCE? LOW TEMPERATURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-P-25732.

3586 TEST PRESSURE SHALL BE 3586 POUNDS PER SQUARE INCH.

3587 TEST PRESSURE TOLERANCE SHALL BE 3587 POUNDS PER SQUARE INCH,

3588 TEST PRESSURE SHALL BE 3588 KILOPASCALS.

3589 TEST PRESSURE TOLERANCE SHALL BE 3589 KILOPASCALS.

3598 TEST TEMPERATURE SHALL BE 3598 DEGREES CELSIUS.

3593 TEST TEMPERATURE TOLERANCE SHALL BE 3593 DEGREES CELSIUS.

3604 TEST TEMPERATURE SHALL BE REACHED WITHIN 3604 MINUTE(S).

3606 TEST DURATION SHALL BE 3606 HOUR (S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PERMANENT SET (COMPRESSION SET)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2382
MAXIMUM PERCENT OF PERMANENT SET AS FOLLOWS:	2381
UNAGED (PERCENT)	2384
AIR AGED (PERCENT)	2386
OIL AGED (PERCENT)	2388
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	3332
PER ASTMD395, METHOD B.	3336
RESILIENCE, LOW TEMPERATURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2592
MAXIMUM LEAKAGE (CUBIC CENTIMETERS)	2594

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2382	PERMANENT SET (COMPRESSION SET). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2382.
2383	PERMANENT SET (COMPRESSION SET). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2384	THE PERMANENT SET OF THE UNAGED SPECIMEN SHALL BE NOT GREATER THAN 2384 PERCENT.
- 2386	THE PERMANENT SET OF THE AIR AGED SPECIMEN SHALL BE NOT GREATER THAN 2386 PERCENT.
2388	THE PERMANENT SET OF THE OIL AGED SPECIMEN SHALL BE NOT GREATER THAN 2388 PERCENT.
3332	PERMANENT SET (COMPRESSION SET). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3332.
3336	PERMANENT SET (COMPRESSION SET). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD B OF ASTMD395.
2592	RESILIENCE, LOW TEMPERATURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2592.
2594	RESILIENCE? LOU TEMPERATURE. THE TOTAL LEAKAGE DURING THE ENTIRE TEST SHALL BE NOT GREATER THAN 2594 CUBIC CENTIMETERS FOR EACH PACKING GLAND.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESILIENCE, LOW TEMPERATURE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ,_.	3612
PER MIL-P-5315.	3614
SYSTEM TEMPERATURE (DEGREES CELSIUS)	3616
TOLERANCE (DEGREES CELSIUS)	3619
TIME TO REDUCE SYSTEM TO TEST TEMPERATURE	
MINIMUM (HOURS)	3622
MAXIMUM (HOURS)	3624
ROTATION RATE (REVOLUTIONS PER MINUTE)	3628
TEST MEDIA (NAME)	3630
MEDIA DOCUMENT (DOC DES)	3632
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	3634
TOLERANCE (POUNDS PER SQUARE INCH)	3636
(KILOPASCALS)	3650
TOLERANCE (KILOPASCALS)	3652

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3612	RESILIENCE, LOW TEMPERATURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3612.
3614	RESILIENCE, LOW TEMPERATURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-P-5315.
3616	TEST SYSTEM TEMPERATURE SHALL BE 3616 DEGREES CELSIUS.
3619	TEST SYSTEM TEMPERATURE TOLERANCE SHALL BE 3619 DEGREES CELSIUS.
3622	THE SYSTEM SHALL BE REDUCED TO THE TEST TEMPERATURE IN NOT LESS THAN 3622 HOUR(S).
3624	THE SYSTEM SHALL BE REDUCED TO THE TEST TEMPERATURE IN NOT GREATER THAN 3624 HOUR(S).
3628	ROTATION SHALL BE 3628 REVOLUTIONS PER MINUTE.
3630	THE TEST FLUID SHALL BE 3630.
3632	THE TEST FLUID SHALL CONFORM TO 3632.
3634	THE TEST PRESSURE SHALL BE 3634 POUNDS PER SQUARE INCH.
3636	THE TEST PRESSURE TOLERANCE SHALL BE 3636 POUNDS PER SQUARE INCH.
3650	THE TEST PRESSURE SHALL BE 3650 KILOPASCALS.
3652	THE TEST PRESSURE TOLERANCE SHALL BE 3652 KILOPASCALS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESILIENCE, LOW TEMPERATURE (CONT)	
PER MIL-P-5315, (CONT)	
TEST TEMPERATURE DURATION (HOURS)	3646
RESISTANCE TO OZONE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	1982
NO EVIDENCE OF SURFACE CRACKS.	1986
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	1962
PER ASTMD1149.	1964
OZONE CONCENTRATION PARTS PER 100 MILLION BY VOLUME (PARTS)	1966
CONDITIONING TEMPERATURE (DEGREES CELSIUS)	1967
TOLERANCE (DEGREES CELSIUS)	1970
EXPOSURE TIME (HOURS)	1974
TOLERANCE (HOURS)	11976

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

3646 THE TEST TEMPERATURE SHALL BE MAINTAINED CONTINUOUSLY FOR 3646 HOUR(S).

1982 RESISTANCE TO OZONE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1982.

1986 RESISTANCE TO OZONE. THE MATERIAL SHALL SHOW NO SURFACE CRACKS*

1962 RESISTANCE TO OZONE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1962.

1964 RESISTANCE TO OZONE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD1149.

1966 THE OZONE CONCENTRATION SHALL BE 1966 PARTS PER 100 MILLION BY VOLUME.

1967 CONDITIONING TEMPERATURE SHALL BE 1967 DEGREES CELSIUS.

1970 CONDITIONING TEMPERATURE TOLERANCE SHALL BE 1970 DEGREES CELSIUS.

1974 THE EXPOSURE TIME SHALL BE 1974 HOUR(S).

1976 TIME TOLERANCE SHALL BE 1976 HOUR(S),

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY/FOG	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	6356
NO EVIDENCE OF Corrosion PHYSICAL DAMAGE. OR DEGRADATION OF PERFORMANCE.	6357
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	6353
PER ASTMB117.	6354
EXPOSURE PERIOD (HOURS)	4783

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6356	SALT SPRAY/FOG. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6356.
6357	SALT SPRAY/FOG. THERE SHALL BE NO EVIDENCE OF Corrosion PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
6353	SALT SPRAY/FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6353.
6354	SALT SPRAY/FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMB117.
4783	DURATION OF TEST SHALL BE 4783 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEALING PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2132
AS FOLLOWS:	2131
SEALING PRESSURE BEFORE AGING (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2134
TOLERANCE (POUNDS PER SQUARE INCH)	2136
(KILOPASCALS)	2138
TOLERANCE (KILOPASCALS)	2140
SEALING PRESSURE AFTER AGING (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2142
TOLERANCE (POUNDS PER SQUARE INCH)	2144
(KILOPASCALS)	2146
TOLERANCE (KILOPASCALS)	2148
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	3102
PER ASTMD1081.	3104

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2132 SEALING PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENTS EXCEPT 2132.

2131 SEALING PRESSURE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2134 SEALING PRESSURE BEFORE AGING SHALL BE 2134 POUNDS PER SQUARE INCH.

2136 PRESSURE TOLERANCE SHALL BE 2136 POUNDS PER SQUARE INCH.

2138 SEALING PRESSURE BEFORE AGING SHALL BE 2138 KILOPASCALS.

2140 PRESSURE TOLERANCE SHALL BE 2140 KILOPASCALS.

2142 SEALING PRESSURE AFTER AGING SHALL BE 2142 POUNDS PER SQUARE INCH.

2144 PRESSURE TOLERANCE SHALL BE 2144 POUNDS PER SQUARE INCH.

2146 SEALING PRESSURE AFTER AGING SHALL BE 2146 KILOPASCALS.

2148 PRESSURE TOLERANCE SHALL BE 2148 KILOPASCALS.

3102 SEALING PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3102.

3104 SEALING PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD1081.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SPECIFIC GRAVITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2432
AS FOLLOWS:	2431
MINIMUM SPECIFIC GRAVITY (NUMBER)	2434
MAXIMUM SPECIFIC GRAVITY (NUMBER)	2436
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	3362
PER ASTMD792.	3363
TEST TEMPERATURE (DEGREES CELSIUS)	3367
TOLERANCE (DEGREES CELSIUS)	3378
SURFACE TEXTURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	1778
AS FOLLOWS:	1775
MAXIMUM SURFACE ROUGHNESS ARITHMETICAL AVERAGE (SELECT ONE)	
(MICROINCHES)	**1782**
(MICROMETERS)	**1784**

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2432	SPECIFIC GRAVITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2432.
2431	SPECIFIC GRAVITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2434	THE SPECIFIC GRAVITY SHALL BE NOT LESS THAN 2434.
2436	THE SPECIFIC GRAVITY SHALL BE NOT GREATER THAN 2436.
3362	SPECIFIC GRAVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3362.
3363	SPECIFIC GRAVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD792,
3367	TEST TEMPERATURE SHALL BE 3367 DEGREES CELSIUS.
3378	TEST TEMPERATURE TOLERANCE SHALL BE 3378 DEGREES CELSIUS.
1778	SURFACE TEXTURE, THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1778.
1775	SURFACE TEXTURE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1782	THE SURFACE ROUGHNESS ARITHMETICAL AVERAGE SHALL BE NOT GREATER THAN 1782 MICROINCH (S).
1784	THE SURFACE ROUGHNESS ARITHMETICAL AVERAGE SHALL BE NOT GREATER THAN 1784 MICROMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SURFACE TEXTURE (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM WAVINESS (SELECT ONE)	
(INCH)	1786
(MILLIMETER)	1790
MAXIMUM PERCENT SURFACE AFFECTED (PERCENT)	1792
SURFACE SHALL BE SMOOTH AND BLEMISH FREE,	1794
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	1772
PER ANSIB46.1.	1774
TENSILE STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2332
AS FOLLOWS:	2331
MINIMUM UNAGED TENSILE STRENGTH (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2334
(KILOPASCALS)	2335

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1786	THE SURFACE WAVINESS SHALL BE NOT GREATER THAN 1786 INCH.
3790	THE SURFACE WAVINESS SHALL BE NOT GREATER THAN 1790 MILLIMETER.
1792	THE SURFACE AFFECTED SHALL BE NOT GREATER THAN 1792 PERCENT.
1794	THE SURFACE SHALL BE SMOOTH AND BLEMISH FREE.
1772	SURFACE TEXTURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1772.
1774	SURFACE TEXTURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ANSIB46.1.
2332	TENSILE STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2332.
2331	TENSILE STRENGTH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2334	THE TENSILE STRENGTH OF THE UNAGED SPECIMEN SHALL BE NOT LESS THAN 2334 POUNDS PER SQUARE INCH.
2335	THE TENSILE STRENGTH OF THE UNAGED SPECIMEN SHALL BE NOT LESS THAN 2335 KILOPASCALS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TENSILE STRENGTH (CONT)	
AS FOLLOWS: (CONT)	
MINIMUM PERCENT OF THE UNAGED TENSILE STRENGTH AFTER AGING	
AIR AGING (PERCENT)	2336
OIL AGING (PERCENT)	2338
OXYGEN-PRESSURE AGING (PERCENT)	2340
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	3312
PER ASTMD412.	3335
TEST TEMPERATURE (DEGREES CELSIUS)	3316
TOLERANCE (DEGREES CELSIUS)	3319
TEST DURATION (HOURS)	3338
TENSILE STRESS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2362

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2336 THE TENSILE STRENGTH OF THE AIR AGED SPECIMEN SHALL BE NOT LESS THAN 2336 PERCENT OF THE UNAGED SPECIMEN.

2338 THE TENSILE STRENGTH OF THE OIL AGED SPECIMEN SHALL BE NOT LESS THAN 2338 PERCENT OF THE UNAGED SPECIMEN.

2340 THE TENSILE STRENGTH OF THE OXYGEN AGED SPECIMEN SHALL BE NOT LESS THAN 2340 PERCENT OF THE UNAGED SPECIMEN.

3312 TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENTS EXCEPT 3312.

3315 TENSILE STRENGTH, TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD412.

3316 THE TESTING TEMPERATURE SHALL BE 3316 DEGREES CELSIUS.

3319 THE TEMPERATURE TOLERANCE SHALL BE 3319 DEGREES CELSIUS.

3338 THE TEST DURATION SHALL BE 3338 HOUR(S).

2362 TENSILE STRESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 23620

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TENSILE STRESS (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	2361
MINIMUM UNAGED TENSILE STRESS (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2364
(KILOPASCALS)	2365
MINIMUM PERCENT OF UNAGED TENSILE STRESS AFTER AGING	
AIR AGING (PERCENT)	2367
OIL AGING (PERCENT)	2366
OXYGEN-PRESSURE AGING (PERCENT)	2370
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	3322
PER ASTMD412.	3325
TEST TEMPERATURE (DEGREES CELSIUS)	3326
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	3329
TEST DURATION (HOURS)	3372

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2361 TENSILE STRESS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2364 THE TENSILE STRESS OF THE UNAGED SPECIMEN SHALL BE NOT LESS THAN 2364 POUNDS PER SQUARE INCH.

2365 THE TENSILE STRESS OF THE UNAGED SPECIMEN SHALL BE NOT LESS THAN 2365 KILOPASCALS.

2367 TENSILE STRESS OF THE AIR AGED SPECIMEN SHALL BE NOT LESS THAN 2367 OF THE UNAGED SPECIMEN.

2366 TENSILE STRESS OF THE OIL AGED SPECIMEN SHALL BE NOT LESS THAN 2366 OF THE UNAGED SPECIMEN.

2370 TENSILE STRESS OF THE OXYGEN BOMB AGED SPECIMEN SHALL BE NOT LESS THAN 2370 PERCENT OF THE UNAGED SPECIMEN.

3322 TENSILE STRESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3322.

3325 TENSILE STRESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD412.

3326 THE TEST TEMPERATURE SHALL BE 3326 DEGREES CELSIUS.

3329 THE TEST TEMPERATURE TOLERANCE SHALL BE 3329 DEGREES CELSIUS.

3372 THE TEST DURATION SHALL BE 3372 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THERMAL EXPANSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	1922
COEFFICIENT OF LINEAR THERMAL EXPANSION (SELECT ONE)	
(INCH PER INCH PER DEGREE CELSIUS)	1926
(MILLIMETER PER MILLIMETER PER DEGREE CELSIUS)	1928
TEMPERATURE RANGE (DEGREES CELSIUS)	1930
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	3780
PER DOCUMENT (DOC DES)	3782
ULTIMATE ELONGATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2302

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1922	THERMAL EXPANSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCETP 1922.
1926	THERMAL EXPANSION. THE COEFFICIENT OF LINEAR THERMAL EXPANSION SHALL BE 1926 INCH PER INCH PER DEGREE CELSIUS
1928	THERMAL EXPANSION. THE COEFFICIENT OF LINEAR THERMAL EXPANSION SHALL BE 1928 MILLIMETER PER MILLIMETER PER DEGREE CELSIUS.
1930	THE TEMPERATURE RANGE SHALL BE 1930 DEGREES CELSIUS.
3780	THERMAL EXPANSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3780.
3782	THERMAL EXPANSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3782.
2302	ULTIMATE ELONGATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2302.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ULTIMATE ELONGATION (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	2301
MINIMUM PERCENT OF ULTIMATE ELONGATION OF THE UNAGED SPECIMEN (PERCENT)	2304
MINIMUM PERCENT OF UNAGED ULTIMATE ELONGATION AFTER AGING	
AIR AGING (PERCENT)	2306
OIL AGING (PERCENT)	2308
OXYGEN-PRESSURE AGING (PERCENT)	2310
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	3302
PER ASTMD412,	3305
TEST TEMPERATURE (DEGREES CELSIUS)	3306
TOLERANCE (DEGREES CELSIUS)	3309

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2301 ULTIMATE ELONGATION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2304 THE ULTIMATE ELONGATION OF THE UNAGED SPECIMEN SHALL BE NOT LESS THAN 2304 PERCENT.

2306 THE ULTIMATE ELONGATION OF THE AIR AGED SPECIMEN SHALL BE NOT LESS THAN 2306 PERCENT OF THE UNAGED SPECIMEN.

2308 THE ULTIMATE ELONGATION OF THE OIL AGED SPECIMEN SHALL BE NOT LESS THAN 2308 PERCENT OF THE UNAGED SPECIMEN.

2310 THE ULTIMATE ELONGATION OF THE OXYGEN BOMB AGED SPECIMEN SHALL BE NOT LESS THAN 2310 PERCENT OF THE UNAGED SPECIMEN.

3302 ULTIMATE ELONGATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3302.

3305 ULTIMATE ELONGATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD412.

3306 THE TESTING TEMPERATURE SHALL BE 3306 DEGREES CELSIUS.

3309 THE TEMPERATURE TOLERANCE SHALL BE 3309 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VOLUMETRIC CHANGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2422
MAXIMUM PERCENT OF INCREASE OR DECREASE IN VOLUME DUR TO FLUID AGING (PERCENT)	2424
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	3353
PER FED-STD-601, METHOD 6211.	3352
TEST MEDIA (NAME)	3353
MEDIA SPECIFICATION (DOC DES)	3354
MEDIA TEMPERATURE (DEGREES CELSIUS)	3355
TOLERANCE (DEGREES CELSIUS)	3365
TEST DURATION (HOURS)	3358
TOLERANCE (HOURS)	3359
WELD FINISH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2708
PER MIL-W-12332.	2710

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2422	VOLUMETRIC CHANGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2422.
2424	VOLUMETRIC CHANGE. THE VOLUME OF THE FLUID AGED SPECIMEN SHALL NOT DECREASE OR INCREASE MORE THAN 2424 PERCENT OF THE UNAGED SPECIMEN.
3351	VOLUMETRIC CHANGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3351.
3352	VOLUMETRIC CHANGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 6211 OF FED-STD-601.
3353	THE TEST MEDIA SHALL BE 3353.
3354	THE TEST MEDIA SHALL CONFORM TO 3354.
3355	THE TEST MEDIA TEMPERATURE SHALL BE 3355 DEGREES CELSIUS.
3365	THE TEMPERATURE TOLERANCE SHALL BE 3365 DEGREES CELSIUS.
3358	THE TEST DURATION SHALL BE 3358 HOUR(S).
3359	THE DURATION TOLERANCE SHALL BE 3359 HOUR(S).
2708	WELD FINISH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT? EXCEPT 2708.
2710	WELD FINISH. THE WELD FINISH SHALL BE IN ACCORDANCE WITH MIL-W-12332.

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WELD FINISH (CONT)	
PER MIL-W-12332. (CONT)	
MINIMUM DISTANCE OF BLEND FROM WELD (SELECT ONE)	
(INCHES)	2712
(MILLIMETERS)	2714
MINIMUM DISTANCE OF BLEND BELOW ADJACENT SURFACE (SELECT ONE)	
(INCHES)	2716
(MILLIMETERS)	2718
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2702
PER MIL-W-12332.	2704
STORAGE CONDITIONS	
(YEARS)	1529
CERTIFY MAXIMUM CURE DATE TO DELIVERY (QUARTERS)	4942

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

271z THE DISTANCE OF BLEND FROM HELD SHALL BE NOT LESS THAN 2712 INCH (S).

2714 THE DISTANCE OF BLEND FROM WELD SHALL BE NOT LESS THAN 2714 MILLIMETER(S).

2716 THE DISTANCE OF BLEND BELOW ADJACENT SURFACE SHALL BE NOT LESS THAN 2716 INCH(S).

2718 THE DISTANCE OF BLEND BELOW ADJACENT SURFACE SHALL BE NOT LESS THAN 2718 MILLIMETER(S).

2702 WELD FINISH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2702.

2704 WELD FINISH TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-W-12332,

STORAGE CONDITIONS.

1529 ITEMS SHALL WITHSTAND 1529 YEARS OF STORAGE WHEN PROPERLY PRESERVED, PACKAGED AND MECHANICALLY PROTECTED WITHOUT REQUIRING MAJOR REPAIR.

4942 MANUFACTURER SHALL CERTIFY THAT THE CURE DATE SHALL BE NOT GREATER THAN 4942 QUARTERS PRIOR TO DELIVERY DATE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STORAGE CONDITIONS (CONT)	
CERTIFY MINIMUM SHELF LIFE AFTER DELIVERY (QUARTERS)	4943
CERTIFY MAXIMUM MANUFACTURE DATE TO DELIVERY (QUARTERS)	4944
AGE LIMITATION PER MIL-STD-1523.	5209
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
c____	7003
D____	7004
E____	7005

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4943	MANUFACTURER SHALL CERTIFY THAT THERE SHALL BE NOT LESS THAN 4943 QUARTERS OF SHELF LIFE AFTER DELIVERY.
4944	MANUFACTURER SHALL CERTIFY THAT THE DATE OF MANUFACTURE SHALL BE NOT GREATER THAN 4944 QUARTERS PRIOR TO DATE OF DELIVERY.
5209	AGE LIMITATIONS OF THE FINISHED PRODUCT SHALL BE IN ACCORDANCE WITH MIL-STD-1523.
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(c) 7003.
7004	(D) 7004.
7005	(E) 70050

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-130.	7629
ADDITIONAL PART MARKING	
A____	6991
B____	6992
c____	6993
D____	6994
E____	6995
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISION (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.
	ADDITIONAL PART MARKING,
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI


(Project EDS-A293)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.


APPENDIX A


ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

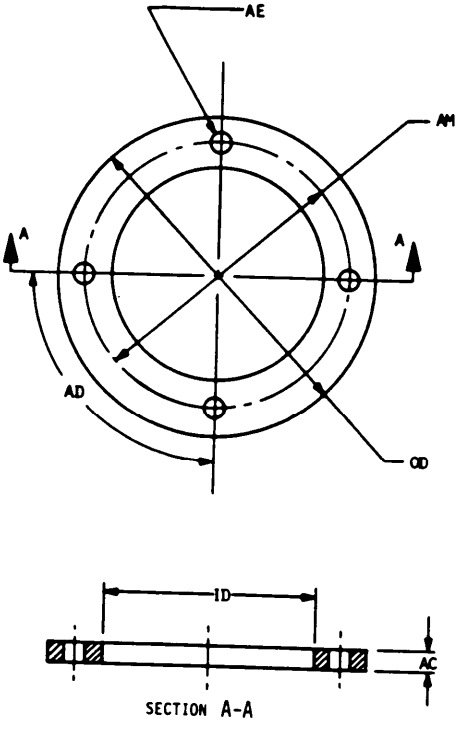

216-01-1

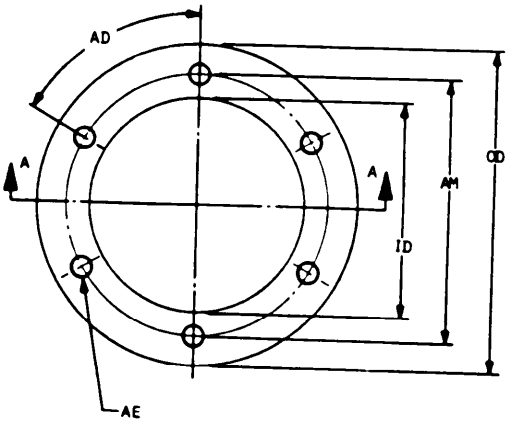





216-01-2


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

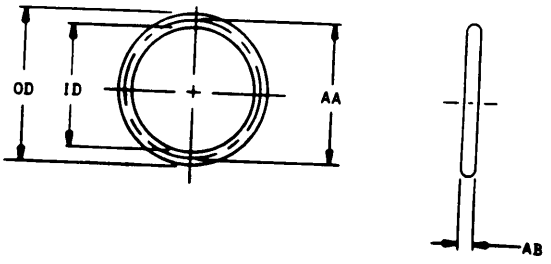



216-01-6

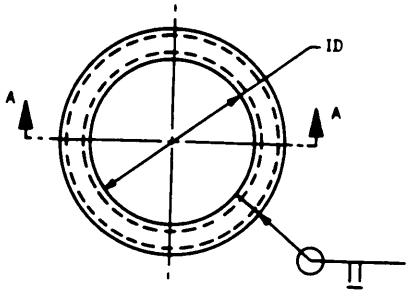




216-01-5

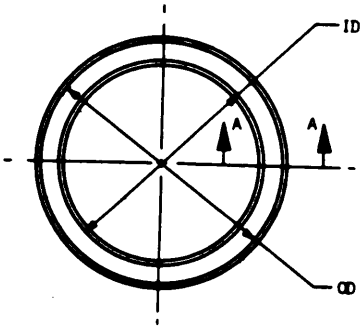

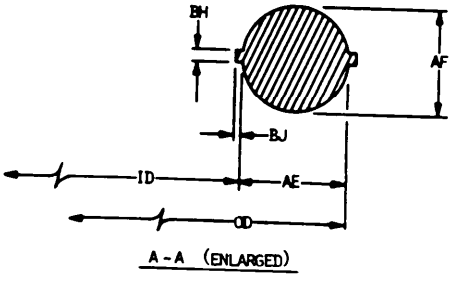


216-01-7


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

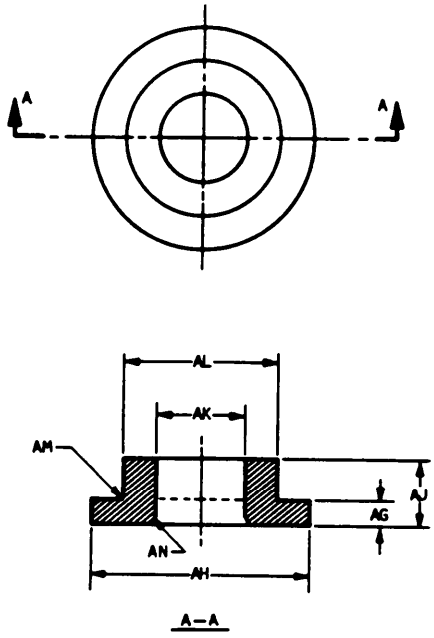

216-01-8

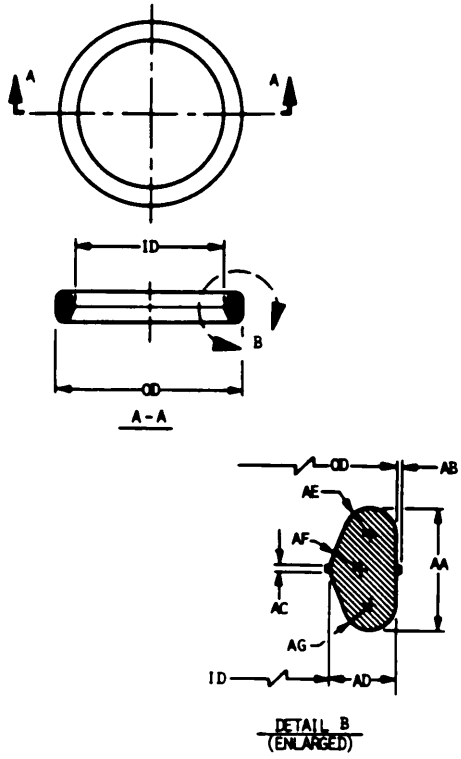


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

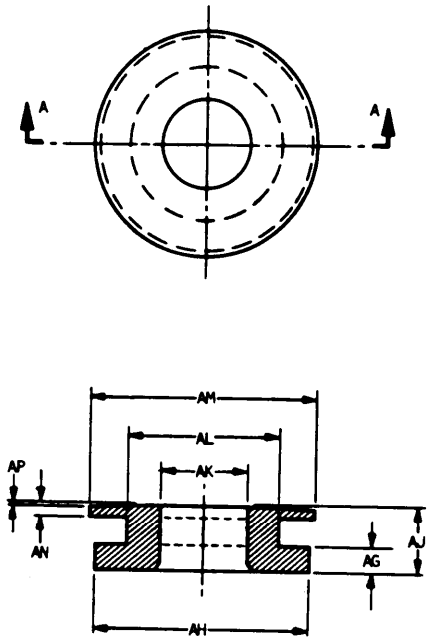

A - A


216-01-10

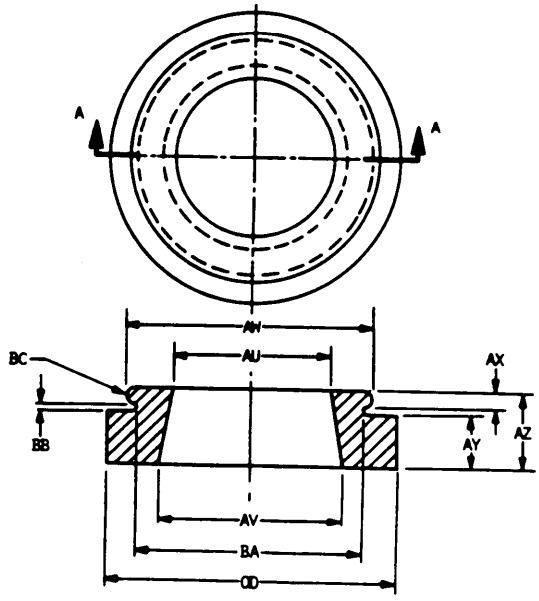


A - A

216-01-11


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

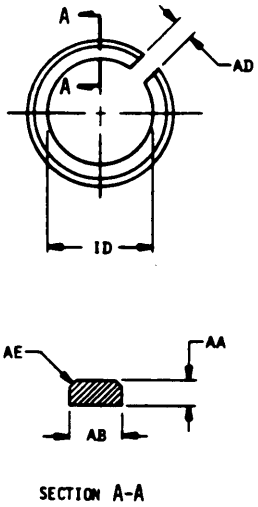


216-01-12

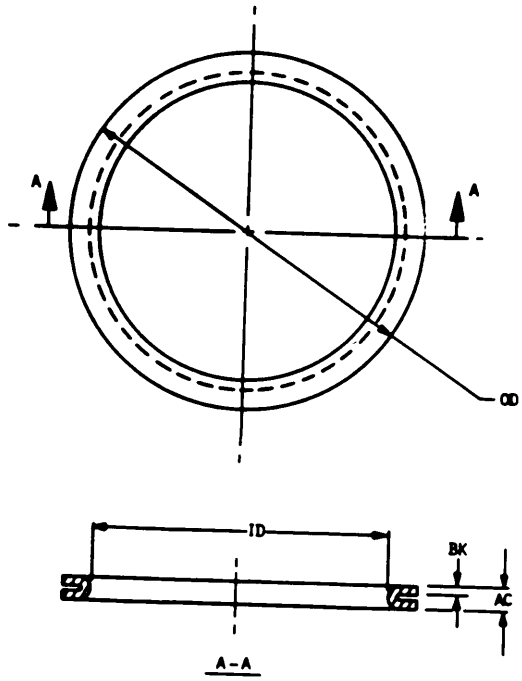

216-01-13

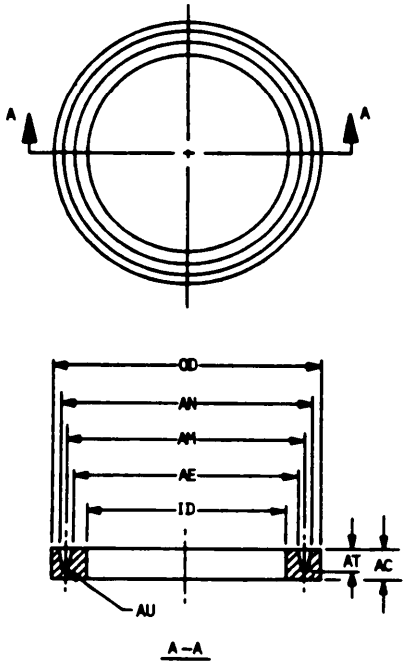


216-01-14

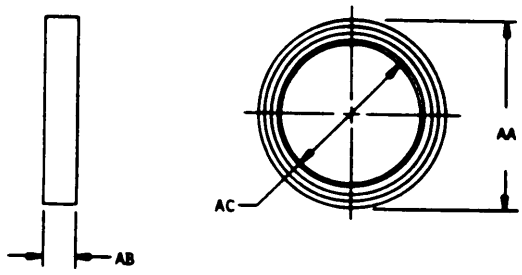



216-01-15

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

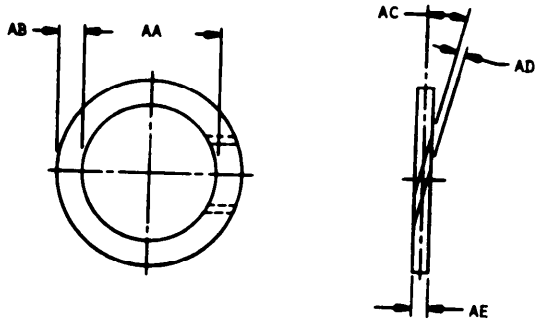



216-01-16



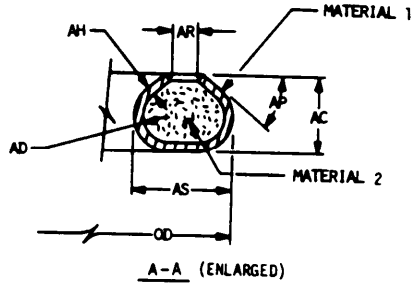


216-02-1

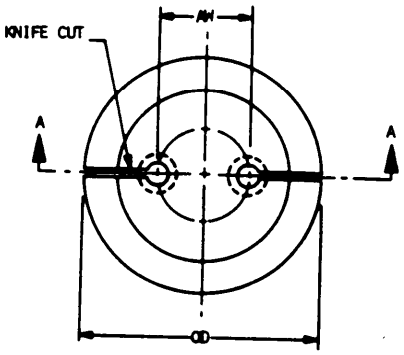

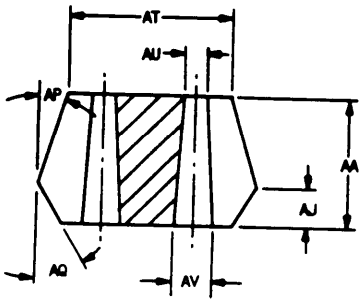


216-03-1

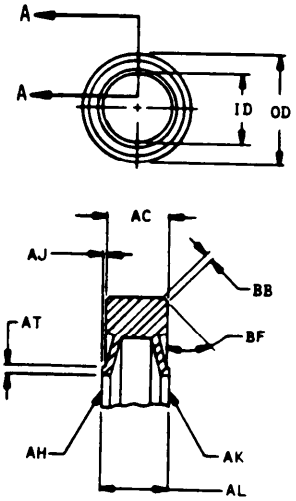


216-03-2


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

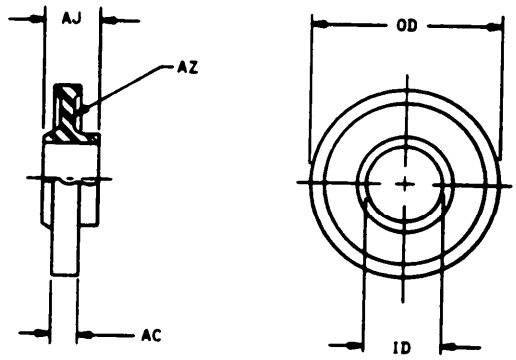


216-03-3

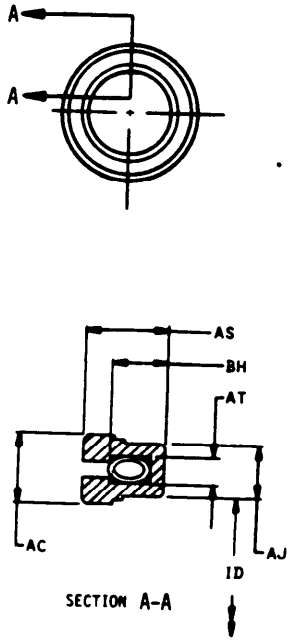

216-03-5

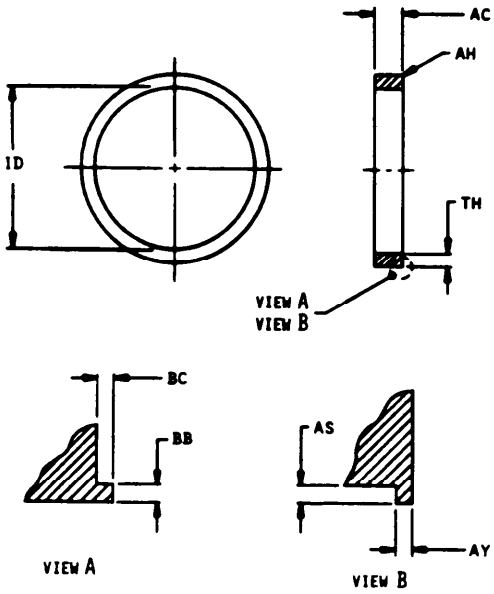


216-03-4

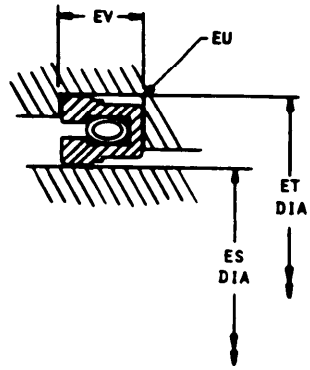


216-03-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

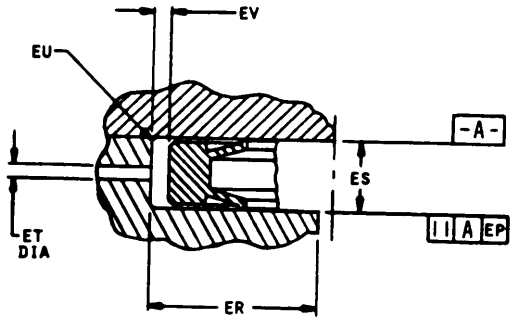


216-03-7

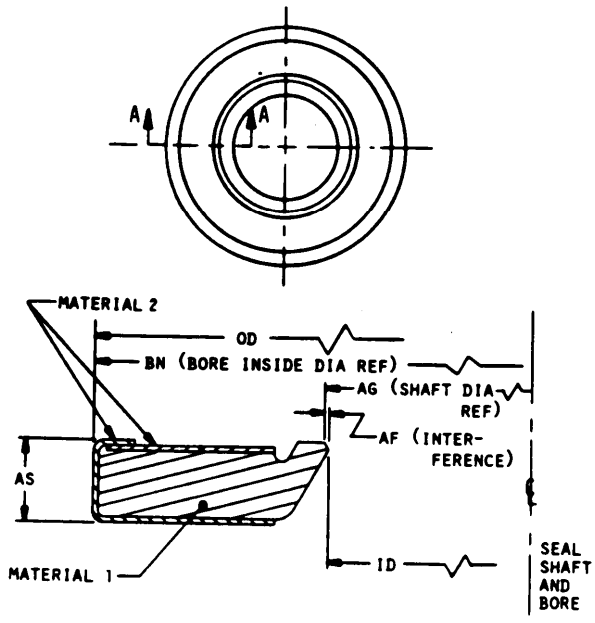

A-A
(ENLARGED)


216-03-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

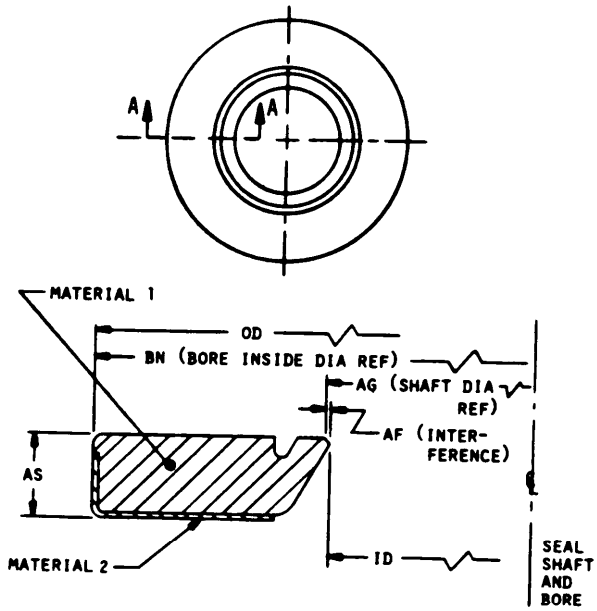

A-A
(ENLARGED)


216-03-9

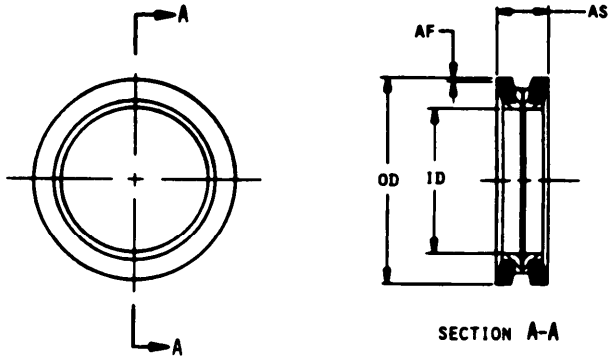


SECTION A-A

216-03-10


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

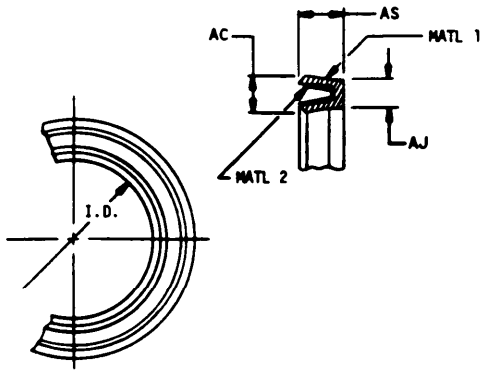


216-03-11

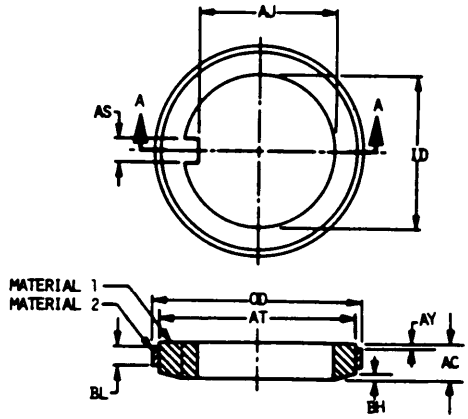

216-04-1

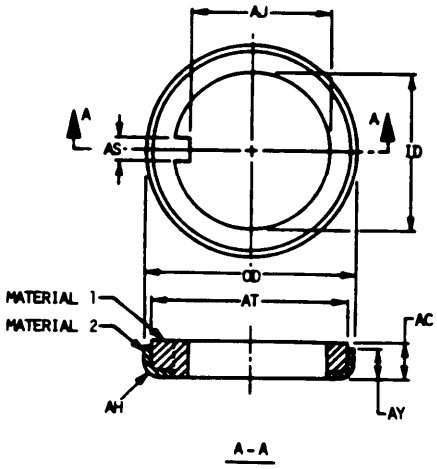


216-04-2

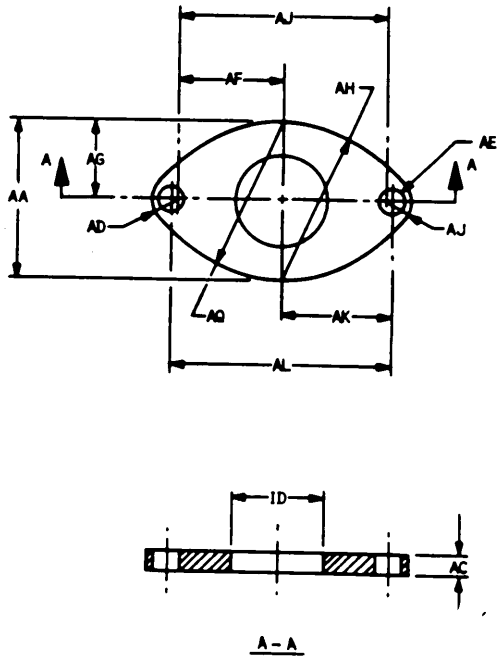


216-05-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

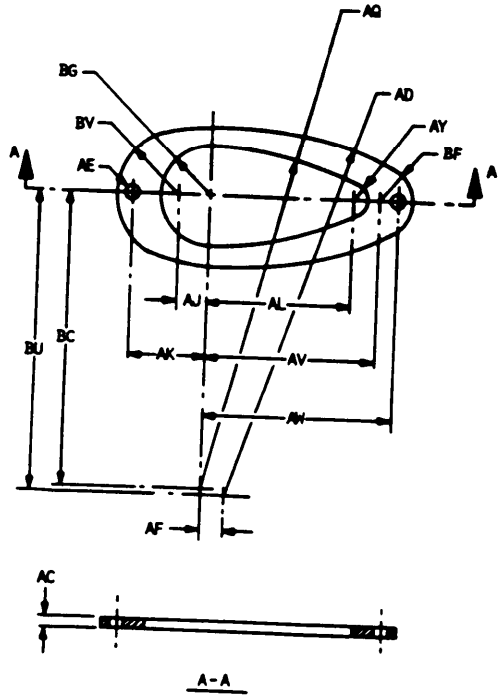


216-05-2

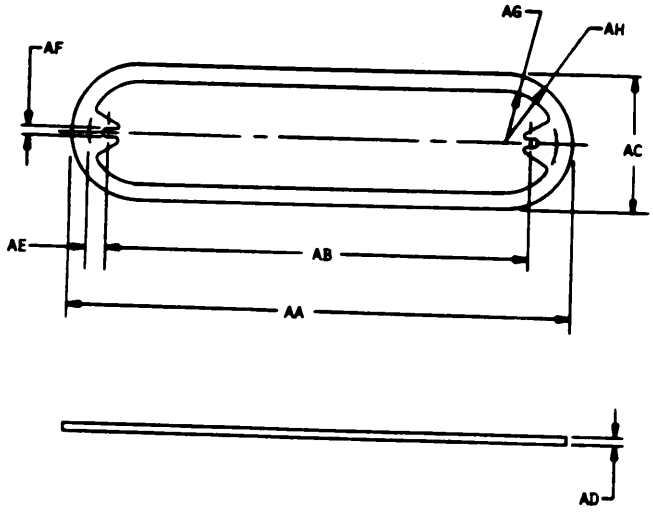


216-05-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

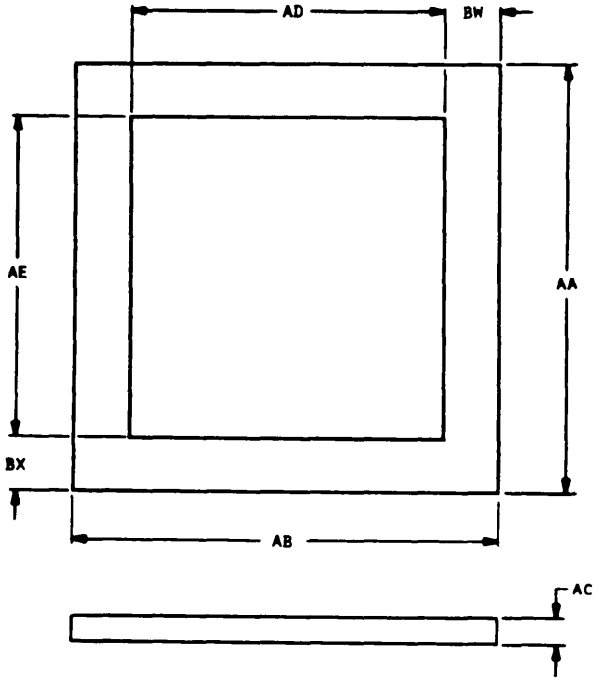


216-05-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

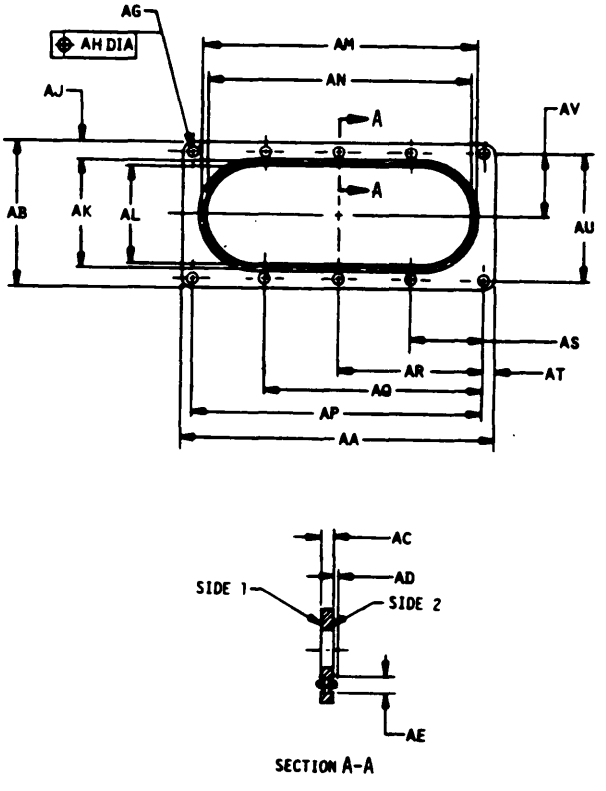


216-05-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

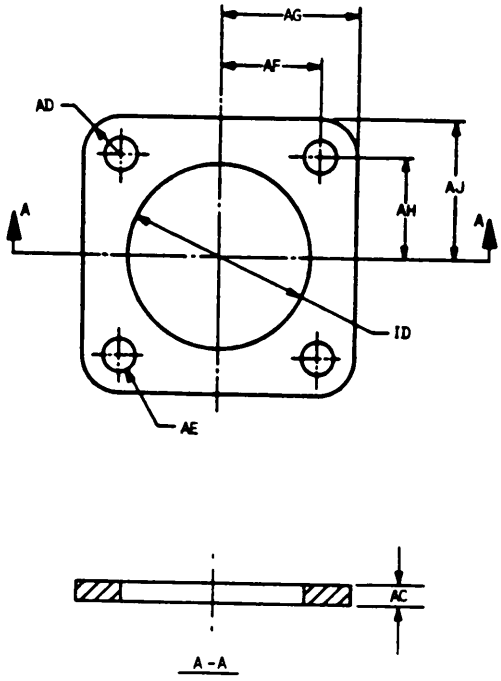


216-05-6

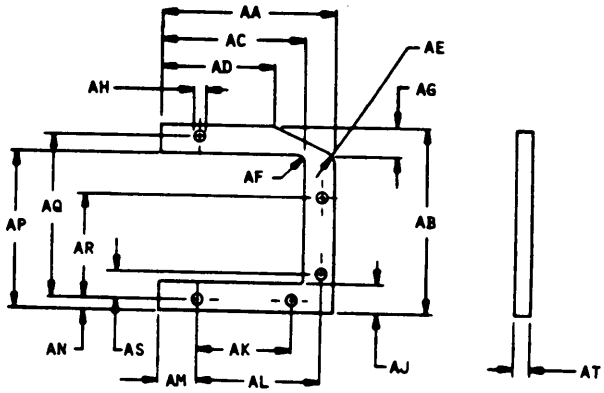


216-05-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

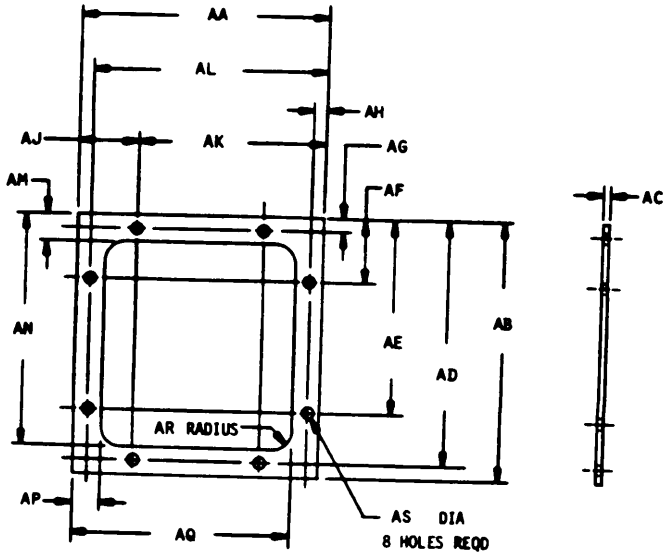


216-05-8

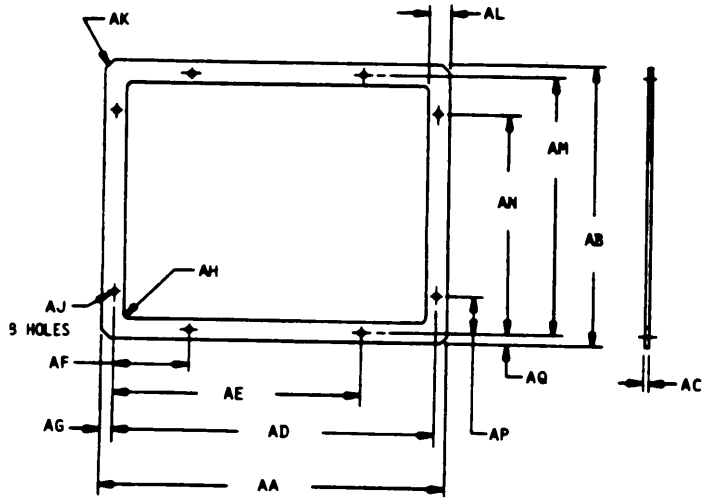


216-05-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

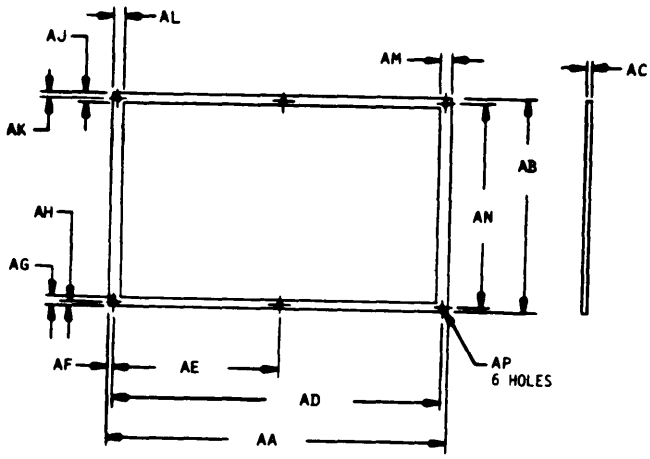


216-05-10

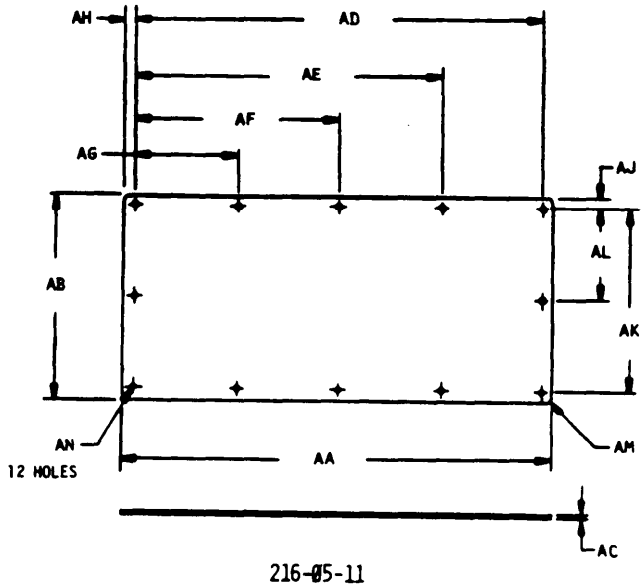


216-05-11

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

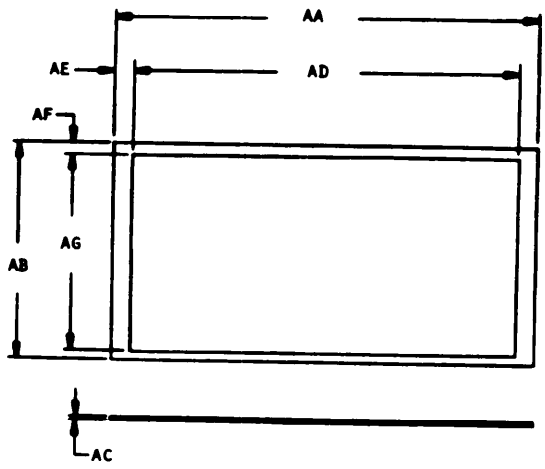


216-05-12

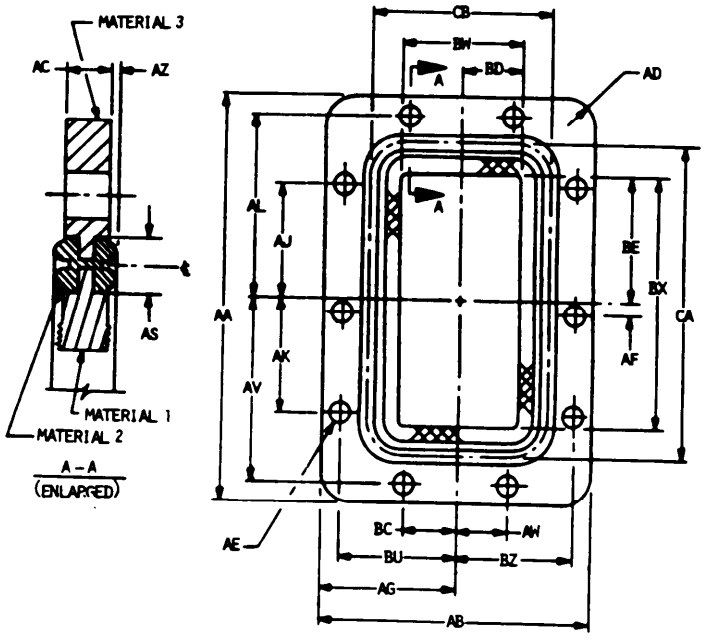



216-06-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

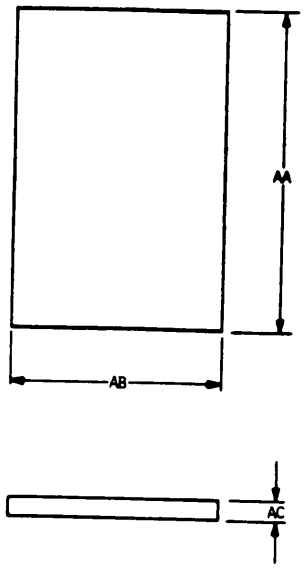


216-07-1







216-07-3

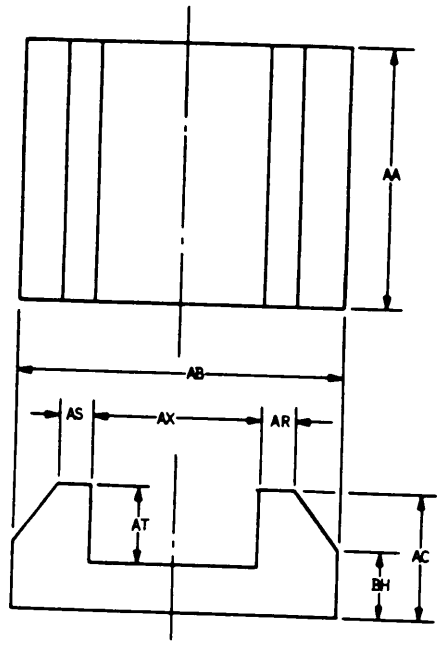


216-07-2


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.






216-07-4

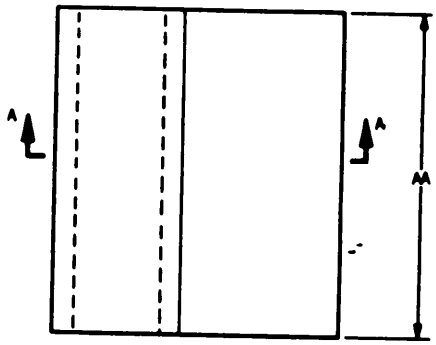






216-07-5

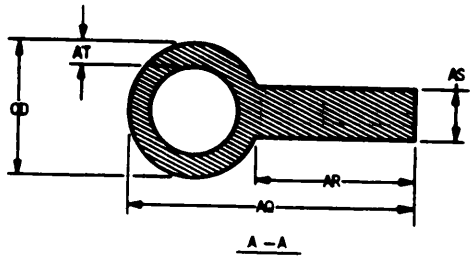


216-07-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.




216-07-7

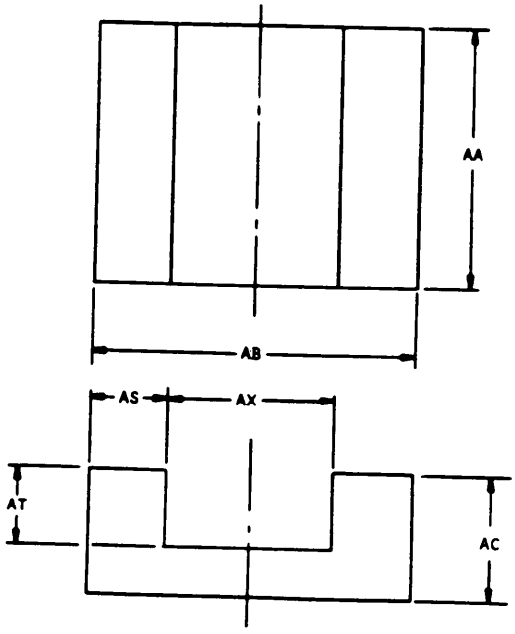


216-07-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

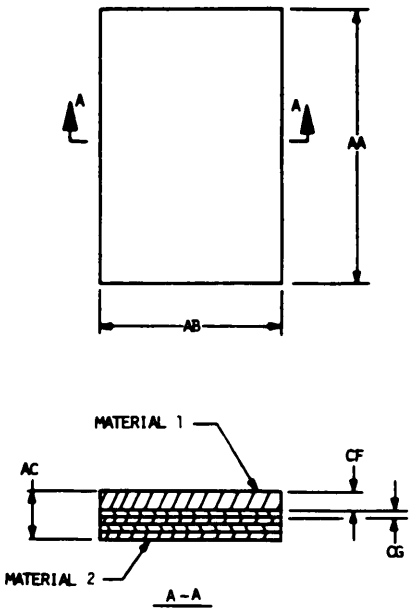

216-08-1

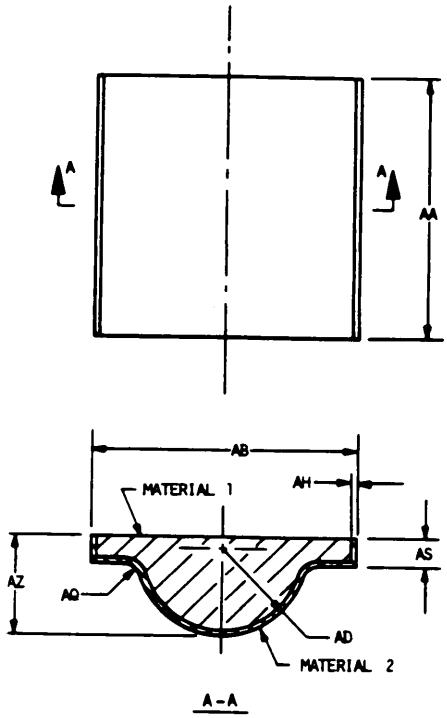

216-08-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHSRACTERISTIC CCDE INDEX

CHAR CODE	PAGE NO	CHAR CODE	PAGE NO	CHAR CODE.	PAGE NO.	CHAR CODE	PAGE NO.
0101	24	1626	44	1718	62	1818	108
0102	24	1628	44	1720	62	1820	108
0103	24	1630	44	1722	62	1822	108
0104	24	1632	44	1725	62	1824	108
0105	24	i634	44	1726	62	1840	86
0107	26	1636	44	1728	62	1842	86
0108	26	1638	46	1730	62	1844	86
0700	24	1640	46	1732	62	1846	86
0800	24	1642	46	1736	76	1848	86
1003	24	1644	46	1738	76	1850	86
1004	24	1646	46	1739	76	1865	88
1005	24	1648	46	1742	72	1869	88
1006	24	1650	46	1746	74	1873	88
1008	24	1658	54	1750	102	1877	88
1520	28	1660	56	1752	102	1902	120
1522	28	1662	56	1755	102	1904	120
1524	28	1664	56	1756	102	1910	118
1526	28	1668	56	1758	102	1912	118
1529	28	1670	56	1760	102	1914	118
1529	150	1672	56	1762	102	1916	118
1560	38	1674	56	1764	102	1916	118
1562	38	1676	56	1766	102	1920	118
1564	38	1678	56	1772	138	1922	144
1566	38	1680	56	1774	138	1926	144
1570	38	1682	58	1775	136	1928	144
1572	38	1684	58	1778	136	1930	144
1574	38	1686	58	1782	136	1932	90
1576	38	1688	58	1784	136	1934	90
1578	38	1691	54	1786	138	1936	90
1580	40	1692	54	1790	136	1962	130
1582	40	1694	54	1792	138	1964	3 0
1584	40	1696	54	1794	138	1966	130
1586	40	1701	60	1802	108	1967	130
1588	38	1702	60	1804	108	1970	130
1590	38	1704	60	1806	108	1974	130
1592	38	1706	60	1808	108	1976	130
1594	38	1708	60	1810	108	1982	130
1620	44	1710	60	1812	108	1986	130
1622	44	1714	62	1815	106	2030	38
1624	44	1716	62	1816	106	2040	40

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T20:56Z
Check the source to verify that this is the currenversion before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2042	40	2261	76	2462	82	2782	150
2044	40	2262	76	2464	82	2704	150
2082	40	2264	76	2472	70	2708	148
2084	40	2266	76	2474	70	2710	148
2086	40	2268	76	2482	88	2712	150
2088	40	2270	76	2484	88	2714	150
2090	44	2292	70	2492	96	2716	150
2092	44	2294	70	2494	96	2718	150
2114	42	2301	146	2502	106	2720	58
2116	42	2302	144	2504	106	2722	58
2118	42	2304	146	2506	106	2730	58
2120	42	2306	146	2511	84	2732	58
2121	42	2398	146	2512	84	2830	86
2122	42	2310	146	2514	84	2832	86
2124	42	2331	138	2516	84	2834	86
2126	42	2332	138	2521	104	2836	86
2128	42	2334	138	2522	104	2838	86
2131	134	2335	138	2524	104	2840	86
2132	134	2336	140	2525	104	3102	134
2134	134	2338	140	2526	104	3104	134
2136	134	2340	140	2527	104	3162	60
2138	134	2361	142	2531	92	3163	60
2140	134	2362	140	2532	92	3166	60
2142	134	2364	142	2533	92	3167	60
2144	134	2365	142	2540	92	3170	60
2146	134	2366	142	2544	92	3173	60
2148	134	2367	142	2552	100	3182	64
2160	42	2370	142	2554	100	3184	64
2162	42	2301	126	2562	120	3186	66
2164	42	2382	126	2564	120	3188	66
2201	64	2384	126	2572	114	3189	66
2202	64	2386	126	2574	114	3190	66
2204	64	2388	126	2582	122	3193	66
2206	64	2402	110	2584	122	3196	66
2208	64	2422	148	2592	126	3199	66
2210	64	2424	148	2594	126	3200	66
2221	68	2431	136	2612	116	3203	66
2222	68	2432	136	2614	116	3204	66
2224	58	2434	136	2622	98	3207	66
2226	68	2436	136	2624	96	3208	66

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE lNDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CCDE	PAGE NO.	CHAR CODE	PAGE NO.
3210	56	3354	168	3464	84	3556	122
3213	66	3355	148	3466	84	356?	114
3214	66	3358	148	346?	84	3564	114
3215	66	3359	148	3470	84	3565	114
3231	68	3362	136	3471	84	3566	114
3232	68	3363	136	3476	84	3568	114
3233	68	3365	148	3462	104	3569	114
3235	68	3367	136	3484	104	3572	114
3236	58	3372	142	3486	104	3573	114
3237	68	3378	136	3487	104	3574	114
3239	68	3382	82	3492	104	3575	116
3242	68	3384	82	3493	104	3579	116
3248	70	3386	82	3501	92	3582	124
3249	70	3395	82	3503	94	3585	124
3262	78	3396	82	3504	94	3586	124
3264	78	3397	82	3505	94	3587	126
3292	70	3398	82	3508	94	3568	124
3294	70	3401	72	3509	94	3589	124
3302	146	3402	72	3510	94	3593	124
3303	146	3403	72	3511	94	3598	124
3306	146	3404	72	3512	94	3604	124
3309	146	3405	72	3513	94	3606	124
3312	140	3408	72	3514	94	3612	128
3315	140	3409	72	3515	96	3614	128
3326	140	3412	88	3516	96	3616	128
3319	140	3413	90	3517	92	3619	128
3322	142	3416	72	3518	94	3622	128
3325	142	3418	90	3522	100	3624	128
3326	142	3420	90	3523	100	3628	128
3329	142	3421	90	3526	100	3630	126
3332	126	342?	90	3529	100	3632	126
3336	126	3430	90	3532	120	3634	128
3338	140	3433	90	3535	122	3636	128
3342	112	3442	96	3536	122	3646	130
3343	112	3444	96	3538	122	3650	128
3346	112	3446	96	3541	122	3652	128
3348	112	3447	96	3543	122	3672	116
3351	148	3452	106	3548	122	3674	116
3352	148	3455	106	3551	122	3676	116
3353	148	3462	84	3554	122	3679	116

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CCDE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3681	118	4031	113	4071	113	4161	75
3683	118	4032	113	4072	113	4162	75
3687	118	4033	113	4073	113	4163	75
3688	110	4034	113	4074	113	4164	75
3702	98	4035	113	4075	113	4165	75
3704	98	4036	113	4076	113	4166	75
3706	98	4037	113	4077	113	4167	75
3708	98	4038	113	4078	113	4168	75
3715	98	4039	113	4079	113	4169	75
3716	98	4040	113	4080	113	4170	75
3718	98	4041	113	4081	113	4171	75
3721	98	4042	113	4082	113	4172	75
3724	98	4043	113	4083	113	4173	75
3727	98	4044	113	4084	113	4174	75
3733	98	4045	113	4085	113	4175	75
3734	98	4046	113	4086	113	4176	75
3735	120	4047	113	4087	113	4177	75
3737	100	4048	113	4088	113	4178	75
3742	78	4049	113	4089	113	4179	75
3743	78	4050	113	4140	75	4180	75
3744	78	4051	113	4141	75	4181	75
3746	80	4052	113	4142	75	4182	75
3747	80	4053	113	4143	75	4183	75
3748	80	4054	113	4144	75	4184	75
3749	80	4055	113	4145	75	4185	75
3750	80	4056	113	4146	75	4186	75
3751	80	4057	113	4147	75	4187	75
3752	80	4058	113	4148	75	4200	121
3753	80	4059	113	4149	75	4201	121
3758	60	4060	113	4150	75	4202	121
3760	80	4061	113	4151	?5	4203	121
3771	78	4062	113	4152	75	4204	121
3772	78	4063	113	4153	75	4205	121
3774	78	4064	113	4154	75	4206	121
3776	78	4065	113	4155	75	4207	121
3780	144	4066	113	4156	75	4208	121
3792	144	4067	113	4157	75	4209	121
3784	92	4068	113	4158	75	4210	121
3786	92	4069	113	4159	75	4211	121
4030	113	4070	113	4160		4212	121

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4213	121	6942	26	7577	34		
4214	121	6991	154	7578	34		
4215	121	6992	154	7580	36		
4754	110	6993	154	7581	30		
4755	110	6994	154	7582	30		
4756	110	6995	154	7583	30		
4760	110	6996	50	7584	30		
4761	110	6997	50	7585	30		
4762	110	6998	52	7586	30		
4783	132	6999	52	7587	30		
4904	32	7001	152	7588	30		
4905	32	7002	152	7589	32		
4942	150	7003	152	7590	32		
4943	152	7004	152	7629	154		
4944	152	7005	152				
4950	36	7021	48				
5046	34	7022	48				
5048	34	7023	48				
5052	34	7024	48				
5054	32	7035	52				
5060	28	7036	52				
5061	28	7037	52				
5062	28	7038	52				
5063	28	7041	48				
5068	32	7042	48				
5069	32	7043	48				
5070	32	7044	48				
5071	32	7047	52				
5209	152	7049	52				
6353	132	7050	50				
6354	132	7051	50				
6356	132	7301	32				
6357	132	7302	32				
6369	24	7344	54				
6372	154	7400	50				
6870	152	7401	50				
6873	24	7572	34				
6874	26	7573	34				
6927	54	7574	34				
6941	26	7576	34				

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Additional Part Marking	154
Additional Requirements	152
Adherence to Metals	54
Adhesion	58
Aging, Air (Oven)	60
Aging, Light	62
Aging, Oil	64
Aging, Oxygen Pressure	68
Altitude Rating	28
Aperture Cards Required	26
Applicable Documents	154
Asbestos Content	70
Base Document	24
Burst Pressure Rating	32
Change in Weight	70
Chemical Composition	72
City, State, Zip	24
Class	28
Classification	28
Cloth Construction	76
Color	38
Company Name/Command	24
Composition	28
Compressibility and Recovery	78
Configuration	34
Contract Number/Office Symbol	24
Control, Source	24
Control, Specification	26
Corrosion and Adhesion	82
Crush	84
Cut Resistance	86
Date	24
Delamination	88
Design and Construction	38
Effect of Steam	88
Electrical Conductivity	90
Embedded Material	42
Endurance	92
Extraction, Boiling Water	96
Extrusion	98

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Fatigue	100
Finish Conformance	102
Finishes	36
Flexibility	104
Format	24
Forming Method	38
Friction (Ply Separation)	106
Friction Torque	106
Fungus	110
Government Design Activity FSCM	24
Grade	28
Hardness	110
Illustrations	36
Impulse	114
Installation Stretch	116
Joints	40
Layer Bonding Agent	42
Liquid Irmnersion	118
Materials	36
Mesh	42
Metals	36
Mounting Hardware	152
Nomenclature	154
Nominal Compression Loading	40
Notes	154
Operating Media	44
Operating Pressure Rating	30
Packaging	154
Packing Braid	40
Part Marking	154
Part Number	26
Part Number Cross-Reference	154
Performance, High Temperature	120
Performance, Low Temperature	122
Permanent Set (Compression Set)	126

Source: https://assist.dla.mil -- Downloaded: 202640-23T20:56Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Phone Number	24
Plies	38
Proof Pressure Rating	30
Quality Assurance Provision	154
Requester's Name	24
Requester FSCM	24
Resilience, Low Temperature	126
Resistance to Ozone	130
Revision of AEDPS Document (Number)	26
Salt Spray/Fog	132
Scope	26
Sealing Elements	44
Sealing Pressure	134
Seal Spring Wire Diameter	40
Shaft Characteristics	44
Source Table	26
Spacing	42
Specific Gravity	136
Storage Conditions	150
Street/Building	24
Style	28
Superseded Document	154
Surface Texture	136
System Application	24
Tabulated Characteristics	36
Temperature Rating	32
Tensile Strength	138
Tensile Stress	140
Thermal Expansion	144
Type	28
Ultimate Elongation	144
Units of Measure	26, 34
Volumetric Change	148
Weave Type	42
Weight	48
Weld Finish	148
Wire Strand Direction	42
Workmanship	152

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET____OF____

*TITLE CODE 1 2 3 4 5 6	*REQUESTER NO. 7 8 9 10 11 12	CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE 20 25 30 35 40 45 50 55 60 65 70 75 79	LINE NO. 80
*REQUESTER'S NAME		Ø 1 Ø 1		
*COMPANY NAME/COMMAND		Ø 1 Ø 2		
*STREET/BUILDING		Ø 1 Ø 3		
*CITY, STATE, ZIP		Ø 1 Ø 4		
*PHONE NO. INCLUDE A/C AUTOVON IF APPLICABLE		Ø 1 Ø 5		
*DATE		1 Ø Ø 3		
*REQUESTER FSCM		1 Ø Ø 4		
*CONTRACT NO./OFFICE SYMBOL		1 Ø Ø 5		
*BASE DOCUMENT		1 Ø Ø 6		
*SYSTEM APPLICATION		1 Ø Ø 8		
*GOVERNMENT DESIGN ACTIVITY FSCM		6 3 6 9		
*FORMAT SIX SECTION DOCUMENT.		Ø 7 Ø Ø		
ONE SECTION DOCUMENT.		Ø 8 Ø Ø		
SEARCH ONLY.		Ø 1 Ø 6		
APERTURE CARDS REQUIRED.		Ø 1 Ø 7		
REVISION OF AEDPS DOCUMENT NO.		Ø 1 Ø 8		
*CONTROL SOURCE.		6 8 7 3		
SPECIFICATION.		6 8 7 4		
*SOURCE TABLE		9 1 5 1		
UNIT OF MEASURE U.S.		6 9 4 1		
SI.		6 9 4 2		

PLEASE SUPPLY THE FOLLOWING:

DASH-NUMBERED PART _____ REV _____ NOTICE # _____

AS A FINAL CHECK, SCAN THE SRS FOR THE FOLLOWING COMMON ERRORS:

- ☐ MANDATORY CHARACTERISTIC CODES AND VALUES NOT SUPPLIED
- ☐ ZERO (Ø) WRITTEN WITHOUT VIRGULE (0)
- ☐ USE OF POUND SIGN (#) WITHOUT ACCOMPANYING CHARACTERISTIC VALUE
- ☐ POUND SIGN (#) OMITTED FROM END OF STATEMENT (CHARACTERISTIC VALUE)
- ☐ CHARACTERISTIC CODE USED MORE THAN ONCE (OTHER THAN MULTILINE STATEMENT)
- ☐ MULTILINE STATEMENT NOT NUMBERED IN COLUMN 80

*MANDATORY

Source: https://assist.dla.mil -- Downloaded: 202640-23T20:56Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET___OF___

TITLE CODE 1 2 3 4 5 6	REQUESTER NO. 7 8 9 10 11 12	CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE 20 25 30 35 40 45 50 55 60 65 70 75 79	LINE NO. 80

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
DOD-STD-35-368	SEALS, GASKETS, AND PACKING

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander,
U.S. Army Missile R & D Command
ATTN: DRDMI-ESD
Redstone Arsenal, AL 35809

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:56Z
Check the source to verify that this is the current version before use.