DOD-STD-35-82A(MI)
15 January 1979
SUPERSEDING
MIL-STD-35-82(MI)
23 MAY 1975

MILITARY STANDARD

CONVERTERS AND INVERTERS

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

FSC EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Converters and Inverters
Automated Engineering
Document Preparation System

DOD-STD-35-82A(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-82A(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for converters and inverters.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	5
	2.1	Issues of documents	5
	2.2	Other publications	6
	3.	DEFINITIONS	7
	4.	GENERAL REQUIREMENTS	8
	4.1	Introduction	8
	4.2	Specification Requirement Sheet (SRS)	8
	4.3	Configuration	8
	4.3.1	Dimensions	8
	4.3.2	Illustrations	8
	4.4	Units of measure	8
	5.	DETAILED REQUIREMENTS	9
	5.1	Introduction	9
	5.2	MSE Formats	9
	5.3	Referenced documents	9
	5.4	Test matrix	9
	5.5	Tabulation	12
	5.6	Keyword Code Index (KCI) and Standard Paragraphs	15
	5.6.1	Interrelationship of Codes	15
	5.6.2	Automatic MSE Data	15
	5.6.3	DOD-STD-35 Tables	15

TABLES

Table	I.	Title Index	2
	II.	Test matrix	11
	III.	Tabulation candidates	12

APPENDICES

Appendix	A.	Illustrations	199
	B.	Characteristic Code Index	214
		Index	222

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for converters and inverters.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
   Applicable Documents
c. Single and Multi-item Specifications (Tabulation)
   Keyword Code Index (KCI)
d. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
CONVERTER	314001	MIL-C-7115	115/200 VAC, 400 HZ, 3-PH TO 28 VDC
		MS3370	100 A, CLASS C STATIC, BLAST COOLED
		MS17976	100 A, CLASS C FAN COOLED
		MS18103	50 A, CLASS C FAN COOLED
		MS18111	150 A, CLASS C BLAST COOLED
		MS28126	200 A, CLASS A
		MS28128	200 A, CLASS A BLAST COOLED
		MS28129	100 A, CLASS A
		MS28132	200 A, CLASS B
		MS28133	50 A, CLASS B
		MS90352	120 A, CARBON ARC SEARCHLIGHT
		MIL-C-46369	TSTRZ, 18 TO 30 VDC TO 1.5 VDC
		MIL-C-50329	OUTPUT +6.5, +23, -23, +33, -33, +15, -15 AND +29 VOLTS
		MIL-C-50330	DC/DC, PROVIDES UNREGULATED V TO V REGULATOR
		MIL-C-52893	DIGITAL DATA CONV FOR ALARM MONITORS
		MIL-C-55666	28 V, 110 A
		MIL-C-83344	SIGNAL DATA CONVERTER

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
CONVERTER	314003 (CONT)	MIL-C-81991	9 TO 28 VDC TO RGLTD 28 VDC
FREQUENCY CHANGER	314002	MIL-F-24122	SOLID STATE, 60 HZ, 3-PH TO 400 HZ, 3-PH
		MIL-F-29000	SOLID STATE, PARALLELABLE 5-KVA
		MIL-F-29001	SOLID STATE, PARALLELABLE 12.5-KVA
INVERTER	334003	MIL-I-7032	28 VDC TO AC AT 400 HZ
		MS3371	CL A, 750 VA, 115 AND 16 V SINGLE PHASE
		MSL6057	100/60 VA, 3/1 PH AND 100 VA, ONE PH, CLASS B
		MSL6062	2500 VA, 3/1-PH CLASS B
		MS17404	2500 VA, 3/1-PH 400 HZ, CLASS B
		MS17406	750 VA, 3/1-PH, 750 VA, 3-PH AND 1000 VA, 1-PH, CLASS B
		MS2J983	250 VA, 3/1-PH, CLASS B
		MS25202	5000 VA, 3/1-PH CL A, 3500 VA, 3/1-PH, CL B
		MIL-I-12659	350 VA
		MIL-I-14603	DC TO AC
		MIL-I-19028	VOLTAGE INVERT
		MIL-I-22401	28 VDC TO 115 VAC, 400 HZ
		MIL-I-27273	POWER, STATIC, 28 VDC TO AC AT 400 HZ
		MS27260	POWER, STATIC

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

TABLE 1. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
INVERTER	314003 (CONT)	MIL-I-45691	115 V, 400 HZ TSTRZ OSC, 400 HZ
		MIL-I-45793	POWER, STATIC
		MIL-I-47204	24 VDC TO 115 VAC, 400 HZ
		MIL-I-47236	24 TO 28 VDC OR 110 TO 120 VAC 60 OR 400 HZ TO 60 VA, 125 VAC
		MIL-I-52358	POWER, STATIC
		MIL-I-60166	POWER, SOLID STATE, 50 VA
		MIL-I-62026	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-I-7032	Inverters, Aircraft, General Specification For
MIL-C-7115	Converters, Aircraft, General Specification For
MIL-I-12659	Inverter, 350 Volt Ampere
MIL-I-14603	Inverter, Vibrator
MIL-I-22401	Inverter
MIL-F-24122	Frequency Changer, Solid State
MIL-I-27273	Inverter, Power, Static, General Specification For
MIL-F-29000	Frequency Converter, Solid State, 5 KVA, with Transit Case
MIL-F-29001	Frequency Converter, Solid State, 12.5 KVA with Transit Cover
MIL-I-45691	Inverter, Power, Static
MIL-I-45793	Inverter, Transistor Oscillator
MIL-C-46369	Converter-Regulator
MIL-I-47204	Inverter, Power, Static
MIL-I-47236	Inverter, Single-Phase, 400-Hertz
MIL-I-60166	Inverter, Power, Static
MIL-I-62026	Inverter, Power, Solid State, Output Rating 50 VA

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

MIL-C-81991	Converters, Aircraft, DC to DC, Boost, General Specification For

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-446	Environmental Requirements for Electronic Parts
MIL-STD-461	Electromagnetic Interference Characteristics Requirements for Equipment
MIL-STD-462	Electromagnetic Interference Characteristics Measurement Of
MIL-STD-704	Aircraft Electric Power Characteristics
MIL-STD-810	Environmental Test Methods
MIL-STD-1285	Marking of Electrical and Electronic Parts

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTME380	Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, Pa, 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Converters and Inverters.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Converters and Inverters, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Converters and Inverters.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Converters and Inverters.

4.3.2 Illustrations. Illustrations applicable to Converters and Inverters are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Test matrix. A test matrix is supplied as a guide for selecting documents to specify tests (see table II). The test matrix presents documents most applicable for use to satisfy the statement "TEST PER (DOC DES)". Any document listed in the Title Index may be used to satisfy the statement. However, the selected document from the Title Index must contain the desired test. Government test method documents and approved industry standards such as ASTM test methods may also be used to satisfy the statement "TEST PER (DOC DES)".

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

TABLE II. TEST MATRIX.

TEST	CODE	DOCUMENT	MIL-C-7032	MIL-C-7115	MIL-I-12659	MIL-I-14603	MIL-I-22401	MIL-F-24122	MIL-I-27273	MIL-F-29000	MIL-F-29001	MIL-I-45793	MIL-C-46369	MIL-I-47236	MIL-I-60166	MIL-I-62026	MIL-C-81991
Efficiency	1953		X	X				X	X						X		X
Endurance	1971		X	X					X								X
Freq Regulation	2009		X					X	X						X		X
Harmonic Content	2036							X	X							X	
Heating-Overload	2057		X	X				X	X						X	X	X
Input Current Bal	2091			X				X									
Input Pwr Factor	2115			X				X							X		
Isolation	2138							X							X		
Life	2163		X	X		X	X		X	X	X		X			X	X
Oper Position	2210		X	X					X								X
Output Mod	2229		X						X								
Parallel Oper	2271			X				X									
Phase Rotation	2333								X			X					
Recovery Time	2403		X	X												X	X
Reduced Input V	2419		X						X								
Ripple Voltage	2439			X													X
Short Circuit	2457			X				X	X					X	X	X	
Starting	2481		X			X											X
Temperature Rise	2615				X			X									
Transient Input	2647			X				X	X								
Unbalanced Load	2662		X					X	X								
V Regulation	2689		X	X				X	X						X		X
Wave Form	2707		X					X	X			X					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

5.5 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table III provides codes for column headings which may be used for converter and inverter characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

TABLE III. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1964	MINIMUM EFFICIENCY PERCENT	2150	MIN ISLN RES CPLG MEGOHMS	2152	MAX ISLN CAP PICOFARADS
2154	MIN ISLN BREAKDOWN VOLTS DC	1620	MAX BACK RIPPLE V PERCENT	1638	INPUT ONE VOLTAGE VOLTS AC
1643	INPUT ONE V ADJ RNG VOLTS AC	1644	INPUT ONE VOLTAGE VOLTS DC	1651	INPUT ONE V ADJ RNG VOLTS DC
1654	INPUT ONE FREQ HERTZ	1657	INPUT ONE FREQ ADJ RNG HERTZ	1664	INPUT ONE MAX POWER FACTOR NO.
1666	INPUT ONE IMPD OHMS	1668	INPUT ONE MAX PWR W	1670	INPUT TWO VOLTAGE VOLTS AC
1675	INPUT TWO V ADJ RNG VOLTS AC	1676	INPUT TWO VOLTAGE VOLTS DC	1683	INPUT TWO V ADJ RNG VOLTS DC
1686	INPUT TWO FREQ HERTZ	1689	INPUT TWO FREQ ADJ RNG HERTZ	1696	INPUT TWO MAX POWER FACTOR NO.
1698	INPUT TWO IMPD OHMS	1700	INPUT TWO MAX PWR W	1702	OUTPUT TWO VOLTAGE VOLTS AC
1707	OUTPUT ONE V ADJ RNG VOLTS AC	1708	OUTPUT ONE VOLTAGE VOLTS DC	1715	OUTPUT ONE V ADJ RNG VOLTS DC

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES. (CONT)

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1718	OUTPUT ONE FREQ HERTZ	1721	OUTPUT ONE FREQ ADJ RNG HERTZ	1728	OUTPUT ONE CURRENT RTG MA
1730	OUTPUT ONE CURRENT RTG AMPERE	1732	OUTPUT ONE IMPD OHMS	1734	OUTPUT ONE NOISE VRMS
1736	OUTPUT ONE TRANSIENT RESPONS US	1738	OUTPUT ONE LINE RGLT PERCENT	1740	OUTPUT ONE LOAD RGLT PERCENT
1742	OUTPUT ONE TEMP COEF PCT/DEG	1744	OUTPUT ONE RATED LOAD OHMS	1746	OUTPUT ONE KVA
1748	OUTPUT ONE PWR WATTS	1750	OUTPUT TWO VOLTAGE VOLTS AC	1755	OUTPUT TWO V ADJ RNG VOLTS AC
1756	OUTPUT TWO VOLTAGE VOLTS DC	1763	OUTPUT TWO V ADJ RNG VOLTS DC	1766	OUTPUT TWO FREQ HERTZ
1769	OUTPUT TWO FREQ ADJ RNG HERTZ	1776	OUTPUT TWO CURRENT RTG MA	1778	OUTPUT TWO CURRENT RTG AMPERE
1780	OUTPUT TWO IMPD OHMS	1782	OUTPUT TWO NOISE VRMS	1784	OUTPUT TWO TRANSIENT RESPONS US
1786	OUTPUT TWO LINE RGLT PERCENT	1788	OUTPUT TWO LOAD RGLT PERCENT	1790	OUTPUT TWO TEMP COEF PCT/DEGREE
1792	OUTPUT TWO RATED LOAD OHMS	1794	OUTPUT TWO KVA	1796	OUTPUT TWO PWR WATTS
1798	OUTPUT 3 VOLTS AC	1803	OUTPUT 3 V ADJ RNG VOLTS AC	1804	OUTPUT 3 VOLTAGE VOLTS DC

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION Candidates (CONT)

CODE	COLUMN HEADING
1811	OUTPUT 3 V ADJ RNG VOLTS DC
1814	OUTPUT 3 FREQ HERTZ
1817	OUTPUT 3 FREQ ADJ RNG HERTZ
1824	OUTPUT 3 CURRENT RTG MA
1826	OUTPUT 3 CURRENT RTG AMPERE
1828	OUTPUT 3 IMPD OHMS
1830	OUTPUT 3 NOISE VRMS
1832	OUTPUT 3 TRANSIENT RESPONS US
1834	OUTPUT 3 LINE RGLT PERCENT
1836	OUTPUT 3 LOAD RGLT PERCENT
1838	OUTPUT 3 TEMP COEF PCT/DEGREE
1840	OUTPUT 3 RATED LOAD OHMS
1842	OUTPUT 3 KVA
1844	OUTPUT 3 PWR WATTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

5.6 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page" presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.6.1 Interrelationship of codes. The interrelationship of the codes is shown by the Indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.6.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.6.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT	0700
ONE SECTION DOCUMENT	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
Specification	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-350	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE : AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6874 THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

0107

0108 0108.

SCOPE.

SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

6941 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE Specified

6942 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE Specified

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION	
CLASS (SELECT ONE)	
A.	1574
B.	1576
C.	1578
D.	1580
(DESIGNATION)	1581
TYPE (SELECT ONE)	
REGULATED.	1582
NONREGULATED.	1584
(DESIGNATION)	1585
RATING	
ALTITUDE RATING	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5060
SEA LEVEL TO (METERS)	5061
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5062
SEA LEVEL TO (METERS)	5063

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CLASSIFICATION.
1574	CLASS. THE DEVICE SHALL BE CLASS A.
1576	CLASS. THE DEVICE SHALL BE CLASS B.
1578	CLASS. THE DEVICE SHALL BE CLASS C.
1580	CLASS. THE DEVICE SHALL BE CLASS D.
1581	CLASS. CLASS 1581 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1582	TYPE. THE DEVICE SHALL BE A REGULATED TYPE.
1584	TYPE. THE DEVICE SHALL BE A NONREGULATED TYPE.
1585	TYPE. TYPE 1585 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
	ALTITUDE RATING.
5060	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5060 FEET.
5061	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5061 METERS.
5062	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5062 FEET.
5063	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5063 METERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RATING (CONT)	
TEMPERATURE RATING	
MINIMUM OPERATING (DEGREES CELSIUS)	5068
MAXIMUM OPERATING (DEGREES CELSIUS)	5069
MINIMUM STORAGE (DEGREES CELSIUS)	7301
MAXIMUM STORAGE (DEGREES CELSIUS)	7302
MAXIMUM SERVICE (DEGREES CELSIUS)	4905
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
*UNITS (SELECT ONE)	
U.S.	
INCHES.	7572
SI	
Millimeters	7577

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	TEMPERATURE RATING.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
7301	THE MINIMUM STORAGE TEMPERATURE RATING SHALL BE 7301 DEGREES CELSIUS.
7302	THE MAXIMUM STORAGE TEMPERATURE RATING SHALL BE 7302 DEGREES CELSIUS.
4905	THE MAXIMUM SERVICE TEMPERATURE RATING SHALL BE 4905 DEGREES CELSIUS.
	CONFIGURATION.
1O09	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE Dimensions	
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	
METALS	
DISSIMILAR METALS.	7580

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED" IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY*)
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST Corrosion DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION	
BACK RIPPLE VOLTAGE	
MAXIMUM (PERCENT)	1620
COOLING (SELECT ONE)	
CONVECTION.	1586
CONDUCTION.	1587
RADIATION.	1589
INTEGRAL FAN.	1588
AIR BLAST.	1590
CONSTRUCTION (SELECT ONE)	
OPEN.	1566
ENCLOSED, Ventilated	1568
HERMETICALLY SEALED.	1570
ENCAPSULATED.	1572
DEVICE (SELECT ONE)	
ROTARY.	1562
NONROTARY.	1564

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	DESIGN AND CONSTRUCTION.
1620	BACK RIPPLE VOLTAGE. THE PEAK-TO-PEAK BACK RIPPLE VOLTAGE SHALL BE NOT GREATER THAN 1620 PERCENT*
1586	COOLING. THE DEVICE SHALL BE COOLED BY CONVECTION.
1587	COOLING. THE DEVICE SHALL BE COOLED BY CONDUCTION.
1589	COOLING. THE DEVICE SHALL BE COOLED BY Radiation
1588	COOLING. THE DEVICE SHALL BE COOLED BY AN INTEGRAL FAN.
1590	COOLING. THE DEVICE SHALL BE COOLED BY AIR BLAST.
1566	CONSTRUCTION. THE DEVICE SHALL BE OF THE OPEN TYPE OF Construction
1568	CONSTRUCTION. THE DEVICE SHALL BE OF THE ENCLOSED, VENTILATED TYPE OF CONSTRUCTION.
1570	CONSTRUCTION. THE DEVICE SHALL BE OF THE HERMETICALLY SEALED TYPE OF CONSTRUCTION-
1572	CONSTRUCTION. THE DEVICE SHALL BE OF THE ENCAPSULATED TYPE OF Construction
1562	DEVICE. THE DEVICE SHALL BE ROTARY.
1564	DEVICE. THE DEVICE SHALL BE NONROTARY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
DUTY CYCLE (SELECT ONE)	
Continuous	1565
ON (HOURS)	1567
*OFF (HOURS)	1569
INPUT NUMBER ONE	
VOLTAGE (SELECT ONE)	
(VOLTS AC)	1638
TOLERANCE (VOLTS AC)	1640
TERMINALS (DESIGNATION)	1642
VOLTAGE ADJUSTMENT RANGE (VOLTS AC)	1643
FREQUENCY (HERTZ)	1654
TOLERANCE (HERTZ)	1656
FREQUENCY ADJUSTMENT RANGE (HERTZ)	1657
PHASE (SELECT ONE)	
ONE.	1658
THREE.	1660
ROTATION (TERMINAL DESIGNATION)	1662
(VOLTS DC)	1644
TOLERANCE (VOLTS DC)	1646

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1565	DUTY CYCLE. THE DEVICE SHALL OPERATE CONTINUOUSLY
1567 1569	DUTY CYCLE. THE DEVICE SHALL BE ON FOR 1567 HOUR(S) AND OFF FOR 1569 HOUR(S).
	INPUT NUMBER ONE.
1638	THE INPUT VOLTAGE SHALL BE 1638 VOLT(S) AC.
1640	THE INPUT VOLTAGE TOLERANCE SHALL BE 1640 VOLT(S) AC.
1642	THE INPUT VOLTAGE TERMINALS SHALL BE 1642.
1643	THE VOLTAGE ADJUSTMENT RANGE SHALL BE 1643 VOLT(S) AC.
1654	THE FREQUENCY SHALL BE 1654.
1656	THE FREQUENCY TOLERANCE SHALL BE 1656 HERTZ.
1657	THE FREQUENCY ADJUSTMENT RANGE SHALL BE 1657 HERTZ.
1658	THE VOLTAGE SHALL BE SINGLE PHASE.
1660	THE VOLTAGE SHALL BE THREE PHASE.
1662	THE PHASE ROTATION SHALL BE 1662.
1644	THE INPUT VOLTAGE SHALL BE 11644 VOLT(S) DC.
1646	THE INPUT VOLTAGE TOLERANCE SHALL BE 1646 VOLT(S) DC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
(VOLTS DC) (CONT)	
POSITIVE TERMINAL (DESIGNATION)	1648
NEGATIVE TERMINAL (DESIGNATION)	1650
VOLTAGE ADJUSTMENT RANGE (VOLTS DC)	1651
GROUND TERMINAL (DESIGNATION)	1652
MAXIMUM POWER FACTOR (NUMBER)	1664
IMPEDANCE (OHMS)	1666
MAXIMUM POWER (WATTS)	1668
INPUT NUMBER TWO	
VOLTAGE (SELECT ONE)	
(VOLTS AC)	1670
TOLERANCE (VOLTS AC)	1672
TERMINALS (DESIGNATION)	1674
VOLTAGE ADJUSTMENT RANGE (VOLTS AC)	1675
FREQUENCY (HERTZ)	1686
TOLERANCE (HERTZ)	1688
FREQUENCY ADJUSTMENT RANGE (HERTZ)	1689
PHASE (SELECT ONE)	
ONE.	1690
THREE.	1692
ROTATION (TERMINAL DESIGNATION)	1694

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1648	THE POSITIVE TERMINAL SHALL BE 1648.
1650	THE NEGATIVE TERMINAL SHALL BE 1650.
1651	THE VOLTAGE ADJUSTMENT RANGE SHALL BE 1651 VOLT(S) DC.
1652	THE GROUND TERMINAL SHALL BE 1652.
1664	THE POWER FACTOR SHALL BE NOT GREATER THAN 1664.
1666	THE IMPEDANCE SHALL BE 1666 OHM(S).
1668	THE POWER SHALL BE NOT GREATER THAN 1668 WATT(S).
	INPUT NUMBER TWO.
1670	THE INPUT VOLTAGE SHALL BE 1670 VOLT(S) AC.
1672	THE INPUT VOLTAGE TOLERANCE SHALL BE 1672 VOLT(S) AC.
1674	THE INPUT NUMBER TWO VOLTAGE TERMINALS SHALL BE 1674.
1675	THE VOLTAGE ADJUSTMENT RANGE SHALL BE 1675 VOLT(S) AC.
1686	THE FREQUENCY SHALL BE 1686 HERTZ.
1688	THE FREQUENCY TOLERANCE SHALL BE 1688 HERTZ.
3689	THE FREQUENCY ADJUSTMENT RANGE SHALL BE 1689 HERTZ.
1690	THE INPUT NUMBER TWO VOLTAGE SHALL BE SINGLE PHASE.
1692	THE INPUT NUMBER TWO VOLTAGE SHALL BE THREE PHASE.
1694	THE PHASE ROTATION SHALL BE 1694.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
VOLTAGE (CONT)	
(VOLTS DC)	1676
TOLERANCE (VOLTS DC)	1678
POSITIVE TERMINAL (DESIGNATION)	1680
NEGATIVE TERMINAL (DESIGNATION)	1682
VOLTAGE ADJUSTMENT RANGE (VOLTS DC)	1683
GROUND TERMINAL (DESIGNATION)	1684
MAXIMUM POWER FACTOR (NUMBER)	1696
IMPEDANCE (OHMS)	1698
MAXIMUM POWER (WATTS)	1700
OUTPUT NUMBER ONE	
VOLTAGE (SELECT ONE)	
(VOLTS AC)	1702
TOLERANCE (VOLTS)	1704
TERMINALS (DESIGNATION)	1706
VOLTAGE ADJUSTMENT RANGE (VOLTS AC)	1707
FREQUENCY (HERTZ)	1718
TOLERANCE (HERTZ)	1720
FREQUENCY ADJUSTMENT RANGE (HERTZ)	1721

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1676	THE INPUT VOLTAGE SHALL BE 1676 VOLT(S) DC.
1678	THE INPUT VOLTAGE TOLERANCE SHALL BE 1678 VOLT(S) DC.
1680	THE POSITIVE TERMINAL SHALL BE 1680.
1682	THE NEGATIVE TERMINAL SHALL BE 1682.
1683	THE VOLTAGE ADJUSTMENT RANGE SHALL BE 1683 VOLT(S) DC.
1684	THE GROUND TERMINAL SHALL BE 1684.
1696	THE POWER FACTOR SHALL BE NOT GREATER THAN 1696.
1698	THE IMPEDANCE SHALL BE 1698 OHM(S).
1700	THE POWER SHALL BE NOT GREATER THAN 1700 WATT(S).
	OUTPUT NUMBER ONE.
1702	THE OUTPUT VOLTAGE SHALL BE 1702 VOLT(S) AC.
1704	THE OUTPUT VOLTAGE TOLERANCE SHALL BE 1704 VOLT(S) AC.
1706	THE OUTPUT VOLTAGE TERMINALS SHALL BE 1706.
1707	THE VOLTAGE ADJUSTMENT RANGE SHALL BE 1707 VOLT(S) AC.
1738	THE FREQUENCY SHALL BE 1738 HERTZ,
1720	THE FREQUENCY TOLERANCE SHALL BE 1720 HERTZ.
1721	THE FREQUENCY ADJUSTMENT RANGE SHALL BE 1721 HERTZ.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
(VOLTS AC) (CONT)	
PHASE (SELECT ONE)	
ONE.	1722
THREE.	1724
ROTATION (TERMINAL DESIGNATION)	1726
(VOLTS DC)	1708
TOLERANCE (VOLTS DC)	1710
POSITIVE TERMINAL (DESIGNATION)	1712
NEGATIVE TERMINAL (DESIGNATION)	1714
VOLTAGE ADJUSTMENT RANGE (VOLTS DC)	1715
GROUND TERMINAL (DESIGNATION)	1716
CURRENT RATING (SELECT ONE)	
(MILLIAMPERES)	1728
(AMPERES)	1730
IMPEDANCE (OHMS)	1732
MAXIMUM NOISE (VOLTS RMS)	1734
MAXIMUM TRANSIENT RESPONSE (MICROSECONDS)	1736
MINIMUM LINE REGULATION (PERCENT)	1738
MINIMUM LOAD REGULATION (PERCENT)	1740

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1722	THE VOLTAGE SHALL BE SINGLE PHASE.
1724	THE VOLTAGE SHALL BE THREE PHASE.
1726	THE PHASE ROTATION SHALL BE 1726.
1708	THE OUTPUT VOLTAGE SHALL BE 1708 VOLT(S) DC.
1710	THE OUTPUT VOLTAGE TOLERANCE SHALL BE 1710 VOLT(S) DC.
1712	THE POSITIVE TERMINAL SHALL BE 1712.
1734	THE NEGATIVE TERMINAL SHALL BE 1714.
1715	THE VOLTAGE ADJUSTMENT RANGE SHALL BE 1715 VOLT(S) DC.
1736	THE GROUND TERMINAL SHALL BE 1736.
1728	THE CURRENT RATING SHALL BE 1728 Milliampere
1730.	THE CURRENT RATING SHALL BE 1730 AMPERE(S).
1732	THE IMPEDANCE SHALL BE 1732 OHM(S).
1734	THE NOISE SHALL BE NOT GREATER THAN 1734 VOLT(S) RMS.
1736	THE TRANSIENT RESPONSE SHALL BE NOT GREATER THAN 1736 MICROSECOND(S).
1738	THE LINE REGULATION SHALL BE NOT LESS THAN 1738 PERCENT.
1740	THE LOAD REGULATION SHALL BE NOT LESS THAN 1740 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
(VOLTS DC) (CONT)	
MAXIMUM TEMPERATURE COEFFICIENT (PERCENT PER DEGREE CELSIUS)	1742
RATED LOAD (OHMS)	1744
MINIMUM KILOVOLT-AMPERE (KILOVOLT–AMPERES)	1746
MINIMUM POWER (WATTS)	1748
OUTPUT NUMBER TWO	
VOLTAGE (SELECT ONE)	
(VOLTS AC)	1750
TOLERANCE (VOLTS AC)	1752
TERMINALS (DESIGNATION)	1754
VOLTAGE ADJUSTMENT RANGE (VOLTS AC)	1755
FREQUENCY (HERTZ)	1766
TOLERANCE (HERTZ)	1768
FREQUENCY ADJUSTMENT RANGE (HERTZ)	1769
PHASE (SELECT ONE)	
ONE.	1770
THREE.	1772
ROTATION (TERMINAL DESIGNATION)	1774

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1742	THE TEMPERATURE COEFFICIENT SHALL BE NOT GREATER THAN 1742 PERCENT PER DEGREE CELSIUS,
1744	THE RATED LOAD SHALL BE 1744 OHM(S).
1746	THE KILOVOLT-AMPERE RATING SHALL BE NOT LESS THAN 1746 KILOVOLT-AMPERES.
1748	THE POWER RATING SHALL BE NOT LESS THAN 1748 WATT(S).
	OUTPUT NUMBER TWO.
1750	THE OUTPUT VOLTAGE SHALL BE 1750 VOLT(S) AC.
1752	THE OUTPUT VOLTAGE TOLERANCE SHALL BE 1752 VOLT(S) AC.
1754	THE OUTPUT NUMBER TWO VOLTAGE TERMINALS SHALL BE 1754.
1755	THE VOLTAGE ADJUSTMENT RANGE SHALL BE 1755 VOLT(S) AC.
1766	THE FREQUENCY SHALL BE 1766 HERTZ.
1768	THE FREQUENCY TOLERANCE SHALL BE 1768 HERTZ.
1769	THE FREQUENCY ADJUSTMENT RANGE SHALL BE 1769 HERTZ.
1770	THE VOLTAGE SHALL BE SINGLE PHASE.
1772	THE VOLTAGE SHALL BE THREE PHASE.
1774	THE PHASE ROTATION SHALL BE 1774.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
VOLTAGE (CONT)	
(VOLTS DC)	1756
TOLERANCE (VOLTS DC)	1758
POSITIVE TERMINAL (DESIGNATION)	1760
NEGATIVE TERMINAL (DESIGNATION)	1762
VOLTAGE ADJUSTMENT RANGE (VOLTS DC)	1763
GROUND TERMINAL (DESIGNATION)	1764
CURRENT RATING (SELECT ONE)	
(MILLIAMPERES)	1776
(AMPERES)	1778
IMPEDANCE (OHMS)	1780
MAXIMUM NOISE (VOLTS RMS)	1782
MAXIMUM TRANSIENT RESPONSE (MICROSECONDS)	1784
MINIMUM LINE REGULATION (PERCENT)	1786
MINIMUM LOAD REGULATION (PERCENT)	1788
MAXIMUM TEMPERATURE COEFFICIENT (PERCENT PER DEGREE CELSIUS)	1790
RATED LOAD (OHMS)	1792

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1756 THE OUTPUT VOLTAGE SHALL BE ~~1756~~ VOLT(S) DC.

1758 THE OUTPUT VOLTAGE TOLERANCE SHALL BE ~~1758~~ VOLT(S) DC.

1760 THE POSITIVE TERMINAL SHALL BE ~~1760~~.

1762 THE NEGATIVE TERMINAL SHALL BE ~~1762~~.

1763 THE VOLTAGE ADJUSTMENT RANGE SHALL BE ~~1763~~ VOLT(S) DC.

1764 THE GROUND TERMINAL SHALL BE ~~1764~~.

1776 THE CURRENT RATING SHALL ~~BE~~ 1776 Milliampere

1778 THE CURRENT RATING SHALL ~~BE~~ 1778 Ampere

1780 THE IMPEDANCE SHALL BE 1780 OHM(S).

1782 THE NOISE SHALL BE NOT GREATER THAN 1782 VOLT(S) RMS.

1784 THE TRANSIENT RESPONSE TIME SHALL BE NOT GREATER THAN 1784 MICROSECOND(S).

1786 THE LINE REGULATION SHALL BE NOT LESS THAN 1786 PERCENT.

1788 THE LOAD REGULATION SHALL BE NOT LESS THAN 1788 PERCENT.

1790 THE TEMPERATURE COEFFICIENT SHALL BE NOT GREATER THAN 1790 PERCENT PER DEGREE CELSIUS.

1792 THE RATED LOAD SHALL BE ~~1792~~ OHM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
(VOLTS DC) (CONT)	
MINIMUM KILOVOLT-AMPERE (KILOVOLT-AMPERES)	1794
MINIMUM POWER (WATTS)	1796
OUTPUT NUMBER THREE	
VOLTAGE (SELECT ONE)	
(VOLTS AC)	1798
TOLERANCE (VOLTS AC)	1800
TERMINALS (DESIGNATION)	1802
VOLTAGE ADJUSTMENT RANGE (VOLTS AC)	1803
FREQUENCY (HERTZ)	1814
TOLERANCE (HERTZ)	1816
FREQUENCY ADJUSTMENT RANGE (HERTZ)	1817
PHASE (SELECT ONE)	
ONE.	1818
THREE.	1820
ROTATION (TERMINAL DESIGNATION)	1822
(VOLTS DC)	1804
TOLERANCE (VOLTS DC)	1806
POSITIVE TERMINAL (DESIGNATION)	1808
NEGATIVE TERMINAL (DESIGNATION)	1810

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1794	THE KILOVOLT-AMPERE RATING SHALL BE NOT LESS THAN 1794 KILOVOLT–AMPERES.
1796	THE POWER RATING SHALL BE NOT LESS THAN 1796 WATT(S).
	OUTPUT NUMBER THREE.
1798	THE OUTPUT VOLTAGE SHALL BE 1798 VOLT(S) AC.
1800	THE OUTPUT VOLTAGE TOLERANCE SHALL BE 1800 VOLT(S) AC.
1802	THE OUTPUT NUMBER THREE TERMINALS SHALL BE 1802.
1803	THE VOLTAGE ADJUSTMENT RANGE SHALL BE 1803 VOLT(S) AC.
1814	THE FREQUENCY SHALL BE 1814 HERTZ.
l816	THE FREQUENCY TOLERANCE SHALL BE 1816 HERTZ.
1817	THE FREQUENCY ADJUSTMENT RANGE SHALL BE 1817 HERTZ.
1818	THE VOLTAGE SHALL BE SINGLE PHASE.
1820	THE VOLTAGE SHALL BE THREE PHASE.
1822	THE PHASE ROTATION SHALL BE 1822.
1804	THE OUTPUT VOLTAGE SHALL BE 1804 VOLT(S) DC.
1806	THE OUTPUT VOLTAGE TOLERANCE SHALL BE 1806 VOLT(S) DC.
1808	THE POSITIVE TERMINAL SHALL BE 1808.
1810	THE NEGATIVE TERMINAL SHALL BE 1810.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
(VOLTS DC) (CONT)	
VOLTAGE ADJUSTMENT RANGE (VOLTS DC)	1811
GROUND TERMINAL (DESIGNATION)	1812
CURRENT RATING (SELECT ONE)	
(MILLIAMPERES)	1824
(AMPERES)	1826
IMPEDANCE (OHMS)	1828
MAXIMUM NOISE (VOLTS RMS)	1830
MAXIMUM TRANSIENT RESPONSE (MICROSECONDS)	1832
MINIMUM LINE REGULATION (PERCENT)	1834
MINIMUM LOAD REGULATION (PERCENT)	1836
MAXIMUM TEMPERATURE COEFFICIENT (PERCENT PER DEGREE CELSIUS)	1838
RATED LOAD (OHMS)	1840
MINIMUM KILOVOLT-AMPERE (KILOVOLT–AMPERES)	1842
MINIMUM POWER (WATTS)	1844

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1811 THE VOLTAGE ADJUSTMENT RANGE SHALL BE 1811 VOLT(S) DC.

1812 THE GROUND TERMINAL SHALL BE 1812.

1824 THE CURRENT RATING SHALL BE 1824 Milliampere

1826 THE CURRENT RATING SHALL BE 1826 AMPERE(S).

1828 THE IMPEDANCE SHALL BE l828 OHM(S).

1830 THE NOISE SHALL BE NOT GREATER THAN 1830 VOLT(S) RMS.

1832 THE TRANSIENT RESPONSE TIME SHALL BE NOT GREATER THAN 1832 MICROSECOND(S)*

1834 THE LINE REGULATION SHALL BE NOT LESS THAN 1834 PERCENT.

1836 THE LOAD REGULATION SHALL BE NOT LESS THAN 1836 PERCENT.

1838 THE TEMPERATURE COEFFICIENT SHALL BE NOT GREATER THAN 1838 PERCENT PER DEGREE CELSIUS.

1840 THE RATED LOAD SHALL BE 1840 OHM(S).

1842 THE KILOVOLT–AMPERE RATING SHALL BE NOT LESS THAN 1842 KILOVOLT-AMPERES,

1844 THE POWER RATING SHALL BE NOT LESS THAN 1844 WATT(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
TERMINATIONS (SELECT ONE)	
CONNECTOR	
PART (NUMBER)	1622
MATING PART (NUMBER)	1624
SPECIFICATION (DOC DES)	1626
TERMINAL BLOCK	
PART (NUMBER)	1627
TERMINATIONS (NUMBER)	1628
WIRE LEADS	
SIZE WIRE (AMERICAN WIRE GAGE)	1630
MINIMUM LENGTH (SELECT ONE)	
(INCHES)	1632
(MILLIMETERS)	1634
TERMINATION TYPE	
(LETTER FROM ILLUSTRATION 314-01-1)	1636

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1622	TERMINATIONS. THE TERMINATING CONNECTOR PART NUMBER SHALL BE 1622.
1624	THE MATING CONNECTOR PART NUMBER SHALL BE 1624.
1626	THE TERMINATING CONNECTOR SPECIFICATION SHALL BE 1626.
1627	TERMINATIONS. THE TERMINATING TERMINAL BLOCK PART NUMBER SHALL BE 1627.
1628	THE TERMINAL BLOCK SHALL HAVE 1628 CONNECTION(S).
1630	TERMINATIONS. THE TERMINATIONS SHALL BE NUMBER 1630 AMERICAN WIRE GAGE WIRE LEADS.
1632	THE WIRE LEADS SHALL BE NOT LESS THAN 1632 INCH(S) IN LENGTH.
1634	THE WIRE LEADS SHALL BE NOT LESS THAN 1634 MILLIMETER(S) IN LENGTH.
1636	TERMINATION TYPE. THE TERMINATION SHALL BE TYPE 1636 AS SHOWN IN ILLUSTRATION 314-01-1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
TERMINATION RESISTANCE	
PER TERMINATION RESISTANCE TABLE.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

TERMINATION RESISTANCE. THE TERMINATION RESISTANCE SHALL BE AS SHOWN IN THE TERMINATION RESISTANCE TABLE.

TERMINATION RESISTANCE TABLE

TERMINALS		RESISTANCE
FROM	TO	OHMS
4000	4001	4002
4003	4004	4005
4006	4007	4008
4009	4010	4011
4012	4013	4014
4015	4016	4017
4018	4019	4020
4021	4022	4023
4024	4025	4026
4027	4028	4029
4030	4031	4032
4033	4034	4035
4036	4037	4038
4039	4040	4041
4042	4043	4044
4045	4046	4047
4048	4049	4050
4051	4052	4053
4054	4055	4056
4057	4058	4059

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024
ACCELERATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	6272
NO EVIDENCE OF PHYSICAL DAMAGE.	6273
REMAIN WITHIN SPECIFIED Tolerance	6277
NO Discontinuity	7345

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).
7021	MAXIMUM WEIGHT PER UNIT, THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).
6272	Acceleration THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6272.
6273	Acceleration THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6277	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE-
7345	THERE SHALL BE NO ELECTRICAL DISCONTINUITY DURING THE TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	6250
PER MIL-STD-810, METHOD 513.	6252
*A LEVEL (G'S)	6275
*VEHICLE CATEGORY (SELECT ONE)	
AIRPLANE.	6240
HELICOPTER,	6241
MANNED AEROSPACE VEHICLE.	6242
AIR LAUNCHED MISSILE.	6243
GROUND LAUNCHED MISSILE.	6244
PROCEDURE NUMBER (ROMAN NUMERAL)	6256
TEST TIME IN EACH DIRECTION (MINUTES)	6259
MONITOR PER METHOD 310 OF MIL-STD-202	
*TEST CIRCUIT (LETTER)	1548
*TEST CONDITION (LETTER)	1549

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6250	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6250.
6252	Acceleration TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 513 OF MIL-STD-8LO.
6275	LEVEL A SHALL BE 6275 G'S.
6240	THE VEHICLE CATEGORY SHALL BE AIRPLANE IN ACCORDANCE WITH METHOD 513 OF MIL–STD–810.
6241	THE VEHICLE CATEGORY SHALL BE HELICOPTER IN ACCORDANCE WITH METHOD 513 OF MIL-STD–81O.
6242	THE VEHICLE CATEGORY SHALL BE MANNED AEROSPACE VEHICLE IN ACCORDANCE WITH METHOD 513 OF MIL-STD-810.
6243	THE VEHICLE CATEGORY SHALL BE AIR LAUNCHED MISSILE IN ACCORDANCE WITH METHOD 513 OF MIL–STD-810.
6244	THE VEHICLE CATEGORY SHALL BE GROUND LAUNCHED MISSILE IN ACCORDANCE WITH METHOD 513 OF MIL–STD-810.
6256	PROCEDURE NUMBER 6256 SHALL APPLY.
6259	DURATION OF TEST SHALL BE 6259 MINUTES IN EACH DIRECTION.
1548	MONITORING DURING THE TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1548 SHALL APPLY.
1549	TEST CONDITION LETTER 1549 IN ACCORDANCE WITH METHOD 310 OF MIL–STD-202 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACOUSTICAL NOISE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1857
AS FOLLOWS:	1859
MAXIMUM RIPPLE (VOLTS RMS)	1858
MAXIMUM NOISE (VOLTS RMS)	1860
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1847
PER MIL-STD-810, METHOD 515.	1848
*TEST CATEGORY.	1849
OPERATE DURING TEST.	1850
DEVICES MONITORED BY (SELECT ONE)	
HARDLINE.	1852
Telemetry	1854

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1857	ACOUSTICAL NOISE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1857.
1859	ACOUSTICAL NOISE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1858	THE RIPPLE VOLTAGE SHALL BE NOT GREATER THAN 1858 VOLT(S) RMS.
1860	THE NOISE VOLTAGE SHALL BE NOT GREATER THAN 1860 VOLT(S) RMS.
1847	ACOUSTICAL NOISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1847.
1848	ACOUSTICAL NOISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 515 OF MIL-STD-810.
1849	TEST CATEGORY 1849 SHALL APPLY.
1850	THE DEVICE(S) SHALL BE OPERATED DURING THE TEST.
1852	THE OPERATION OF THE DEVICE(S) SHALL BE MONITORED DURING THE TEST VIA HARDLINE.
1854	THE OPERATION OF THE DEVICE(S) SHALL BE MONITORED DURING THE TEST VIA TELEMETRY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ALTITUDE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1885
AS FOLLOWS:	1887
NO ERRATIC OPERATION OR Malfunction	1886
DEVICES SHALL REMAIN WITHIN SPECIFIED Tolerance	1888
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1865
PER MIL-STD-810, METHOD 5000	1871
*PROCEDURE (NUMBER)	1866
TEMPERATURE (DEGREES CELSIUS)	1867
TOLERANCE (DEGREES CELSIUS)	1868
ALTITUDE (SELECT ONE)	
(FEET)	1869
(METERS)	1870
PRESSURE (SELECT ONE)	
(KILOPASCALS)	1874
(TORR)	1876

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1885	ALTITUDE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1885.
1887	ALTITUDE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1886	THERE SHALL BE NO ERRATIC OPERATION OR MALFUNCTION.
1888	THE DEVICE(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCES.
1865	ALTITUDE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1865.
1871	ALTITUDE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 500 OF MIL-STD-810.
1866	TEST PROCEDURE NUMBER 1866 SHALL APPLY.
1867	THE TEST TEMPERATURE SHALL BE 1867 DEGREES CELSIUS.
1868	THE TEST TEMPERATURE TOLERANCE SHALL BE 1868 DEGREES CELSIUS.
1869	THE TEST ALTITUDE SHALL BE 1869 FEET.
1870	THE TEST ALTITUDE SHALL BE 1870 METER(S).
1874	THE TEST PRESSURE SHALL BE 1874 KILOPASCAL(S).
1876	THE TEST PRESSURE SHALL BE 1876 TORR.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ALTITUDE (CONT)	
PER MIL-STD-810, METHOD 5000 (CONT)	
MAXIMUM RATE OF PRESSURE CHANGE (SELECT ONE)	
(KILOPASCALS PER SECOND)	1880
(TORR PER SECOND)	1882
COMMUTATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1907
NO MORE THAN FINE PINPOINT SPARKING.	1908
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1895
PER MIL-I-7032.	1896
TEST TEMPERATURE (DEGREES CELSIUS)	1898
TOLERANCE (DEGREES CELSIUS)	1900
TEST VOLTAGE (PERCENT OF RATED VOLTAGE)	1902
LOAD (PERCENT OF RATED LOAD)	1904

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1880	THE RATE OF PRESSURE CHANGE SHALL BE NOT GREATER THAN 1880 KILOPASCAL(S) PER SECOND.
1882	THE RATE OF PRESSURE CHANGE SHALL BE NOT GREATER THAN 1882 TORR PER SECOND.
1907	COMMUTATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1907.
1908	Commutation THERE SHALL BE NO MORE THAN FINE, PINPOINT SPARKING.
1895	COMMUTATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1895.
1896	COMMUTATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-I-7032.
1898	THE TEST TEMPERATURE SHALL BE 1898 DEGREES CELSIUS.
1900	THE TEST TEMPERATURE TOLERANCE SHALL BE 1900 DEGREES CELSIUS.
1902	THE TEST VOLTAGE SHALL BE 1902 PERCENT OF THE RATED VOLTAGE.
1904	THE ELECTRICAL LOAD SHALL BE 1904 PERCENT OF THE RATED LOAD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4908
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN	4906
MAXIMUM LEAKAGE (MILLIAMPERES)	4894
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4884
PER MIL-STD-202, METHOD 301.	6300
*ALTITUDE PER METHOD 105 OF MIL-STD-202	
*TEST CONDITION (LETTER)	4886
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4885
(VOLTS, AC)	4849

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4908	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908.
4906	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE, THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4894	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4894 M i l l i a m p e r e
4884	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884.
6300	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD–202.
4886	ALTITUDE SHALL BE IN ACCORDANCE WITH TEST CONDITION LETTER 4886 OF METHOD 105 OF MIL-STD-202.
4885	TEST VOLTAGE SHALL BE 4885 VOLTS, DC.
4849	TEST VOLTAGE SHALL BE 4849 VOLTS, AC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	6311
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	6312
BETWEEN MUTUALLY INSULATED PARTS.	6292
BETWEEN ALL INSULATED PARTS AND GROUND.	6293
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	6294
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4859
DURATION OF VOLTAGE APPLICATION (SECONDS)	4891
MOUNTING PER DOCUMENT (DOC DES)	6280
REGULATION OF TEST VOLTAGE (PERCENT)	6308
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4900

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
6311	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
6312	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE,
6292	BETWEEN MUTUALLY INSULATED PARTS.
6293	BETWEEN ALL INSULATED PARTS AND GROUND.
6294	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
4859	SPECIAL PREPARATION SHALL BE IN ACCORDANCE WITH 4859.
4891	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4891. SECOND(S)-
6280	MOUNTING SHALL BE IN ACCORDANCE WITH 6280.
6308	REGULATION OF THE TEST VOLTAGE SHALL BE WITHIN 6308 PERCENT.
4900	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4900 KILOVOLTAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4902
(MILLIAMPERES)	6310
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4874
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION Breakdown	4856
MAXIMUM LEAKAGE (MILLIAMPERES)	4875
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4861
PER MIL-STD-202, METHOD 301.	4862
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4854
(VOLTS, AC)	4855

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4902	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4902 AMPERE(S).
6310	THE SURGE CURRENT SHALL BE NOT GREATER THAN 6310. MILLIAMPERE(S)-
4874	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.
4856	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4875	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4875 M I L L I A M P E R E
4861	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.
4862	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4854	TEST VOLTAGE SHALL BE 4854 VOLTS, DC.
4855	TEST VOLTAGE SHALL BE 4855 VOLTS, AC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	4842
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	4848
BETWEEN MUTUALLY INSULATED PARTS.	4844
BETWEEN ALL INSULATED PARTS AND GROUND.	4845
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	4846
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4850
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867
MOUNTING PER DOCUMENT (DOC DES)	5000
REGULATION OF TEST VOLTAGE (PERCENT)	4869
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4870
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4717
(MILLIAMPERES)	4897

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4842	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
4848	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
4844	BETWEEN MUTUALLY INSULATED PARTS.
4845	BETWEEN ALL INSULATED PARTS AND GROUND.
4846	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
4850	SPECIAL PREPARATION OR CONDITIONS SHALL BE IN ACCORDANCE WITH 4850.
4867	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).
5000	MOUNTING SHALL BE IN ACCORDANCE WITH 50000
4869	REGULATION OF TEST VOLTAGE SHALL BE WITHIN 4869 PERCENT.
4870	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4870 KILOVOLTAMPERE(S).
4717	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4717 AMPERE(S).
4897	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4897 Milliampere

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
METHOD OF VOLTAGE CONNECTION PER DOCUMENT (DOC DES)	6267
EFFICIENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1963
MINIMUM EFFICIENCY (PERCENT)	1964
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	l951
PER DOCUMENT (DOC DES)	1953
ELECTRICAL LOAD (OHMS)	1954
POWER FACTOR (NUMBER)	1956
INPUT VOLTAGE (SELECT ONE)	
(VOLTS DC)	1958
TOLERANCE (VOLTS DC)	1961
(VOLTS AC)	1959
TOLERANCE (VOLTS AC)	1965

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6267	METHOD OF CONNECTION OF TEST VOLTAGE SHALL BE IN ACCORDANCE WITH 6267.
1963	EFFICIENCY* THE REQUIREMENT(S) SHALL BE IN ACCORDANCE ___ WITH THE BASE DOCUMENT, EXCEPT 1963.
1964	EFFICIENCY. THE EFFICIENCY SHALL BE NOT LESS THAN 1964 PERCENT.
1951	EFFICIENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1951.
1953	EFFICIENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1953.
1954	THE ELECTRICAL LOAD SHALL BE 1954 OHM(S),
1956	THE POWER FACTOR SHALL BE 1956.
1958	THE INPUT VOLTAGE SHALL BE 1958 VOLT(S) DC.
1961	THE INPUT VOLTAGE TOLERANCE SHALL BE 1961 VOLT(S) DC.
1959	THE INPUT VOLTAGE SHALL BE 3959 VOLT(S) AC.
1965	THE INPUT VOLTAGE TOLERANCE SHALL BE 1965 VOLT(S) AC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
EFFICIENCY (CONT)	
PER DOCUMENT (CONT)	
TEMPERATURE (DEGREES CELSIUS)	1612
ALTITUDE (SELECT ONE)	
(FEET)	1608
(METERS)	1610
ENDURANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1981
AS FOLLOWS:	1983
MAXIMUM OUTPUT DRIFT	
VOLTAGE (PERCENT OF THE RATED VOLTAGE)	1982
FREQUENCY (PERCENT OF THE RATED FREQUENCY)	1984
NO EXCESSIVE WEAR.	1986
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1969
PER DOCUMENT (DOC DES)	1971

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1612	THE TEST TEMPERATURE SHALL BE 1612 DEGREES CELSIUS.
1608	THE TEST ALTITUDE SHALL BE 1608 FEET.
1610	THE TEST ALTITUDE SHALL BE 1610 METER(S).
1981	ENDURANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1981.
1983	Endurance THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1982	THE OUTPUT VOLTAGE DRIFT SHALL BE NOT GREATER THAN 1982 PERCENT OF THE RATED VOLTAGE.
1984	THE OUTPUT FREQUENCY DRIFT SHALL BE NOT GREATER THAN 1984 PERCENT OF THE RATED FREQUENCY.
1986	NO PART OF THE DEVICE SHALL SHOW EXCESSIVE WEAR.
1969	ENDURANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1969.
1971	Endurance TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1971.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE (CONT)	
PER DOCUMENT (CONT)	
TEST DURATION (HOURS)	1972
LOAD (PERCENT OF RATED LOAD)	1974
ON/OFF SWITCHING PERIODS (NUMBER)	1976
DURATION OF SWITCHING (SECONDS)	1977
MAXIMUM MEASUREMENT INTERVAL (HOUR INTERVALS)	1978
EXPLOSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2003
NO EVIDENCE OF EXPLOSION OR VIOLENT BURNING.	2004
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1991
PER MIL-STD-810, METHOD 511.	1993
*PROCEDURE (NUMBER)	1992
CHAMBER TEMPERATURE (DEGREES CELSIUS)	1994
TOLERANCE (DEGREES CELSIUS)	1996

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1972	THE DURATION OF THE TEST SHALL BE 1972 HOUR(S).
1974	THE ELECTRICAL LOAD SHALL BE 1974 PERCENT OF THE RATED LOAD.
1976	THE ELECTRICAL LOAD SHALL BE SWITCHED ALTERNATELY ON AND OFF FOR 1976 PERIOD(S).
1977	DURATION OF SWITCHING SHALL BE 1977 SECOND(S).
1978	THE MEASUREMENT READINGS SHALL BE TAKEN AT NOT GREATER THAN 1978 HOUR INTERVALS.
2003	EXPLOSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2003.
2004	EXPLOSION. THERE SHALL BE NO EVIDENCE OF AN EXPLOSION OR VIOLENT BURNING.
1991	EXPLOSION TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1991.
1993	EXPLOSION TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 511 OF MIL-STD-810.
1992	PROCEDURE NUMBER 1992 SHALL APPLY.
1994	THE TEST CHAMBER TEMPERATURE SHALL BE 1994 DEGREES CELSIUS.
1996	THE TEST CHAMBER TEMPERATURE TOLERANCE SHALL BE 1996 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR COD E
EXPLOSION (CONT)	
PER MIL-STD-810. METHOD 511. (CONT)	
LOAD (PERCENT OF RATED LOAD)	1998
FREQUENCY REGULATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2027
AS FOLLOWS:	2029
MAXIMUM FREQUENCY DEVIATION (HERTZ)	2028
FREQUENCY TO VOLTAGE RATIO	
MINIMUM (NUMBER)	2030
MAXIMUM (NUMBER)	2031
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2007
PER DOCUMENT (DOC DES)	2009

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1998	THE ELECTRICAL LOAD SHALL BE 1998 PERCENT OF THE RATED LOAD.
2027	FREQUENCY REGULATION- THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 20270
2029	FREQUENCY Regulation THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2028	THE FREQUENCY DEVIATION SHALL BE NOT GREATER THAN 2028 HERTZ.
2030	THE FREQUENCY TO VOLTAGE RATIO SHALL BE NOT LESS THAN 2030.
2031	THE FREQUENCY TO VOLTAGE RATIO SHALL BE NOT GREATER THAN 2031.
2007	FREQUENCY Regulation TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2007.
2009	FREQUENCY REGULATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2009.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FREQUENCY REGULATION (CONT)	
PER DOCUMENT (CONT)	
AMBIENT TEMPERATURE	
MINIMUM (DEGREES CELSIUS)	2010
MAXIMUM (DEGREES CELSIUS)	2011
TOLERANCE (DEGREES CELSIUS)	2012
MEASUREMENT INTERVAL (MINUTES)	2014
POWER FACTOR (SELECT ONE)	
MINIMUM LAGGING (NUMBER)	2016
MINIMUM LEADING (NUMBER)	2017
MAXIMUM ALTITUDE (SELECT ONE)	
(FEET)	2018
(METERS)	2019
DEVICE POSITION	
ROTATING INCREMENTS FROM NORMAL (DEGREES)	2020
INPUT VOLTAGE	
MINIMUM (PERCENT OF RATED VOLTAGE)	2022
MAXIMUM (PERCENT OF RATED VOLTAGE)	2023

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2010	THE AMBIENT TEMPERATURE SHALL BE NOT LESS THAN 2010 DEGREES CELSIUS,
2011	THE AMBIENT TEMPERATURE SHALL BE NOT GREATER THAN 2011 DEGREES CELSIUS.
2012	THE AMBIENT TEMPERATURE TOLERANCE SHALL BE 2012 DEGREES CELSIUS.
2014	THE FREQUENCY SHALL BE MEASURED AT 2034 MINUTE INTERVALS.
2016	THE LAGGING POWER FACTOR SHALL BE NOT LESS THAN 2016.
2017	THE LEADING POWER FACTOR SHALL BE NOT LESS THAN 2017.
2018	THE ALTITUDE SHALL BE NOT GREATER THAN 2018 FEET.
2019	THE ALTITUDE SHALL BE NOT GREATER THAN 2019 METER(S).
2020	THE DEVICE SHALL BE ROTATED IN 2020 DEGREE INCREMENTS FROM THE NORMAL POSITION.
2022	THE INPUT VOLTAGE SHALL BE NOT LESS THAN 2022 PERCENT OF THE RATED VOLTAGE.
2023	THE INPUT VOLTAGE SHALL BE NOT GREATER THAN 2023 PERCENT OF THE RATED VOLTAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4760
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761
NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED.	4762
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4754
PER MIL-STD-810, METHOD 5080	4755
TEST PERIOD (DAYS)	4756
HARMONIC CONTENT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2051
MAXIMUM HARMONIC CONTENT (PERCENT)	2052

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4760	FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 47600
4761	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED? THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4762	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4754	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 47540
4755	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.
4756	TEST PERIOD SHALL BE 4756 DAY(S).
2051	HARMONIC CONTENT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2051.
2052	HARMONIC CONTENT. THE HARMONIC CONTENT SHALL BE NOT GREATER THAN 2052 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HARMONIC CONTENT (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2035
PER DOCUMENT (DOC DES)	2036
MINIMUM INPUT VOLTAGE (PERCENT OF RATED INPUT VOLTAGE)	2038
MAXIMUM INPUT VOLTAGE (PERCENT OF RATED INPUT VOLTAGE)	2040
LOAD	
CONDITION ONE (PERCENT OF RATED LOAD)	2042
CONDITION TWO (PERCENT OF RATED LOAD)	2044
CONDITION THREE (PERCENT OF RATED LOAD)	2046
MINIMUM LAGGING POWER FACTOR (NUMBER)	2048
HEATING-OVERLOAD	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2069
MAXIMUM TEMPERATURE RISE (DEGREES CELSIUS)	2070

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2035	HARMONIC CONTENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2035.
2036	HARMONIC CONTENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2036.
2038	THE INPUT VOLTAGE SHALL BE NOT LESS THAN 2038 PERCENT OF THE RATED INPUT VOLTAGE.
2040	THE INPUT. VOLTAGE SHALL BE NOT GREATER THAN 2040 PERCENT OF THE RATED INPUT VOLTAGE.
2042	THE ELECTRICAL LOAD FOR CONDITION ONE SHALL BE 2042 PERCENT OF THE RATED LOAD.
2044	THE ELECTRICAL LOAD FOR CONDITION TWO SHALL BE 2044 PERCENT OF THE RATED LOAD.
2046	THE ELECTRICAL LOAD FOR CONDITION THREE SHALL BE 2046 PERCENT OF THE RATED LOAD.
2048	THE LAGGING POWER FACTOR SHALL BE NOT LESS THAN 2048.
2069	HEATING-OVERLOAD. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2069.
2070	HEATING-OVERLOAD" TEMPERATURE RISE RESULTING FROM HEATING-OVERLOAD SHALL BE NOT GREATER THAN 2070 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HEATING-OVERLOAD (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2055
PER DOCUMENT (DOC DES)	2057
AMBIENT TEMPERATURE	
MINIMUM (DEGREES CELSIUS)	2058
MAXIMUM (DEGREES CELSIUS)	2060
INPUT VOLTAGE (PERCENT OF RATED INPUT VOLTAGE)	2062
ELECTRICAL LOAD (PERCENT OF RATED LOAD)	2064
DUTY CYCLE (PERCENT)	2066
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4798
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	4799
NO DEGRADATION OF PERFORMANCE.	4815
REMAIN WITHIN SPECIFIED TOLERANCE.	4791

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2055	HEATING-OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2055.
2057	HEATING–OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2057.
2058	THE AMBIENT TEMPERATURE SHALL BE NOT LESS THAN 2058 DEGREES CELSIUS.
2060	THE AMBIENT TEMPERATURE SHALL BE NOT GREATER THAN 2060 DEGREES CELSIUS.
2062	THE INPUT VOLTAGE SHALL BE 2062 PERCENT OF THE RATED INPUT VOLTAGE.
2064	THE ELECTRICAL LOAD SHALL BE 2064 PERCENT OF THE RATED LOAD.
2066	THE DUTY CYCLE SHALL BE 2066 PERCENT.
4798	HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 47980
4799	HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
4815	THERE SHALL BE NO DEGRADATION OF PERFORMANCE.
4791	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE. (CONT)	
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1477
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	4795
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	4805
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	4813
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	4803
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4788
PER MIL-STD-810, METHOD 5070	4871
*PROCEDURE NUMBER (SELECT ONE)	
TEST PROCEDURE I.	4767

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1477	THERE SHALL BE NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DIELECTRIC WITHSTANDING VOLTAGE IS Performed
4795	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4795 MEGOHM(S) AT HIGH HUMIDITY.
4805	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4805 MEGOHM(S) AFTER DRYING.
4813	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4813 MILLIAMPERE(S) AT HIGH HUMIDITY.
4803	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4803 MILLIAMPERE(S) AFTER DRYING.
4788	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.
4871	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 507 OF MIL-STD-810.
4767	PROCEDURE NUMBER I SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
TEST PROCEDURE I. (CONT)	
EXTREME TEMPERATURE BEFORE TESTING (DEGREES CELSIUS)	4777
*DURATION OF TEMPERATURE EXPOSURE (HOURS)	4778
TEST PROCEDURE II.	6334
CYCLE LIMITED TO 24 HOURS DURATION.	4716
TEST PROCEDURE III.	6335
TEST PROCEDURE IV.	6336
TEST PROCEDURE V.	6337
NUMBER OF CYCLES (NUMBER)	4800
WATER PURITY BY CONDUCTIVITY METHOD.	4764
OPERATION AND MEASUREMENT AT HIGH TEMPERATURE PORTION OF CYCLES (NUMBER)	4916
INSULATION RESISTANCE CYCLES (NUMBER)	4919
DIELECTRIC WITHSTANDING VOLTAGE CYCLES (NUMBER)	4920

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4777	SPECIMEN(S) SHALL BE EXPOSED TO 4777 DEGREES CELSIUS BEFORE TESTING.
4778	DURATION OF EXPOSURE TO EXTREME TEMPERATURE SHALL BE 4778 HOUR(S).
6334	PROCEDURE NUMBER II SHALL APPLY.
4716	CYCLES SHALL BE LIMITED TO 24 HOURS DURATION.
6335	PROCEDURE NUMBER III SHALL APPLY.
6336	PROCEDURE NUMBER IV SHALL APPLY.
6337	PROCEDURE NUMBER V SHALL APPLY.
4800	THERE SHALL BE 4800 CYCLE(S).
4764	WATER PURITY SHALL BE DETERMINED BY THE CONDUCTIVITY METHOD.
4916	OPERATION AND MEASUREMENTS SHALL BE PERFORMED AT HIGH TEMPERATURE DURING CYCLE(S) 4916.
4919	INSULATION RESISTANCE SHALL BE MEASURED AT CYCLE(S) 4919, AT HIGH TEMPERATURE*
4920	DIELECTRIC WITHSTANDING VOLTAGE SHALL BE MEASURED AT CYCLE(S) 4920, AT HIGH TEMPERATURE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
PER MIL-STD-810, METHOD 5070 (CONT)	
OPERATION AND MEASUREMENT AT LOW TEMPERATURE PORTION OF CYCLES (NUMBER)	1554
INSULATION RESISTANCE CYCLES (NUMBER)	1555
DIELECTRIC WITHSTANDING VOLTAGE CYCLES (NUMBER)	1556
IMMERSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4819
NO EVIDENCE OF PHYSICAL DAMAGE.	4820
NO EVIDENCE OF MOISTURE PENETRATION,	4866
REMAIN WITHIN SPECIFIED TOLERANCE.	4822
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4809
PER MIL-STD-810, METHOD 512.	7303
*PPOCEDURE (NUMBER)	7304

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1554	OPERATION AND MEASUREMENTS SHALL BE PERFORMED AT LOW TEMPERATURE, DURING CYCLE(S) 1554.
1555	INSULATION RESISTANCE SHALL BE MEASURED AT CYCLE(S) 1555, AT LOW TEMPERATURE.
1556	DIELECTRIC WITHSTANDING VOLTAGE SHALL BE MEASURED AT CYCLE(S) 1556, AT LOW TEMPERATURE.
4819	IMMERSUIN. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4819.
4820	IMMERSION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4866	THERE SHALL BE NO EVIDENCE OF MOISTURE Penetration
4822	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4809	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4809.
7303	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 512 OF MIL-STD-810.
7304	PROCEDURE NUMBER 7304 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMMERSION (CONT)	
PER MIL-STD-810, METHOD 512. (CONT)	
MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4812
DEVICES CONDITION FOR TEST (SELECT ONE)	
TRANSIT.	2156
OPERATIONAL	2158
IMPEDANCE, OUTPUT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2085
MAXIMUM IMPEDANCE (OHMS)	2086
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2075
PER MIL-C-46369.	2076
APPLIED FREQUENCY (KILOHERTZ)	2078
VOLTAGE (VOLTS RMS)	2080
TERMINALS (DESIGNATION)	2082

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4812	FINAL MEASUREMENT(S) SHALL BE MADE WITHIN 4812 HOUR(S) AFTER FINAL CYCLE.
2156	THE DEVICE(S) SHALL BE IN A TRANSIT CONDITION DURING THE TEST.
2158	THE DEVICE(S) SHALL BE IN AN OPERATIONAL CONDITION DURING THE TEST.
2085	IMPEDANCE, OUTPUT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 20850
2086	IMPEDANCE, OUTPUT. THE OUTPUT IMPEDANCE SHALL BE NOT GREATER THAN 2086 OHM(S).
2075	IMPEDANCE, OUTPUT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2075.
2076	IMPEDANCE, OUTPUT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-46369.
2078	THE APPLIED FREQUENCY SHALL BE 2078 KILOHERTZ,
2080	THE APPLIED VOLTAGE SHALL BE 2080 VOLT(S) RMS.
2082	THE OUTPUT IMPEDANCE SHALL BE MEASURED BETWEEN TERMINALS 20820

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INPUT CURRENT BALANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2109
MINIMUM INPUT CURRENT BALANCE (PERCENT)	2110
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2089
PER DOCUMENT (DOC DES)	2091
MINIMUM INPUT VOLTAGE (PERCENT OF RATED VOLTAGE)	2092
MAXIMUM INPUT VOLTAGE (PERCENT OF RATED VOLTAGE)	2094
MINIMUM TEMPERATURE (DEGREES CELSIUS)	2096
MAXIMUM TEMPERATURE (DEGREES CELSIUS)	2098
MINIMUM INPUT FREQUENCY (HERTZ)	2100
MAXIMUM INPUT FREQUENCY (HERTZ)	2102
LOAD STEPS (NUMBER)	2104
LOAD PER STEP (PERCENT OF RATED LOAD)	2106

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2109	INPUT CURRENT BALANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2109.
2110	INPUT CURRENT BALANCE. THE INPUT CURRENT BALANCE SHALL BE NOT LESS THAN 2110 PERCENT.
2089	INPUT CURRENT BALANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 20890
2091	INPUT CURRENT BALANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2091.
2092	THE INPUT VOLTAGE SHALL BE NOT LESS THAN 2092 PERCENT OF THE RATED VOLTAGE.
2094	THE INPUT VOLTAGE SHALL BE NOT GREATER THAN 2094 PERCENT OF THE RATED VOLTAGE.
2096	THE TEMPERATURE SHALL BE NOT LESS THAN 2096 DEGREES CELSIUS.
2098	THE TEMPERATURE SHALL BE NOT GREATER THAN 2098 DEGREES CELSIUS.
2100	THE INPUT FREQUENCY SHALL BE NOT LESS THAN 2100 HERTZ.
2102	THE INPUT FREQUENCY SHALL BE NOT GREATER THAN 2102 HERTZ.
2104	THE LOAD SHALL BE INCREASED IN 2104 STEP(S).
2106	THE LOAD FOR EACH STEP SHALL BE EQUAL TO 2106 PERCENT OF RATED LOAD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INPUT POWER FACTOR	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2129
MINIMUM INPUT POWER FACTOR (NUMBER)	2130
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2113
PER DOCUMENT (DOC DES)	2115
MINIMUM INPUT VOLTAGE (PERCENT OF RATED VOLTAGE)	2116
MAXIMUM INPUT VOLTAGE (PERCENT OF RATED VOLTAGE)	2117
MINIMUM TEMPERATURE (DEGREES CELSIUS)	2118
MAXIMUM TEMPERATURE (DEGREES CELSIUS)	2119
MINIMUM INPUT FREQUENCY (HERTZ)	2120
MAXIMUM INPUT FREQUENCY (HERTZ)	2122
LOAD STEPS (NUMBER)	2124
LOAD PER STEP (PERCENT OF RATED LOAD)	2126

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2129	INPUT POWER FACTOR. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2129.
2130	INPUT POWER FACTOR. THE INPUT POWER FACTOR SHALL BE NOT LESS THAN 2130.
2113	INPUT POWER FACTOR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2113.
2115	INPUT POWER FACTOR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2115.
2116	THE INPUT VOLTAGE SHALL BE NOT LESS THAN 2116 PERCENT OF THE RATED VOLTAGE.
2117	THE INPUT VOLTAGE SHALL BE NOT GREATER THAN 2117 PERCENT OF THE RATED VOLTAGE.
2118	THE TEMPERATURE SHALL BE NOT LESS THAN 2118 DEGREES CELSIUS.
2119	THE TEMPERATURE SHALL BE NOT GREATER THAN 2119 DEGREES CELSIUS.
2120	THE INPUT FREQUENCY SHALL BE NOT LESS THAN 2120 HERTZ.
2122	THE INPUT FREQUENCY SHALL BE NOT GREATER THAN 2122 HERTZ.
2124	THE LOAD SHALL BE INCREASED IN 2124 STEP(S).
2126	THE LOAD FOR EACH STEP SHALL BE EQUAL TO 2126 PERCENT OF RATED LOAD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1380
AS FOLLOWS:	6359
*MINIMUM INSULATION RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	5384
*SECOND TEST (MEGOHMS)	1387
REMAIN WITHIN SPECIFIED TOLERANCE	1388
NO EVIDENCE OF PHYSICAL DAMAGE.	1407
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	1371
PER MIL-STD-202, METHOD 302.	1511

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.
6359	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1386	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 1386 MEGOHM(S).
1384	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHM(S) AT THE FIRST TEST TEMPERATURE.
1387	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHM(S) AT THE SECOND TEST TEMPERATURE.
1388	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1407	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1371	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.
I511	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 302 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 302. (CONT)	
*CONDITION (SELECT ONE)	
TEST CONDITION (LETTER)	1378
TEST VOLTAGE (VOLTS, DC)	1373
ELECTRIFICATION TIME (SECONDS)	1376
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	1377
POINTS OF MEASUREMENT:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	1497
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	1498
BETWEEN MUTUALLY INSULATED PARTS.	1522
BETWEEN INSULATED PARTS AND GROUND.	1523
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	1524
SPECIAL PREPARATIONS OR CONDITIONS PER DOCUMENT (DOC DES)	1520

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1378	TEST CONDITION LETTER 1378 SHALL APPLY.
1373	TEST POTENTIAL SHALL BE 1373 VOLTS, DC.
1376	ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S).
1377	THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.
	POINTS OF INSULATION RESISTANCE MEASUREMENT SHALL BE AS F O L L O W S :
1497	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
1498	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
1522	BETWEEN MUTUALLY INSULATED PARTS.
1523	BETWEEN ALL INSULATED PARTS AND GROUND.
1524	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
1520	SPECIAL PREPARATIONS OR CONDITIONS SHALL BE IN ACCORDANCE WITH 1520.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 3020 (CONT)	
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	1372
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	1381
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1383
ISOLATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2149
AS FOLLOWS:	2151
MINIMUM RESISTIVE COUPLING (MEGOHMS)	2150
MAXIMUM CAPACITIVE COUPLING (PICOFARADS)	2152
MINIMUM BREAKDOWN VOLTAGE BETWEEN INPUT AND OUTPUT (VOLTS DC)	2154
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2137
PER DOCUMENT (DOC DES)	2138

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1372	FIRST TEST TEMPERATURE SHALL BE 1372 DEGREES CELSIUS.
1381	SECOND TEST TEMPERATURE SHALL BE 1381 DEGREES CELSIUS,
1383	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1383 DEGREES CELSIUS.
2149	ISOLATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT? EXCEPT 2149.
2151	ISOLATION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2150	THE RESISTIVE COUPLING SHALL BE NOT LESS THAN 2150 MEGOHM(S).
2152	THE CAPACITIVE COUPLING SHALL BE NOT GREATER THAN 2152 PICOFARAD(S).
2154	THE BREAKDOWN VOLTAGE BETWEEN THE INPUT AND OUTPUT SHALL BE NOT LESS THAN 2154 VOLT(S) DC.
2137	ISOLATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2137.
2138	ISOLATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2138.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ISOLATION (CONT)	
PER DOCUMENT (CONT)	
MAXIMUM TEST VOLTAGE (SELECT ONE)	
(VOLTS AC)	2140
(VOLTS DC)	2144
MINIMUM TEST FREQUENCY (HERTZ)	2142
TEST TERMINALS (NUMBER)	2146
LIFE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2185
AS FOLLOWS:	2187
NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF Performance	2186
MAXIMUM FREQUENCY DRIFT (PERCENT)	2188
MAXIMUM VOLTAGE DRIFT (PERCENT)	2190
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2161
PER DOCUMENT (DOC DES)	2163

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2140 THE TEST VOLTAGE SHALL BE NOT GREATER THAN 2140 VOLT(S) AC.

2144 THE TEST VOLTAGE SHALL BE NOT GREATER THAN 21144 VOLT(S) DC.

2142 THE TEST FREQUENCY SHALL BE NOT LESS THAN 2142 HERTZ.

2146 THE TEST TERMINALS SHALL BE 2146.

2185 LIFE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2185.

2187 LIFE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2186 THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE-

2188 THE FREQUENCY DRIFT SHALL BE NOT GREATER THAN 2188 PERCENT.

2190 THE VOLTAGE DRIFT SHALL BE NOT GREATER THAN 2190 PERCENT.

2161 LIFE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2161.

2163 LIFE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2163.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LIFE (CONT)	
PER DOCUMENT (CONT)	
TEST DURATION (HOURS)	2164
TEMPERATURE ONE (DEGREES CELSIUS)	2166
INPUT VOLTAGE (PERCENT OF RATED INPUT VOLTAGE)	2168
ELECTRICAL LOAD (PERCENT OF RATED LOAD)	2170
TEMPERATURE TWO (DEGREES CELSIUS)	2172
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2174
TEST ONE DURATION (HOURS)	2176
TEST TWO DURATION (HOURS)	2178
MONITORED DURING TEST	
VOLTAGE REGULATION.	2180
FREQUENCY REGULATION.	2182
NUCLEAR RADIATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2221
AS FOLLOWS:	2203

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2164	THE TEST DURATION SHALL BE 2164 HOUR(S).
2166	THE TEMPERATURE FOR TEST ONE SHALL BE 2166 DEGREES CELSIUS.
2168	THE INPUT VOLTAGE SHALL BE 2168 PERCENT OF THE RATED INPUT VOLTAGE.
2170	THE ELECTRICAL LOAD SHALL BE 2170 PERCENT OF THE RATED LOAD.
2172	THE TEMPERATURE FOR TEST TWO SHALL BE 2172 DEGREES CELSIUS.
2174	THE TEST TEMPERATURE TOLERANCE SHALL BE 2174 DEGREES CELSIUS.
2176	THE DURATION FOR TEST ONE SHALL BE 2176 HOUR(S).
2178	THE DURATION FOR TEST TWO SHALL BE 2178 HOUR(S).
2180	THE VOLTAGE REGULATION SHALL BE MONITORED DURING THE TEST.
2182	THE FREQUENCY REGULATION SHALL BE MONITORED DURING THE TEST.
2201	NUCLEAR Radiation THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2201.
2203	NUCLEAR RADIATION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NUCLEAR RADIATION (CONT)	
AS FOLLOWS: (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.	2202
MINIMUM VOLTAGE REGULATION (PERCENT)	2204
MINIMUM FREQUENCY REGULATION (PERCENT)	2206
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2193
PER MIL-STD-446.	2194
MEASUREMENTS AFTER TEST	
VOLTAGE. REGULATION.	2196
FREQUENCY REGULATION	2198
OPERATING POSITION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2223
NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.	2224

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2202	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF Performance
2204	THE VOLTAGE REGULATION SHALL BE NOT LESS THAN 2204 PERCENT.
2206	THE FREQUENCY REGULATION SHALL BE NOT LESS THAN 2206 PERCENT.
2193	NUCLEAR RADIATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2193.
2194	NUCLEAR RADIATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-446.
2196	MEASUREMENTS AFTER TEST SHALL INCLUDE VOLTAGE REGULATION.
2198	MEASUREMENTS AFTER TEST SHALL INCLUDE FREQUENCY REGULATION.
2223	OPERATING POSITION- THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2223.
2224	OPERATING POSITION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OPERATING POSITION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2209
PER DOCUMENT (DOC DES)	2210
ANY POSITION OPERATION VERIFIED DURING OTHER TESTS.	2212
ROTATION INCREMENTS (DEGREES)	2214
TOTAL ROTATION (DEGREES)	2216
ROTATION AXIS (SELECT ONE)	
ROTATE FROM NORMAL HORIZONTAL POSITION IN EACH MAJOR AXIS.	2218
EXCEPT AXIS (DESIGNATION)	2220
OUTPUT MODULATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2237
AS FOLLOWS:	2239
NO SUSTAINED VOLTAGE OSCILLATIONS,	2238

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2209	OPERATING POSITION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 22090
2210	OPERATING POSITION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2210.
2212	THE DEVICE(S) SHALL BE VERIFIED TO BE CAPABLE OF OPERATING IN ANY POSITION DURING OTHER TESTS.
2214	THE DEVICE(S) SHALL BE ROTATED IN INCREMENTS OF 2214 DEGREE(S).
2216	THE TOTAL ROTATION SHALL BE 2216 DEGREE(S).
2218	THE ROTATION SHALL BE IN EACH MAJOR AXIS FROM THE NORMAL HORIZONTAL POSITION.
2220	ROTATION ABOUT THE 2220 AXIS SHALL BE AVOIDED.
2237	OUTPUT Modulation THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2237.
2239	OUTPUT MODULATION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2238	THERE SHALL BE NO SUSTAINED VOLTAGE OSCILLATIONS,

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OUTPUT MODULATION (CONT)	
AS FOLLOWS: (CONT)	
NO SUSTAINED FREQUENCY OSCILLATIONS	2240
MAXIMUM FREQUENCY MODULATION (PERCENT)	2242
MAXIMUM VOLTAGE MODULATION (PERCENT)	2244
MINIMUM FREQUENCY MODULATIONS (HERTZ)	2246
MAXIMUM FREQUENCY MODULATIONS (HERTZ)	2248
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2227
PER DOCUMENT (DOC DES)	2229
INPUT VOLTAGE (PERCENT OF RATED INPUT VOLTAGE)	2230
ELECTRICAL LOADS (PERCENT OF RATED LOAD)	2232
POWER FACTOR (NUMBER)	2234
OUTPUT MODULATION METHOD (NAME)	2235

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2240	THERE SHALL BE NO SUSTAINED FREQUENCY OSCILLATIONS.
2242	THE FREQUENCY MODULATION SHALL BE NOT GREATER THAN 2242 PERCENT.
2244	THE VOLTAGE MODULATION SHALL BE NOT GREATER THAN 2244 PERCENT.
2246	THE FREQUENCY IN THE MODULATION SHALL BE NOT LESS THAN 2246 HERTZ.
2248	THE FREQUENCY IN THE MODULATION SHALL BE NOT GREATER THAN 2248 HERTZ.
2227	OUTPUT MODULATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 22270
2229	OUTPUT MODIFICATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 22290
2230	THE INPUT VOLTAGE SHALL BE 2230 PERCENT OF THE RATED INPUT VOLTAGE.
2232	THE ELECTRICAL LOAD(S) SHALL BE 2232 PERCENT OF RATED LOAD.
2234	THE ELECTRICAL LOAD(S) SHALL BE ADJUSTED FOR A POWER FACTOR OF 2234.
2235	THE OUTPUT MODULATION METHOD SHALL BE 22350

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OVERSPEED	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2261
AS FOLLOWS:	2263
NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION-	2262
MINIMUM VOLTAGE REGULATION (PERCENT)	2264
MINIMUM FREQUENCY REGULATION (PERCENT)	2266
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2251
PER MIL-C-7032.	2253
OVERSPEED (PERCENT)	2254
DURATION (MINUTES)	2255
MEASUREMENTS AFTER TEST	
VOLTAGE REGULATION.	2256
FREQUENCY Regulation	2258

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2261	OVERSPEED. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2261,
2263	OVERSPEED. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2262	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE,
2264	THE VOLTAGE REGULATION SHALL BE NOT LESS THAN 2264 PERCENT.
2266	THE FREQUENCY REGULATION SHALL BE NOT LESS THAN 2266 PERCENT.
2251	OVERSPEED. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2251,
2253	OVERSPEED. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-7032.
2254	THE OVERSPEED SHALL BE 2254 PERCENT OF THE RATED SPEEDS
2255	DURATION OF OVERSPEED SHALL BE 2255 MINUTE
2256	THE MEASUREMENTS AFTER TEST SHALL INCLUDE VOLTAGE REGULATION.
2258	THE MEASUREMENTS AFTER TEST SHALL INCLUDE FREQUENCY REGULATION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PARALLEL OPERATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2279
AS FOLLOWS:	2281
MAXIMUM LOAD SHARE DIFFERENCE (PERCENT)	2280
MAXIMUM EQUALIZING RESISTANCE (OHMS)	2282
MAXIMUM VOLTAGE DECREASE (VOLTS)	2284
MAXIMUM EQUALIZER TERMINAL CURRENT (AMPERES)	2286
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2269
PER DOCUMENT (DOC DES)	2271
STEPS (NUMBER)	2272
LOAD PER STEP (PERCENT OF RATED LOAD)	2274
DEVICES IN PARALLEL (NUMBER)	2276

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2279	PARALLEL OPERATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2279.
2281	PARALLEL Operation THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2280	THE LOAD SHARING DIFFERENCE SHALL BE NOT GREATER THAN 2280 PERCENT.
2282	THE EQUALIZING RESISTANCE SHALL BE NOT GREATER THAN 2282 OHM(S).
2284	THE VOLTAGE DECREASE OF ANY DEVICE SHALL BE NOT GREATER THAN 2284 VOLT(S).
2286	THE EQUALIZER TERMINAL CURRENT SHALL BE NOT GREATER THAN 2286 Ampere
2269	PARALLEL Operation TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2269.
2271	PARALLEL OPERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2271.
2272	THE LOAD SHALL BE INCREASED IN 2272 STEP(S).
2274	THE LOAD FOR EACH STEP SHALL BE EQUAL TO 2274 PERCENT OF RATED LOAD.
2276	THERE SHALL BE 2276 DEVICE(S) CONNECTED IN PARALLEL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PHASE BALANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2325
AS FOLLOWS:	2327
MAXIMUM CURRENT UNBALANCE (PERCENT)	2326
MAXIMUM VOLTAGE UNBALANCE (PERCENT)	2328
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2309
PER MIL-I-7032.	2310
INPUT VOLTAGE (PERCENT OF RATED INPUT VOLTAGE)	2312
ELECTRICAL LOADS CONNECTED SUCCESSIVELY TO EACH PHASE	
FIRST LOAD (PERCENT OF RATED LOAD)	2314
SECOND LOAD (PERCENT OF RATED LOAD)	2316
THIRD LOAD (PERCENT OF RATED LOAD)	2318

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2325	PHASE BALANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 23250
2327	PHASE BALANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2326	THE CURRENT UNBALANCE SHALL BE NOT GREATER THAN 2326 PERCENT.
2328	THE VOLTAGE UNBALANCE SHALL BE NOT GREATER THAN 2328 PERCENT.
2309	PHASE BALANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2309.
2310	PHASE BALANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-I-7032.
2312	THE INPUT VOLTAGE SHALL BE 2312 PERCENT OF THE RATED INPUT VOLTAGE.
2314	THE FIRST ELECTRICAL LOAD TO BE CONNECTED SUCCESSIVELY TO EACH PHASE TERMINAL SHALL BE 2314 PERCENT OF THE RATED LOAD.
2316	THE SECOND ELECTRICAL LOAD TO BE CONNECTED SUCCESSIVELY TO EACH PHASE TERMINAL SHALL BE 2316 PERCENT OF THE RATED LOAD.
2318	THE THIRD ELECTRICAL LOAD TO BE CONNECTED SUCCESSIVELY TO EACH PHASE TERMINAL SHALL BE 2318 PERCENT OF THE RATED LOAD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PHASE BALANCE (CONT)	
PER MIL-I-70320 (CONT)	
POWER FACTOR (NUMBER)	2320
MEASURING INSTRUMENT ACCURACY (PERCENT)	2322
PHASE ROTATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2339
AS FOLLOWS:	2341
PHASE ROTATION AT OUTPUT CONNECTOR (SEQUENCE)	2340
PHASE ROTATION AT TERMINAL NUMBERS (NUMBERS)	2342
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2331
PER DOCUMENT (DOC DES)	2333
INSTRUMENT CONNECTED TO (CONNECTOR)	2334
INSTRUMENT CONNECTED TO (TERMINALS)	2336

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2320	THE POWER FACTOR SHALL BE 2320.
2322	THE MEASURING INSTRUMENT ACCURACY SHALL BE 2322 PERCENT.
2339	PHASE ROTATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2339.
2341	PHASE ROTATION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2340	THE PHASE ROTATION SHALL BE 2340 AT THE OUTPUT CONNECTOR*
2342	THE PHASE ROTATION SHALL BE AT TERMINAL NUMBERS 23420
2331	PHASE ROTATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2331.
2333	PHASE ROTATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2333-
2334	THE PHASE ROTATION INDICATING INSTRUMENT SHALL BE CONNECTED TO 2334 CONNECTOR(S).
2336	THE PHASE ROTATION INDICATING INSTRUMENT SHALL BE CONNECTED TO 2336 TERMINAL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
POLARITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2355
AS FOLLOWS:	2357
OUTPUT VOLTAGE	
POSITIVE (TERMINAL DESIGNATION)	2356
NEGATIVE (TERMINAL DESIGNATION)	2358
GROUND (TERMINAL DESIGNATION)	2360
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2345
PER MIL–I-620260	2347
INPUT VOLTAGE	
POSITIVE (TERMINAL DESIGNATION)	2348
NEGATIVE (TERMINAL DESIGNATION)	2350
GROUND (TERMINAL DESIGNATION)	2352

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2355	POLARITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 23550
2357	POLARITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2356	THE POSITIVE OUTPUT VOLTAGE SHALL BE AT TERMINAL NUMBER 2356.
2358	THE NEGATIVE OUTPUT VOLTAGE SHALL BE AT TERMINAL NUMBER 2358.
2360	THE GROUND TERMINAL SHALL BE 2360.
2345	POLARITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2345.
2347	POLARITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL–I-62026.
2348	THE POSITIVE INPUT VOLTAGE SHALL BE AT TERMINAL NUMBER 2348.
2350	THE NEGATIVE INPUT VOLTAGE SHALL BE AT TERMINAL NUMBER 2350.
2352	THE GROUND TERMINAL SHALL BE 23520

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RADIO INTERFERENCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2375
PER MIL-STD-461.	2376
NO ADVERSE INTERFERENCE TO ADJACENT EQUIPMENT.	2378
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2363
PER MIL-STD-4611, METHOD (DESIGNATION)	2364
PER MIL-STD-4620	2370
*TEST METHODS	
CE (NUMBER)	2365
RE (NUMBER)	2367
CS (NUMBER)	2369
RS (NUMBER)	2371
CRE (NUMBER)	2373
LOAD STEPS (NUMBER)	2366
LOAD PER STEP (PERCENT OF RATED LOAD)	2368

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2375	RADIO Interference THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2375.
2376	RADIO INTERFERENCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH MIL-STD-4630
2378	THERE SHALL BE NO ADVERSE INTERFERENCE TO ADJACENT EQUIPMENT.
2363	RADIO INTERFERENCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2363.
2364	RADIO INTERFERENCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-461, TEST METHOD 2364.
2370	RADIO INTERFERENCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-4620
2365	TEST METHOD CE 2365 SHALL APPLY.
2367	TEST METHOD RE 2367 SHALL APPLY.
2369	TEST METHOD CS 2369 SHALL APPLY.
2371	TEST METHOD RS 2371 SHALL APPLY.
2373	TEST METHOD CRE 2373 SHALL APPLY.
2366	THE LOAD SHALL BE INCREASED IN 2366 STEP(S).
2368	THE LOAD FOR EACH STEP SHALL BE EQUAL TO 2368 PERCENT OF THE RATED LOAD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RAIN	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2393
AS FOLLOWS:	2395
NO DEGRADATION OF FINISHES OR MATERIALS.	2394
MINIMUM VOLTAGE REGULATION (PERCENT)	2396
MINIMUM FREQUENCY REGULATION (PERCENT)	2398
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2381
PER MIL-STD-810, METHOD 506.	2382
DEVICES OPERATED DURING TEST.	2384
OPERATING DURATION AFTER TEST (HOURS)	2386
MEASUREMENTS AFTER TEST	
VOLTAGE REGULATION.	2388
FREQUENCY REGULATION.	2390

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2393	RAIN. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2393.
2395	RAIN. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2394	THERE SHALL BE NO DEGRADATION OF FINISHES OR MATERIALS.
2396	THE VOLTAGE REGULATION SHALL BE NOT LESS THAN 2396 PERCENT.
2398	THE FREQUENCY REGULATION SHALL BE NOT LESS THAN 2398 PERCENT.
2381	TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2381.
2382	RAIN. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 506 OF MIL-STD-810.
2384	THE DEVICE(S) SHALL BE OPERATED DURING TEST.
2386	OPERATING DURATION AFTER TEST SHALL BE 2386 HOUR(S).
2388	THE VOLTAGE REGULATION TEST SHALL BE PERFORMED AFTER THE TEST.
2390	THE FREQUENCY REGULATION TEST SHALL BE PERFORMED AFTER THE TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RECOVERY TIME	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2409
AS FOLLOWS:	2411
NO SUSTAINED OSCILLATIONS.	2410
MAXIMUM OSCILLATIONS ABOVE RIPPLE LEVEL (NUMBER)	2412
VOLTAGE TRANSIENTS PER MIL–STD-704, FIGURE (NUMBER)	2414
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2401
PER DOCUMENT (DOC DES)	2403
(WRITE-IN)	2405

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2409 RECOVERY TIME. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2409.

2411 RECOVERY TIME. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2410 THERE SHALL BE NO SUSTAINED Oscillations

2412 THE NUMBER OF OSCILLATIONS ABOVE THE OUTPUT VOLTAGE RIPPLE, AS A RESULT OF LOAD SWITCHING, SHALL BE NOT GREATER THAN 2412.

2414 THE VOLTAGE TRANSIENTS REQUIREMENTS SHALL BE PER FIGURE 2414 OF MIL-STD-704.

2401 RECOVERY TIME. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2401.

2403 RECOVERY TIME. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2403.

2405 2405.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RECOVERY TIME (CONT)	
TEST METHODS (CONT)	
PER RECOVERY TIME TEST TABLE.	
REDUCED INPUT VOLTAGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2427
AS FOLLOWS:	2430
MINIMUM OUTPUT VOLTAGE (VOLTS)	2428
MAXIMUM OUTPUT VOLTAGE (VOLTS)	2429
MINIMUM OUTPUT FREQUENCY (HERTZ)	2432
MAXIMUM OUTPUT FREQUENCY (HERTZ)	2433

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

RECOVERY TIME. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE RECOVERY TIME TEST TABLE.

RECOVERY TIME TEST TABLE

TEMP DEG C	LOAD (PCT)	SW TO LOAD (PCT)	SW TO LOAD (PCT)	OUTPUT V (PCT)	RECOVERY V (PCT) MIN	RECOVERY T (S) MAX
4060	4061	4062	4063	4064	4065	4066
4067	4068	4069	4070	4071	4072	4073
4074	4075	4076	4077	4078	4079	4080
4081	4082	4083	4084	4085	4086	4087
4088	4089	4090	4091	4092	4093	4094

2427 REDUCED INPUT VOLTAGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2427.

2430 REDUCED INPUT VOLTAGE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2428 THE OUTPUT VOLTAGE SHALL BE NOT LESS THAN 2428 VOLT(S).

2429 THE OUTPUT VOLTAGE SHALL BE NOT GREATER THAN 2429 VOLT(S).

2432 THE OUTPUT FREQUENCY SHALL BE NOT LESS THAN 2432 HERTZ.

2433 THE OUTPUT FREQUENCY SHALL BE NOT GREATER THAN 2433 HERTZ.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
REDUCED INPUT VOLTAGE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2417
PER DOCUMENT (DOC DES)	2419
MINIMUM INPUT VOLTAGE (PERCENT OF RATED INPUT VOLTAGE)	2420
MAXIMUM INPUT VOLTAGE (PERCENT OF RATED INPUT VOLTAGE)	2421
ELECTRICAL LOAD (PERCENT OF RATED LOAD)	2422
MINIMUM OPERATING DURATION (SECONDS)	2424
RELIABILITY SCREENING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	6929
NO EVIDENCE OF PHYSICAL DAMAGE.	6930
REMAIN WITHIN SPECIFIED TOLERANCE.	6937

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2417	REDUCED INPUT VOLTAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2417.
2419	REDUCED INPUT VOLTAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2419.
2420	THE INPUT VOLTAGE SHALL BE NOT LESS THAN 2420 PERCENT OF THE RATED INPUT VOLTAGE.
2421	THE INPUT VOLTAGE SHALL BE NOT GREATER THAN 2421 PERCENT OF THE RATED INPUT VOLTAGE.
2422	THE ELECTRICAL LOAD SHALL BE 2422 PERCENT OF THE RATED LOAD .
2424	THE OPERATING DURATION AT REDUCED INPUT VOLTAGE SHALL BE NOT LESS THAN 2424 SECOND(S).
6929	RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6929.
6930	RELIABILITY SCREENING (BURN–IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6937	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RELIABILITY SCREENING (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6696
PER MIL-STD-202, METHOD 108.	6697
*DURATION (SELECT ONE)	
TEST CONDITION (LETTER)	6698
(HOURS)	6699
*DUTY CYCLE (SELECT ONE)	
1.5 HOURS ON AND 0.5 HOUR OFF.	6710
STEADY STATE.	6713
*TEST TEMPERATURE (DEGREES CELSIUS)	6700
*TOLERANCE (DEGREES CELSIUS)	6701
STILL AIR REQUIRED.	6923
POWER APPLIED TIMES RATED POWER (NUMBER)	6921
MAXIMUM VOLTAGE (VOLTS)	6939

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6696	RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6696.
6697	RELIABILITY SCREENING (BURN-IN, AGEING, CONDITIONING, STABILIZATION, LOAD LIFE, OVERLOAD), TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 108 OF MIL-STD-202.
6698	TEST CONDITION LETTER 6698 SHALL APPLY.
6699	DURATION OF THE TEST SHALL BE 6699 HOUR(S).
6710	DUTY CYCLE SHALL BE ONE AND ONE-HALF HOURS ON AND ONE-HALF HOUR OFF.
6713	DUTY CYCLE SHALL BE STEADY STATE.
6700	TEST TEMPERATURE SHALL BE 6700 DEGREES CELSIUS.
6701	TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 6701 DEGREES CELSIUS.
6923	TEST CHAMBER SHALL HAVE STILL AIR.
6921	ITEM(S) SHALL BE TESTED AT 6921 TIMES THE RATED POWER.
6939	APPLIED VOLTAGE SHALL BE NOT GREATER THAN 6939 VOLTS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RELIABILITY SCREENING (CONT)	
PER MIL-STD-202, METHOD 108. (CONT)	
TEST POTENTIAL (SELECT ONE)	
(VOLTS, AC)	6706
(VOLTS, DC)	6707
ELECTRICAL LOAD (OHMS)	6920
MEASUREMENT INTERVALS (HOURS)	6922
MOUNT PER DOCUMENT (DOC DES)	6924
RESISTANCE TO SOLDERING HEAT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4700
NO EVIDENCE OF PHYSICAL DAMAGE.	4701
REMAIN WITHIN SPECIFIED TOLERANCE.	4718
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4689
PER MIL-STD-202, METHOD 210.	4698

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6706	TEST POTENTIAL SHALL BE 6706 VOLTS, AC.
6707	TEST POTENTIAL SHALL BE 6707 VOLTS, DC.
6920	THE ELECTRICAL LOAD SHALL BE 6920 OHMS.
6922	MEASUREMENTS SHALL BE TAKEN AT 6922 HOUR INTERVALS DURING THE TEST.
6924	MOUNTING SHALL BE IN ACCORDANCE WITH 6924.
4700	RESISTANCE TO SOLDERING HEAT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4700.
4701	RESISTANCE TO SOLDERING HEAT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4718	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4689	RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4689.
4698	RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 210 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLDERING HEAT (CONT)	
PER MIL-STD-202, METHOD 210. (CONT)	
*TEST CONDITION (LETTER)	4691
NUMBER OF TERMINATIONS TESTED (QUANTITY)	4694
DEPTH OF IMMERSION IN SOLDER (SELECT ONE)	
(INCHES)	4692
(MILLIMETERS)	4669
IMMERSION IN FLUX PERMITTED	4671
SPECIAL PREPARATIONS PERMITTED.	4989
COOLING TIME (MINUTES)	4695
RESISTANCE TO SOLVENTS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4834
NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.	4830
MARKING SHALL REMAIN LEGIBLE.	4836

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4691 TEST CONDITION LETTER 4693 SHALL APPLY.

4694 4694 TERMINATION(S) PER UNIT SHALL BE TESTED.

4692 DEPTH OF IMMERSION IN SOLDER SHALL BE 4692 INCH(S).

4669 DEPTH OF IMMERSION IN SOLDER SHALL BE 4669 MILLIMETER(S).

4671 IMMERSION OF TERMINATION IN FLUX SHALL BE PERMITTED.

4989 SPECIAL PREPARATION SHALL BE PERMITTED.

4695 COOLING TIME SHALL BE 4695 MINUTES PRIOR TO FINAL EXAMINATION AND MEASUREMENTS.

4834 RESISTANCE TO SOLVENTS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4834.

4830 RESISTANCE TO SOLVENTS. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.

4836 MARKING SHALL REMAIN LEGIBLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLVENTS (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4829
PER MIL-STD-202, METHOD 215.	4839
SOLVENTS TO BE ADDED (NAME)	4838
SOLVENTS TO BE DELETED (SUBPARAGRAPH LETTER)	4835
BRUSHED AREA (SELECT ONE)	
BRUSH MARKING AREA.	4831
ALL OF SPECIMEN TO BE BRUSHED.	6279
RIPPLE VOLTAGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2445
AS FOLLOWS:	2447

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4829	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4829.
4839	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202. THE SPECIMENS SHALL BE DIVIDED INTO GROUPS OF EQUAL NUMBER TO THE EXTENT POSSIBLE.
4838	IN ADDITION TO THE SPECIFIED SOLVENT(S)? 4838 SHALL ALSO BE USED.
4835	BRUSHING SHALL BE PERFORMED WITH THE SOLVENTS IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202, EXCEPT THAT SOLUTION(S) 4835 SHALL NOT BE USED.
4831	THE MARKING AREA SHALL BE BRUSHED.
6279	THE ENTIRE SURFACE SHALL BE BRUSHED.
2445	RIPPLE VOLTAGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 24450
2447	RIPPLE VOLTAGE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RIPPLE VOLTAGE (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM RIPPLE VOLTAGE PEAK (VOLTS)	2446
REQUIREMENTS PER MIL-STD-704.	2448
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2437
PER DOCUMENT (DOC DES)	2439
LOAD STEPS (NUMBER)	2440
LOAD PER STEP (PERCENT OF RATED LOAD)	2441
MINIMUM TEMPERATURE (DEGREES CELSIUS)	2442
SALT FOG	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4998
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.	4999
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4779

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2446	THE RIPPLE VOLTAGE SHALL BE NOT GREATER THAN 2446 VOLT(S) PEAK AT ANY LOAD STEP.
2448	THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH MIL-STD-704.
2437	RIPPLE VOLTAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 24370
2439	RIPPLE VOLTAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 24390
2440	THE LOAD SHALL BE INCREASED IN 2440 STEP(S).
2441	THE LOAD FOR EACH STEP SHALL BE EQUAL TO 2441 PERCENT OF RATED LOAD.
2442	THE TEMPERATURE SHALL BE NOT LESS THAN 2442 DEGREES CELSIUS.
4998	SALT FOG. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 49980
4999	SALT FOG. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE
4779	SALT FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 47790

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT FOG (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-810, METHOD 5090	4780
SALT SOLUTION (PERCENT)	4786
EXPOSURE PERIOD (HOURS)	4783
DRYING PERIOD (HOURS)	4775
OPERATE (SELECT ONE)	
OPERATE ONLY AFTER DRYING.	6245
OPERATE ONLY AFTER EXPOSURE.	6246
OPERATE AFTER EXPOSURE AND AFTER DRYING.	6247
OPERATE AFTER 24 HOURS OF EXPOSURE.	6248
SAND AND DUST	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4958
NO EVIDENCE OF DUST PENETRATION.	4959
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4952

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4780	SALT FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 509 OF MIL-STD-810.
4786	SOLUTION SHALL BE 4786 PERCENT SALT.
4783	DURATION OF THE TEST SHALL BE 4783 HOUR(S).
4775	DRYING PERIOD SHALL BE 4775 HOUR(S).
6245	ITEM(S) SHALL BE OPERATED ONLY AFTER DRYING.
6246	ITEM(S) SHALL BE OPERATED ONLY AFTER EXPOSURE.
6247	ITEM(S) SHALL BE OPERATED AFTER EXPOSURE AND AFTER DRYING.
6248	ITEM(S) SHALL BE OPERATED AFTER 24 HOURS OF EXPOSURE.
4958	SAND AND DUST. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4958.
4959	SAND AND DUST. THERE SHALL BE NO EVIDENCE OF DUST PENETRATION.
4952	SAND AND DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 49520

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SAND AND DUST (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 110.	4960
TEST SPECIMENS SHALL BE OPERATED DURING TEST STEPS (NUMBER)	4872
*DURATION OF OPERATION (HOURS)	6299
SPECIMEN ORIENTATION SHALL BE CHANGED DURING TEST.	1539
SECOND 6-HOUR TEST REQUIRED IMMEDIATELY FOLLOWING TEMPERATURE STABILIZATION IN STEP 20	4956
SHOCK	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENTS EXCEPT _____	7315
NO EVIDENCE OF PHYSICAL DAMAGE.	7316
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	7311
PER MIL-STD-810, METHOD 516.	7312

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4960	SAND AND DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 110 OF MIL-STD-202.
4872	ITEM(S) SHALL BE OPERATED DURING STEP(S) 4872.
6299	DURATION OF OPERATION SHALL BE 6299 HOUR(S).
1539	ORIENTATION SHALL BE CHANGED DURING THE TEST.
4956	THE SECOND 6-HOUR TEST SHALL BE PERFORMED IMMEDIATELY AFTER REACHING TEMPERATURE STABILIZATION IN STEP 20
7315	SHOCK. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 7315.
7316	SHOCK. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
7311	SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 7311.
7312	SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 516 OF MIL-STD-810.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK (CONT)	
PER MIL-STD-810, METHOD 516. (CONT)	
*PROCEDURE	
PROCEDURE IS	7313
*FIGURE (SELECT ONE)	
FIGURE 516-1 APPLIES.	7317
FIGURE 516-2 APPLIES.	7318
*AMPLITUDE, A OR B (LETTER)	7305
*DURATION, C OR D (LETTER)	7306
PROCEDURE II.	6327
PROCEDURE III.	6338
*FIGURE (SELECT ONE)	
FIGURE 516-1 APPLIES.	6339
FIGURE 516-2 APPLIES.	6340
*AMPLITUDE A OR B (LETTER)	6341
*DURATION C OR D (LETTER)	6342

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7313	PROCEDURE NUMBER I SHALL APPLY.
7317	THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH FIGURE 516-1 OF METHOD 516 OF MIL-STD-810.
7318	THE SHOCK PULSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516-2 OF METHOD 516 OF MIL-STD-810.
7305	AMPLITUDE LETTER 7305 SHALL APPLY.
7306	DURATION LETTER 7306 SHALL APPLY.
6327	PROCEDURE NUMBER II SHALL APPLY.
6338	PROCEDURE NUMBER III SHALL APPLY.
6339	THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH THE FIGURE 516-1 OF METHOD 516 OF MIL-STD-810.
6340	THE SHOCK PULSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516-2 OF METHOD 516 OF MIL-STD-810.
6341	AMPLITUDE LETTER 6341 SHALL APPLY.
6342	DURATION LETTER 6342 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK (CONT)	
PROCEDURE (CONT)	
PROCEDURE IV.	6343
*FIGURE (SELECT ONE)	
FIGURE 516-1 APPLIES.	6344
FIGURE 516–2 APPLIES.	6345
*AMPLITUDE, A OR B (LETTER)	6346
*DURATION, C OR D (LETTER)	6347
PROCEDURE V.	6348
PROCEDURE VI.	6349
TEST TEMPERATURE (DEGREES CELSIUS)	7307
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	7308
OPERATION DURING TEST REQUIRED.	7309
PERCENT RATED LOAD APPLIED (PERCENT)	6204
SHOCK, HIGH IMPACT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1494

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6343	PROCEDURE NUMBER IV SHALL APPLY.
6344	THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH FIGURE 516-1 OF METHOD 516 OF MIL–STD–81O.
6345	THE SHOCK PULSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516–2 OF METHOD 516 OG MIL–STD-810.
6346	AMPLITUDE LETTER 6346 SHALL APPLY.
6347	DURATION LETTER 6347 SHALL APPLY.
6348	PROCEDURE NUMBER V SHALL APPLY.
6349	PROCEDURE NUMBER VI SHALL APPLY.
7307	THE TEST TEMPERATURE SHALL BE 7307 DEGREES CELSIUS.
7308	THE TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 7308 DEGREES CELSIUS.
7309	OPERATION DURING THE TEST IS REQUIRED.
6204	THE ELECTRICAL LOAD SHALL BE 6204 PERCENT OF THE RATED LOAD.
1494	SHOCK, HIGH IMPACT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1494.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, HIGH IMPACT (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE.	1495
REMAIN WITHIN SPECIFIED TOLERANCE.	3464
NO DISCONTINUITY DURING TEST.	1451
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1486
PER MIL-STD-202, METHOD 207.	1482
*MOUNTING FIXTURE (SELECT ONE)	
FIGURE NUMBER FROM METHOD 207 OF MIL-STD-202 (NUMBER)	1488
ANY SUITABLE MOUNTING FIXTURE.	1478
MOUNTING FIXTURE PER DOCUMENT (DOC DES)	3468
PERCENT RATED LOAD APPLIED (PERCENT)	6203
SHORT CIRCUIT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2471

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1495	SHOCK, HIGH IMPACT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1464	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1451	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.
1486	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1486.
1482	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 207 OF MIL-STD-202.
1488	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH FIGURE 1488 OF METHOD 207 OF MIL-STD-202.
1478	THE MOUNTING FIXTURE SHALL BE ANY SUITABLE MOUNTING FIXTURE.
1468	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH 1468.
6203	THE ELECTRICAL LOAD SHALL BE 6203 PERCENT OF THE RATED LOAD.
2471	SHORT CIRCUIT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2471.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHORT CIRCUIT (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	2473
NO EVIDENCE OF DAMAGE.	2472
MINIMUM VOLTAGE REGULATION (PERCENT)	2474
MINIMUM FREQUENCY REGULATION (PERCENT)	2476
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2455
PER DOCUMENT (DOC DES)	2457
MINIMUM CURRENT (AMPERES)	2460
DURATION (SECONDS)	2462
TIMES SHORT CIRCUIT APPLIED (NUMBER)	2464
MEASUREMENTS AFTER TEST	
VOLTAGE REGULATION	2466
FREQUENCY REGULATION	2468

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2473 SHORT CIRCUIT. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2472 THERE SHALL BE NO EVIDENCE OF DAMAGE.

2474 THE VOLTAGE REGULATION SHALL BE NOT LESS THAN 2474 PERCENT.

2476 THE FREQUENCY REGULATION SHALL BE NOT LESS THAN 2476 PERCENT.

2455 SHORT CIRCUIT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2455.

2457 SHORT CIRCUIT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2457.

2460 THE SHORT CIRCUIT CURRENT SHALL BE NOT LESS THAN 2460 AMPERE(S).

2462 THE SHORT CIRCUIT DURATION SHALL BE 2462 SECOND(S).

2464 THE SHORT CIRCUIT SHALL BE APPLIED 2464 TIME(S).

2466 THE MEASUREMENTS AFTER TEST SHALL INCLUDE VOLTAGE REGULATION.

2468 THE MEASUREMENTS AFTER TEST SHALL INCLUDE FREQUENCY REGULATION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SOLDERABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4674
NO EVIDENCE OF PHYSICAL DAMAGE.	4675
MEET EVALUATION CRITERIA SPECIFIED IN METHOD 208 OF MIL-STD-202.	4672
REMAIN WITHIN SPECIFIED Tolerance	4677
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4662
PER MIL-STD-202, METHOD 208.	4683
NUMBER OF TERMINALS TO BE TESTED (QUANTITY)	4666
DEPTH OF IMMERSION (SELECT ONE)	
(INCHES)	4667
(MILLIMETERS)	4663
DISTANCE WRAP WIRE APPLIED FROM BODY (SELECT ONE)	
(INCHES)	4664
(MILLIMETERS)	4665
SPECIAL PREPARATIONS PERMITTED.	6205

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4674	SOLDERABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4674.
4675	SOLDERABILITY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4672	THE RESULTS OF THE SOLDERABILITY TEST SHALL BE IN ACCORDANCE WITH THE ACCEPTANCE CRITERIA OF METHOD 208 OF MIL-STD-202.
4677	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4662	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4662.
4683	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 208 OF MIL-STD-202.
4666	4666 TERMINATION(S) PER UNIT SHALL BE TESTED.
4667	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4667 INCH(S).
4663	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4663 MILLIMETER(S).
4664	THE WRAP WIRE SHALL BE 4664 INCH(S) FROM THE BODY.
4665	THE WRAP WIRE SHALL BE 4665 MILLIMETER(S) FROM THE BODY.
6205	SPECIAL PREPARATION SHALL BE PERMITTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STARTING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2501
AS FOLLOWS:	2503
CURRENT PEAK SHALL SHOW NO TENDENCY TO REMAIN AT PEAK VALUE.	2502
MINIMUM VOLTAGE REGULATION (PERCENT)	2504
MINIMUM FREQUENCY REGULATION (PERCENT)	2506
NO EVIDENCE OF EXCESSIVE BURNING OR WEAR.	2508
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2479
PER DOCUMENT (DOC DES)	2481
INPUT VOLTAGE (PERCENT OF RATED INPUT VOLTAGE)	2482
MINIMUM TEMPERATURE (DEGREES CELSIUS)	2484
MAXIMUM CURRENT (AMPERES)	2485
STARTING CURRENT (PERCENT OF RATED LOAD)	2486

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
2501	STARTING.	THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2502.
2503	STARTING.	THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2502		THE CURRENT PEAK SHALL SHOW NO TENDENCY TO REMAIN AT PEAK VALUE.
2504		THE VOLTAGE REGULATION SHALL BE NOT LESS THAN 2504 PERCENT.
2506		THE FREQUENCY REGULATION SHALL BE NOT LESS THAN 2506 PERCENT.
2508		THERE SHALL BE NO EVIDENCE OF EXCESSIVE BURNING OR WEAR.
2479	STARTING.	TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2479.
2481	STARTING.	TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2481,
2482		THE INPUT VOLTAGE SHALL BE 2482 PERCENT OF THE RATED INPUT VOLTAGE.
2484		THE TEMPERATURE SHALL BE NOT LESS THAN 2484 DEGREES CELSIUS,
2485		THE STARTING CURRENT SHALL BE NOT GREATER THAN 2485 AMPERE(S).
2486		THE STARTING CURRENT SHALL BE 2486 PERCENT OF THE RATED LOAD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STARTING (CONT)	
PER DOCUMENT (CONT)	
CURRENT AFTER START (PERCENT OF RATED CURRENT)	2488
DURATION (SECONDS)	2489
DURATION BEFORE OUTPUT VOLTAGE MEASUREMENT (SECONDS)	2490
DURATION BEFORE OUTPUT FREQUENCY MEASUREMENT (SECONDS)	2492
STARTING CYCLES (NUMBER)	2494
ON TIME (MINUTES)	2496
OFF TIME (MINUTES)	2498
STARTING CONTACTOR DROPOUT VOLTAGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2519
AS FOLLOWS:	2525
STARTING CONTACTOR SHALL REMAIN CLOSED.	2520
STARTING CONTACTOR DROPOUT VOLTAGE (VOLTS)	2521

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2488	THE CURRENT AFTER START SHALL BE 2488 PERCENT OF RATED CURRENT.
2489	DURATION OF CURRENT AFTER START SHALL BE 2489 Second
2490	THE OUTPUT VOLTAGE SHALL BE MEASURED AFTER 2490 SECOND(S) AFTER STARTING.
2492	THE OUTPUT FREQUENCY SHALL BE MEASURED AFTER 2492 SECOND(S) AFTER STARTING.
2494	THE DEVICE(S) SHALL BE STARTED AND STOPPED 2494 TIME(S).
2496	THE ON TIME SHALL BE 2496 MINUTE(S).
2498	THE OFF TIME SHALL BE 2498 MINUTE(S).
2519	STARTING CONTACTOR DROPOUT VOLTAGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2519.
2525	STARTING CONTACTOR DROPOUT VOLTAGE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2520	THE STARTING CONTACTOR SHALL REMAIN CLOSED,
2521	THE STARTING CONTACTOR DROPOUT VOLTAGE SHALL BE 2521 VOLT(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STARTING CONTACTOR DROPOUT VOLTAGE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2511
PER MIL-C-7032.	2535
MINIMUM INPUT VOLTAGE (VOLTS)	2514
MINIMUM TEMPERATURE (DEGREES CELSIUS)	2516
SUNSHINE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2535
AS FOLLOWS:	2537
NO DEGRADATION OF FINISHES OR MATERIAL.	2536
DEVICES SHALL REMAIN WITHIN SPECIFIED TOLERANCES.	2538
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2523
PER MIL-STD-810, METHOD 5050	2530

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2511	STARTING CONTACTOR DROPOUT VOLTAGE* TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2511.
2515	STARTING CONTACTOR DROPOUT VOLTAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-7032.
2514	THE INPUT VOLTAGE SHALL BE NOT LESS THAN 2514 VOLT(S).
2516	THE TEMPERATURE SHALL BE NOT LESS THAN 2516 DEGREES CELSIUS.
2535	SUNSHINE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2535.
2537	SUNSHINE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2536	THERE SHALL BE NO DEGRADATION OF FINISHES OR MATERIALS.
2538	THE DEVICE(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCES.
2523	SUNSHINE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2523.
2530	SUNSHINE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 505 OF MIL-STD-810.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SUNSHINE (CONT)	
PER MIL-STD-810, METHOD 5050 (CONT)	
*PROCEDURE (NUMBER)	2524
TEMPERATURE (DEGREES CELSIUS)	2526
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2527
SOLAR RADIATION (SELECT ONE)	
(WATTS PER SQUARE FOOT)	2528
TOLERANCE (WATTS PER SQUARE FOOT)	2529
(WATTS PER SQUARE METER)	2531
TOLERANCE (WATTS PER SQUARE METER)	2533
DEVICE OPERATIONAL DURING TEST.	2532
TEMPERATURE-ALTITUDE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ———	25511
AS FOLLOWS:	2553
NO EVIDENCE OF PHYSICAL DAMAGE.	2552
DEVICES SHALL REMAIN WITHIN SPECIFIED TOLERANCES.	2554

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2524	PROCEDURE NUMBER 2524 SHALL APPLY.
2526	THE TEMPERATURE SHALL BE 2526 DEGREES CELSIUS.
2527	THE TEMPERATURE TOLERANCE SHALL BE 2527 DEGREES CELSIUS.
2528	THE DEVICE(S) SHALL BE EXPOSED TO SOLAR RADIATION OF 2528 WATT(S) PER SQUARE FOOT.
2529	THE SOLAR RADIATION TOLERANCE SHALL BE 2529 WATT(S) PER SQUARE FOOT.
2531	THE DEVICE(S) SHALL BE EXPOSED TO SOLAR RADIATION OF 2531 WATT(S) PER SQUARE METER.
2533	THE SOLAR RADIATION TOLERANCE SHALL BE 2533 WATT(S) PER SQUARE FOOT.
2532	THE DEVICE(S) SHALL BE OPERATED DURING THE TEST.
2551	TEMPERATURE–ALTITUDE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2551.
2553	TEMPERATURE-ALTITUDE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2552	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2554	THE DEVICE(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCES-

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE-ALTITUDE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2541
PER MIL-STD-810, METHOD 504.	2542
*DEVICE CLASS (DESIGNATION)	2544
MINIMUM INPUT VOLTAGE (PERCENT OF RATED INPUT VOLTAGE)	2546
MAXIMUM INPUT VOLTAGE (PERCENT OF RATED INPUT VOLTAGE)	2548
TEMPERATURE, HIGH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6228
NO EVIDENCE OF PHYSICAL DAMAGE,	6229
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6217
PER MIL-STD-810, METHOD 501.	6218

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2541	TEMPERATURE-ALTITUDE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2541.
2542	TEMPERATURE-ALTITUDE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 504 OF MIL-STD-810.
2544	THE DEVICE(S) SHALL BE CLASS 2544.
2546	THE INPUT VOLTAGE SHALL BE NOT LESS THAN 2546 PERCENT OF THE RATED INPUT VOLTAGE.
2548	THE INPUT VOLTAGE SHALL BE NOT GREATER THAN 2548 PERCENT OF THE RATED INPUT VOLTAGE.
6228	TEMPERATURE, HIGH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6228.
6229	TEMPERATURE, HIGH THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6217	TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6217.
62118	TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 501 OF MIL-STD-810.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, HIGH (CONT)	
PER MIL-STD-810, METHOD 501. (CONT)	
*PROCEDURE (ROMAN NUMERAL)	6219
STORAGE TEMPERATURE (DEGREES CELSIUS)	6220
STORAGE DURATION (HOURS)	6221
HIGHEST OPERATING TEMPERATURE (DEGREES CELSIUS)	6222
OPERATION TIME (SELECT ONE)	
(MINUTES)	6224
(HOURS)	6225
TEMPERATURE, LOW	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6318
NO EVIDENCE OF PHYSICAL DAMAGE.	6319
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6231
PER MIL-STD-810, METHOD 502.	6232

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6219	PROCEDURE NUMBER 6219 SHALL APPLY.
6220	STORAGE TEMPERATURE SHALL BE 6220 DEGREES CELSIUS.
6221	STORAGE DURATION SHALL BE 6221 HOUR(S).
6222	HIGHEST OPERATING TEMPERATURE SHALL BE 6222 DEGREES CELSIUS.
6224	OPERATING TIME SHALL BE 6224 MINUTE(S).
6225	OPERATING TIME SHALL BE 6225 HOUR(S).
6318	TEMPERATURE, LOW. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6318.
6319	TEMPERATURE, LOW. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6231	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6231.
6232	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 502 OF MIL-STD-810.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, LOW (CONT)	
PER MIL-STD-810, METHOD 5020 (CONT)	
STORAGE TEMPERATURE (DEGREES CELSIUS)	6234
STORAGE DURATION (HOURS)	6235
LOWEST OPERATING TEMPERATURE (DEGREES CELSIUS)	6236
CHAMBER AIR VELOCITY (SELECT ONE)	
(FEET PER SECOND)	6237
(METERS PER SECOND)	6238
OPERATION TIME (SELECT ONE)	
(MINUTES)	6315
(HOURS)	6316
TEMPERATURE RISE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2631
AS FOLLOWS:	2633
MAXIMUM TEMPERATURE RISE FOR DEVICES (DEGREES CELSIUS)	2632
MAXIMUM TEMPERATURE RISE FOR ANY COMPONENT (DEGREES CELSIUS)	2634

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6234	STORAGE TEMPERATURE SHALL BE 6234 DEGREES CELSIUS.
6235	STORAGE DURATION SHALL BE 6235 HOUR(S).
6236	LOWEST OPERATING TEMPERATURE SHALL BE 6236 DEGREES CELSIUS.
6237	CHAMBER AIR VELOCITY SHALL BE 6237 FEET PER SECOND.
6238	CHAMBER AIR VELOCITY SHALL BE 6238 METERS PER SECOND.
6315	OPERATING TIME SHALL BE 6315 MINUTE(S).
6316	OPERATING TIME SHALL BE 6316 HOUR(S).
2631	TEMPERATURE RISE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2631.
2633	TEMPERATURE RISE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2632	THE TEMPERATURE RISE FOR THE DEVICE(S) SHALL BE NOT GREATER THAN 2632 DEGREES CELSIUS.
2634	THE TEMPERATURE RISE OF ANY COMPONENT IN THE DEVICE SHALL BE NOT GREATER THAN 2634 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE RISE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2613
PER DOCUMENT (DOC DES)	2615
INPUT VOLTAGE (PERCENT OF RATED INPUT VOLTAGE)	2616
INPUT FREQUENCY (PERCENT OF RATED INPUT FREQUENCY)	2618
OUTPUT VOLTAGE (PERCENT OF RATED OUTPUT VOLTAGE)	2619
OUTPUT FREQUENCY (PERCENT OF RATED OUTPUT FREQUENCY)	2620
ELECTRICAL LOAD (PERCENT OF RATED ELECTRICAL LOAD)	2622
MAXIMUM POWER FACTOR (NUMBER)	2624
MAXIMUM AMBIENT TEMPERATURE (DEGREES CELSIUS)	2626
DURATION OF TEST (HOURS)	2628

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2613 TEMPERATURE RISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2613.

2615 TEMPERATURE RISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2615.

2616 THE INPUT VOLTAGE SHALL BE 2616 PERCENT OF THE RATED INPUT VOLTAGE.

2618 THE INPUT FREQUENCY SHALL BE 2618 PERCENT OF THE RATED INPUT FREQUENCY.

2619 THE OUTPUT VOLTAGE SHALL BE 2619 PERCENT OF THE RATED OUTPUT VOLTAGE.

2620 THE OUTPUT FREQUENCY SHALL BE 2620 PERCENT OF THE RATED OUTPUT Frequency

2622 THE ELECTRICAL LOAD SHALL BE 2622 PERCENT OF THE RATED ELECTRICAL LOAD.

2624 THE POWER FACTOR SHALL BE NOT GREATER THAN 26240

2626 THE AMBIENT TEMPERATURE SHALL BE NOT GREATER THAN 2626 DEGREES CELSIUS.

2628 THE TEST DURATION SHALL BE 2628 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1418
NO EVIDENCE OF PHYSICAL DAMAGE.	1433
REMAIN WITHIN SPECIFIED TOLERANCE	6296
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1410
PER MIL-STD-202, METHOD 211.	1375
*TEST CONDITIONS	
TEST CONDITION AT APPLIED FORCE (SELECT ONE)	
(POUNDS)	1411
(NEWTONS)	1419
TEST CONDITION B, BENDS (NUMBER)	1412

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1418	TERMINAL STRENGTH* THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1418.
1433	TERMINAL STRENGTH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6296	ITEM(S) SHALL REMAIN WITHIN SPECIFIED Tolerance
1410	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1410.
1375	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 211 OF MIL-STD-202.
1411	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1411 POUND(S).
1419	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1419 NEWTON(S).
1412	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION B. THERE SHALL BE 1412 BEND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL STRENGTH (CONT)	
TEST CONDITIONS (CONT)	
TEST CONDITION C, LOAD (SELECT ONE)	
(POUNDS)	1413
(KILOGRAMS)	1420
TEST CONDITION D.	1414
TEST CONDITION E, TORQUE (SELECT ONE)	
(POUND-INCHES)	1416
(NEWTON METERS)	1421
THERMAL SHOCK (TEMPERATURE CYCLING)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4722
NO EVIDENCE OF PHYSICAL DAMAGE.	4723
REMAIN WITHIN SPECIFIED TOLERANCE.	4726
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4713
PER MIL-STD-202, METHOD 107.	4714

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1413	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C, THE LOAD SHALL BE 1413 POUND(S).
1420	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1420 KILOGRAM(S).
1414	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION D.
1416	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1416 POUND-INCH(S).
1421	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1421 NEWTON METER(S).
4722	THERMAL SHOCK (TEMPERATURE CYCLING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4722.
4723	THERMAL SHOCK (TEMPERATURE CYCLING). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4726	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4713	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4713.
4714	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 107 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THERMAL SHOCK (TEMPERATURE CYCLING) (CONT)	
PER MIL-STD-202, METHOD 107. (CONT)	
*TEST CONDITION (LETTER)	4715
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4719
TRANSIENT INPUT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2651
AS FOLLOWS:	2653
RECOVER AUTOMATICALLY TO SPECIFIED PERFORMANCE.	2652
NO FLASHOVER OR INSULATION Breakdown	2654
MINIMUM VOLTAGE REGULATION (PERCENT)	2656
MINIMUM FREQUENCY REGULATION (PERCENT)	2657
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2645
PER DOCUMENT (DOC DES)	2647

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4715	TEST CONDITION LETTER 4715 SHALL APPLY.
4719	MOUNTING SHALL BE IN ACCORDANCE WITH 4719.
2651	TRANSIENT INPUT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2651.
2653	TRANSIENT INPUT. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2652	THE DEVICE SHALL RECOVER AUTOMATICALLY TO SPECIFIED PERFORMANCE.
2654	THERE SHALL BE NO FLASHOVER OR INSULATION BREAKDOWN.
2656	THE VOLTAGE REGULATION SHALL BE NOT LESS THAN 2656 PERCENT.
2657	THE FREQUENCY REGULATION SHALL BE NOT LESS THAN 2657 PERCENT.
2645	TRANSIENT INPUT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2645.
2647	TRANSIENT INPUT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 26470

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TRANSIENT INPUT (CONT)	
TEST METHODS (CONT)	
PER TRANSIENT INPUT TABLE.	
UNBALANCED LOADS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2667
MAXIMUM VOLTAGE UNBALANCE (PERCENT)	2668
-TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2661
PER DOCUMENT (DOC DES)	2662

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE | STANDARD PARAGRAPH

TRANSIENT INPUT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE TRANSIENT INPUT TEST TABLE.

TRANSIENT INPUT TEST TABLE

TEST NO.	INPUT VOLTS (V)	DURATION (S)	NO. OF APPLICATIONS
1	4500	4501	4502
2	4503	4504	4505
3	4506	4507	4508
4	4509	4510	4511
5	4512	4513	4514

2667 UNBALANCED LOADS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT ~~2667.~~

2668 UNBALANCED LOADS. THE VOLTAGE UNBALANCE SHALL BE NOT GREATER THAN 2668 PERCENT.

2661 UNBALANCED LOADS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2661.

2662 UNBALANCED LOADS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2662.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
UNBALANCED LOADS (CONT)	
TEST METHODS (CONT)	
PER UNBALANCED LOAD TEST TABLE.	
VIBRATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4681
NO EVIDENCE OF PHYSICAL DAMAGE.	4682

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

UNBALANCED LOADS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE UNBALANCED LOAD TEST TABLE.

TEST NO.	TERM IDENT	3 PHASE LOAD (PCT)	1 PHASE LOAD (PCT)	POWER FACTOR (NO.)
1	4440	4441	4442	4443
2	4444	4445	4446	4447
3	4448	4449	4450	4451
4	4452	4453	4454	4455
5	4456	4457	4458	4459
6	4460	4461	4462	4463
7	4464	4465	4466	4467
8	4468	4469	4470	4471
9	4472	4473	4474	4475
10	4476	4477	4478	4479
11	4480	4481	4482	4483
12	4484	4485	4486	4487

4681 VIBRATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4681.

4682 VIBRATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
REMAIN WITHIN SPECIFIED TOLERANCE.	1538
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY.	1374
MAXIMUM DISCONTINUITY (SELECT ONE)	
(MILLISECONDS)	1545
(MICROSECONDS)	1546
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1505
PER MIL-STD-810, METHOD 514.	1514
*PROCEDURE NUMBER (ROMAN NUMERAL)	1518
EQUIPMENT (CATEGORY)	1540
CURVE (LETTERS)	1525
APPLICABLE TABLE (NUMBER)	1532

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1538	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1374	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1545	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1545 MILLISECONDS.
1546	THE DISCONTINUITY SHALL BE NOT GREATER THAN 1546 MICROSECONDS.
1505	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1505.
1514	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 514 OF MIL-STD-810.
1518	PROCEDURE NUMBER 3518 SHALL APPLY.
1540	THE EQUIVALENT CATEGORY SHALL BE 1540 IN ACCORDANCE WITH METHOD 514 OF MIL-STD-810.
1525	CURVE 1525 SHALL APPLY.
1532	PROCEDURE AND TIME SCHEDULE SHALL BE AS SHOWN ON TABLE 1532 OF METHOD 5114 OF MIL-STD-810.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION (CONT)	
PER MIL-STD-810, METHOD 514. (CONT)	
APPLICABLE FIGURE (NUMBER)	1559
OPERATION NOT REQUIRED.	1424
TEMPERATURE (DEGREES CELSIUS)	1542
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1543
DURATION AT TEMPERATURE (HOURS)	1544
PERCENT RATED LOAD APPLIED (PERCENT)	4678
VIBRATION, HIGH FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1455
NO EVIDENCE OF PHYSICAL DAMAGE.	1456
NO DISCONTINUITY DURING TEST.	1473
REMAIN WITHIN SPECIFIED TOLERANCE	1469
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1446

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1559	TEST CURVES SHALL BE AS SHOWN IN FIGURE 1559 OF METHOD 514 OF MIL-STD-810.
1424	OPERATION DURING THE TEST IS NOT REQUIRED.
1542	VIBRATION TEST SHALL BE PERFORMED AT A TEMPERATURE OF 1542 DEGREES CELSIUS.
1543	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1543 DEGREES CELSIUS.
1544	THE TEMPERATURE TIME DURATION SHALL BE 1544 HOUR(S).
4678	THE LOAD SHALL BE 4678 PERCENT OF THE RATED LOAD.
1455	VIBRATION, HIGH FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1455.
1456	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED PHYSICAL DAMAGE.
l473	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1469	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1446	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1446.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 204.	l447
*TEST CONDITION (LETTER)	1448
PERCENT RATED LOAD APPLIED (PERCENT)	6200
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4709
NORMAL MOUNTING METHOD.	4708
MOUNT PER DOCUMENT (DOC DES)	4707
METHOD OF DETERMINING MECHANICAL RESONANCE (SELECT ONE)	
VISUALLY BY MEANS OF A STROBOTAC.	1533
ELECTRICAL OUTPUT INDICATORS	1534
VIBRATION, LOW FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1475
NO EVIDENCE OF PHYSICAL DAMAGE.	1476

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1447	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 204 OF MIL-STD-202.
1448	TEST CONDITION LETTER 1448 SHALL APPLY.
6200	THE LOAD SHALL BE 6200 PERCENT OF THE RATED LOAD.
4709	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4708	MOUNTING SHALL BE BY THE NORMAL METHOD.
4707	MOUNTING SHALL BE IN ACCORDANCE WITH 47070
1533	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE VISUALLY BY MEANS OF A STROBOTAC.
1534	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE BY ELECTRICAL OUTPUT Indicators
1475	VIBRATION, LOW FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1475.
1476	VIBRATION, LOW FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
REMAIN WITHIN SPECIFIED TOLERANCE.	1480
NO DISCONTINUITY DURING TEST.	1490
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1466
PER MIL-STD-202, METHOD 201.	1467
DURATION OF VIBRATION PER AXIS (HOURS)	1470
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4731
NORMAL MOUNTING METHOD.	4730
MOUNT PER DOCUMENT (DOC DES)	4729
DIRECTION OF MOTION	
PARALLEL TO LONGITUDINAL AXIS.	1535
PERPENDICULAR TO LONGITUDINAL AXIS.	1536
ON THE CENTERLINE OF MOST SENSITIVE AXIS.	4979

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1480	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1490	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1466	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1466.
1467	VIBRATION, LOW FREQUENCY, TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 201 OF MIL-STD-202.
1470	DURATION OF TEST SHALL BE 1470 HOUR(S) PER AXIS.
4731	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4730	MOUNTING SHALL BE BY THE NORMAL METHOD.
4729	MOUNTING SHALL BE IN ACCORDANCE WITH 4729.
1535	THE DIRECTION OF MOTION SHALL BE PARALLEL TO THE LONGITUDINAL AXIS.
1536	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE LONGITUDINAL AXIS.
4979	THE DIRECTION OF MOTION SHALL BE ON THE CENTERLINE OF THE MOST SENSITIVE AXIS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY (CONT)	
DIRECTION OF MOTION (CONT)	
90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.	4978
THREE MUTUALLY PERPENDICULAR Directions	1537
PERCENT RATED LOAD APPLIED (PERCENT)	6201
VOLTAGE REGULATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2701
MINIMUM VOLTAGE REGULATION (PERCENT)	2702
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2687

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4978	THE DIRECTION OF MOTION SHALL BE 90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.
1537	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR DIRECTIONS.
6201	THE LOAD SHALL BE 6201 PERCENT OF THE RATED LOAD.
27011	VOLTAGE REGULATION THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2701.
2702	VOLTAGE REGULATION. THE VOLTAGE REGULATION SHALL BE NOT LESS THAN 2702 PERCENT.
2687	VOLTAGE REGULATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2687.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VOLTAGE REGULATION (CONT)	
TEST METHODS (CONT)	
PER DOCUMENT (DOC DES)	2689
MINIMUM INPUT VOLTAGE (PERCENT OF RATED INPUT VOLTAGE)	2690
MAXIMUM INPUT VOLTAGE (PERCENT OF RATED INPUT VOLTAGE)	2691
MINIMUM TEMPERATURE (DEGREES CELSIUS)	2692
MAXIMUM TEMPERATURE (DEGREES CELSIUS)	2693
MINIMUM INPUT FREQUENCY (HERTZ)	2694
MAXIMUM INPUT FREQUENCY (HERTZ)	2695
LOAD STEPS (NUMBER)	2696
LOAD PER STEP (PERCENT OF RATED LOAD)	2697
WAVE FORM	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2715
AS FOLLOWS:	2717

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2689 VOLTAGE REGULATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2689.

2690 THE INPUT VOLTAGE SHALL BE NOT LESS THAN 2690 PERCENT OF THE RATED INPUT VOLTAGE.

2691 THE INPUT VOLTAGE SHALL BE NOT GREATER THAN 2691 PERCENT OF THE RATED INPUT VOLTAGE.

2692 THE TEMPERATURE SHALL BE NOT LESS THAN 2692 DEGREES CELSIUS.

2693 THE TEMPERATURE SHALL BE NOT GREATER THAN 2693 DEGREES CELSIUS.

2694 THE INPUT FREQUENCY SHALL BE NOT LESS THAN 2694 HERTZ.

2695 THE INPUT FREQUENCY SHALL BE NOT GREATER THAN 2695 HERTZ.

2696 THE LOAD SHALL BE INCREASED IN 2696 STEP(S).

2697 THE LOAD FOR EACH STEP SHALL BE EQUAL TO 2697 PERCENT OF RATED LOAD.

2715 WAVE FORM. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2715.

2717 WAVE FORM. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WAVE FORM (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM CREST FACTOR (PERCENT)	2716
MAXIMUM AMPLITUDE OF ANY HARMONIC (PERCENT)	2718
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2705
PER DOCUMENT (DOC DES)	2707
MINIMUM INPUT VOLTAGE (PERCENT OF RATED INPUT VOLTAGE)	2708
MAXIMUM INPUT VOLTAGE (PERCENT OF RATED INPUT VOLTAGE)	2709
LOAD STEPS (NUMBER)	2710
LOAD PER STEP (PERCENT OF RATED LOAD)	2711
MINIMUM LAGGING POWER FACTOR (NUMBER)	2712
PERFORMANCE CHARACTERISTICS (SEE TABLE XII, DOD-STD-35)	

NOTE : AUTOMATIC WHEN TABLE XII IS USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2716	THE CREST FACTOR SHALL BE NOT GREATER THAN 2716 PERCENT.
2718	THE AMPLITUDE OF ANY HARMONIC SHALL BE NOT GREATER THAN 2718 PERCENT OF THE FUNDAMENTAL FREQUENCY.
2705	WAVE FORM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2705.
2707	WAVE FORM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2707.
2708	THE INPUT VOLTAGE SHALL BE NOT LESS THAN 2708 PERCENT OF THE RATED INPUT VOLTAGE.
2709	THE INPUT VOLTAGE SHALL BE NOT GREATER THAN 2709 PERCENT OF THE RATED INPUT VOLTAGE.
2710	THE LOAD SHALL BE INCREASED IN 2710 STEP(S).
2711	THE LOAD FOR EACH STEP SHALL BE EQUAL TO 2711 PERCENT OF RATED LOAD.
2712	THE LAGGING POWER FACTOR SHALL BE NOT LESS THAN 2712.

PERFORMANCE CHARACTERISTICS. PERFORMANCE CHARACTERISTICS SHALL BE AS SHOWN IN THE PERFORMANCE CHARACTERISTICS TABLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE : AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(c) 7003.
7004	(D) 7004.
7005	(E) 7005.
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL–STD-130.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADDITIONAL PART MARKING	
A _____	6991
B _____	6992
C _____	6993
D _____	6994
E _____	6995
DEFINITION OF HERMETIC SEALING	
NOTE: AUTOMATIC WHEN CODE 1570 IS USED TO REQUIRE HERMETIC SEALING.	
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

DEFINITION OF HERMETIC SEALING. FOR THE PURPOSE OF THIS DOCUMENT, A HERMETICALLY-SEALED ITEM IS ONE IN WHICH THE ELEMENT IS CONTAINED WITHIN A SEALED ENCLOSURE OF CERAMIC, GLASS OR METAL, OR A COMBINATION THEREOF, WHERE SEALING IS ACCOMPLISHED BY MATERIAL FUSION, WELDING, BRAZING OR SOLDERING.

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI

(Project EDS-A288)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

APPENDIX A

ILLUSTRATIONS


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.




314-01-1


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

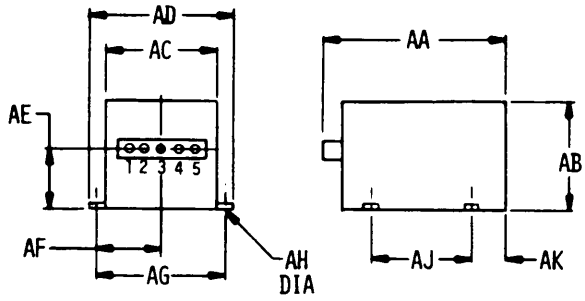

314-02-1

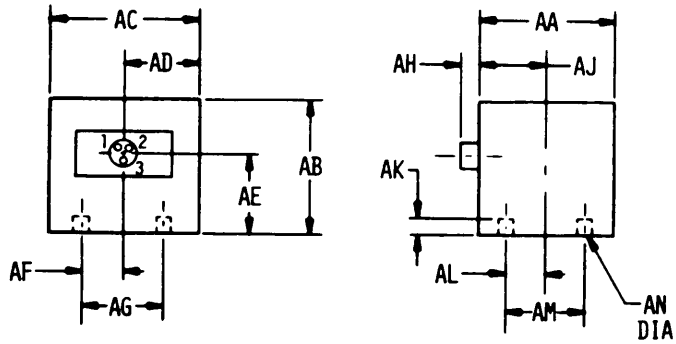


314-02-2

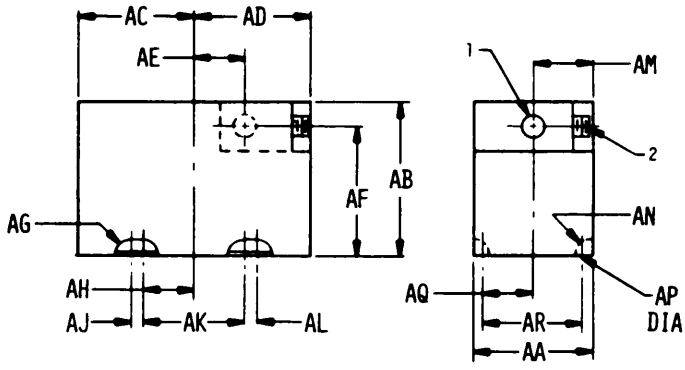


314-02-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

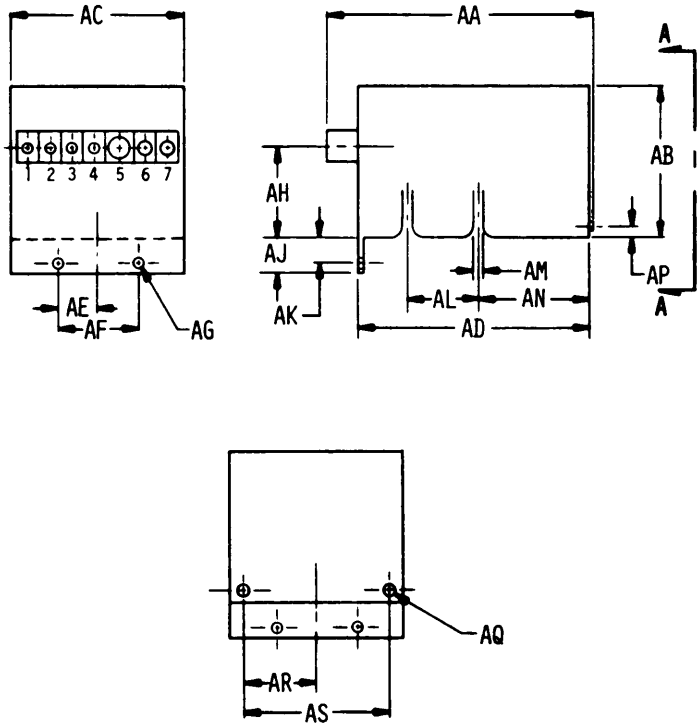


314-02-4

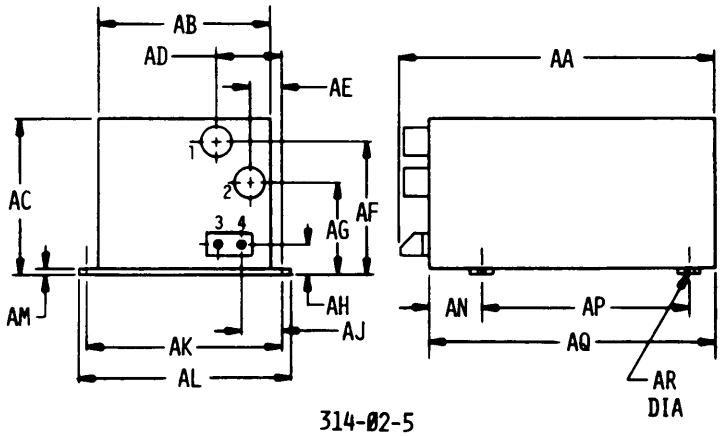


314-02-5


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

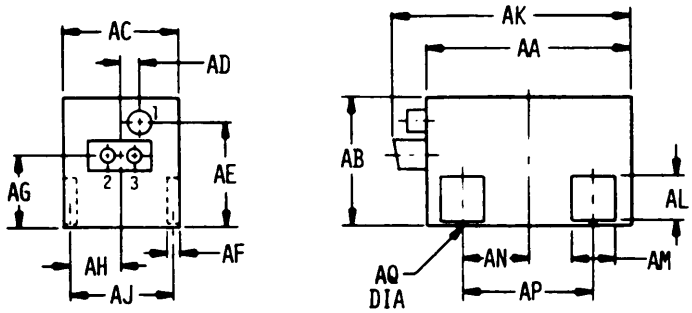

314-02-6

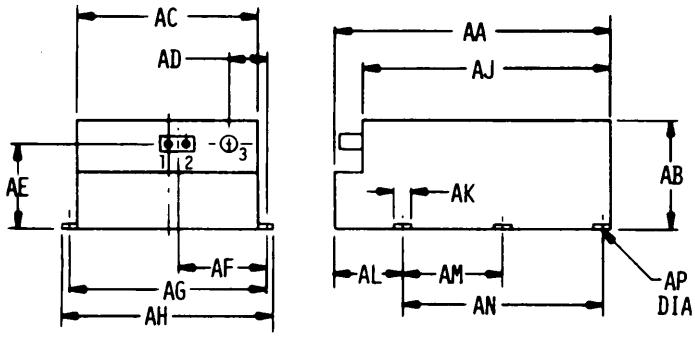


314-02-7

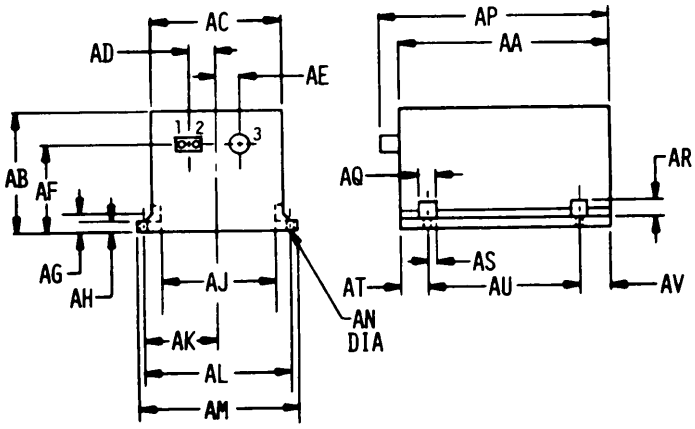


314-02-8


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

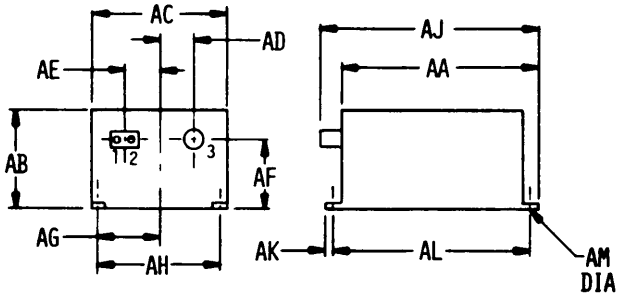

314-02-9

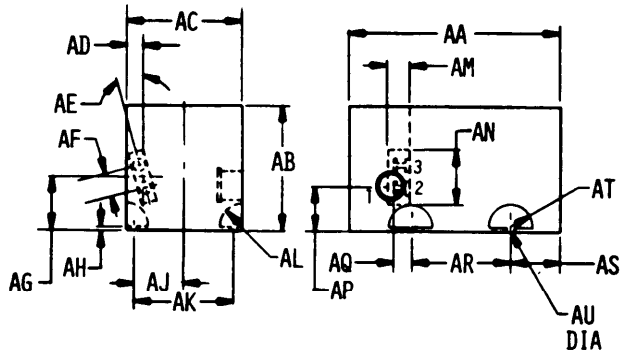


314-02-10

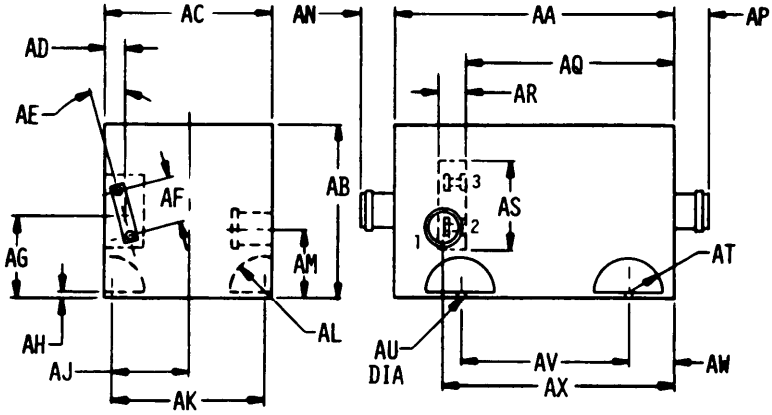


314-02-11

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

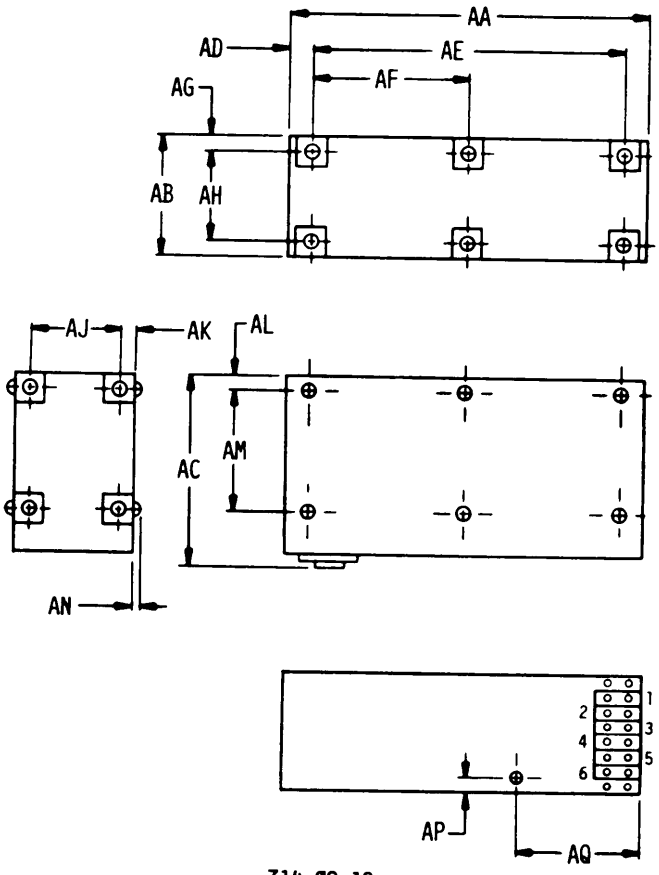


314-02-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

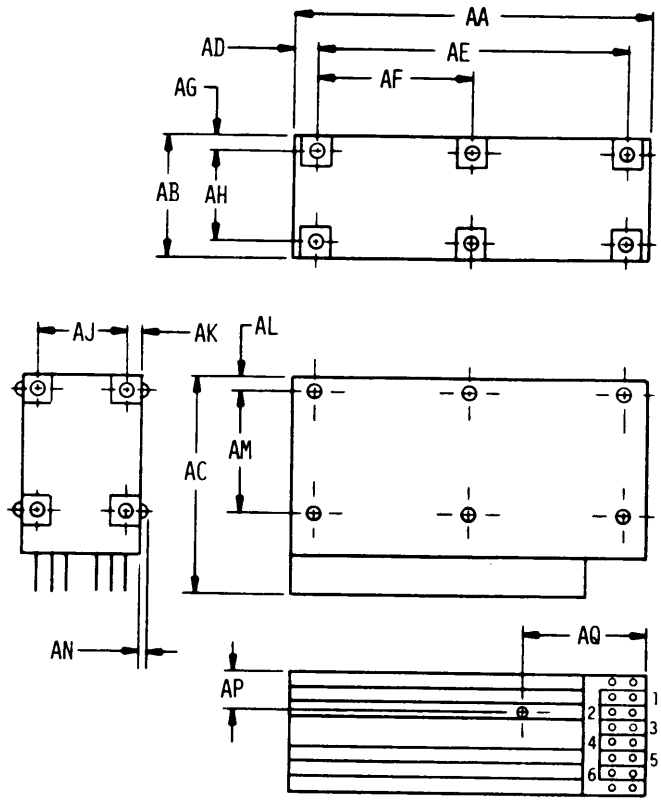


314-02-13

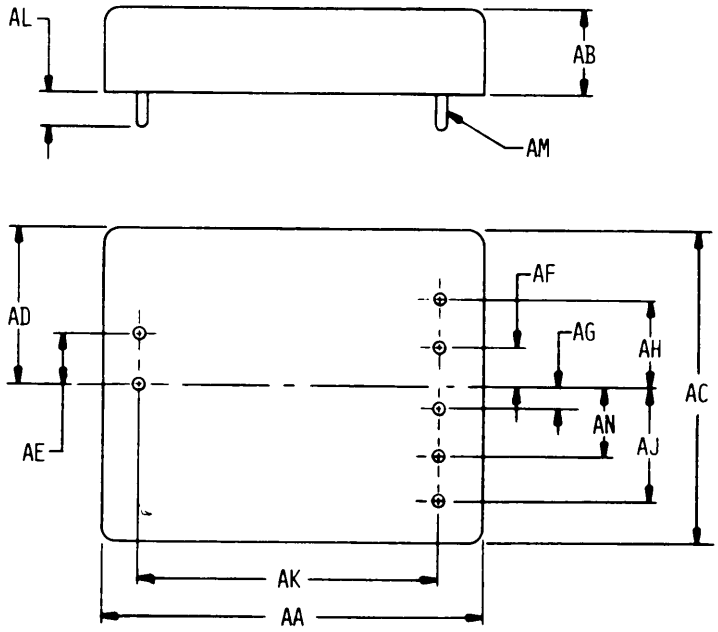


314-02-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

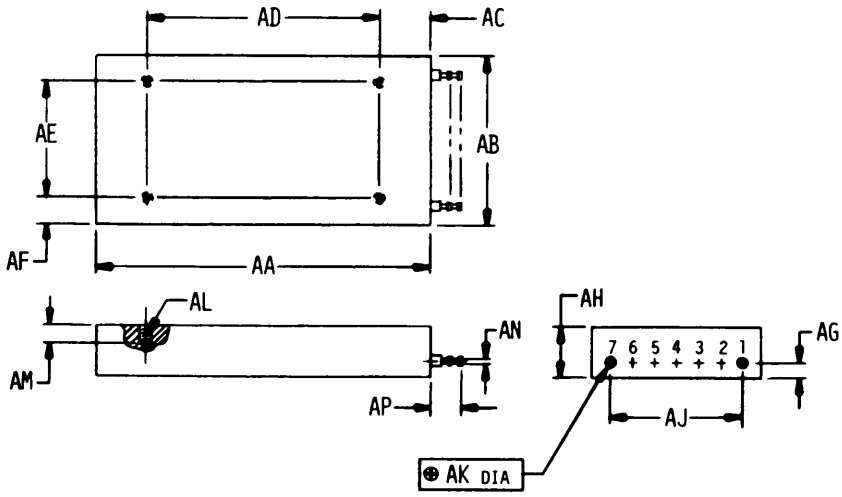


314-02-15

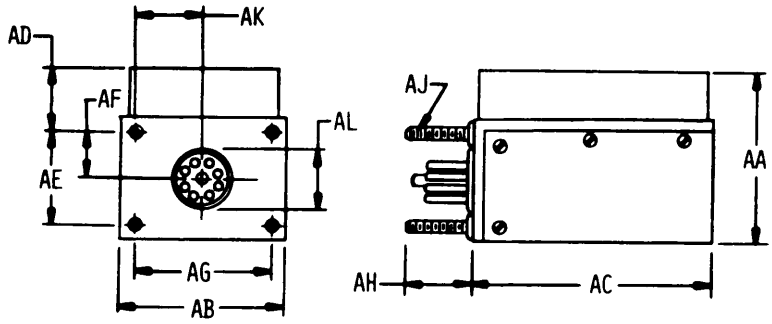


314-02-16

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

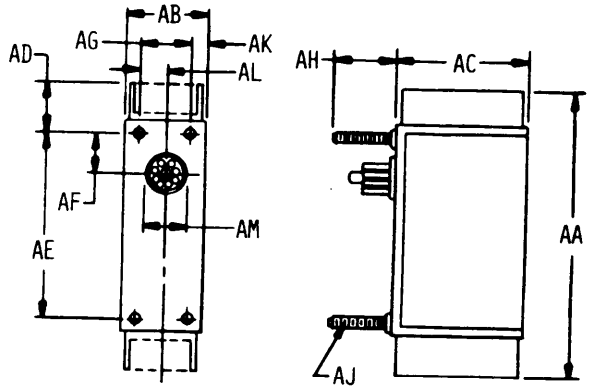


314-02-17

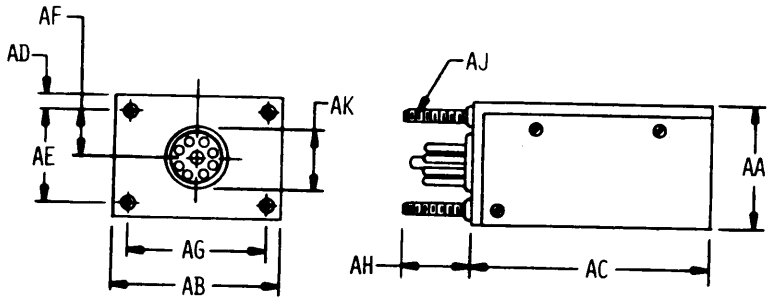


314-02-18

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

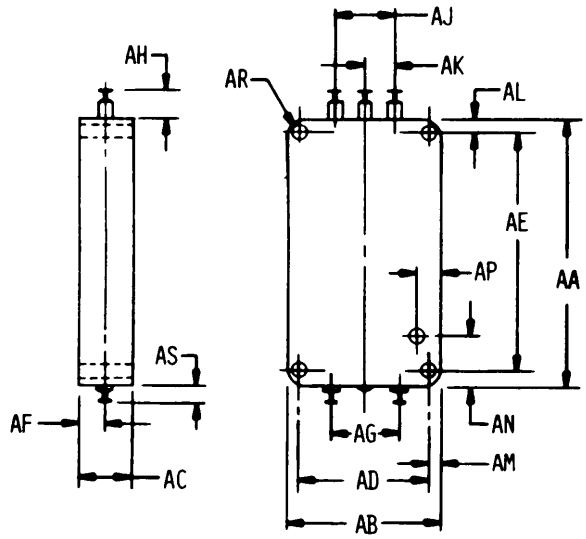


314-02-19

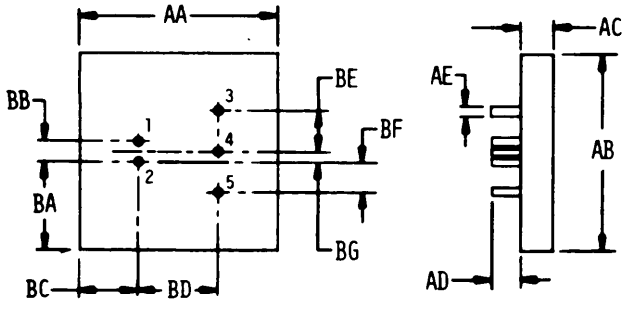


314-02-20

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

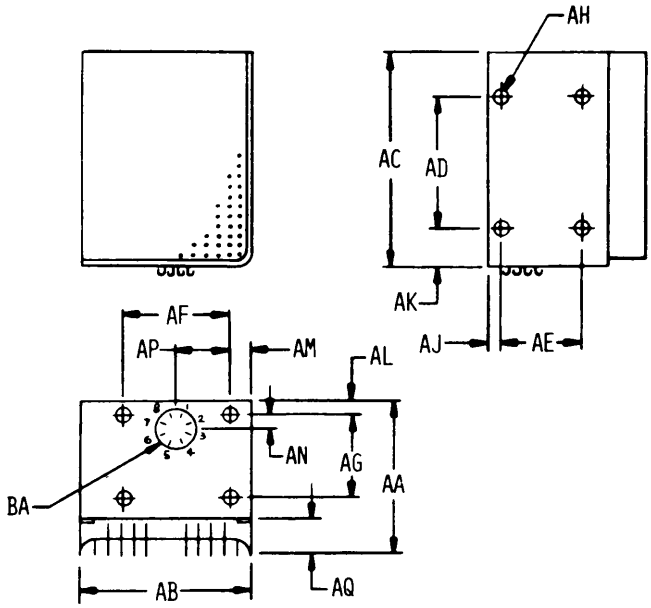


314-02-21

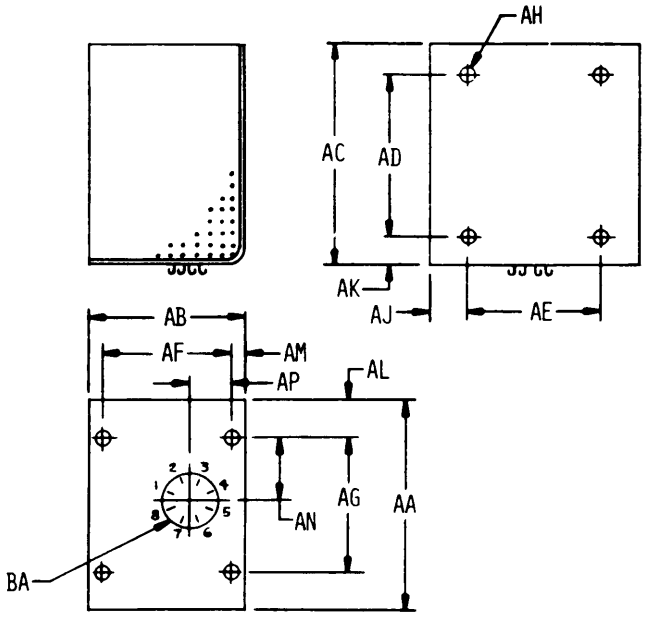


314-02-22

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

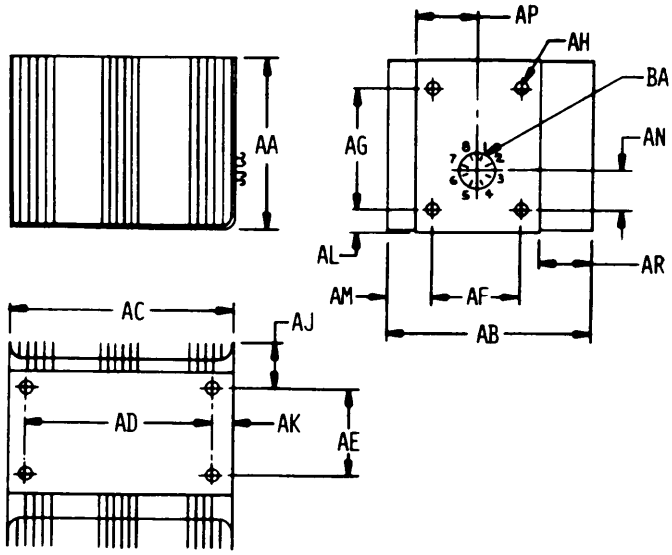


314-02-23

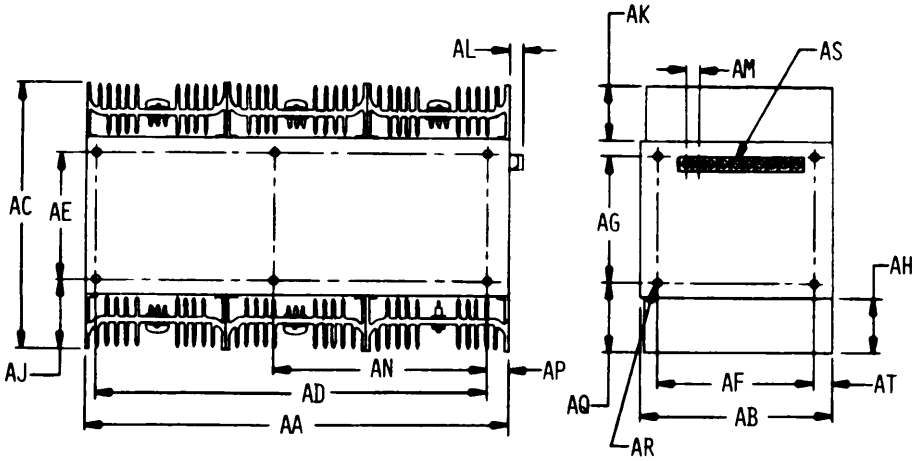


314-02-24

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

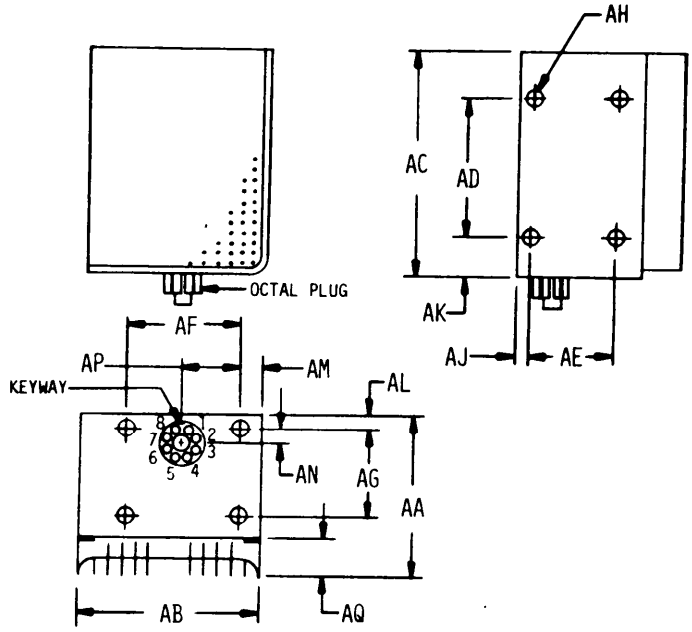

314-02-25

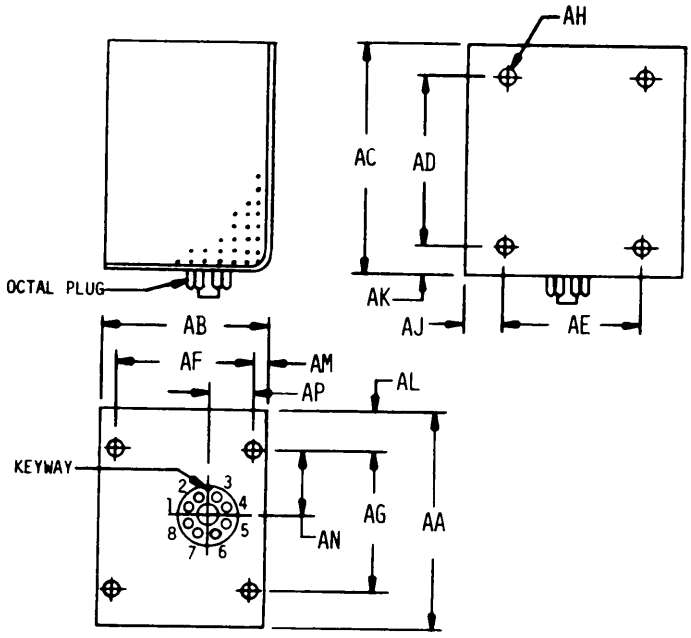

314-02-26

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	16	1421	172	1534	184	1608	68
0102	16	1424	182	1535	186	1610	68
0103	16	1433	170	1536	186	1612	68
0104	16	1446	182	1537	188	1620	26
0105	16	1447	184	1538	180	1622	44
0107	18	1448	184	1539	142	1624	44
0108	18	1451	148	1540	180	1626	44
0700	16	1455	182	1542	182	1627	44
0800	16	1456	182	1543	182	1628	44
1003	16	1464	148	1544	182	1630	44
1004	16	1466	186	1545	180	1632	44
1005	16	1467	186	1546	180	1634	44
1006	16	1468	148	1548	50	1636	44
1008	16	1469	182	1549	50	1638	28
1009	22	1476	186	1554	86	1640	28
1371	34	1473	182	1555	86	1642	28
1372	98	1475	184	1556	66	1643	28
1373	96	1476	184	1559	182	1644	28
1374	180	1477	82	1562	26	1646	28
1375	170	1478	148	1564	26	1648	30
1376	96	1480	186	1565	28	1650	30
1377	96	1482	148	1566	26	1651	30
1378	96	1486	148	1567	28	1652	30
1383	94	1408	148	1568	26	1654	28
1381	98	1490	186	1569	28	1656	28
1383	98	1494	146	1570	26	1657	28
1384	94	1495	148	1572	26	1658	28
1386	94	1497	96	1574	20	1660	28
1387	94	1498	96	1576	20	1662	28
1388	94	1505	180	1578	20	1664	30
1407	94	1511	94	1580	20	1666	30
1410	170	1514	180	1581	20	1668	30
1411	170	1518	180	1582	20	1672	30
1412	170	1520	96	1504	20	1672	30
1413	172	1522	96	1585	20	1674	30
1414	172	1523	96	1586	26	1675	30
1416	172	1524	96	1587	26	1676	32
1418	170	1525	180	1588	26	1678	32
1419	170	1532	180	1589	26	1680	32
1420	172	1533	184	1590	26	1682	32

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1683	32	1754	36	1822	40	1900	56
1684	32	1755	36	1824	42	1902	56
1686	30	1756	38	1826	42	1904	56
1688	30	1758	38	1828	42	1907	56
1689	30	1760	38	1830	42	1908	56
1690	30	1762	38	1832	42	1951	66
1692	30	1763	38	1834	42	1953	66
1694	30	1764	38	1836	42	1954	66
1696	32	1766	36	1838	42	1956	66
1698	32	1768	36	1840	42	1958	66
1700	32	1769	36	1842	42	1959	66
1702	32	1770	36	1844	42	1961	66
1704	32	1772	36	1847	52	1963	66
1706	32	1774	36	1848	52	1964	66
1707	32	1776	30	1849	52	1965	66
1700	34	1778	38	1850	52	1969	68
1710	34	1780	38	1852	52	1971	68
1712	34	1782	38	1854	52	1972	70
1714	34	1784	38	1857	52	1974	70
1715	34	1186	38	1858	52	1976	70
1716	34	1788	38	1859	52	1977	70
1718	32	1790	38	1860	52	1978	70
1720	32	1792	38	1865	54	1981	68
1721	32	1794	40	1866	54	1982	68
1722	34	1796	40	1867	54	1983	68
1724	34	1798	40	1868	54	1984	68
1726	34	1800	40	1869	54	1986	68
1728	34	1802	40	1870	54	1991	70
1730	34	1803	40	1871	54	1992	70
1732	34	1804	40	1874	54	1993	70
1734	34	1806	40	1876	54	1994	70
1736	34	1808	40	1880	56	1996	70
1738	34	1810	40	1882	56	1998	72
1740	34	1811	42	1885	54	2003	70
1742	36	1812	42	1886	54	2004	70
1744	36	1814	40	1887	54	2007	72
1746	36	1816	40	1888	54	2009	72
1748	36	1817	40	1895	56	2010	74
1750	36	1818	40	1896	56	2011	74
1752	36	1820	40	1898	56	2012	74

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2014	74	2091	90	2168	102	2243	108
2016	74	2092	90	2170	102	2242	108
2017	74	2094	90	2172	102	2244	108
2018	74	2096	90	2174	102	2246	108
2019	74	2098	90	2176	102	2248	108
2020	74	2100	90	2178	102	2251	110
2022	74	2102	90	2180	102	2253	11o
2023	74	2104	90	2182	102	2254	110
2027	72	2106	90	2185	100	2255	11o
2028	72	2109	90	2186	100	2256	110
2029	72	2110	90	2187	100	2258	110
2030	72	2113	92	2188	100	2261	110
2031	72	2115	92	2190	100	2262	110
2035	78	2116	92	2193	104	2263	110
2036	78	2117	92	2194	104	2264	110
2038	78	2118	92	2196	104	2266	110
2040	78	2119	92	2198	104	2269	112
2042	78	2120	92	2201	102	2271	112
2044	78	2122	92	2202	104	2272	112
2046	78	2124	92	2203	102	2274	112
2040	78	2126	92	2204	104	2276	112
2051	76	2129	92	2206	104	2279	112
2052	76	2130	92	2209	106	2280	112
2055	70	2137	98	2210	106	2281	112
2057	80	2138	98	2212	106	2282	112
2058	80	2140	100	2214	106	2284	112
2060	80	2142	100	2216	106	2286	112
2062	80	2144	100	2218	106	2309	114
2064	80	2146	100	2220	106	2310	114
2066	80	2149	98	2223	104	2312	114
2069	78	2150	98	2224	104	2314	114
2072	78	2151	98	2227	108	2316	114
2075	80	2152	98	2229	108	2318	114
2076	88	2154	98	2230	108	2320	116
2078	88	2156	88	2232	108	2322	116
2080	88	2158	88	2234	108	2325	114
2082	88	2161	100	2235	108	2326	114
2085	88	2163	100	2237	106	2327	114
2086	88	2164	102	2238	106	2328	114
2089	90	2166	102	2239	106	2331	116

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2333	116	2398	122	2474	150	2536	158
2334	116	2401	124	2476	150	2537	158
2335	116	2403	124	2479	154	2538	158
2339	116	2405	124	2481	154	2541	162
2340	116	2409	124	2482	154	2542	162
2341	116	2410	124	2484	154	2544	162
2342	116	2411	124	2485	154	2546	162
2345	118	2412	124	2486	154	2548	162
2347	118	2414	124	2488	156	2351	160
2348	118	2417	128	2489	156	2552	160
2350	118	2419	128	2490	156	2553	160
2352	118	2420	120	2492	156	2554	160
2355	118	2421	128	2494	156	2613	168
2356	118	2422	128	2496	156	2615	168
2357	118	2424	128	2498	156	2616	168
2359	118	2427	126	2501	154	2518	168
2360	118	2428	126	2502	154	2619	168
2363	120	2429	126	2503	154	2620	168
2364	120	2430	126	2504	154	2622	168
2365	120	2432	126	2506	154	2624	168
2366	120	2433	126	2508	154	2626	168
2367	120	2437	138	2511	150	2626	168
2368	120	2439	138	2514	158	2631	166
2369	120	2440	138	2515	158	2632	166
2370	120	2441	138	2516	158	2633	166
2371	120	2442	138	2519	156	2634	166
2373	120	2445	136	2520	156	2645	174
2375	120	2446	138	2521	156	2647	174
2376	120	2447	136	2523	158	2651	174
2378	120	2448	138	2524	160	2652	174
2381	122	2455	150	2525	156	2653	174
2382	122	2457	150	2526	160	2654	174
2384	122	2460	150	2527	160	2656	174
2386	122	2462	150	2528	160	2657	174
2388	122	2464	150	2529	160	2661	176
2399	122	2466	150	2530	158	2662	176
2393	122	2460	150	2531	160	2667	176
2394	122	2471	148	2532	160	2668	176
2395	122	2672	150	2533	160	2607	188
2396	122	2473	150	2535	158	2689	190

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2690	190	4020	47	4060	127	4444	179
2691	190	4021	47	4061	127	4445	179
2692	190	4022	47	4062	127	4446	179
2693	190	4023	47	4063	127	4447	179
2694	190	4024	47	4064	127	4448	179
2695	190	4025	47	4065	127	4449	179
2696	190	4026	47	4066	127	4450	179
2697	190	4027	47	4067	127	4451	179
2701	188	4028	47	4068	127	4452	179
2702	188	4029	47	4069	127	4453	179
2705	196	4030	47	4070	127	4454	179
2707	196	4031	47	4071	127	4455	179
2708	196	4032	47	4072	127	4456	179
2709	196	4033	47	4073	127	4457	179
2710	196	4034	47	4074	127	4458	179
2711	196	4035	47	4075	127	4459	179
2712	196	4036	47	4076	127	4460	179
2715	190	4037	47	4077	127	4461	179
2716	196	4038	47	4078	127	4462	179
2717	190	4039	47	4079	127	4463	179
2718	196	4040	47	4080	127	4464	179
4000	47	4041	47	4081	127	4465	179
4001	47	4042	47	4082	127	4466	179
4002	47	4043	47	4083	127	4467	179
4003	47	4044	47	4084	127	4468	179
4005	47	4045	47	4085	127	4469	179
4006	47	4046	47	4086	127	4470	179
4007	47	4047	47	4087	127	4471	179
4008	47	4048	47	4088	127	4472	179
4009	47	4049	47	4089	127	4473	179
4010	47	4050	47	4090	127	4474	179
4011	47	4051	47	4091	127	4475	179
4012	47	4052	47	4092	127	4476	179
4013	47	4053	47	4093	127	4477	179
4014	47	4054	47	4094	127	4478	179
4015	47	4055	47	4404	47	4479	179
4016	47	4056	47	4440	179	4480	179
4017	47	4057	47	4441	179	4481	179
4018	47	4058	47	4442	179	4482	179
4019	47	4059	47	4443	179	4483	179

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4484	179	4698	132	4803	82	4886	58
4485	179	4700	132	4805	82	4891	60
4486	179	4701	132	4809	86	4894	58
4487	179	4707	184	4812	88	4897	64
4500	177	4708	184	4813	82	4900	60
4501	177	4709	184	4815	80	4902	62
4502	177	4713	172	4819	86	4905	22
4503	177	4714	172	4820	86	4906	58
4504	177	4715	174	4822	86	4908	58
4505	177	4716	84	4829	136	4916	84
4506	177	4717	64	4833	134	4919	84
4507	177	4718	132	4831	136	4920	84
4508	177	4719	174	4834	134	4950	24
4509	177	4722	172	4835	136	4952	140
4510	177	4723	172	4836	134	4956	142
4511	177	4726	172	4838	136	4958	140
4512	177	4729	186	4839	136	4959	140
4513	177	4730	186	4842	64	4960	142
4514	177	4731	186	4844	64	4978	188
4662	152	4754	76	4845	64	4979	186
4663	152	4755	76	4846	64	4989	134
4664	152	4756	76	4848	64	4998	138
4665	152	4760	76	4849	58	4999	138
4666	152	4761	76	4850	64	5000	64
4667	152	4762	76	4854	62	5060	20
4669	134	4764	84	4855	62	5061	20
4671	134	4767	82	4856	62	5062	20
4672	152	4775	140	4859	60	5063	20
4674	152	4777	84	4861	62	5068	22
4675	152	4778	84	4862	62	5069	22
4677	152	4779	138	4866	86	6200	184
4678	182	4780	140	4867	64	6201	180
4681	178	4783	140	4869	64	6203	148
4682	178	4786	140	4873	64	6204	146
4683	152	4788	82	4871	82	6205	152
4b89	132	4791	80	4872	142	6217	162
4691	134	4795	82	4874	62	6218	162
4692	134	4798	80	4875	62	6219	164
4694	134	4799	80	4884	58	6220	164
4695	134	4800	84	4805	58	6221	164

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
6222	164	6311	60	6921	130	7345	48
6224	164	6312	60	6922	132	7572	22
6225	164	6315	166	6923	130	7577	22
6228	162	6316	166	6924	132	7580	24
6229	162	6318	164	6929	128	7629	194
6232	164	6319	164	6930	128	7630	194
6232	164	6327	144	6937	128		
6234	166	6334	84	6939	130		
6235	166	6335	84	6941	18		
6236	166	6336	84	6942	18		
6237	166	6337	84	6991	196		
6238	166	6338	144	6932	196		
6240	50	6339	144	6993	196		
6241	50	6340	144	6994	196		
6242	50	6341	144	6995	196		
6243	50	6342	144	7001	194		
6244	50	6343	146	7002	194		
6245	140	6344	146	7003	194		
6246	140	6345	146	7004	194		
6247	140	6346	146	7005	194		
6248	140	6347	146	7021	48		
6250	50	6348	146	7022	48		
6252	50	6349	146	7023	48		
6256	50	6359	94	7024	48		
6259	50	6369	16	7301	22		
6267	56	6572	194	7302	22		
6272	48	6696	130	7303	86		
6273	48	6697	130	7304	86		
6275	50	6698	130	7305	144		
6277	48	6699	130	7306	144		
6279	136	6700	130	7307	146		
6280	60	6701	130	7308	146		
6292	60	6706	132	7309	146		
6293	60	6707	132	7311	142		
6294	60	6710	130	7312	142		
6296	170	6713	130	7313	144		
6299	142	6870	194	7315	142		
6300	58	6873	16	7316	142		
6308	60	6874	18	7317	144		
6310	62	6920	132	7318	144		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Acceleration	48
Acoustical Noise	52
Additional Part Marking	196
Additional Requirements	194
Altitude	54
Altitude Rating	20
Aperture Cards Required	18
Applicable Documents	196
Back Ripple Voltage	26
Base Document	16
City, State, Zip	16
Class	20
Classification	20
Commutation	56
Company Name/Command	16
Configuration	22
Construction	26
Contract Number/Office Symbol	16
Control, Source	16
Control, Specification	18
Cooling	26
Date	16
Definition of Hermetic Sealing	196
Design and Construction	26
Device	26
Dielectric Withstanding Voltage at Reduced Barometric Pressure	58
Dielectric Withstanding Voltage at Sea Level	62
Duty Cycle	28
Efficiency	66
Endurance	68
Explosion	70
Finishes	24
Format	16
Frequency Regulation	72
F u n g u s	76
Government Design Activity FSCM	16
Harmonic Content	76

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Heating-Overload	78
Humidity	80
Illustrations	24
Immersion	86
Impedance, Output	88
Input Current Balance	90
Input Number One	28
Input Number Two	30
Input Power Factor	92
Insulation Resistance	94
Isolation	98
Life	100
Materials	24
Metals	24
Mounting Hardware	194
Nomenclature	196
Notes	196
Nuclear Radiation	102
Operating Position	104
Output Modulation	106
Output Number One	32
Output Number Three	40
Output Number Two	36
Overspeed	110
Packaging	196
Parallel Operation	112
Part Marking	194
Part Number	18
Part Number Cross-Reference	196
Performance Characteristics	192
Phase Balance	114
Phase Rotation	116
Phone Number	16
Polarity	118
Quality Assurance Provisions	196
Radio Interference	120

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Rain	122
Rating	20
Recovery Time	124
Reduced Input Voltage	126
Reliability Screening	128
Requester FSCM	16
Requester's Name	16
Resistance to Soldering Heat	132
Resistance to Solvents	134
Revision of AEDPS Document (Number)	18
Ripple Voltage	136
Salt Fog	138
Sand and Dust	140
Scope	18
Shock	142
Shock, High Impact	146
Short Circuit	148
Solderability	152
Source Table	18
Starting	154
Starting Contactor Dropout Voltage	156
Street/Building	16
Sunshine	158
Superseded Document	196
System Application	16
Tabulated Characteristics	24
Temperature-Altitude	160
Temperature, High	162
Temperature, Low	164
Temperature Rating	22
Temperature Rise	166
Terminal Strength	170
Termination Resistance	46
Terminations	44
Termination Type	44
Thermal Shock (Temperature Cycling)	172
Transient Input	174
Type	20
Unbalanced Loads	176
Units of Measure	18, 22

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Vibration	178
Vibration, High Frequency	182
Vibration, Low Frequency	184
Voltage Regulation;	188
Wave Form	190
Weight	48
Workmanship	194

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET___OF___

*TITLE CODE 1 2 3 4 5 6	*REQUESTER NO. 7 8 9 10 11 12	CHAR CODE 13 14 15 16
*REQUESTER'S NAME		Ø 1 Ø 1
*COMPANY NAME/COMMAND		Ø 1 Ø 2
*STREET/BUILDING		Ø 1 Ø 3
*CITY, STATE, ZIP		Ø 1 Ø 4
*PHONE NO. INCLUDE A/C AUTOVON IF APPLICABLE		Ø 1 Ø 5
*DATE		1 Ø Ø 3
*REQUESTER FSCM		1 Ø Ø 4
*CONTRACT NO./OFFICE SYMBOL		1 Ø Ø 5
*BASE DOCUMENT		1 Ø Ø 6
*SYSTEM APPLICATION		1 Ø Ø 8
*GOVERNMENT DESIGN ACTIVITY FSCM		6 3 6 9
*FORMAT SIX SECTION DOCUMENT.		Ø 7 Ø Ø
ONE SECTION DOCUMENT.		Ø 8 Ø Ø
SEARCH ONLY.		Ø 1 Ø 6
APERTURE CARDS REQUIRED.		Ø 1 Ø 7
REVISION OF AEDPS DOCUMENT NO.		Ø 1 Ø 8
*CONTROL SOURCE.		6 8 7 3
SPECIFICATION.		6 8 7 4
*SOURCE TABLE		9 1 5 1
UNIT OF MEASURE U.S.		6 9 4 1
SI.		6 9 4 2

CHARACTERISTIC VALUE

20 25 30 35 40 45 50 55 60 65 70 75 79 LINE NO. 80

PLEASE SUPPLY THE FOLLOWING:

DASH-NUMBERED PART _____ REV _____ NOTICE # _____

AS A FINAL CHECK, SCAN THE SRS FOR THE FOLLOWING COMMON ERRORS:

- ☐ MANDATORY CHARACTERISTIC CODES AND VALUES NOT SUPPLIED
- ☐ ZERO (Ø) WRITTEN WITHOUT VIRGULE (O)
- ☐ USE OF POUND SIGN (#) WITHOUT ACCOMPANYING CHARACTERISTIC VALUE
- ☐ POUND SIGN (#) OMITTED FROM END OF STATEMENT (CHARACTERISTIC VALUE)
- ☐ CHARACTERISTIC CODE USED MORE THAN ONCE (OTHER THAN MULTILINE STATEMENT)
- ☐ MULTILINE STATEMENT NOT NUMBERED IN COLUMN 80

*MANDATORY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET___OF___

TITLE CODE 1 2 3 4 5 6	REQUESTER NO. 7 8 9 10 11 12	CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE 20 25 30 35 40 45 50 55 60 65 70 75 79	LINE NO. 80

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

LD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314



OFFICIAL BUSINESS
NALTY FOR PRIVATE USE $300

Commander,
U.S. Army Missile R & D Command
ATTN: DRDMI-ESD
Redstone A rsenal, Alabama 35809

-D

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.