MIL-C-87011A(NU)
28 December 1979
SUPERSEDING
MIL-C-87011(CG)
1 March 1976

MILITARY SPECIFICATION

COAT, WOMAN'S, LIGHT BLUE (CG)

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a polyester double knit summer coat.

1.2 Classification. The coat shall be of two types in the following sizes and lengths as specified (see 6.2).

Type I - With shoulder loops
Type II - Without shoulder loops

Sizes: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 18, 20 and 22

Lengths: Short, regular and long

2. APPLICABLE DOCUMENTS

2.1 Issue of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

SPECIFICATION

FEDERAL

DDD-L-20 - Label, For Clothing, Equipage and Tentage (General Use)

Beneficial comments (recommendations, additions, and deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8410

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-B-3461	- Buttons, Insignia, Metal Uniform and Cap
MIL-B-17757	- Boxes, Fiberboard, Corrugated (Modular Sizes)
MIL-C-29150	- Cloth, Double Knit, Polyester, Twill
MIL-T-43548	- Thread, Polyester, Cotton-Covered

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams and Stitchings

MILITARY

MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-1608	- Provisions for Evaluating Quality of Coats, Women's Dress

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

RULES AND REGULATIONS

US POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, US Government Printing Office, Washington, DC 20402.)

2.2 Other publications. The following documents form a part of the specification to the extent specified herein. Unless otherwise indicated, the issues in effect on date of invitation for bids or request for proposal shall apply.

TECHNICAL MANUAL OF THE AMERICAN
ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS

(Application for copies of the AATCC Manual should be addressed to the American Association of Textile Chemists and Colorists, Research Triangle Park, Post Office Box 12215, Durham, N.C. 27709.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to the American Trucking Association, Attn: Traffic Department, 1616 P Street, N.W., Washington, DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

3. REQUIREMENT

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.2 First article. When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.2).

3.3 Materials

3.3.1 Basic material. The basic material shall be a polyester, double knit, twill fabric conforming to Type I of MIL-C-29150. The shade shall match Blue 3367.

3.3.2 Thread, polyester, cotton-covered. The thread used for seaming and stitching shall be ticket No. 70, 2 or 3 ply and for buttonhole stitching ticket No. 50, 2 or 3 ply conforming to MIL-T-43548. The color of the thread shall match the basic material.

3.3.2.1 Colorfastness. The dyed thread shall show colorfastness to laundering and light equal to or better than the standard sample when tested as specified in MIL-T-43548. When no standard sample is available, the dyed thread shall show a minimum of "good" colorfastness to laundering and light when tested as specified in MIL-T-43548.

3.3.3 Buttons, metal. The metal buttons used for the fronts and belt shall be 28 line and 22 1/2 line for the pocket flaps conforming to type I, style 5, Class A of MIL-B-3461. The buttons for the fronts, belt, and pocket flaps shall be supplied with 15/16 inch length bodkin toggles.

* 3.3.4 Interlining, fusible. The topcollar, pocket flaps, facings and belt shall be fused. A fused sample consisting of the fusible and basic material shall conform to the requirements specified below when tested as specified in 4.4.1 and 4.4.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

Component testing requirements

Appearance of fused sample
Initial - No evidence of bubbling, color change, or bleed through
After 5 washings - No evidence of bubbling or delamination
Stiffness, inch lbs x 10^{-4} (Average of six samples; three tested fusible side up and three tested fusible side down).

Initial		
Warp	Min 5.0	Max 10.0
Filling	Min 5.0	Max 10.0

After 5 washings - samples shall retain a minimum of 75% of the original stiffness

Peel strength

Initial	Min 30 oz.
After 5 washings	Min 28 oz.

In-process testing requirements

Appearance of fused sample
- no evidence of bubbling, color change or bleed through
Peel strength - Min 25 oz.

3.3.4.1 Thickness fusible. The thickness of the fusible interlining should not measure greater than 0.030 inches, when tested as specified in 4.4.1.

* 3.3.5 Label. Each coat shall have a combination personal, identification, size and instruction label conforming to type I, classes 10 and 14 of DDD-L-20. The label shall show colorfastness to wet-dry cleaning and laundering. The inscription and format shall be as follows:

NAME:
SERVICE NO:
COAT, WOMEN'S, LIGHT BLUE (CG)
FIBER CONTENT: 100% Polyester
SIZE: 10R (EXAMPLE)
STOCK NO: 8410-00-000-0000 (EXAMPLE)
CONTRACT NO: DLA-100-00-0-0000 (EXAMPLE)
NAME OF CONTRACTOR:

WASHING INSTRUCTIONS

Machine Wash - Warm Water (120°F max)
Tumble Dry - Medium Heat - Remove Promptly
or
May Also be Dry Cleaned

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

3.4 Design. The coat shall be of conventional length, unlined, princess style, single breasted with a five (28-line) gold Coast Guard buttoned closure. There shall be four horizontal buttoned (22 1/2-line) pocket flaps (two on the breast and two on the hips), notched pointed collar and lapels, set-in-short-sleeves and two buttons (28-line) on the back belt.

3.4.1 Figure. Figure 1 is furnished for information purposes only. When inconsistencies exist between the written specification and the figure, the written specification shall govern.

3.5 Patterns. Standard patterns will be furnished by the Government (see 6.3). The patterns allow 3/8 inch for all seams except as otherwise indicated in Table I. The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way.

3.5.1 List of pattern parts. The component parts of the coat shall be cut from the materials as specified and in accordance with the number of parts required for the manufacturing process as follows:

Material	Nomenclature of Pattern Parts	Cut parts
Cloth, polyester twill double knit	Back (center)	1
	Side Back	2
	Front	2
	Side front	2
	Sleeve (short)	2
	Facing Front	2
	Facing (Bottom hem)	1
	Top Collar	1
	Undercollar	1
	Belt (back)	1
	Neck Facing	1
	Flap (breast)	4
	Flap (lower)	4
Fusible, interlining	Facing (front)	2
	Facing (Bottom hem)	1
	Top collar	1
	Flap (Breast)	2
	Flap (Lower)	2
	Belt	1
Templates	Buttonhole Marker	-

3.6 Construction

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

3.6.1 Stitches, seams, and stitching. Stitch, seam, and stitching types shall conform to FED-STD-751. Wherever two or more methods for seam or stitch types are given for the same part of the operation, any one may be used. Where stitch type 401 is used, the looper, that is the underthread shall be on the inside of the coat. Seam allowance shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats or open seams will result.

3.6.2 Thread breaks and ends of seams. Ends of all seams and stitchings, when not caught in other seams or stitchings, shall be backtacked not less than 3/8 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks (401 stitch type) may be repaired by using 301 stitch type.

3.6.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

* 3.6.4 Buttonholes. Buttonholes shall be straight-cut style with both ends securely barred. The finished cut length for buttonholes on the front shall be 3/4 to 7/8 inch. The length of the buttonholes for the belt shall be 3/4 to 7/8 inch with 5/16 inch of the buttonhole cut. The buttonholes on the pocket flaps shall have a length of 5/8 to 3/4 inch with 5/16 inch of the buttonhole cut. The cut portion of the pocket flap and belt buttonhole shall start in the center of the buttonhole and extend towards the pointed end of the flaps and belt.

* 3.7 Manufacturing operation requirements. The coat shall be manufactured in accordance with operation requirements specified in Table I. The contractor is not required to follow the exact sequence of operations listed provided that the finished garment is identical to that produced by following the sequence of operations listed.

3.7.1 Pressing. All pressing specified in Table I shall be performed by using a heated pressing iron or steam pressing machine, except the fusible pressing which shall be pressed as recommended.

* 3.7.2 All fusing of the fusibles to the basic material shall be on a single ply basis (no stacking allowed).

* 3.7.3 The statement "press fusible to various cut parts in accordance with the fusible manufacturer's recommendations" refers to time, temperature and pressure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
1.	Cutting a. The coat shall be cut in strict accordance with patterns furnished which show size, shape, placement of component parts, directional lines for cutting, and instructions and notches for the proper assembly of all parts. b. Cut all parts of the coat out of one piece of material, except undercollar which may be cut from ends and when so cut shall closely match the main assembly.					
*	c. Cut shoulder loops to finish as specified in operation 5c and 8e.					
2.	Replacement of defective components During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in MIL-STD-1608 shall be removed from production and replaced with non-defective and properly matched components.					
3.	Marking a. All parts shall be marked, ticketed, or bundled to insure a uniform shade and proper assembly throughout the coat. b. The use of corrosive metal fastening devices or sewn-on tickets shall be prohibited.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
3.	Marking (cont'd) c. The use of ink pad numbering machine, rubber stamp or pencil is acceptable provided the numbers do not show through the outside of the coat. Whenever possible, numbers shall be covered by the seam allowance.					
4.	Make pocket flaps a. Position fusible to top ply of flap and press fusible to top ply in accordance with the fusible manufacturer's recommendations.					
	b. Stitch top ply to under ply, 1/4 to 5/16 inch from raw edge the two sides and the bottom pointed end	301	SSe-2(a)	10-14	70	70
	c. Turn to finished position forcing out points and edges.					
	d. Topstitch 3/16 to 1/4 inch from folded edge the two sides and bottom edge.	301	SSe-2(b)	10-14	70	70
	e. Place a vertical buttonhole, centered on flap, 5/8 (± 1/16) inch from the point on flap	Button-hole		50-54 per buttonhole including tack	50	50
5.	Make shoulder loop (type 1 coat only) a. Fold a strip of basic material in half lengthwise: turn both raw edges to the inside and stitch 1/16 inch from each edge.	301	EFp-2	10-14	70	70
	OR					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
5.	Make shoulder loop (type 1 coat only) (cont'd)					
	b. Abut raw edges of a basic material strip and double stitch not less than 3/16 inch gauge, using a covering stitch on the underside.	402 or 406	EFh-1	8-10	70	70
	c. Finished width of shoulder loops shall measure 1/4 to 3/8 inch.					
6. *	Fronts					
	a. Stitch face to face, the side fronts to front, matching notches	301 or 401	SSa-1	10-14	70	70
	b. Press seams open and flat.					
7. *	Backs					
	a. Stitch face to face, the side backs to center backs, matching notches	301 or 401	SSa-1	10-14	70	70
	b. Press seams open and flat.					
8. *	Seam shoulder and attach shoulder loops					
	a. Stitch, face to face, the fronts and back at shoulder seams, matching the front and back joining seams.	301 or 401	SSa-1	10-14	70	70
	b. Press seams open and flat.					
	c. Fold under and stitch 1/16 inch from the folded edge both ends of shoulder loops to each front. The top ends of each loop shall be 1/16 to 1/8 inch below shoulder seam.	301	LSd-1	10-14	70	70

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
8.	Seam shoulder and attach shoulder loops (cont'd) d. The first loop shall be positioned 1 1/4 (± 1/8) inches from armhole and the second loop 3 (± 1/8) inches from the first loop, measured from center to center of loops. e. The length of finished shoulder loop openings shall be as follows: Loop next to the neck 1 1/8 (± 1/8) inches Loop next to armhole 1 1/2 (± 1/8) inches NOTE: Operations 8c, d, and e pertain only to type I coat.					
9. *	Side seams Stitch face to face, the side backs and side fronts at side seams, matching notches. b. Press seam open and flat.	301 or 401	SSa-1	10-14	70	70
10. *	Attach pocket flaps to fronts a. Position flaps to fronts according to marks on pattern and stitch the open end of flap to front 3/16 inch from raw edge.	301	LSb1-2(a)	10-14	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
10.	Attach pocket flaps to fronts (Cont'd)					
	b. Turn attached edge of flap down and topstitch 1/4 inch from folded edge. There shall be no raw edge visible after topstitching. Backstitch or tack ends of topstitching.	301	LSb1-2(b)	10-14	70	70
*	NOTE: The point of the flap shall be aligned with the front seam.					
11.	Sleeves					
	a. Close underarm sleeve seam	301	SSa-1	10-14	70	70
	b. Press seam open and flat.					
	c. Fold bottom of sleeve under forming a 1 3/8 (± 1/16) inch hem and blindstitch to sleeve.	Hand or machine	EFa-1	8-10 6-10	70 70	70
	d. Set sleeve to armhole, matching notches.	301	SSa-1	10-14	70	70
12.	Make collar					
	a. Position fusible to top collar and press in accordance with the fusible manufacturer's recommendations.					
	b. Stitch undercollar to top collar along each end and top edge of collar, 1/4 to 5/16 inch from raw edges. Trim corners.	301	SSe-2(a)	10-14	70	70
	c. Turn collar, force out corners and edges, and topstitch 1/4 inch from the folded edge.	301	SSe-2(b)	10-14	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
13.	Attach collar					
	a. Stitch the collar to the neckline, face to face, 1/4 to 5/16 inches from raw edges between the notches.	301	SSa-1	10-14	70	70
14.	Join front facings and neck facing					
	a. Position fusible to facings (front and bottom hem) and press in accordance with the fusible manufacturer's recommendations.					
	b. Stitch the bottom hem facings to front facings.	301	SSa-1	10-14	70	70
*	c. Position combination label on left facing with bottom edge of label 1 1/2 inches from finished bottom edge of coat. Stitch on all four sides of label.	301	LSbj-1	10-14	70	70
	d. Join neck facing to front facings 1/4 to 3/8 inch from raw edges.	301	SSa-1	10-14	70	70
	e. Overedge stitch inside edges of front facing, neck facing and bottom hem facing.	503 or 504	SSa-1 and EFd-1	10-14	70	70
	f. Press facing seams open and flat.					
15.	Join assembled facings to coat body					
	a. Stitch, facing to coat, 1/4 to 3/8 inch from raw edges, completely around outer edge of coat.	301	SSe-2(a)	10-14	70	70
	b. Turn assembly to finished position trim corners, forcing out edges and points.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
15.	Join assembled facings to coat body (cont'd)					
*	c. Raisestitch, 1/16 inch from the folded edge, the neck facing and inside bottom edge of bottom hem facing to neck seam and bottom hem allowances. Stitching shall not show on outside of coat and at the bottom it shall extend to within 3 or 4 inches of the front corners.	301	LSq-2(b)	10-14	70	70
	d. Tack by hand or machine with a back tack or straight line tack, the front facings and neck facings seams to the shoulder seams.	Hand or 301		3-4 (double looped thread)	70	
				10-14 per back tack.	70	70
	NOTE: The tacking shall not be exposed on the outside of the coat.					
*	e. Blindstitch bottom hem facing to coat body from front joining seam to front joining seam. The blind-stitching shall be placed along the top edge of bottom hem facing, continuing out to the front joining seams along a straight line. The ends of the blind-stitching shall be locked.	Hand or Machine	- -	8-10	70 70	70
*	NOTE: Care shall be taken to avoid any twisting of the fronts, backs, front facing or bottom hem facing during the blindstitching operation.					
16.	Stitch lapel facing					
	a. Topstitch, 3/16 to 1/4 inch from folded edge, from lapel notch down front and across bottom edge.	301	SSe-2(b)	10-14	70	70
	NOTE: The stitching along the bottom edges shall extend to the front joining seam.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
17.	Make belt					
	a. Position fusible to belt and press in accordance with the manufacturer's recommendations.					
	b. Fold belt, stitch raw edges of side leaving approximately two inches for turning purposes.	301	SSa-1	10-14	70	70
	c. Press seam open and flat.					
	d. Stitch points of belt.	301	SSae-2(a)	10-14	70	70
	e. Turn belt with seam on the underside and centered on belt.					
*	f. Stitch, 3/16 to 1/4 inch from the folded edge, the side and pointed ends of belt.	301	SSae-2(a) and OSf-1	10-14	70	70
*	g. Close opening in belt. Closure shall be smooth and flat. Stitching shall not be exposed on outside of belt.	Hand		8-10	70	
		or Machine		6-10	70	70
*	h. Place a horizontal buttonhole, centered on belt at each end, 3/4 to 7/8 inch from the pointed end	Button-hole		50-54 per buttonhole including tack	50	50
18.	Make buttonholes					
	a. Mark and stitch five buttonholes in accordance with the buttonhole marker template, on the right front, to finish 5/8 (+ 1/16) inch from the front edge The purling shall be on the outside of the coat.	Button-hole		50-54 per buttonhole including tacks	50	50

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
19.	Make eyelets a. Sew five eyelets with 1/8 to 3/16 inch diameter holes placed with the center 5/8 (± 1/8) inch from the finished left front edge to correspond with buttonholes on right front. The purling shall be on the inside of the coat.	Eyelet		25 per eyelet	50	50
20.	Pressing a. Press edge of fronts, collar and bottom of coat on edge pressing machine. b. Sleeves shall be rolled pressed. c. Press fronts, side seams and back on body machine. d. Press armholes and shoulders on an armhole machine Shoulders may be pressed on a shoulder machine. e. Remove gloss wrinkles, creases and pressing impressions.					
21.	Attach belt a. Position belt to back with the pointed end of belt buttonhole tacked in accordance with notches on patterns. Tack belt with the tacking superimposed on the buttonhole tack.	Hand or Machine		8-10 6-10	70 70	70
22. *	Attach buttons a. All metal buttons shall be attached by bodkins with the eagle in the upright position.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
22. *	Attach buttons (cont'd) b. Insert backs of seven 28-line metal buttons with permanently attached bodkin type toggles through each eyelet of left front and buttonholes in belt and secure by setting bodkin. c. Insert backs of four 22 1/2 line metal buttons with permanently attached bodkin type toggles through each buttonhole of pocket flaps and secure by setting bodkin.					
23.	Clean coat a. All ends of stitching shall be trimmed and loose threads removed from coat. b. Remove all spots and stains. c. Remove all shade tickets without injury to the material.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

3.8 Sizes and measurements. Sizes and measurements of finished coats shall be as shown in Table II (see figure 1). All measurements are expressed in inches

Table II - Measurements of coat

Sizes	(A) Bust	(B) Waist	Length (C) S	Length (C) R	Length (C) L	Sleeve inseam (D) S	Sleeve inseam (D) R	Sleeve inseam (D) L
6	35	28	24 3/8	25 1/2	27	3 1/2	4	4 1/4
7	35 1/2	28 1/2	24 3/8	25 1/2	27	3 1/2	4	4 1/4
8	36	29	24 1/2	25 5/8	27 1/8	3 1/2	4	4 1/4
9	36 1/2	29 1/2	24 1/2	25 5/8	27 1/8	3 1/2	4	4 1/4
10	37	30	24 5/8	25 3/4	27 1/4	3 1/2	4	4 1/4
11	37 1/2	30 1/2	24 5/8	25 3/4	27 1/4	3 1/2	4	4 1/4
12	38	31	24 3/4	25 7/8	27 3/8	3 1/2	4	4 1/4
13	38 3/4	31 3/4	24 3/4	25 7/8	27 3/8	3 1/2	4	4 1/4
14	39 1/2	32 1/2	24 7/8	26	27 5/8	3 1/2	4	4 1/4
15	40 1/4	33 1/4	24 7/8	26	27 5/8	3 1/2	4	4 1/4
16	41	34	25	26 1/8	27 7/8	3 1/2	4	4 1/4
18	43	36	25	26 1/8	27 7/8	3 1/2	4	4 1/4
20	45	38	25 1/4	26 1/4	28	3 1/2	4	4 1/4
22	47	40	25 1/4	26 1/4	28	3 1/2	4	4 1/4
Tolerance	± 3/4	± 3/4	± 1/4	± 1/4	± 1/4	± 1/4	± 1/4	± 1/4

NOTE: Measurements shall be taken with the coat fully buttoned, laid flat and smooth.

A. Bust. Twice the measurement taken across the front at the base of armholes from folded edge to folded edge.

B. Waist. Twice the measurement taken across the front midway between the third and fourth buttons from folded edge to folded edge.

C. Back length. Measurement taken from the base of undercollar (seam), down center back to bottom of coat.

D. Sleeve inseam. Measurement taken from the base of armhole, along inseam to bottom of sleeve.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

3.9 Workmanship. The finished coats shall conform to the quality established by this specification. As a final step in the contractor's production control plan before formation of a lot, each dress coat shall be examined after pressing and prior to folding for packaging, and a coat containing a selected defect shall not be included in the end item lot. Selected defects are those defects listed in MIL-STD-1608 indicated by an asterisk (*). The occurrence of defects shall not exceed the applicable acceptable point value or defect limit.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

* 4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

1. First article inspection (See 4.3).
2. Quality conformance inspection (See 4.4).

4.3 First article inspection. The first article submitted in accordance with 3.2 shall be inspected as specified in 4.4.3 for compliance with design, construction, workmanship and dimensional requirements.

4.4 Quality conformance inspection. Inspection shall be performed in accordance with MIL-STD-1608.

* 4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in the specification or applicable purchase document. In addition, testing shall be performed on the component listed in Table III for the characteristics noted. Whenever applicable, tests shall be conducted in accordance with method prescribed in FED-STD-191. All requirements are applicable to the sample unit. All test reports shall contain the individual values used in expressing the final result. The contractor shall furnish a certificate of compliance for the fusible thickness requirements specified in 3.3.4.1. The lot shall be unacceptable if one or more units fail to meet any test requirements specified. All fused samples for Table III testing shall be fused on the end item manufacturer's equipment. Two sample units shall be taken regardless of end item lot size. The sample unit shall be expressed as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

Material	Sample unit for testing
The basic material and fusible interlining fused together	a 15 x 15 inch sample

Table III - Component Testing

Characteristic	Requirement paragraph	Test method
Stiffness	3.3.4	
Initial		5206
After 5 launderings		AATCC-124-1973 1/ and 5206
Peel strength	3.3.4	
Initial		5951
After 5 launderings		5951 and AATCC-124-1973 1/
Appearance of fused sample	3.3.4	
Initial		Visual
After 5 launderings		AATCC-124-1973 1/ and Visual

1/ One 15 x 15 inch specimen shall be laundered; wash temperature shall be 140±5°F (60±3°C) drying shall be performed only after the 5th washing and the evaluation portion of the AATCC test method is not applicable. Pressing of the samples prior to evaluation is prohibited.

4.4.2 In-process inspection

4.4.2.1 Sample size. The size of the fused check sample shall correspond to the total area covered by the top collars, pocket flaps, belts and facings which are fused at one time on the press.

4.4.2.2 Number of check samples. One check sample (see 4.4.2.1) shall be prepared following fusing of every 1000 top collars, pocket flaps, or belts and 200 facings, as applicable, and tested for the characteristics below.

4.4.2.3 Appearance of the fused check sample. Each check sample shall be visually inspected for color change, bleed through and bubbling. If there is any evidence of these conditions present, the previously fused 1000 top collars, pocket flaps, belts or 200 facings shall be inspected for the above conditions. Any top collar, pocket flaps, belts or facings exhibiting any of these conditions shall be removed from the lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

4.4.2.4 Peel strength. The method of testing shall be as specified in 4.4.2.4.1. If the check sample fails the peel strength test, the previously 1000 fused top collars, pocket flaps, belts or 200 facings and check sample shall be re-fused after the fault has been corrected. If the check sample fails a second time, the 1000 top collars, pocket flaps, belts or 200 facings shall be rejected.

* 4.4.2.4.1 Apparatus and procedure for in-process peel strength testing. The apparatus to be used for this test shall be a commercial type spring scale accurate to 0.5 oz. The procedure to be followed in performing the test shall be as follows:

(1) Three 1x8 inch wide strips parallel to the warp direction shall be cut from right, middle and left side of the check sample for peel strength testing.

(2) Separate the fusible from the basic fabric at the end of the 1 inch wide strips for a distance of 2 inches.

(3) Secure the end of the basic fabric to a lightweight clamp like holder 1 inch or more in width and approximately 1.0 ounce in weight. Hang the clamp to the end of the spring scale.

(4) Position the fusible in another clamp 1 inch or more in width and approximately 1.0 ounce in weight and pull the fusible downwards in a vertical direction with a steady continuous motion.

(Motion to be exerted by hand until complete separation of the fusible from the samples. Minimum peel strength reading shall be taken visually from the spring scale. Failure of any individual strip shall indicate failure of the check sample.

NOTE: Care shall be taken not to jerk the fabric during the testing.

4.4.3 Examination of the end item. The end item examination provisions for the finished coat shall be as specified in MIL-STD-1608.

* 4.4.4 Packaging inspection. Packaging inspection shall be in accordance with MIL-STD-1608.

5. PACKAGING

5.1 Preservation-packaging. Packaging shall be level A or C (see 6.2)

5.1.1 Level A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

5.1.1.1 Unit packaging. Each coat shall have a sheet of minimum 10 pound basis weight (24 by 36 - 480) bleached tissue paper placed inside the length and width of the coat. A tissue paper pad shall be inserted inside the coat at the shoulders and across the back of the collar, so as to eliminate sharp creases and fold lines. The coat shall be fully buttoned and placed front down. Fold over the sides and sleeves toward the center of the back and then fold the coat in half by bringing the bottom edge up even with the shoulderline. The completely folded coat shall measure approximately 15 inches in length by 11 inches in width. Each folded coat shall be inserted in a snug fitting flat clear polyethylene film bag of 0.00125 inch thickness (± 20% tolerance). The bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The final closure of the bag shall be heat sealed with the seal made as close as possible to the open end. A 1/4 inch hole shall be made at one corner of the polyehtylene bag to allow excess air to escape. As an alternate, the polyethylene bag may be of the tuck-in or reverse flap type, in which a heat seal closure and corner vent hole are not required.

5.1.2 Level C (Commercial packaging). Coats shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A. Thirty (30) coats of one size only, packaged as specified in 5.1 shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to class weather resistant, type CF, variety SW, grade V3c, size 3A of MIL-B-17757. The fiberboard for the liner shall conform to type CF, class weather resistant, variety DW, grade V15c of MIL-B-17757. Level A folded coats shall be stacked flat, one in width, two in length and fifteen in depth within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2 Level B. Thirty (30) coats of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to class domestic, type CF, variety DW, grade 275, size 3A of MIL-B-17757. The fiberboard for the liner shall conform to class domestic, type CF, variety SW or DW, grade 200 of MIL-B-17757. Level A folded coats shall be stacked flat, one in width, two in length and fifteen in depth within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with MIL-B-17757 and closed in accordance with the appendix of the box specification.

5.2.3 Level C (Commercial Packing). Coats packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the U.S. Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene bagged packages. Polyethylene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information

Stock Number
Nomenclature
Size
Quantity

5.3.2 Labels, mixed sizes. Each shipping container, packed with mixed sizes shall have securely attached to the end and side, directly under the printing or stenciling a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly printed or stamped the correct quantity and sizes contained therein.

6. NOTES

6.1 Intended use. The coats are intended for wear by female personnel of the Coast Guard as part of their summer uniform.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Sizes, lengths and type required (see 1.2).
c. Where first article sample is required (see 3.2).
d. Levels of packaging and packing required (see 5.1 and 5.2).
e. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids.

* 6.4 Changes from previous issue. The margins of the specification are marked with an asterisk to indicate when changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.


Custodian:
Navy - NU

Preparing activity:
Navy - NU

Review interest
Navy - CG
DPSC - CT

Project No. 8410-N474

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

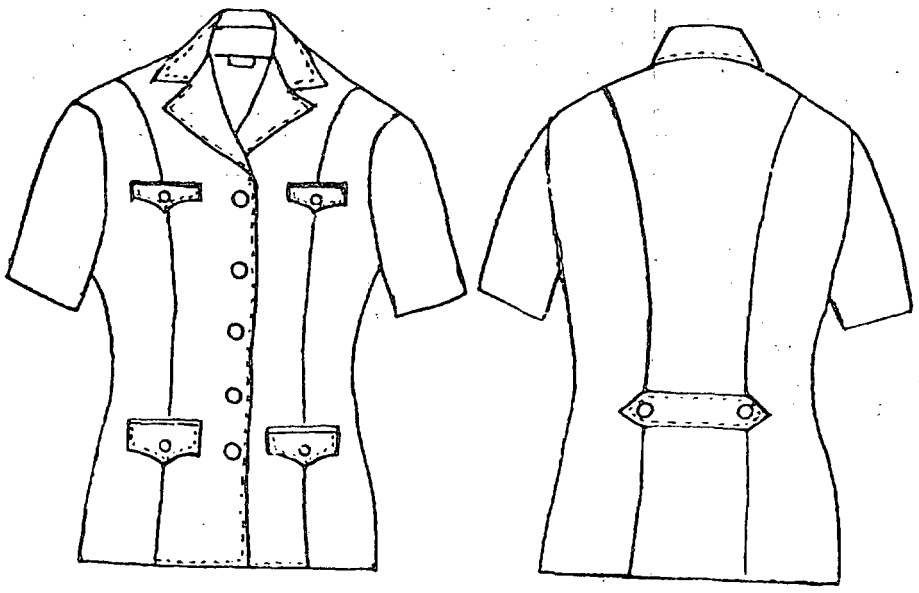

Front view

Back view

FIGURE 1 - Coat, Woman's, Light Blue (CG) (Type II)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-87011A(CG) Coat, Woman's Light Blue (NU)

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

Replaces edition of 1 Jan 72 which may be used.

S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:35Z
Check the source to verify that this is the current version before use.