MILITARY SPECIFICATION

CAP, GARRISON, WOMAN'S, AIR FORCE

This specification is approved for use by the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a woman's garrison (flight) cap.

1.2 Classification. The cap shall be of the following types and classes, as specified (see 6.2):

Type I - Polyester/Wool Tropical Cloth

Class 1 - General Officers
Class 2 - Officers
Class 3 - Enlisted

Type II - Texturized Polyester Serge Cloth

Class 1 - General Officers
Class 2 - Officers
Class 3 - Enlisted

1.2.1 Sizes. The woman's cap shall be furnished in the following sizes, as specified (see 6.2):

20	22	24
20-1/2	22-1/2	24-1/2
21	23	
21-1/2	23-1/2	

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: ASD/ENES, Wright-Patterson AFB OH 45433 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23 12:20Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents

2.1.1 Specifications and standards. Unless otherwise specified, the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-T-276	Thread, Cotton
CCC-C-438	Cloth, Buckram, Woven and Nonwoven
DDD-L-20	Label: For Clothing, Equipage and Tentage, (General Use)
PPP-B-636	Boxes, Shipping, Fiberboard
PPP-T-45	Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing

MILITARY

MIL-C-368	Cloth, Satin, Rayon and Cloth, Twill, Rayon
MIL-B-1667	Braid, Textile, Cord-Edge
MIL-C-21115	Cloth, Tropical: Wool, Polyester/Wool
MIL-C-29365	Cloth, Nonwoven: Interlining, Fusible, Nylon and Polyester, Polyamid
MIL-C-43718	Cloth, Twill, Polyester: Polyester and Cotton: Polyester and Rayon
MIL-C-83448	Cloth, Serge Polyester Texturized

STANDARDS

FEDERAL

FED-STD-751	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-129	Marking for Shipment and Storage
MIL-STD-147	Palletized Unit Loads
MIL-STD-902	Provisions for Evaluating Quality of Caps, Garrison, Women's

(Copies of specifications and standards required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. The issues of the document whic is indicated as DoD adopted shall be the issue listed in the current DoDISS an the supplement thereto, if applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:20Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D 3951 Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testin and Materials, 1916 Race St., Philadelphia PA 19103.)

THE COLOR ASSOCIATION OF THE UNITED STATES, INC.

Department of Defense (DoD) Standard Color Card of Official Standardized Shade for Sewing Threads 1968

(Application for copies should be addressed to The Color Association of the United States, Inc., 24 East 38th St., New York NY 10016.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Standard sample. A standard sample, when furnished, in solely for guidance and information to the contractor (see 6.3). Variations from the document may appear in the sample, in which case the document shall govern.

3.2 First article. When specified, a sample shall be subjected to first article inspection (see 4.3, 6.2 and 6.4).

3.3 Materials

3.3.1 Basic material. The basic material for the type I cap shall conform to type III, class 3 of MIL-C-21115, USAF Shade No. Blue 1578. The basic materia for the type II cap shall conform to MIL-C-83448, USAF Shade No. Blue 1598.

3.3.2 Braid. The braid for classes 1, 2, and 3 caps shall conform to classes 5, 6, and 7 of MIL-B-1667, respectively. The polyester yarn described in MIL-B-1667, in lieu of rayon yarn, may be used for the cord cover over the braid.

3.3.3 Sweatband. The sweatband outershell shall conform to MIL-C-43718, clas 2. The color shall be black. The interlining for the sweatband shall conform to CCC-C-438, type III, class 1.

3.3.3.1 Sweatband reinforcement strip. The sweatband reinforcement strip shall be a 5/8 inch wide strip of print cloth or sheeting coated lightly on both sides with pyroxylin or vinyl.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:20Z
Check the source to verify that this is the current version before use.

3.3.4 Outershell interlining. The interlining for the outershell (side panel, crown, and curtain) shall be a nonwoven cloth which conforms to the requirements of class 3, cited in MIL-C-29365, except the material composition shall consist of 100 percent polyester spun laced fibers without the web. The weight shall be 1.3 to 2.0 ounces per square yard and the following fusing conditions shall apply when fusing the nonwoven fusible material to the outershell:

a. Temperature between pressing surfaces of 290°F (minimum) and 310°F (maximum),.at the fuseline (not the temperature at the clock).

b. Pressure between pressing surfaces, 3 to 4 pounds per square inch.

c. Pressing time of 10 seconds (minimum) and 12 seconds (maximum).

d. Heat dry.

3.3.5 Lining. The lining shall conform to class 1 of MIL-C-368 and shall be gray, conforming to USAF Shade No. 1154 (see 6.3).

3.3.6 Thread. The thread for all sewing, except the basting thread, shall conform to type IA3, 3 ply, Ticket Nos. 40 and 50 of V-T-276 and to type IA3, 2 ply, Ticket No. 70 of V-T-276. Except for the thread used for stitching that will appear on the sweatband, the thread shall be vat dyed Navy Blue AT, C.A. 66060 (see DoD Standard Color Card of Official Standardized Shades for Sewing Threads 1968). The thread for stitching that will appear on the sweatband shall be black, approximately matching the sweatband and shall have good colorfastness to light, perspiration and wet dry cleaning.

3.3.7 Label. Each cap shall have a combination identification, size and personal identification label that conforms to type VI or IV, classes 4 and 10 of DDD-L-20. The label shall show colorfastness to dry cleaning. The label shall include the following information:

Name:
Service No.:
Cap, Garrison, Woman's, Air Force
Contract No.: DLA-100-00-0-0000 (Example) 1/
Stock No.: 8405-00-000-0000 (Example) 1/
Wool Content Information: 1/
Manufacturer's Name or Trademark: 1/
DRY CLEAN ONLY

SIZE 1/

1/ The manufacturer shall insert the applicable information.

3.4 Design. The cap shall be envelope style, fully lined with silver braid for General Officers, silver and blue braid for Officers, and blue braid for Enlisted personnel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:20Z
Check the source to verify that this is the current version before use.

3.5 Patterns. Standard patterns that show size, shape and notches for proper assembly of all parts will be furnished by the Government. Unless otherwise specified herein, the standard patterns will provide a seam allowance of 1/4 inch. The standard patterns shall not be altered in any way, and are to be used as a guide for cutting the contractor's working patterns. The working patterns shall be identical to the standard patterns.

3.5.1 Pattern parts. The parts of the cap shall be cut from the material specified in accordance with the pattern parts indicated in table I.

3.6 Construction. The construction shall conform in all respects to the requirements specified in table II and herein. Figures 1 and 2 are furnished solely for guidance and information. Should variation from the written document appear in figures 1 or 2, the written document shall govern.

3.6.1 Stitches, seams, and stitchings. All stitches, seams, and stitchings shall conform to FED-STD-751. The type of seam, stitching, and stitches per inch shall be as specified in table II. When two or more methods of seams or stitches are given for the same operation, any one may be used. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the cap.

3.6.1.1 Thread breaks and end of seams and stitchings. Thread breaks of all stitch types shall be secured by stitching back of the break not less than 1/2 inch. Ends of seams produced with stitch type 301 shall be backtacked not less than 1/4 inch except where ends are turned under or caught in other seams or stitching. Ends of a continuous line of stitching shall overlap not less than 1/2 inch.

3.7 Manufacturing operations requirements. The cap shall be made in accordance with operation requirements specified in table II. The contractor is not required to follow exact sequence of operations listed unless otherwise specified. Any additional basting or holding stitching to facilitate the manufacture of the cap will be permissible, provided the threads are removed or will not show in the finished cap. Notches to facilitate the assembly or to control the size of the cap (in addition to the notches on the patterns) will be permissible provided the notches will not weaken the cap and will not be visible in the finished cap.

3.7.1 Shade and size marking. The cut parts of the cap shall be marked to insure a uniform size. Any method of marking may be used except:

a. Corrosive metal fastening devices.

b. Sew-on type tickets.

c. Adhesive type tickets which show discoloration and the adhesive mass which adheres to the material upon removal of the ticket.

d. Any marking medium which would tend to leave a permanent mark.

3.8 Finished measurements. The finished measurements shall conform to table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:20Z
Check the source to verify that this is the current version before use.

TABLE I. List of pattern parts.

Material	Pattern nomenclature	Cut parts
Basic material (see 3.3.1)	Crown 1/	1
	Panel (side) 1/	2
Fusible (see 3.3.4)	Curtain	1
	Crown	1
	Panel (side)	2
Lining (see 3.3.6)	Crown 1/	1
	Apron	2
Cloth, Twill (see 3.3.3)	Sweatband outershell	1
Buckram (see 3.3.3)	Sweatband interlining	1

1/ One pattern part for the crown and one pattern part for the side panel will be furnished and shall be used to cut both the basic material and the lining.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:20Z
Check the source to verify that this is the current version before use.

TABLE II. Sewing operations.

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin/ Looper
1.	Cut parts. a. The parts of the cap shall be cut in strict accordance with the patterns and on the straight in the direction of the warp material. All polyester/ wool parts of the cap shall be cut out of one piece of material. All texturized polyester parts shall be cut out of one piece of material. The parts of the sweatband shall be cut in accordance with patterns or stripped and placed on a roll. b. The outershell fabric for the cap shall be fused before cutting. or c. When fusible and basic cloth parts are cut separately, it is recommended that the fusible parts be approximately 1/16 inch smaller all around. Fuse the crown, side panels and curtain interlining pieces to the respective crown, side panels and curtain outershell pieces.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:20Z
Check the source to verify that this is the current version before use.

TABLE II. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin/ Looper
2.	Replacement of damaged parts. During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects or damages that are classified as defects in MIL-STD-902 shall be removed from production and replaced with non-defective and properly matched components.					
3.	Component marking. All parts of the cap shall be marked, bundled or ticketed to insure the proper assembly of size and shade.					
4.	Attach or apply label.					
	a. The bottom of the label shall be centered 1 inch above the bottom raw edge, on the left (as worn) panel lining piece and stitched 1/16 inch from the edge on all four sides of the label.	301	LSbj-1	10-14	50	50
	or					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:20Z
Check the source to verify that this is the current version before use.

TABLE II. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin/ Looper
4.	Attach or apply label. (Cont'd)					
	b. The label shall be applied in the center 1 inch above the bottom raw edge, on the left (as worn) panel lining piece.					
	NOTE: The label shall be attached or applied before the panel lining pieces are joined to the outer shell. The personal identification (name and serial number) at the top of the label shall appear above the sweatband, in the finished cap.					
5.	Make crown.					
	a. The crown pieces (fused outer-shell and lining) shall be stitched together with a 1/8 to 3/16 inch seam.	101 or 301	SSa-1	8-10	70	70
	b. The crown shall be folded in half lengthwise. The halves of the crown shall be single stitched together at the fold with a 1/2 ±1/8 inch seam at the center, beginning 1/2 inch from the center front, tapering to nothing, not more than 1/2 inch from each end of the crown, with the ends of the stitching securely backstitched.	301	OSf-1	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:20Z
Check the source to verify that this is the current version before use.

TABLE II. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin/ Looper
6.	Join panels.					
	a. The outershell side panel pieces shall be positioned even, face to face. Join at each end (front and back) from bottom edge to notch at top.	301	SSa-1	10-12	50	50
	b. The seam outlets of the outer shell at the front and the back shall be opened and raised stitched 1/16 inch at each side of the seam.	301	SSz-3(b)	10-12	50	50
	c. The lining side panel pieces shall be positioned even face to face. Join at each end (front and back) from bottom edge to notch at top.	301	SSa-1	10-12	50	50
7.	Join panels to crown.					
	a. The joined panel pieces (outer shell and lining) shall be positioned even with the corresponding edges of the crown and joined to the crown.	301 or 401	LSq-2(a)	10-12	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:20Z
Check the source to verify that this is the current version before use.

TABLE II. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin/ Looper
7.	Join panels to crown. (Cont'd)					
	b. The seam joining the panels to the crown shall be turned toward the center of the crown and raised stitched 1/16 inch from the edge of the crown seam, catching all seam allowances in the stitching. The bottom of the stitching shall not show through to the outside of the panels (outer shell or lining).	301 or 401	LSq-2(a)	10-12	50	50
	c. The cap shall be turned so that the basic fabric will be on the outside. The front and the back seams joining the panels (outer shell) adjacent to the crown points shall be smoothed out.					
	d. The bottom edges of the panels (outershell and lining) shall be overedge stitched together.	503 or 504 or 505	EFd-1	8-10	70	70
8.	Join braid to curtain.					
	a. The bottom edge of the curtain shall be overedge stitched.	503 or 504 or 505	EFd-1	8 - 10	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:20Z
Check the source to verify that this is the current version before use.

TABLE II. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin/ Looper
8.	Join braid to curtain. (Cont'd)					
	b. The tape of the cord-edge braid shall be joined to the upper edge the curtain. NOTE: Operation No. 8b may be omitted provided that the top of the curtain is positioned tightly against the cord edge of the braid in the finished cap.	301 or 101 or 401	LSq-3(a)	10-12	50	50
	c. The raw edges of the seam and the edge of the tape of the cord-edge braid shall be overedge stitched together, or the raw edge of the curtain may be overedge stitched separately. If the raw edge of the curtain is overedge stitched separately, the tape of the cord-edge braid will not need to be overedge stitched.	503 or 504 or 505	EFd-1	8-10	70	70
	d. The cord-edge braid shall be turned over and the curtain edge shall be stitched with a double row of stitching, 1/8 to 3/16 inch gage, with the first row of stitching 1/16 inch from the edge.	301 or 401	LSq-3(b)	10-12	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:20Z
Check the source to verify that this is the current version before use.

TABLE II. Sewing operations. - Continued

	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin/ Looper
8.	Join braid to curtain. (Cont'd) NOTE: The cord-edge braid shall be sewn onto the curtain evenly so that the cord-edge braid or the curtain will not be wavy or puckered. The cord-edge braid at the underlapping end of the curtain (left side of cap as worn) shall extend to the end of the curtain.					
9.	Join curtain to panels. a. The ends of the curtain shall be overlapped (left side over right side of cap as worn), matched with the front and back seams of the panels in the position worn, and joined together as indicated by the pattern notches. The left end of the curtain shall be sewn slightly full from the notch to the end to avoid a tight edge when the cap folds at the front.	301 or 401	SSa-1	6-8	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:20Z
Check the source to verify that this is the current version before use.

TABLE II. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin/ Looper
9.	Join curtain to panels. (Cont'd)					
	b. A basting stitch that utilizes a good commercial thread shall be sewn across the bottom of the curtain 1/2 inch from the bottom raw edge.	101	OSa-1	6-8	70	70
	or					
	c. In lieu of the basting stitch specified in Operation No. 9b, a chalk mark shall be placed around the bottom of the curtain 1/2 inch from the bottom edge.					
	d. The bottom serged edge of the panels shall be positioned at the exact line of the basting stitch specified in Operation No. 9b. The curtain shall be joined to the panels with a single row of stitching.	301 or 401	LSa-1	6-8	50	50
	NOTE: The curtain shall cross itself at the front seam of the cap, a tolerance of 1/4 inch from the exact alignment will be allowed.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:20Z
Check the source to verify that this is the current version before use.

TABLE II. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin/ Looper
9.	Join curtain to panels. (Cont'd) e. The basting stitch specified in Operation No. 9b shall be removed before the sweatband is joined to the curtain.					
10.	Press cap. a. A side shaper shall be inserted between the curtain and the side panels on each side of the cap. The curtain shall be smoothed on the shaper. b. The cap shall be pressed smooth and flat with a heated pressing machine or a heated steam iron, with the bottom edge folded and creased. The front and the back of the curtain shall not be creased. NOTE: The cap shall be completely pressed before the sweatband is attached (see Operation No. 12).					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:20Z
Check the source to verify that this is the current version before use.

TABLE II. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin/ Looper
11.	Make sweatband.					
	a. The sweatband shall be cut to the required length. A two-piece sweatband shall not be used.					
	b. Center the sweatband interlining on the sweatband outer shell fabric, leaving a 1/4 inch of fabric on each side to be turned over the interlining. Raise stitch 1/8 inch from the folded edge. The finished width of the sweatband shall be 1 ±1/8 inch.	301 or 401	SSbc-1	10-12	50	50
	or					
	c. The sweatband may be made on a roll with a double needle and folder and cut to required length.	301 or 401	SSbc-2	10-12	50	50
	d. Abut ends of sweatband and join with a row of zig-zag stitching, reinforced on the underside with a strip of coated material.	304	FSe-1	10-12	40	40

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:20Z
Check the source to verify that this is the current version before use.

TABLE II. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin/ Looper
12.	Attach sweatband.					
	a. The sweatband shall be zigzag stitched through the curtain seam allowance and the panels with the ends of the sweatband overlapping 3/4 ±1/4 inch and the line of stitching overlapped. The ends of the sweatband shall not overlap at the backseam of the cap. The double ply of the sweatband shall not be less than 2 inches or more than 4 inches from the backseam of the cap.	304	LSa-1	10-14	40	40
	b. The overlapped end of the sweatband shall be zigzag stitched to the underlapped portion of the sweatband The stitching shall be through the sweatband only.	304	LSa-1	10-12	40	40
	or					
	c. If the alternate abutted sweatband is used, the sweatband shall be stitched through curtain seam allowance and the side panels. The abutted end shall not be less than 2 inches or more than 4 inches from the back seam of cap.	301 or 304	LSa-1	10-12	40	40

Source: https://assist.dla.mil -- Downloaded: 2026-10-23112:20Z
Check the source to verify that this is the current version before use.

TABLE II. Sewing operations. - Continued

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin/ Looper
13.	Clean cap. a. All ends of the stitching shall be trimmed. b. All loose threads, spots, stains, and pin tickets shall be removed from the cap.					
14.	Finish pressing. a. The entire cap shall be touched up as necessary, using live steam, to remove all wrinkles and unwanted creases. b. All gloss and pressing impressions shall be removed from the cap.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:20Z
Check the source to verify that this is the current version before use.

TABLE III. Finished measurements (inches).

Size	Height of Side Panels 1/			Height of Curtain 2/				
	Center Front	Center Back	Overall At Side Center	Center Front	Center Back	Side	Top Crown	Circum-ference 3/
20	3	1-7/8	3-1/2	2-3/8	1-1/8	2-5/8	2-3/8	20
20-1/2	3-1/8	1-7/8	3-5/8	2-3/8	1-1/4	2-3/4	2-1/2	20-1/2
21	3-1/8	2	3-5/8	2-3/8	1-3/8	2-3/4	2-5/8	21
21-1/2	3-1/4	2	3-3/4	2-3/8	1-1/2	2-7/8	2-3/4	21-1/2
22	3-1/4	2-1/8	3-3/4	2-3/8	1-5/8	2-7/8	2-7/8	22
22-1/2	3-3/8	2-1/8	3-7/8	2-3/8	1-3/4	3	3	22-1/2
23	3-3/8	2-1/4	3-7/8	2-3/8	1-7/8	3	3-1/8	23
23-1/2	3-3/8	2-1/4	4	2-3/8	2	3-1/8	3-1/4	23-1/2
24	3-1/2	2-3/8	4	2-3/8	2-1/8	3-1/8	3-3/8	24
24-1/2	3-1/2	2-3/8	4-1/8	2-3/8	2-1/4	3-1/4	3-1/2	24-1/2
Tolerance	±1/8	±1/8	±1/8	±1/8	±1/8	±1/8	±1/8	±1/4

1/ The overall height measurements of the panels shall be taken at the front the back, and the center of the cap from the bottom folded edge of the curtain to the top edge of the side panel (see figure 2).

2/ The finished measurements of the height of the curtain shall not include the braid and shall be taken at the front, the back and both sides at the point where the front lap-over terminates from the bottom folded edge of the curtain to the top edge of the curtain (see figure 2).

3/ The finished measurements for the circumference shall be taken with a ga

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:20Z
Check the source to verify that this is the current version before use.

3.9 Workmanship. The finished cap shall conform to the quality of product established by this specification. As a final step in the contractor's production control plan before formation of a lot, each cap shall be examined for the defects listed in MIL-STD-902. The occurrence of defects shall not exceed the appplicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the supplier may use his own or any other facility suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submittted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).

b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When required (see 6.2), the first article shall be inspected as specified in 4.4.3 for compliance with design, construction, workmanship, and dimensional requirements. The presence of any defect shall be cause for rejection of the first article.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-902.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified or qualified in this document or applicable purchase document.

4.4.2 In-process inspection. Inspection shall be made at any point or during any phase of the manufacturing process to determine whether construction details which cannot be examined in the finished product are in accordance with specified requirements. This inspection shall include verification that the working patterns conform to the Government patterns in all respects. Whenever nonconformance is noted, corrections shall be made to the items affected and lot in process. Items which cannot be corrected shall be removed from production.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:20Z
Check the source to verify that this is the current version before use.

4.4.3 Point count inspection. Sampling and inspection provisions for end item examination of the cap, dimensional examination, and packaging inspection shall be performed in accordance with MIL-STD-902.

4.4.3.1 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the inspection lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

4.5 Inspection method

4.5.1 Fusing operations. Fusing operations should be in accordance with procedures recommended by the fusible producers. Caps have been successfully fused with the fusing press (it is recommended the fusing machine be checked at least twice a day and after each warm-up period) set at the following conditions:

a. Temperature between fabrics of 290°F (minimum) and 310°F (maximum).

b. Pressure between pressing surfaces, 3 to 4 pounds per square inch.

c. Pressing time of 10 seconds (minimum) and 12 seconds (maximum).

d. Heat dry.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial, as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:20Z
Check the source to verify that this is the current version before use.

5.1.1 Level A

5.1.1.1 Unit packing. Each cap shall be inserted in a snug-fitting flat style clear polyethylene film bag of 0.00125 inch thickness (±25 percent tolerance). The polyethylene bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The final closure of the bag shall be heat sealed with the heat seal made as close as possible to the open end. The bag may be fabricated from polyethylene film tubing or sheeting. A 1/4 inch diameter hole shall be made at one corner of each polyethylene bag to allow excess air to escape. Alternatively, the final closure of the polyethylene bag may be accomplished by means of a tuck or reverse flap.

5.1.1.2 Intermediate packing. Sixty caps of one size only, unit packed as specified in 5.1.1.1, shall be packed in an intermediate paperboard box conforming to type CF or SF, class domestic, style FTC of PPP-B-636. The minimum bursting strength of the box shall be 175 pounds per square inch. The inside dimensions of the box shall be approximately 15 inches long, 12-1/2 inches wide and 5-1/2 inches deep. The box shall be closed by applying tape across the lengthwise seams and extending the tape along the bottom and up the side of the box at least 2 inches. The tape shall be a minimum of 2 inches wide and shall conform to type II, class 2 of PPP-T-45.

5.1.2 Commercial. The caps shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial, as specified (see 6.2).

5.2.1 Level A. Three-hundred and sixty caps of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container that is assembled, closed and reinforced to conform to type CF or SF, class weather-resistant, style RSC of PPP-B-636. The minimum bursting strength of the shipping container shall be 275 psi. The shipping container shall be securely sealed by applying adhesive (glue) throughout the entire area of contact between the flaps or by a combination of metal stitching the bottom flaps and sealing the top flaps with adhesive. Inspection shall be in accordance with 4.4.3. Toward the end of the contract or when there are less than the required amount of the same size per shipping container, mixed sizes may be packed within the same container.

5.2.2 Level B. Three-hundred and sixty caps of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container that is constructed and closed to conform to type CF or SF, class domestic, style RSC of PPP-B-636. The minimum bursting strength of the shipping container shall be 275 psi. The shipping container shall be securely sealed by applying adhesive (glue) throughout the entire area of contact between the flaps or by a combination of metal stitching the bottom flaps and sealing the top flaps with adhesive. Inspection shall be in accordance with 4.4.3. Toward the end of the contract or when there are less than the required amount of the same size per shipping container, mixed sizes may be packed within the same container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:20Z
Check the source to verify that this is the current version before use.

5.2.2.1 Weather-resistant container. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636, and closed in accordance with method III as specified in the appendix of PPP-B-636 except that the inspection shall be in accordance with 4.4.3.

5.2.3 Commercial. Caps, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Marking. In addition to any special marking required by the contract or purchase order, unit packages and shipping containers shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

5.3.1 Polyethylene packages. Polyethylene bagged unit packs shall have the required identification information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification.

5.3.2 Mixed sizes. Each shipping container, packed with mixed sizes, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label, 5 by 4 inches, with the words "MIXED NSNs" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and NSNs contained therein.

5.4 Palletization. When specified (see 6.2), caps, packed as specified in 5.2, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with the bonding means K and L or the film bonding means O or P. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

6. NOTES

6.1 Intended use. The garrison cap covered by this specification is intended to be worn by female personnel of the Department of the Air Force.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number and date of this specification.

b. Type, class and size required (see 1.2 and 1.2.1).

c. When a first article sample is required (see 3.2, 4.3 and 6.4).

d. Selections of applicable levels of preservation and packing (see 5.1 and 5.2).

e. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

f. When palletization is required (see 5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:20Z
Check the source to verify that this is the current version before use.

6.3 Samples. For access to samples of the end item and shade samples, address the contracting activity issuing the invitation for bids.

6.4 First article. When a first article sample is required, it shall be inspected and approved under the appropriate provisions of FAR 15-209.4. The first article should be a preproduction sample or initial production item. The contracting officer should specify the appropriate type of first article and the number of units to be furnished.

Custodian:
Air Force - 11


Review activities:
Air Force - 82, 99
DLA - CT

User activity:
Air Force - 45


Preparing activity:
Air Force - 11

Project No. 8410-F973

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:20Z
Check the source to verify that this is the current version before use.

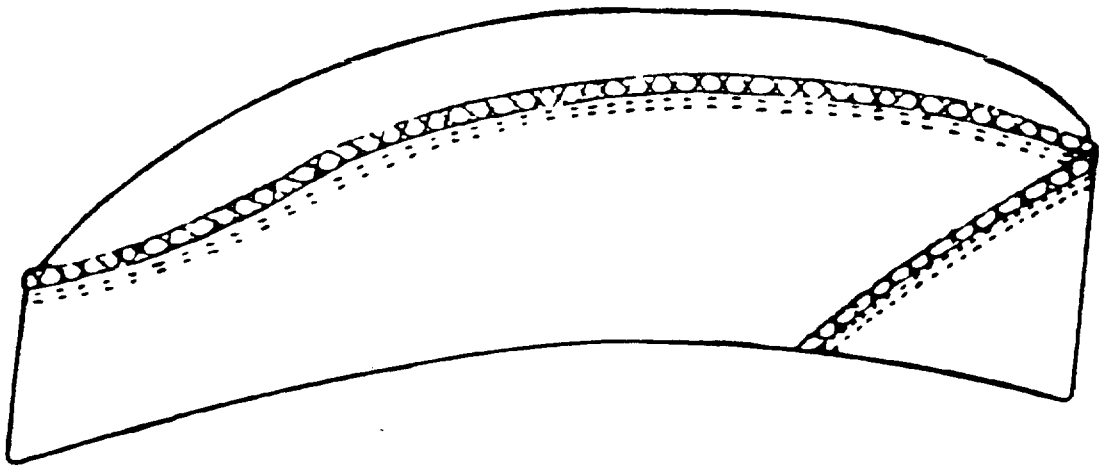


Side view

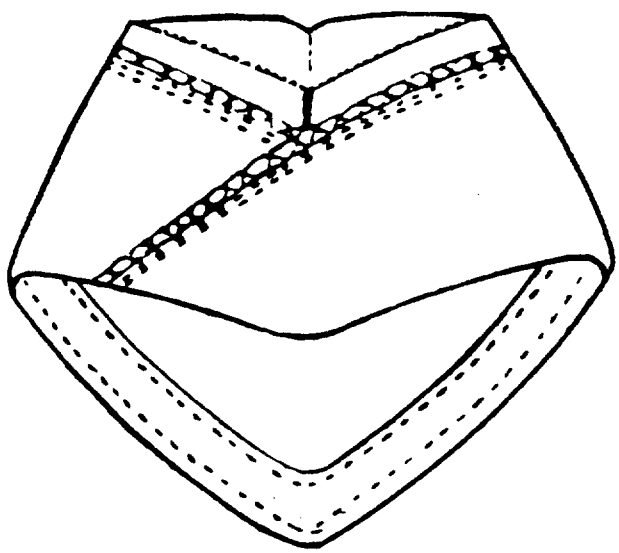


Front view

FIGURE 1. Woman's garrison cap.

Source: https://assist.dla.mil -- Downloaded: 2020-10-28T14:29Z
Check the source to verify that this is the current version before use.

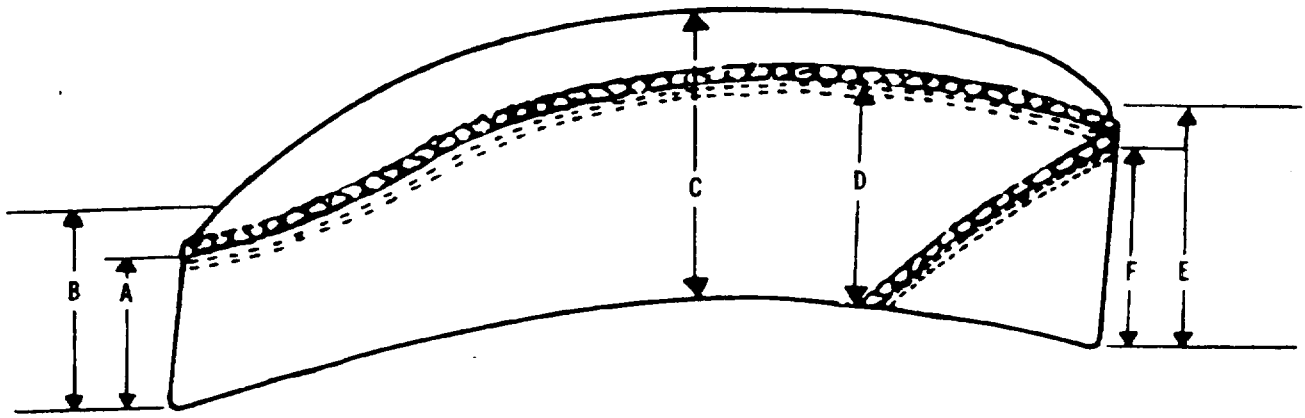

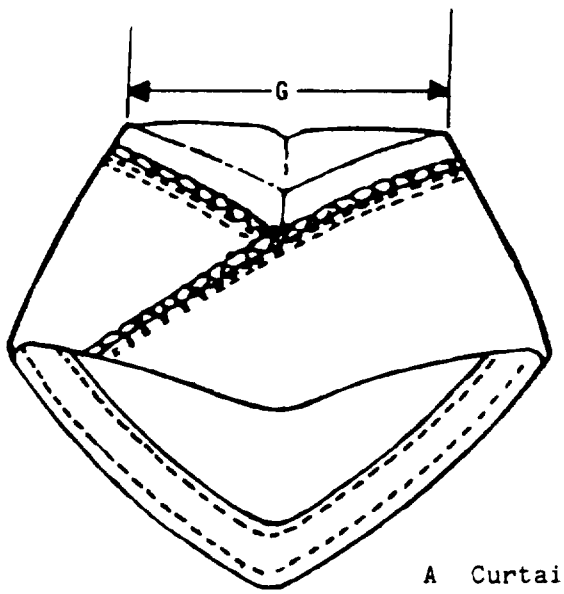

A Curtain height, Center back
B Side panel height, Center back
C Panel, Overall at side center
D Side overall, Curtain
E Side panel height, Center front
F Curtain height, Center front
G Top crown

FIGURE 2. Woman's garrison cap measurement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:20Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for u submitting comments and suggestions for improvements. All users of military standardization documents are invited to pro suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorizatio to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE AIR FORCE
ASD/ENES
Wright-Patterson AFB OH 45433

NO POST
NECESS
IF MAIL
IN THI
UNITED ST

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

ASD/ENES
Wright-Patterson AFB OH 45433

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:20Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:20Z
Check the source to verify that this is the current version before use.