MIL-STD-35-87(MI)
9 JANUARY 1975

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

HOLDERS, SUPPORTS, AND BRACKETS (CRYSTAL)

FSC-EDS

Source: https://assist.dla.mil -- Downloaded: 202640-23T21:00Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL COMMAND
Washington, D.C. 20315

Automated Engineering
Document Preparation System,
Holders, Supports and Brackets (Crystal)

MIL-STD-35-87(MI)

1. This Military Standard is approved by the U.S. Army Materiel Command, Department of the Army, and is mandatory for use by all its activities. All other military activities are required to employ this Standard where suitable.

2. Recommended corrections, additions or deletions should be addressed to Commander, U.S. Army Missile Command, ATTN: AMSMI-RCS, Redstone Arsenal, Alabama 35809.

Source: https://assist.dla.mil -- Downloaded: 202640-23T21:00Z
Check the source to verify that this is the current version before use.

MIL-STD-35-87(MI)

FOREWORD

1. The purpose of MIL-STD-35-87(MI) is to facilitate the preparation of Military Specification, Exceptions for Crystal Holders, Supports and Brackets.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the basic MIL-STD-35, along with MIL-STD-35-1 for Materials, and MIL-STD-35-2 for Finishes.

3. It is important that the procedure described in the basic document (MIL-STD-35C) and subsequent revisions be followed explicitly in order for the computer to produce a document suitable for competitive procurement. Information which is standard for all dash numbered parts has been included in the basic document at the issuance of MIL-STD-35C. This information is not repeated in each dash numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS

SECTION	TITLE	INSTR PAGE	SRL PAGE
SECTION 1	INTRODUCTION	1-1	
1.1	Scope	1-1	
1.2	Purpose	1-1	
1.3	Format	1-1	
1.4	Military Specification, Exception Title Index	1-2	
1.4.1	Title	1-2	
1.4.2	Index	1-3	
SECTION 2	APPLICABLE DOCUMENTS	2-1	
SECTION 3	DEFINITIONS	3-1	
SECTION 4	GENERAL DESCRIPTION OF AEDPS	4-1	
SECTION 5	DETAILED DESCRIPTION OF AEDPS	5-1	
5.1	Introduction	5-1	
5.2	Specification Requirement Sheet (SRS)	5-1	
5.3	Specification Requirements	5-1	
5.4	Code 1006 Requirements and Test Methods	5-1	
5.5	Approved Item Name Code	5-2	
5.6	Dimensions and Figures	5-3	
5.7	Applicable Documents	5-3	
5.8	Tabulation	5-3	
5.9	Design Characteristics	5-3	5-17
5.10	Insulation Resistance	5-5	5-18

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:00Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS (CONT)

SECTION	TITLE	INSTR PAGE	SRL PAGE
5.11	Salt Spray	5-8	5-20
5.12	Seal	5-8	5-20
5.13	Solderability	5-11	5-23
5.14	Terminal Strength	5-12	5-24
5.15	Thermal Shock (Base Assembly)	5-13	5-25
5.16	Thermal Shock (Glass Envelope)	5-15	5-27
SECTION 6	USE OF AEDPS	6-1	
6.1	Procedure	6-1	
SECTION 7	FIGURES	7-1	
SECTION 8	TABLES	8-1	

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:00Z
Check the source to verify that this is the current version before use.

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM (AEDPS)

SECTION 1

INTRODUCTION

1.1 Scope

This dash numbered part of the Automated Engineering Document Preparation System, MIL-STD-35, covers detailed requirements of Crystal Holders, Supports and Brackets.

1.2 Purpose

The purpose of this dash numbered part of MIL-STD-35 is to provide a requester necessary information to properly prepare a request for a Crystal Holders, Supports and Brackets Military Specification, Exception (MSE).

1.3 Format

The requester will find it impossible to complete an SRS using only this dash numbered part of MIL-STD-35. Specification requirements which are standard for all generic families have been included in the master document at the issuance of MIL-STD-35C. These specification requirements are not repeated in each dash numbered part. The following list contains subjects from MIL-STD-35C which are pertinent to every family unless otherwise excepted.

General Description of AEDPS
Part Numbering
Specification Requirements Sheet
Writing Methodology
Mandatory Specification Requirements
General Specification Requirements
Dimensions and Drawings
Applicable Documents
Materials
Finishes
Inspections
Single and Multi-Item Specifications (Tabulation)
Sources
Search
General Instructions for SRL
Tables A through S

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

1.4 Military Specification, Exception Title Index

1.4.1 Title

The title of the generated MSE must be selected from one of the titles listed in the Military Specification Exception Title Index (see 1.4.2). If a suitable title is not found in the Military Specification Exception Title Index, a request should be forwarded to USAMICOM, ATTN: AMSMI-RCS, along with the desired title, and the related document. A code will be assigned and the code, title, and related document will be made a part of the Military Specification Exception Title Index. The requester will be notified of the code assigned.

One of the six-digit characteristic value codes, listed in the CODE column of the Military Specification Exception Title Index, entered on a Specification Requirements Sheet (SRS), will specify that the title of the MSE will be the title shown with that code in the index. Each MSE title listed in the index is compatible with the document(s) listed with that title in the RELATED DOCUMENT column. The list may or may not be a complete listing.

The information contained in the RELATED DOCUMENT COVERAGE column is intended for the requester's reference; when more than one document is listed for a title, this information will be found useful in determining which of the documents is most suitable for use as the applicable General Specification.

The MSE title uses the basic federal item name listed in Cataloging Handbook H6. Titles with additional modifying and identifying words are provided to assist a designer in defining the scope of the MSE. To allow the designer flexibility, the title is generally not as restrictive as the basic specification to which the exception is taken. The reverse AEDPS title comprises the words that will appear in the Scope paragraph (1.1) of the MSE.

If the item selected from the AEDPS document becomes an item of supply, then the Cataloging Handbook H6 nomenclature must be used.

The MSE title may or may not be the same as the title used in DODISS, FIIG or the document to which the MSE document was written. Documents referenced in the MSE that will be listed in the Applicable Documents paragraph (2.1) of the MSE will be identified by the exact title that appears on the referenced document. The title written on the MSE or in DODISS or FIIG will not be entered in paragraph 2.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

1.4.2 Index

The Military Specification Exception Title Index is as follows:

CODE	TITLE	RELATED DOCUMENT	RELATED DOCUMENT COVERAGE
Ø63ØØ1	Holder, Crystal	MIL-H-10056	Holder
Ø63ØØ2	Support, Crystal	MIL-H-10056	Support
Ø63ØØ3	Bracket, Crystal	MIL-H-10056	Bracket

Source: https://assist.dla.mil -- Downloaded: 202640-23T21:00Z
Check the source to verify that this is the currentversion before use.

SECTION 2

APPLICABLE DOCUMENTS

The following documents form a part of this Standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-H-10056	Holders, Crystal, General Specification For

STANDARDS

MILITARY

MIL-STD-202	Test Methods for Electronic and Electrical Parts

OTHER PUBLICATIONS

ASTME380	Metric Practice Guide

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

SECTION 3

DEFINITIONS

Definitions contained in MIL-STD-35 are applicable to Crystal Holders, Supports and Brackets.

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:00Z
Check the source to verify that this is the current version before use.

SECTION 4

GENERAL DESCRIPTION OF AEDPS

The general description of AEDPS contained in MIL-STD-35 is applicable to Crystal Holders, Supports and Brackets.

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:00Z
Check the source to verify that this is the current version before use.

SECTION 5

DETAILED DESCRIPTION OF AEDPS

5.1 Introduction

The detailed description of AEDPS applicable to Crystal Holders, Supports and Brackets consists of the following:

a. The detailed description of AEDPS specified in MIL-STD-35.

b. The additional detailed description contained in this section.

5.2 Specification Requirement Sheet (SRS)

Each request for a MSE shall be submitted on an SRS. The preferred forms are the modified 80 column keypunch forms shown in MIL-STD-35. It is expected that copies, as required, of the SRS form will be reproduced locally.

A detailed description of the SRS and its use, contained in MIL-STD-35, is applicable to Crystal Holders, Supports and Brackets.

5.3 Specification Requirements

All specification requirements described in MIL-STD-35 are applicable to Crystal Holders, Supports and Brackets.


Refer to ASTME380 for guidance in using the International System of Units.

5.4 Code 1006 Requirements and Test Methods

Many requirements and test methods are shown on the SRL as "Requirements per 1006 document" or "Test per 1006 document" with an adjacent code for each. The adjacent code, entered on the SRS with an "X", will cause the MSE to state that the requirement or test method be in accordance with the document to which exception is being taken.

Similarly, many requirements and test methods are shown on the SRL as "Requirements per 1006 document except" or "Test per 1006 document except " with an adjacent code for each. This adjacent code, entered on the SRS with the exact words desired to complete the statement shown, will specify a complete statement. Only the words required to complete the statement after the "except" are entered on the SRS. (Example 1.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

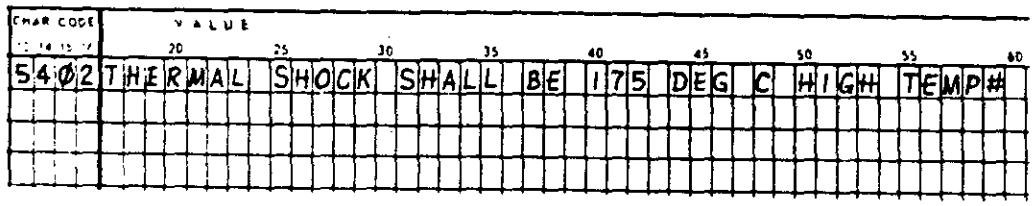

EXAMPLE 1.

In Example 1, the code and entry will generate a paragraph as follows:

"GROUP A INSPECTION. GROUP A INSPECTION SHALL BE PERFORMED AS SPECIFIED IN THE SPECIFICATION REFERENCED IN 3.1 EXCEPT THERMAL SHOCK SHALL BE 175 DEG C HIGH TEMP."

The test method per 1006 code and requirements per 1006 code from the same test shall not be used together. This condition would indicate no exception is being specified. If a test method code(s) has been selected, it is mandatory that a requirement code be selected; and if a requirement code has been selected, it is mandatory that a test method code(s) be selected.

5.5 Approved Item Name Code

The approved item name code to be entered on the SRS with Code 1007 for Crystal Holders, Supports and Brackets is selected from the following list:

Item Name	Approved Item Name Code
Holder, Quartz Crystal	00197
Unapproved Name	77777

Only the Approved Item Name Code number is entered on the SRS with Code 1007.

Source: https://assist.dla.mil -- Downloaded: 202640-23T21:00Z
Check the source to verify that this is the current version before use.

5.6 Dimensions and Figures

All specification requirements for dimensions and figures described in MIL-STD-35 are applicable.

The figures applicable to Crystal Holders, Supports and Brackets are contained in the Appendix.

5.7 Applicable Documents

The documents listed in the Applicable Document List of Section 5 of MIL-STD-35 and appropriate codes from Table B of MIL-STD-35 shall be entered on the SRS. In addition, the appropriate documents shown in the DOCUMENTS column below and applicable codes from Table B of MIL-STD-35 shall be entered on the SRS when the codes listed in the CODES column are used to specify tests or requirements. Shown parenthetically in the CODES column is a reference to the applicable tests or requirements.

DOCUMENTS	CODES
MIL-H-10056	1600 (Design Characteristics) 1953 (Thermal Shock, Base Assembly) 1986 (Thermal Shock, Glass Envelope)
MIL-STD-202	1511 (Insulation Resistance) 4771 (Salt Spray) 4732 (Seal) 4683 (Solderability) 1375 (Terminal Strength)

5.8 Tabulation

All specification requirements for tabulation described in MIL-STD-35 are applicable. There are no candidates for tabulation in this dash-numbered part. However, dimensional codes 1010 thru 1369 (Table A of MIL-STD-35) apply.

5.9 Design Characteristics

Code 1600, entered on the SRS with the supply type designation number from MIL-H-10056, will specify the type designation (Example 2).

Three codes are available for specifying the holder. None of these codes are mandatory. Only one code should be selected. These codes and information concerning them are as follows:

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:00Z
Check the source to verify that this is the current version before use.

Code 1602, entered with an "X" on the SRS, will specify that the holder is to be metal and hermetically sealed.

Code 1604, entered with an "X" on the SRS, will specify that the holder is to be glass and hermetically sealed.

Code 1606, entered with an "X" on the SRS, will specify that the holder is to be plastic and sealed (Example 2).

Four codes are available for specifying the temperature range. These codes and information concerning them are as follows:

Codes 5068 and 5069, entered with a value (in degrees C) on the SRS, will specify the minimum and the maximum operating temperature, respectively. If Code 5068 is used, it is mandatory to use Code 5069 (Example 2).

Codes 5070 and 5071, entered with a value (in degrees C) on the SRS, will specify the minimum and the maximum nonoperating temperature, respectively. If Code 5070 is used, it is mandatory to use Code 5071.

Eight codes are available for specifying the altitude at which the item may be used. None of these codes are mandatory. These codes and information concerning them are as follows:


Codes 5072 or 5073, entered with a value (in feet or metres, respectively) on the SRS, will specify the lowest altitude at which the item must operate.

Code 5074 or 5075, entered with a value (in feet or metres, respectively) on the SRS, will specify the highest altitude at which the item must operate (Example 2).

Code 5076 or 5077, entered with a value (in feet or metres, respectively) on the SRS, will specify the lowest altitude to which the item will be subjected while nonoperative.

Code 5078 or 5079, entered with a value (in feet or metres, respectively) on the SRS, will specify the highest altitude to which the item will be subjected while nonoperative.

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:00Z
Check the source to verify that this is the current version before use.

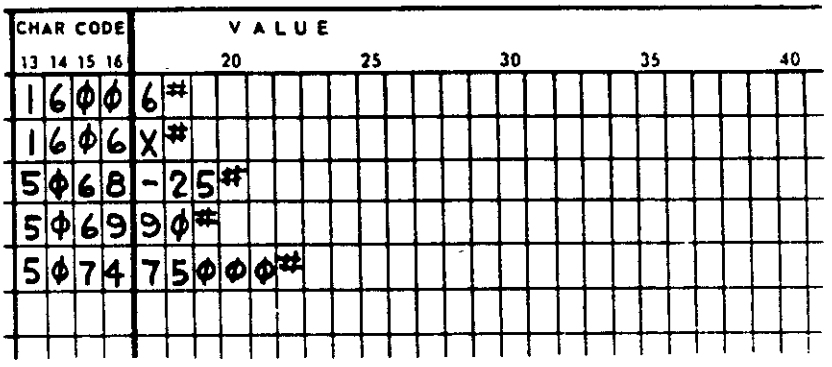

EXAMPLE 2.

Code 1600 specifies 6 as the supply type designation number.

Code 1606 specifies that the holder is to be plastic and sealed.

Codes 5068 and 5069 specify an operating temperature range from -25 degrees Celsius to +90 degrees Celsius.

Code 5074 specifies that the highest operating altitude is 75,000 feet.

5.10 Insulation Resistance

Code 1370 specifies to test in accordance with 1006 document (5.4).

Code 1371 specifies to test in accordance with 1006 document except (5.4).

Code 1511, entered with an "X" on the SRS, will specify to test in accordance with Method 302 of MIL-STD-202.

Code 1378 or 1373, entered with a value (test condition letter or in volts dc, respectively) on the SRS, will specify the test condition letter or the test potential. Code 1378 or 1373 is mandatory if testing is to be performed in accordance with Method 302 of MIL-STD-202. If Code 1378 is used, it will specify that the test condition is to be in accordance with the letter shown with this code on the SRS (Example 3). If Code 1373 is used, it will specify that the test potential shall be the value shown with this code on the SRS.

Source: https://assist.dla.mil -- Downloaded: 202640-23T21:00Z
Check the source to verify that this is the currentversion before use.

Code 1522, entered with an "X" on the SRS, will specify that points of measurement shall be between mutually insulated parts.

Code 1523, entered with an "X" on the SRS, will specify that points of measurement shall be between all mutually insulated parts and ground.

Code 1524, entered with an "X" on the SRS, will specify that points of measurement shall be between current carrying parts and the case.

Code 1372, entered with a value (in degrees C) on the SRS, will specify that the first test temperature shall be the nominal value shown with this code on the SRS (Example 3).

Code 1381, entered with a value (in degrees C) on the SRS, will specify that the second test temperature shall be the nominal value shown with this code on the SRS (Example 3).

Code 1376, entered with a value (in seconds) on the SRS, will specify that the electrification time shall be the value shown with this code on the SRS (Example 3).

Code 1377, entered with a value (in percent) on the SRS, will specify that the measurement error at the required insulation resistance value shall not exceed the value shown with this code on the SRS (Example 3).

Code 1379 specifies that requirements shall be in accordance with 1006 document (5.4).

Code 1380 specifies that requirements shall be in accordance with 1006 document except (5.4).


Code 1407, entered with an "X" on the SRS, will specify that there shall be no evidence of physical damage. Code 1407 is mandatory if requirements are to be detailed.

Code 1384, entered with a value (in megohms) on the SRS, will specify that the first test temperature insulation resistance shall be the minimum value shown with this code on the SRS (Example 3).

Code 1387, entered with a value (in megohms) on the SRS, will specify that the second test temperature insulation resistance shall be the minimum value shown with this code on the SRS (Example 3).

Code 1386, entered with a value (in megohms) on the SRS, will specify the minimum insulation resistance if no temperature is specified or only one temperature is specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

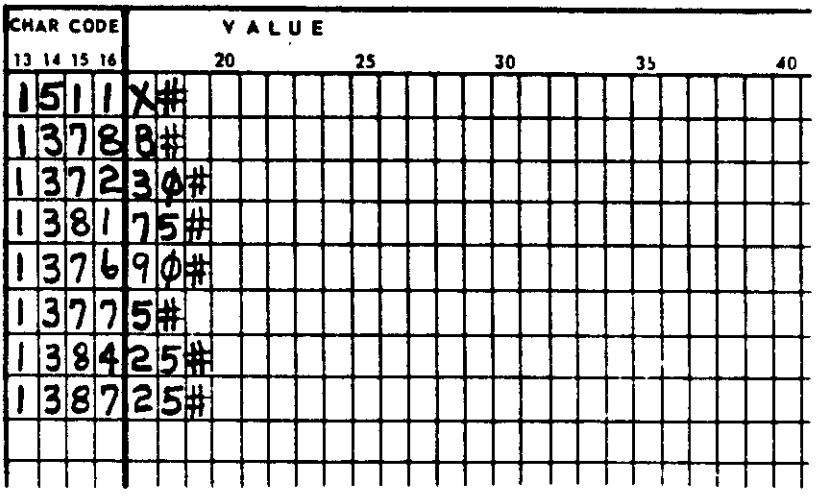

EXAMPLE 3.

The codes and values entered on the SRS in Example 3 specify the following:

Code 1511 specifies that testing shall be in accordance with Method 302 of MIL-STD-202.

Code 1378 specifies that test condition letter B applies.

Code 1372 specifies that the first test temperature shall be 30 degrees C, nominal.

Code 1381 specifies that the second test temperature shall be 75 degrees C, nominal.

Code 1376 specifies that the electrification time shall be 90 seconds.

Code 1377 specifies that the measurement error at the insulation resistance value required shall not exceed 5 percent.

Source: https://assist.dla.mil -- Downloaded: 202640-23T21:00Z
Check the source to verify that this is the current version before use.

Code 1384 specifies that the insulation resistance at the first test temperature shall be 25 megohms, minimum.

Code 1387 specifies that the insulation resistance at the second test temperature shall be 25 megohms, minimum.

5.11 Salt Spray

Code 4769 specifies to test in accordance with 1006 document (5.4).

Code 4770 specifies to test in accordance with 1006 document except (5.4).

Code 4771, entered with an "X" on the SRS, will specify to test in accordance with Method 101 of MIL-STD-202.

Code 4772, entered on the SRS with a test condition letter, will specify that the test condition shall be as specified by the test condition letter shown with this code on the SRS. If Code 4771 is used, it is mandatory that Code 4772, with a test condition letter, be entered on the SRS.

Code 4877 specifies that requirements shall be in accordance with 1006 document (5.4).

Code 4878 specifies that requirements shall be in accordance with 1006 document except (5.4).

Code 4782, entered with an "X" on the SRS, will specify that there shall be no evidence of corrosion, physical damage, or degradation of performance.

5.12 Seal

Code 4733 specifies to test in accordance with 1006 document (5.4).

Code 4734 specifies to test in accordance with 1006 document except (5.4).

Code 4732 and an "X" entered on the SRS will specify to test in accordance with Method 112 of MIL-STD-202 (Example 4).

Code 4737, entered on the SRS with a test condition letter, will specify that the test condition shall be as specified by the test condition letter shown with this code on the SRS (Example 4). If Code 4732 is used, it is mandatory that Code 4737, with a test condition letter, be entered on the SRS.

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:00Z
Check the source to verify that this is the currentversion before use.

Code 4738, entered on the SRS with the name or description of the leak detecting liquid, will specify the liquid to be used in the test if an exception is required.

Code 4739, entered with a value (in degrees C) on the SRS, will specify that the temperature of the leak detecting liquid shall be the value shown with this code on the SRS.

Code 4740, entered with the test procedure number on the SRS, will specify that the test procedure number shall be that shown with this code on the SRS (Example 4). Code 4740 is mandatory if test condition C is specified with Code 4737.

Code 4741, entered with a value (in ATM cc/sec) on the SRS, will specify the degree of leakage rate sensitivity to which the leak detector is to be set (Example 4). Code 4741 is mandatory if test condition C is specified with Code 4737.

Code 4742 or 4736, entered with a value (in psig or kilopascals) on the SRS, will specify the backfilling pressure (Example 4).

Code 4749, entered on the SRS with a number, will specify the number of pressure cycles. Code 4749 shall be used only if Code 4740 specifies test procedure II.

Code 4750, entered on the SRS with a test condition letter, will specify the applicable gross leak test condition (Example 4). Code 4750 is mandatory if Procedure III is specified with Code 4740.

Code 4751 or 4735, entered with a value (in Torr or kilopascals, respectively) on the SRS, will specify the chamber pressure. Code 4751 or 4735 is mandatory if Procedure IV is specified with Code 4740.

Code 4752, entered with a value (in minutes) on the SRS, will specify the duration of the reduced pressure. Code 4752 is mandatory if Procedure IV is specified with Code 4740.

Code 4750, entered on the SRS with a test condition letter, will specify the applicable gross leak test condition. Code 4750 is mandatory if Procedure IV is specified with Code 4740.

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:00Z
Check the source to verify that this is the current version before use.

If test condition letter D or E is specified with Code 4737, two codes are available to specify the method of mounting. Neither of these codes is mandatory. These codes and information concerning them are as follows:

Code 4743, entered with an "X" on the SRS, will specify that any suitable mounting method may be used.

Code 4747, entered with an "X" on the SRS, will specify that the normal usage method of mounting may be used.

Code 4744 specifies that requirements shall be in accordance with 1006 document (5.4).

Code 4745 specifies that requirements shall be in accordance with 1006 document except (5.4).

Two codes (4746 and 4748) are available if the requirement is to be detailed. Only one code should be selected. These codes and information concerning them are as follows:

Code 4746, entered with an "X" on the SRS, will specify maximum leakage in accordance with the leak rate sensitivity specified.

Code 4748, entered with an "X" on the SRS, will specify that there shall be no bubbles indicative of leakage.

CHAR CODE 13 14 15 16	VALUE 20 25 30 35 40
4732	X#
4737	C#
4740	III#
4741	1.0 X 10 TO THE -8TH POWER#
4742	25#
4750	A#

EXAMPLE 4.

The codes and values entered on the SRS in Example 4 specify the following:

Code 4732 specifies that testing is to be in accordance with Method 112 of MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

Code 4737 specifies test condition C.

Code 4740 specifies that test procedure number III is to be used.

Code 4741 specifies that the degree of leakage rate sensitivity is to be 1 x 10^{-8} ATM cc/sec.

Code 4742 specifies that the backfilling pressure is to be 25 psig.

Code 4750 specifies that test condition A is to be used to check for gross leaks.

5.13 Solderability

Code 4661 specifies to test in accordance with 1006 document (5.4).

Code 4662 specifies to test in accordance with 1006 document except (5.4).

Code 4683, entered with an "X" on the SRS, will specify to test in accordance with Method 208 of MIL-STD-202 (Example 5).

Code 4666, entered with a number on the SRS, will specify the number of terminals to be tested.

Code 4667 or 4763, entered with a value (in inches or millimetres, respectively) on the SRS, will specify the depth of immersion (Example 5).

Code 4664 or 4865, entered with a value (in inches or millimetres) on the SRS, will specify the placement of the wire wrap from the body (Example 5).


Code 4673 specifies that requirements shall be in accordance with 1006 document (5.4).

Code 4674 specifies that requirements shall be in accordance with 1006 document except (5.4).

Code 4675, entered with an "X" on the SRS, will specify that there shall be no evidence of physical damage to the test unit (Example 5). Code 4675 is mandatory if requirements are to be detailed.

Code 4672, entered with an "X" on the SRS, will specify that the solder coverage after the dip process shall be in accordance with the acceptance criteria of Method 208 of MIL-STD-202 (Example 5).

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:00Z
Check the source to verify that this is the current version before use.

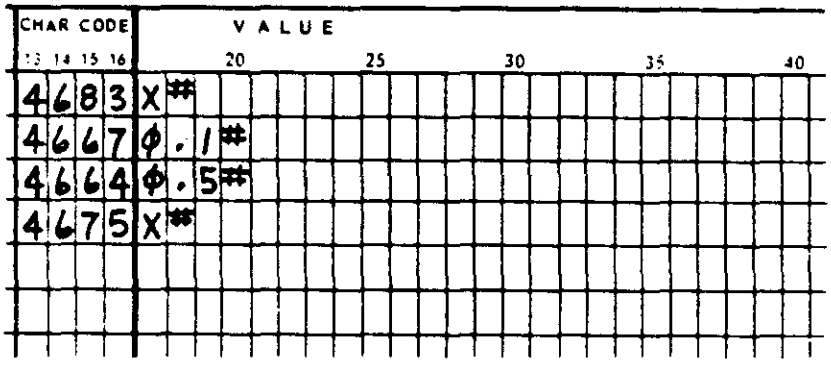

EXAMPLE 5.

The codes and values entered on the SRS in Example 5 specify the following:

Code 4683 specifies testing in accordance with Method 208 of MIL-STD-202.

Code 4667 specifies a depth of immersion of 0.1 inches.

Code 4664 specifies that the placement of the wire wrap is to be 0.5 inches from the body.

Code 4675 specifies that there is to be no evidence of physical damage.

5.14 Terminal Strength

Code 1409 specifies to test in accordance with 1006 document (5.4).

Code 1410 specifies to test in accordance with 1006 document except (5.4).

Code 1375, entered with an "X" on the SRS, will specify to test in accordance with Method 211 of MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:00Z
Check the source to verify that this is the current version before use.

Eight codes are available for specifying the test condition and other test data. It is mandatory to use one or more of these codes if testing is to be performed in accordance with MIL-STD-202. These codes and information concerning them are as follows:

Code 1411 or 1419, entered with a value (in pounds or newtons, respectively) on the SRS, will specify test condition A and the applied force.

Code 1412, entered with a number on the SRS, will specify test condition B and the number of bends.

Code 1413 or 1420, entered with a value (in pounds or kilograms, respectively) on the SRS, will specify test condition C and the load to be suspended from the terminal.

Code 1414, entered with an "X" on the SRS, will specify test condition D.

Code 1416 or 1421, entered with a value (in pound-inches or newton-metres, respectively) on the SRS, will specify test condition E and the torque.

Code 1417 specifies that requirements shall be in accordance with 1006 document (5.4).

Code 1418 specifies that requirements shall be in accordance with 1006 document except (5.4).

Code 1700, entered with an "X" on the SRS, will specify that there shall be no evidence of physical damage or degradation of performance.

5.15 Thermal Shock (Base Assembly)

Code 1950 specifies to test in accordance with 1006 document (5.4).

Code 1952 specifies to test in accordance with 1006 document except (5.4).

Code 1953, entered with an "X" on the SRS, will specify to test in accordance with MIL-H-10056 (Example 6).

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:00Z
Check the source to verify that this is the current version before use.

Eight codes are available for specifying details of the test in MIL-H-10056. These codes and information concerning them are as follows:

Code 1954, entered with a value (in seconds) on the SRS, will specify the minimum time for immersion in the liquid soldering flux (Example 6).

Code 1956, entered with a value (in degrees C) on the SRS, will specify the solder flux temperature (Example 6).

Codes 1958 and 1960, entered with values (in degrees C) on the SRS, will specify the plus and minus tolerance, respectively, of the solder flux temperature (Example 6).

Code 1962, entered with a value (in seconds) on the SRS, will specify the minimum time for immersion in solder (Example 6).


Code 1964, entered with a value (in degrees C) on the SRS, will specify the solder temperature (Example 6).

Codes 1966 and 1968, entered with values (in degrees C) on the SRS, will specify the plus and minus tolerance, respectively, of the solder temperature (Example 6).

Code 1974 specifies that requirements shall be in accordance with 1006 document (5.4).

Code 1976 specifies that requirements shall be in accordance with 1006 document except (5.4).

Code 1978, entered with an "X" on the SRS, will specify that there shall be no evidence of cracking or chipping in the glass.

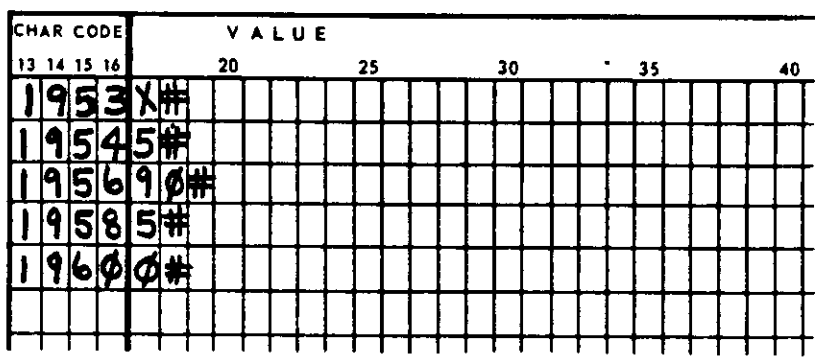

EXAMPLE 6.

Source: https://assist.dla.mil -- Downloaded: 2026Ø-23T21:00Z
Check the source to verify that this is the current version before use.

The codes and values entered on the SRS in Example 6 specify the following:

Code 1953 specifies that testing shall be performed in accordance with MIL-H-10056.

Code 1954 specifies that the minimum immersion time shall be 5 seconds.

Code 1956 specifies that the solder flux temperature shall be 90 degrees C.

Codes 1958 and 1960 specify that the solder flux temperature tolerance shall be plus 5 degrees C and minus 0 degrees C.

5.16 Thermal Shock (Glass Envelope)

Code 1982 specifies to test in accordance with 1006 document (5.4).

Code 1984 specifies to test in accordance with 1006 document except (5.4).

Code 1986, entered with an "X" on the SRS, will specify that testing shall be performed in accordance with MIL-H-10056.

Code 1988, entered with a value (in seconds) on the SRS, will specify the length of time that the test item shall be immersed in boiling water.

Codes 1990 and 1992, entered with values (in seconds) on the SRS, will specify the plus and minus tolerances, respectively, of the immersion time in boiling water.

Code 1994, entered with a value (in seconds) on the SRS, will specify the length of time that the test item shall be immersed in ice water.

Codes 1996 and 1998, entered with values (in seconds) on the SRS, will specify the plus and minus tolerances, respectively, of the immersion time in ice water.

Code 2000 specifies that requirements shall be in accordance with 1006 document (5.4).

Source: https://assist.dla.mil -- Downloaded: 202640-23T21:00Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
1.3	Enter on the SRS, requirements from MIL-STD-35	
5.9	Design Characteristics	
	Type Designation (Supply type designation number from MIL-H-10056)	1600
	Holder shall be (Select one if required)	
	Metal, hermetically sealed.	1602
	Glass, hermetically sealed.	1604
	Plastic, sealed.	1606
	Temperature Range:	
	Operating	
	Minimum temperature (deg C)	5068
	Maximum temperature (deg C)	5069
	Nonoperating	
	Minimum temperature (deg C)	5070
	Maximum temperature (deg C)	5071
	Altitude:	
	Low Operative (feet)	5072
	Low Operative (metres)	5073

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.9 (Cont)	Design Characteristics (Cont)	
	High Operative (feet)	5074
	High Operative (metres)	5075
	Low Nonoperative (feet)	5076
	Low Nonoperative (metres)	5077
	High Nonoperative (feet)	5078
	High Nonoperative (metres)	5079
5.10	Insulation Resistance	
	(Select one test method)	
	Test per 1006 document.	1370
	Test per 1006 document except _____.	1371
	Test per MIL-STD-202, Method 302.	1511
	*Condition (Select one)	
	Test Condition (letter)	1378
	Test Potential (volts, dc)	1373
	Points of measurement shall be:	
	Between mutually insulated parts.	1522

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.10 (Cont)	Insulation Resistance (Cont)	
	Between all mutually insulated parts and ground.	1523
	Between current carrying parts and case.	1524
	First test temperature (deg C) nominal	1372
	Second test temperature (deg C) nominal	1381
	Electrification time (seconds)	1376
	Measurement error at the insulation resistance value required, if other than 10 percent, shall be within _____ (percent)	1377
	(Select one requirement)	
	Requirements per 1006 document.	1379
	Requirements per 1006 document except _____.	1380
	Requirements as follows:	
	*No evidence of physical damage.	1407
	First test temperature insulation resistance, minimum (megohms)	1384
	Second test temperature insulation resistance, minimum (megohms)	1387
	Insulation resistance, minimum (megohms)	1386

Source: https://assist.dla.mil -- Downloaded: 202640-23T21:00Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.11	Salt Spray	
	(Select one test method)	
	Test per 1006 document.	4769
	Test per 1006 document except _____.	4770
	Test per MIL-STD-202, Method 101.	4771
	*Test Condition (letter)	4772
	(Select one requirement)	
	Requirements per 1006 document.	4877
	Requirements per 1006 document except _____.	4878
	Requirement as follows:	
	There shall be no evidence of corrosion, physical damage, or degradation of performance.	4782
5.12	Seal	
	(Select one test method)	
	Test per 1006 document.	4733
	Test per 1006 document except _____.	4734

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:00Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.12 (Cont)	Seal (Cont)	
	Test per MIL-STD-202, Method 112.	4732
	*Test condition (letter)	4737
	If test condition letter A or B:	
	Liquid for test (write-in)	4738
	Liquid temperature (deg C)	4739
	If test condition letter is C:	
	*Test procedure (number)	4740
	*Degree of leakage rate sensitivity (atm cc/sec)	4741
	Backfilling pressure, when required (psig)	4742
	Backfilling pressure, when required (kilopascals)	4736
	Pressure cycles, when required (number)	4749
	If Procedure III in Condition C:	
	*Applicable gross leak test condition (letter)	4750

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:00Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.12 (Cont)	Seal (Cont)	
	If Procedure IV in Condition C:	
	*Chamber Pressure (torr)	4751
	*Chamber Pressure (kilopascals)	4735
	*Duration of reduced pressure (minutes)	4752
	*Applicable gross leak test condition (letter)	4750
	If test condition letter D or E (Select one if required):	
	Any suitable mounting method.	4743
	Normal usage method of mounting.	4747
	(Select one requirement)	
	Requirements per 1006 document.	4744
	Requirements per 1006 document except _____.	4745
	Requirements as follows: (Select one)	
	Maximum leakage in accordance with leak rate sensitivity specified.	4746
	No visible bubbles indicative of leakage.	4748

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.13	Solderability	
	(Select one test method)	
	Test per 1006 document.	4661
	Test per 1006 document except _____.	4662
	Test per MIL-STD-202, Method 208.	4683
	Terminals to be tested (number)	4666
	Depth of immersion (inches)	4667
	Depth of immersion (millimetres)	4663
	Wrap wire (inches) from body	4664
	Wrap wire (millimetres) from body	4665
	(Select one requirement)	
	Requirements per 1006 document.	4673
	Requirements per 1006 document except _____.	4674
	Requirements as follows:	
	*No evidence of physical damage.	4675

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:00Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.13 (Cont)	Solderability (Cont)	
	The results of the solderability test shall be in accordance with the acceptance criteria of Method 208 of MIL-STD-202.	4672
5.14	Terminal Strength	
	(Select one test method)	
	Test per 1006 document.	1409
	Test per 1006 document except _____.	1410
	Test per MIL-STD-202, Method 211.	1375
	*Test Conditions (Select one or more as required)	
	Test Condition A, applied force (pounds)	1411
	Test Condition A, applied force (newtons)	1419
	Test Condition B, number of bends shall be _____.	1412
	Test Condition C, load (pounds)	1413
	Test Condition C, load (kilograms)	1420
	Test Condition D.	1414

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.14 (Cont)	Terminal Strength (Cont)	
	Test Condition E, torque (pound-inches)	1416
	Test Condition E, torque (newton-metres)	1421
	(Select one requirement)	
	Requirements per 1006 document.	1417
	Requirements per 1006 document except _____.	1418
	Requirement as follows:	
	No evidence of physical damage or degradation of performance.	1700
5.15	Thermal Shock (Base Assembly)	
	(Select one test method)	
	Test per 1006 document.	1950
	Test per 1006 document except _____.	1952
	Test per MIL-H-10056.	1953
	Liquid soldering flux immersion:	
	Minimum immersion time (seconds)	1954

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:00Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.15 (Cont)	Thermal Shock (Base Assembly) (Cont)	
	Solder flux temperature (deg C)	1956
	*Temperature Tolerance (deg C)	
	*Plus _____.	1958
	*Minus _____.	1960
	Molten solder immersion:	
	Minimum immersion time (seconds)	1962
	Solder Temperature (deg C)	1964
	*Temperature Tolerance (deg C)	
	*Plus _____.	1966
	*Minus _____.	1968
	(Select one requirement)	
	Requirements per 1006 document.	1974
	Requirements per 1006 document except _____.	1976
	Requirement as follows:	
	There shall be no evidence of cracking or chipping of the glass.	1978

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:00Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC NAME	CODE
5.16	Thermal Shock (Glass Envelope)	
	(Select one test method)	
	Test per 1006 document.	1982
	Test per 1006 document except _____.	1984
	Test per MIL-H-10056.	1986
	Duration of immersion in boiling water (seconds)	1988
	*Immersion time tolerance (seconds)	
	*Plus _____	1990
	*Minus _____	1992
	Duration of immersion in ice water (seconds)	1994
	*Immersion time tolerance (seconds)	
	*Plus _____	1996
	*Minus _____	1998
	(Select one requirement)	
	Requirements per 1006 document.	2000

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:00Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENTS LIST (SRL)

REF PARA	CHARACTERISTIC	
	NAME	CODE
5.16 (Cont)	Thermal Shock (Glass Envelope) (Cont)	
	Requirements per 1006 document except _____.	2002
	Requirement as follows:	
	The glass envelope shall not crack, break, or chip.	2004

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:00Z
Check the source to verify that this is the current version before use.

SECTION 6

USE OF AEDPS

6.1 Procedure

The step by step procedure contained in MIL-STD-35 is applicable to Crystal Holders, Supports and Brackets.

Custodians:
Army-MI

User Activity:
Army-MU

Review Activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

Preparing Activity:
Army-MI
(Project EDS-A063)

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:00Z
Check the source to verify that this is the current version before use.

SECTION 7

FIGURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

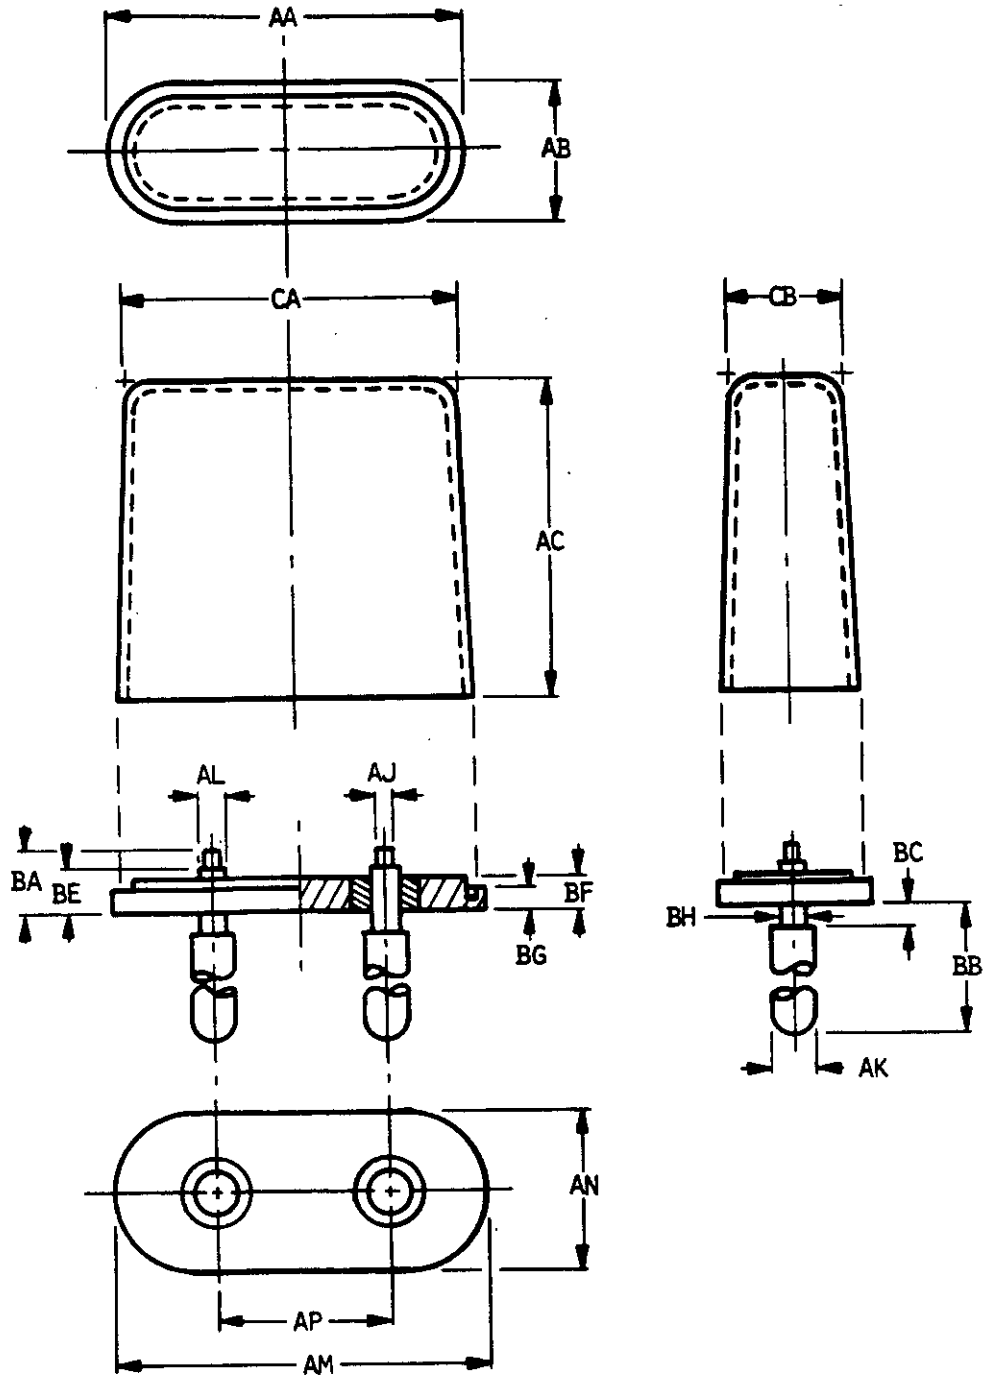


FIGURE 063-01-1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

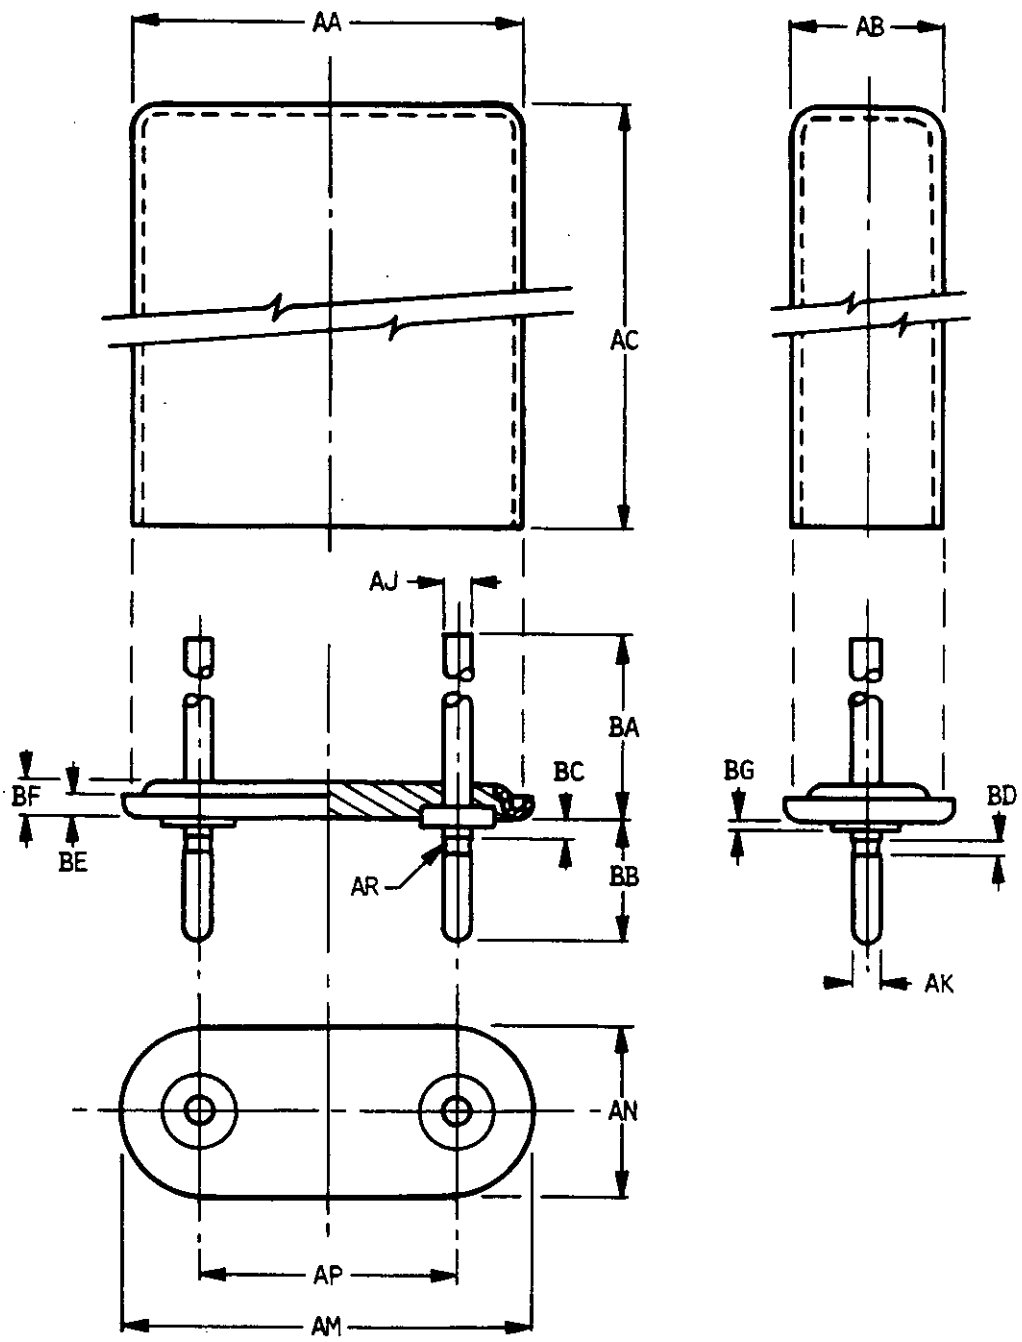


FIGURE 063-02-1.

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:00Z
Check the source to verify that this is the current version before use.

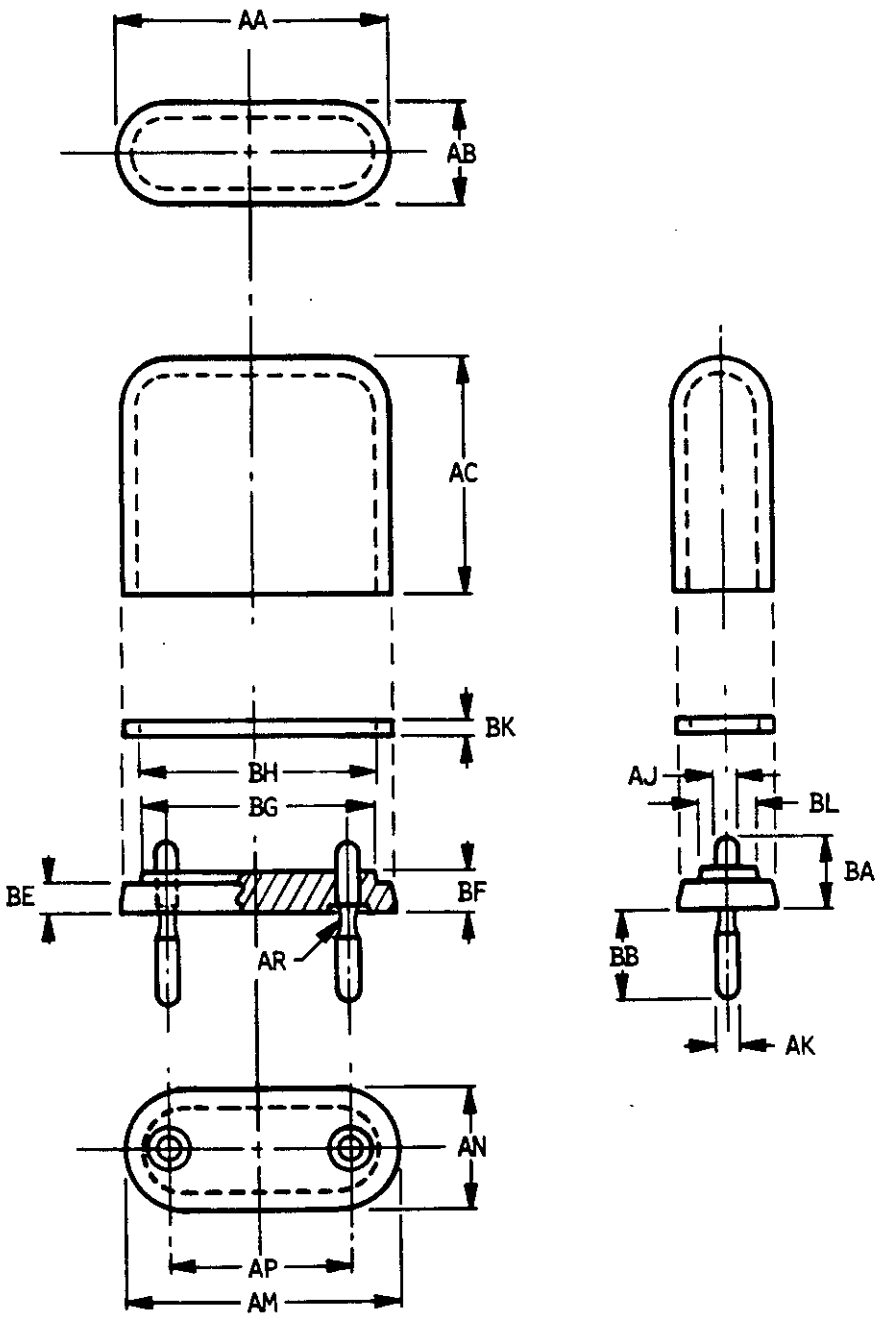


FIGURE 063-03-1

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:00Z
Check the source to verify that this is the current version before use.

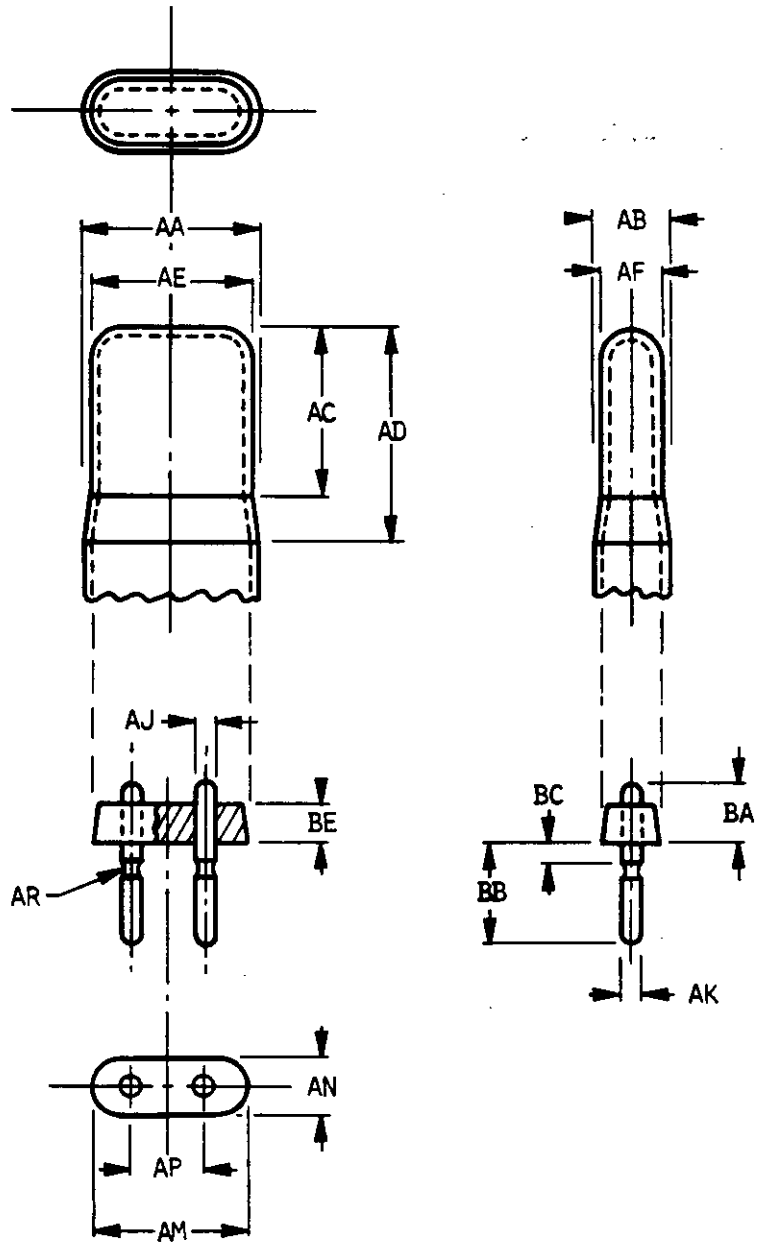


FIGURE 063-04-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

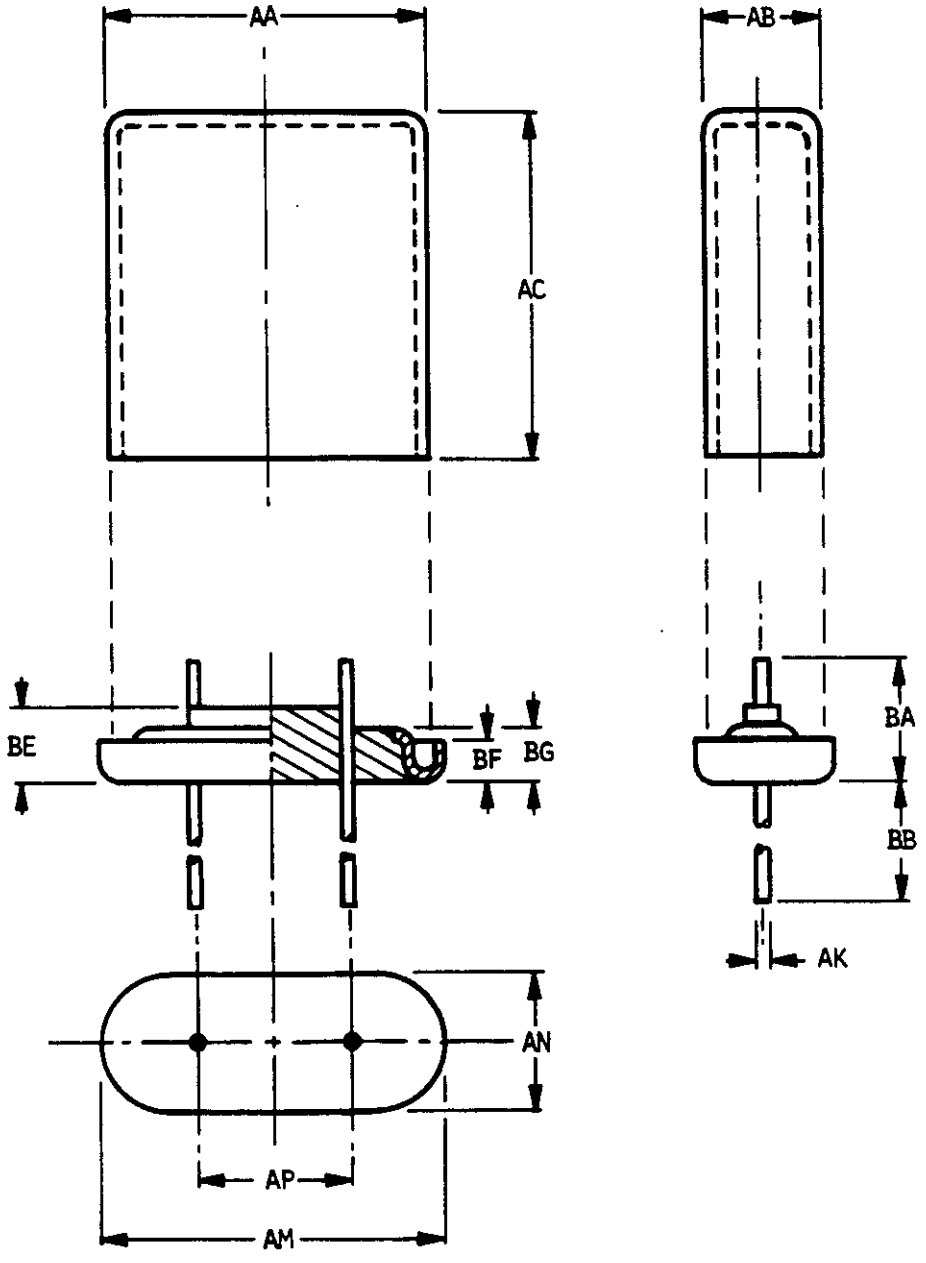


FIGURE 063-05-1

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:00Z
Check the source to verify that this is the current version before use.

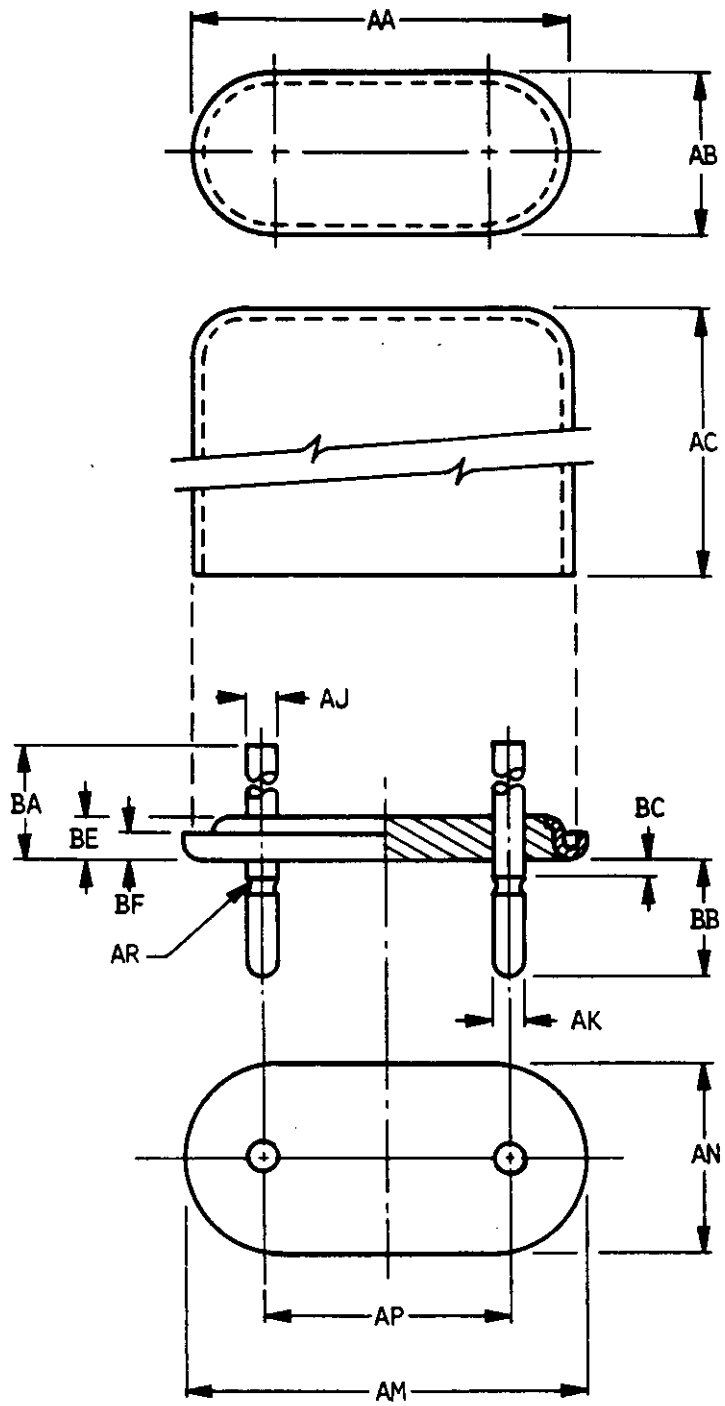


FIGURE 063-06-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

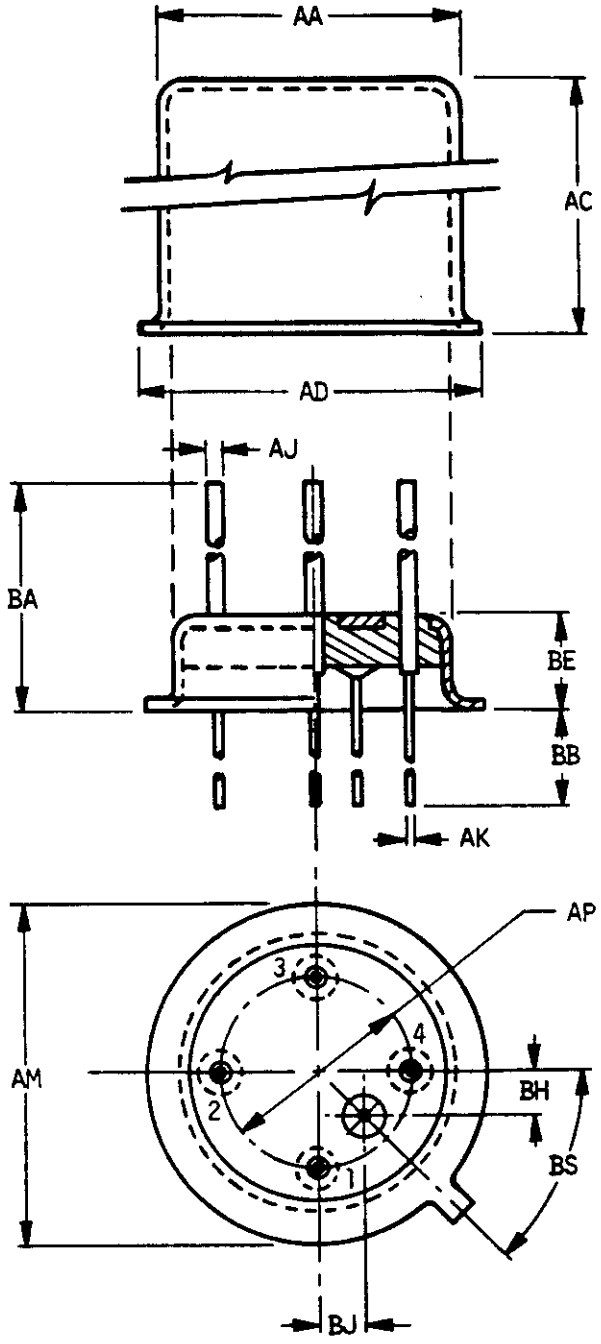


FIGURE 063-07-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

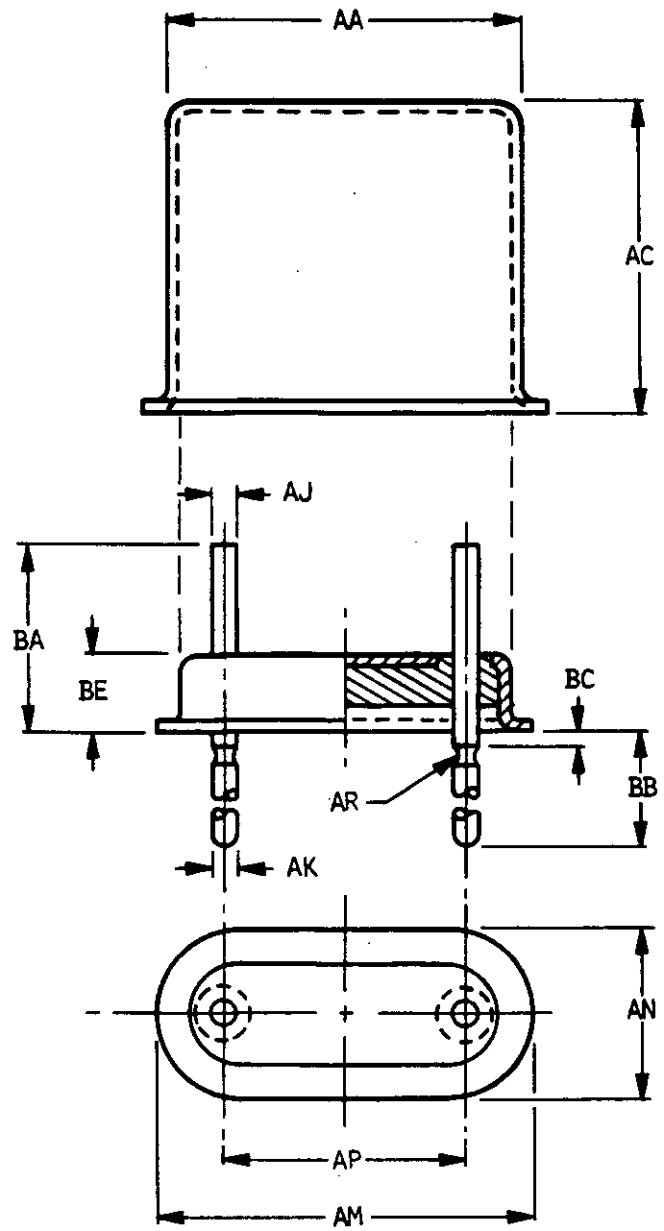


FIGURE 063-08-1

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:00Z
Check the source to verify that this is the current version before use.

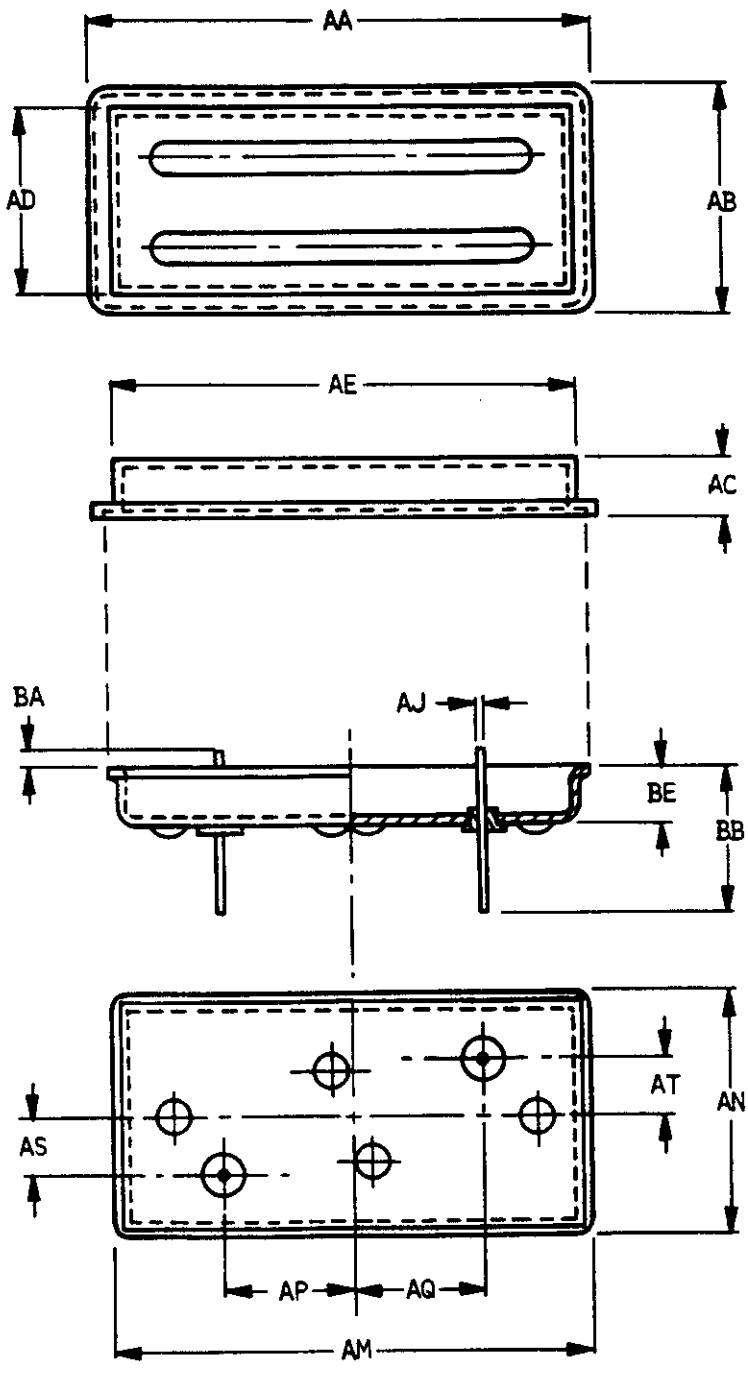


FIGURE 063-09-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

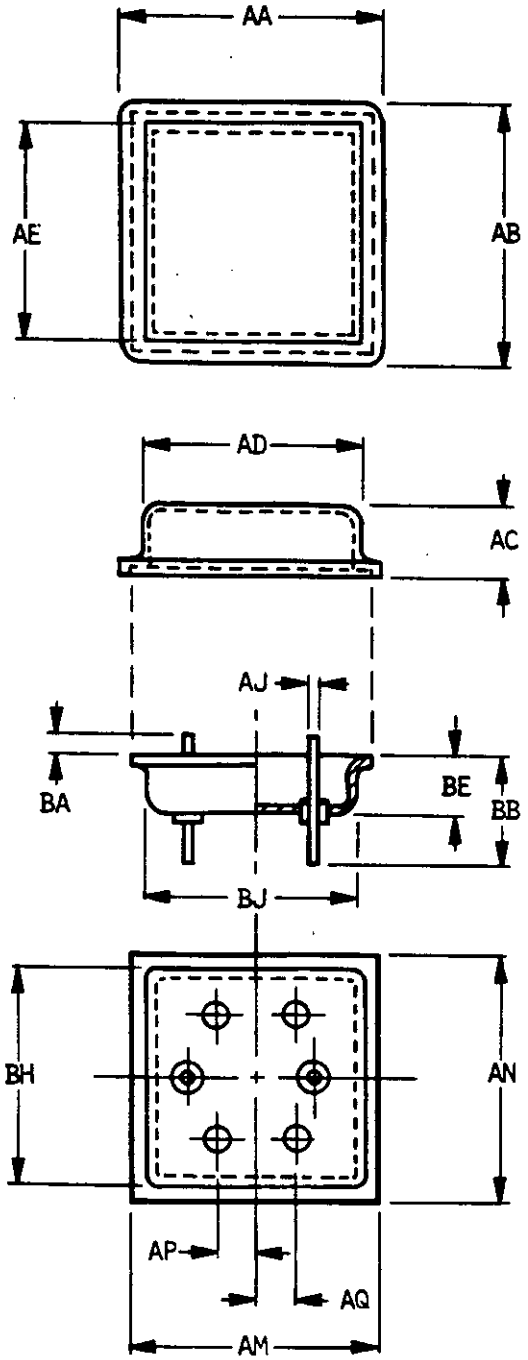


FIGURE 063-10-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

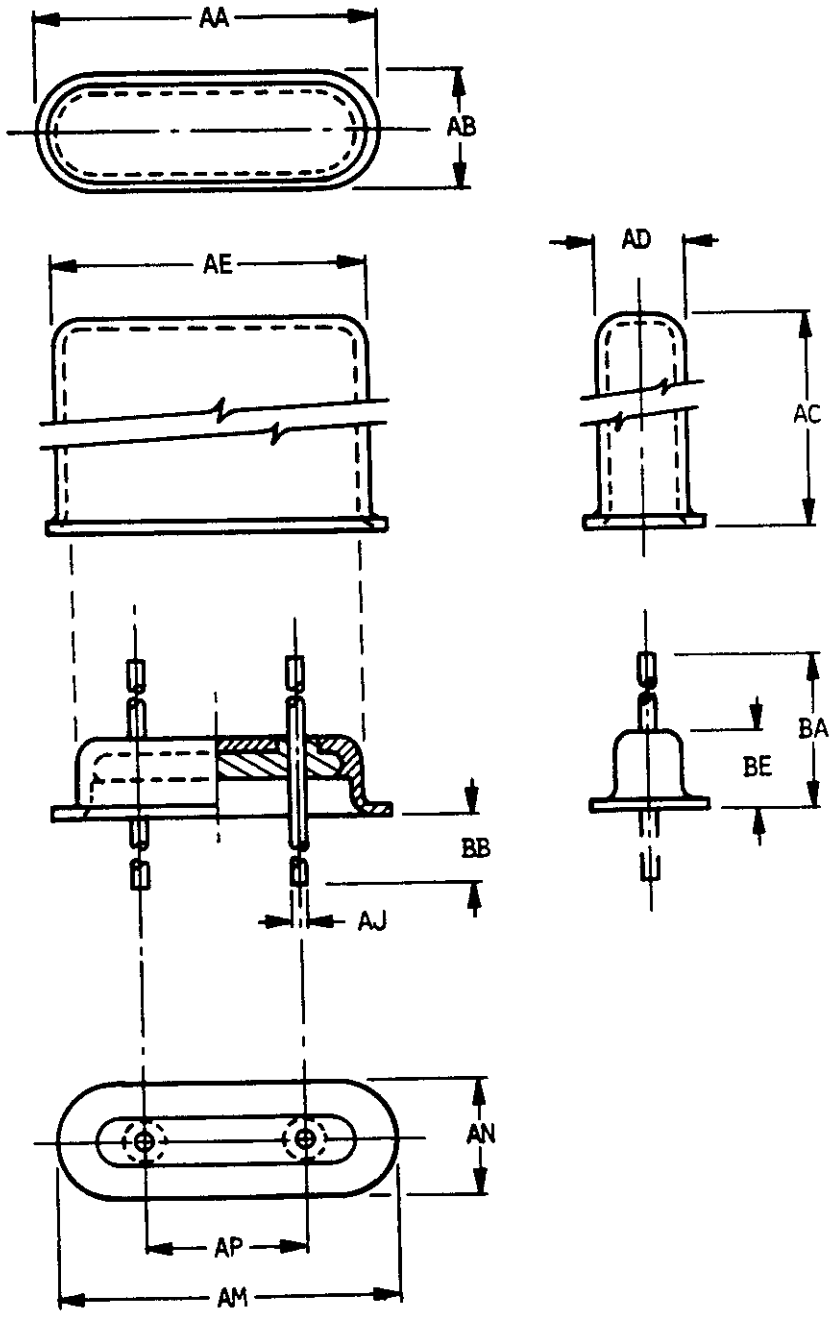


FIGURE 063-11-1

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:00Z
Check the source to verify that this is the current version before use.

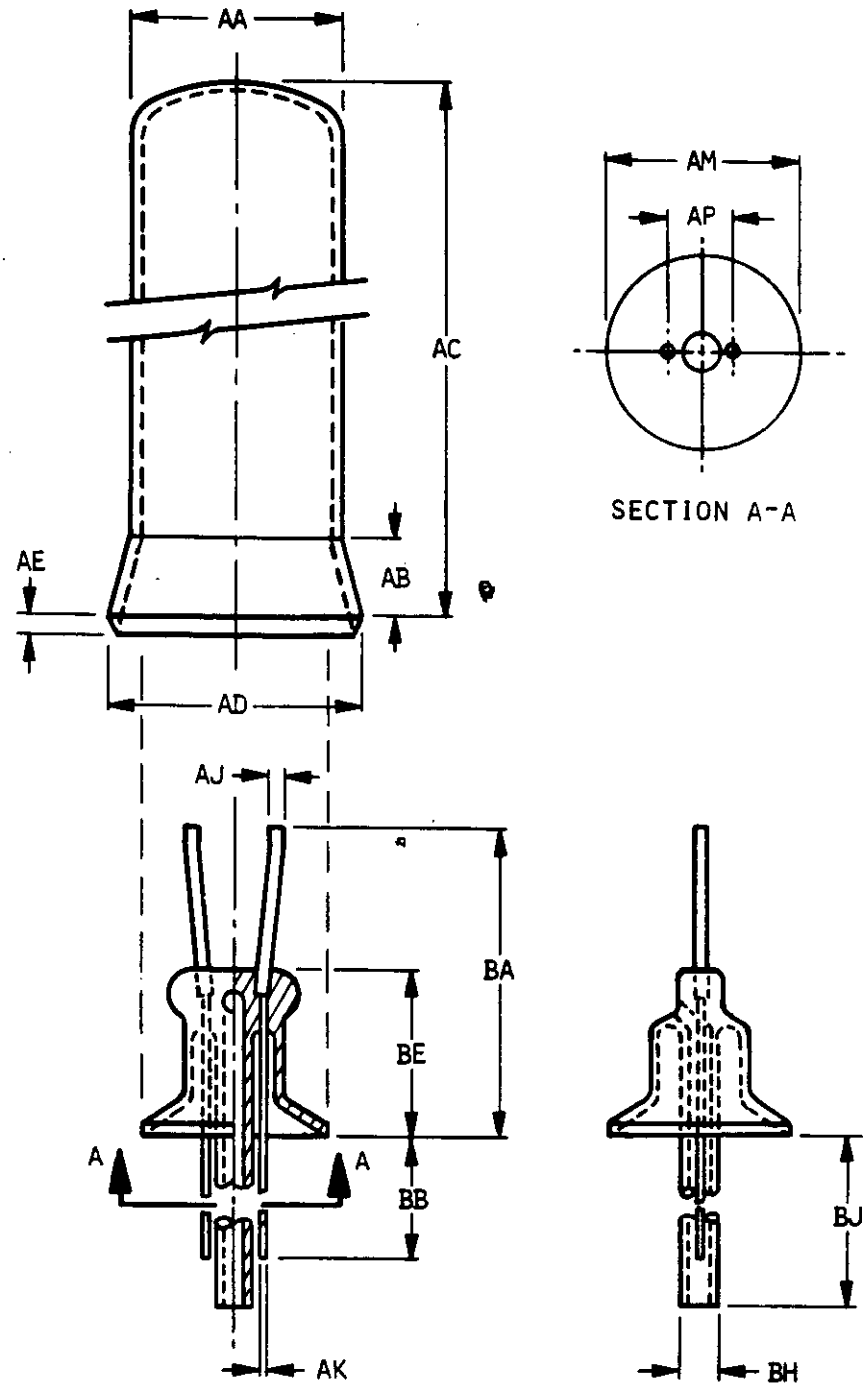


FIGURE 063-12-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

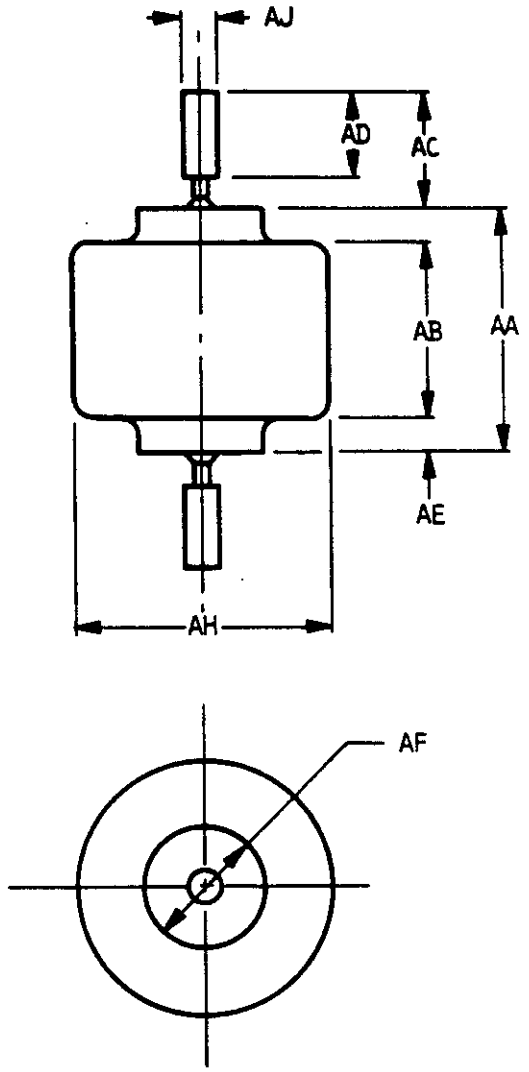


FIGURE 063-13-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

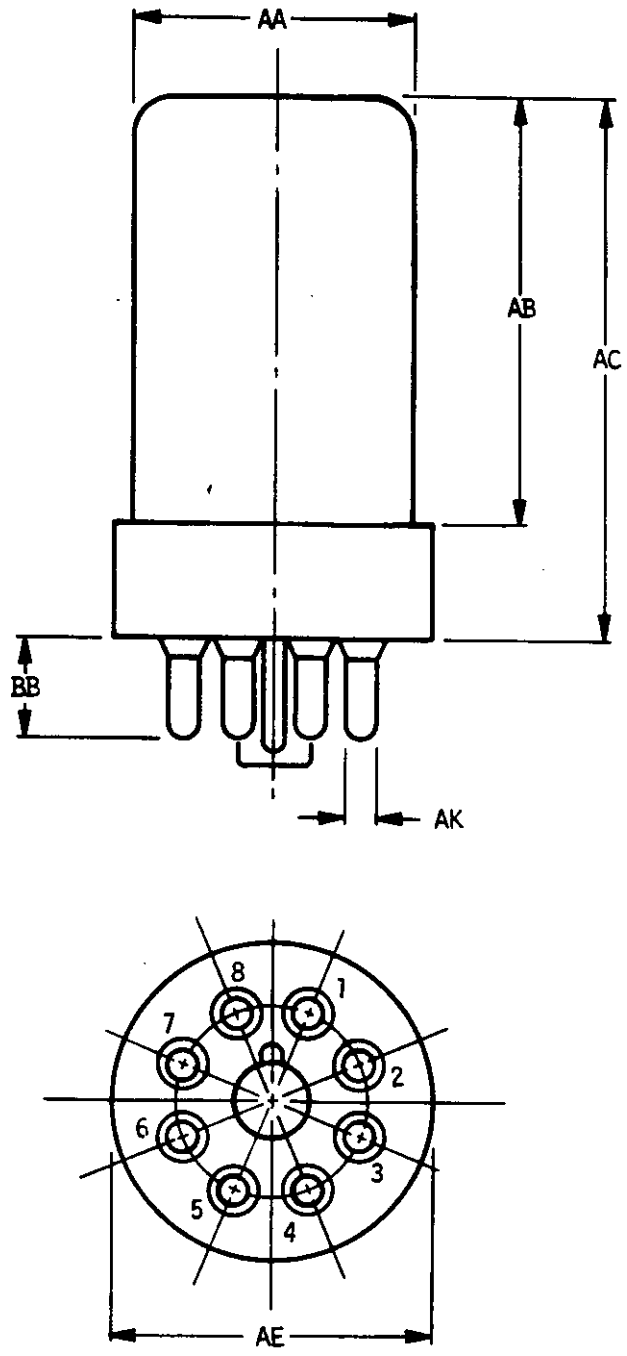


FIGURE 063-14-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

SECTION 8

TABLES

Tables contained in MIL-STD-35 are applicable to Crystal Holders, Supports and Brackets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Missile Command
ATTN: AMSMI-RCS
Redstone Arsenal, AL 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:00Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
MIL-STD-35-87(MI); AEDPS; Crystal Holders, Supports and Brackets

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:00Z
Check the source to verify that this is the current version before use.