MIL-T-82199(MC)
14 November 1968
SUPERSEDING
See Section 6

MILITARY SPECIFICATION

TROUSERS, MEN'S: MESS, BLACK (OFFICER'S)

1. SCOPE

1.1 Scope. This specification covers the requirements for the officer's mess, black trousers.

1.2 Classification. The trousers shall be of one type in the following sizes, as specified (see 6.2).

Schedule of sizes

Waist	26	28	30	32	34	36	38	40	42	44
Inseam	29 31	29 31	29 31	29 31	29 31	29 31	29 31	31	31	31
		33 35	33 35	33 35	33 35	33 35	33 35	33 35		

1.3 Individual orders. When trousers are custom tailored to an individual order, this specification shall govern, except the detail requirements of Table I Section 3, may be modified to the extent necessary for good custom tailoring practices.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-B-871	-	Button, Sewing Hole, And Button, Staple (Plastic).
V-F-106	-	Fastener, Slide; Interlocking.
V-T-276	-	Thread, Cotton.
V-T-280	-	Thread, Cotton Gimp, Buttonhole.
V-T-301	-	Thread, Silk.
UU-P-268	-	Paper, Kraft, Untreated, Wrapping.
CCC-C-438	-	Cloth, Cotton, Buckram.
CCC-T-191	-	Textile Test Methods.
DDD-L-20	-	Labels; For Clothing, Equipage And Tentage (General Use)
DDD-T-86	-	Tape, Textile, Cotton, General Purpose, (Unbleached, Bleached Or Dyed).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-C-326	- Cloth, Silesia, Cotton.
MIL-C-368	- Cloth, Satin, Rayon And Cloth, Twill, Rayon.
MIL-C-15062	- Cloth, Flannel, Wool, Undercollar Cloth.
MIL-B-17757	- Boxes, Fiberboard, Corrugated (Modular Sizes).
MIL-C-21115	- Cloth, Tropical: Wool; Polyester/Wool.

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams, And Stitchings.

MILITARY

MIL-STD-105	- Sampling Procedures And Tables For Inspection By Attributes.
MIL-STD-129	- Marking For Shipment And Storage.

(Copies of specification and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

UNIFORM CLASSIFICATION COMMITTEE
Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, 202 Chicago Union Station, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Sample. Samples are furnished solely for guidance and information to the supplier (see 6.3). Variation from this specification may appear in the sample, in which case the specification shall govern.

3.2 First article approval. Unless otherwise specified (see 6.2) before production is commenced, a sample of the finished trousers shall be submitted or made ready for the contracting officer, or his authorized representative, for inspection. The approval of the first article authorizes the commencement of production but does not relieve the supplier of responsibility for compliance with all provisions of this specification. The first article shall be manufactured by the supplier in the same facilities to be used for the manufacture of the production item.

3.3 Materials.

3.3.1 Basic material. The basic material shall be cloth, wool and polyester, tropical 8.5 to 9.5-ounce; black, shade 2607 (see 6.3), conforming to type III of MIL-C-21115.

3.3.2 Reinforcement patches. The reinforcement patches for the leg bottoms of trousers shall be made of cloth, wool, flannel undercollar cloth, conforming to MIL-C-15062. The color of the cloth shall be black.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

3.3.3 Silesia.

3.3.3.1 Pocketing. The material for the pockets shall be cloth, cotton, silesia, black, minimum 5.5-ounce, conforming to type III of MIL-C-326.

3.3.3.2 Lining, interlining and pocket stay. The material for the crotch piece, pocket stay and left fly interlining shall be cloth, cotton, silesia, black, shade 3212, (see 6.3) 5.0-ounce maximum, conforming to type I of MIL-C-326.

3.3.4 Lining. The material for lining the waistband and right fly shall be cloth, rayon, twill, black, shade 2604 (see 6.3), conforming to class 1, 3.7-ounce of MIL-C-368.

3.3.5 Buckram. The material for interlining waistbands shall be cloth, buckram, cotton, black, conforming to type III, class 1 of CCC-C-438.

3.3.6 Stay tape. The tape for the front edge of the side pocket shall be cotton, 1/4 inch wide conforming to type III, class 1 of DDD-T-86.

3.3.7 Braid. The braid shall be rayon 3/4 inch wide, black, with cotton cord center (see Figure 1) in accordance with the A.H. Rice Company Style No. 3825, or equal.

3.3.8 Slide fastener. The slide fastener for the fly shall conform to type I, style 1, brass, natural finish, size LS, with short tab pull of V-F-106.

3.3.8.1 Color and colorfastness. The tape shall show good fastness to wet (dry) cleaning. The color of the tape shall be black, shade G, Cable No. 66507.

3.3.9 Thread and gimp.

3.3.9.1 Thread. All outside seaming and stitching shall be performed with silk thread, conforming to type I of V-T-301 and all other seaming and stitching with cotton thread conforming to type I of V-T-276, and the following:

	Type	Ticket No.	Ply	Material	Needle or bobbin
Topstitching	-	A	3	Silk	Needle
	IC2	A	3	Cotton	Bobbin
Inseaming, outseaming, seat seaming	IC2	A	3	Cotton	Both
Bartacks, inside	IA3	40	3	Cotton	Bobbin
Bartacks, outside	-	A	3	Silk	Needle
Serging	IA3	70	3	Cotton	Both
Buttonholes	-	A	3	Silk	Bobbin
	IC2	A	3	Cotton	Needle
Buttons	IB3	24	4	Cotton	Both
Blindstitching	IC2	0	3	Cotton	Both
All other seaming and stitching	IA3	40	3	Cotton	Both

3.3.9.2 Gimp. The buttonhole gimp shall be cotton, No. 8, soft or glazed finish, conforming to type I or II of V-T-280.

3.3.9.3 Color, thread. The color of thread and gimp shall be black, shade AA, Cable No. 66043.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

3.3.9.4 Colorfastness. The thread and gimp shall show good fastness to wet (dry) cleaning and in addition the silk thread shall show good fastness to light when tested as specified in applicable thread specifications.

3.3.10 Buttons. Buttons shall conform to type II, class D, glossy finish, style 4, 22-line and 27-line of V-B-871.

3.3.10.1 Color, buttons. The color of the buttons shall be black, shade BT.

3.3.11 Labels. The label for each trouser shall conform to type I, class 1 and 2 combined of DDD-L-20. The combination identification and size label shall measure not less than 2-1/2 inches by 1-1/2 inches. The content and format of the label shall be as follows:

Item description
Name of contractor
Contract number
Size _____ Stock number _____

The size shall include the waist and finished inseam length (see 1.2), for example 36-29. The label shall show fastness to dry cleaning.

3.4 Design. The trousers shall be U. S. Marine Corps design as shown in Figures 1 and 2; having a two-piece lined waistband with outlet at center back and button french type fly with slide fastener closure; side pockets with straight opening; hip darts, and finished leg bottoms. The trousers shall have ornamental rayon braid.

3.5 Patterns. Standard patterns will be furnished to the supplier by the Government. The standard patterns shall not be altered in any way and shall be used only as a guide for cutting the supplier's working patterns. The supplier's working patterns shall be identical to the standard patterns. The standard patterns provide an allowance of 5/8 inch for crotch seam, 3/8-inch allowance for all other seams except as otherwise specified in Table I, and seat seam outlet at waist in accordance with patterns. The patterns provide a 3-inch allowance for bottom turn-up of legs. The standard patterns show size, directional lines for cutting, are marked and notched for proper placement and assembly of the component parts.

3.5.1 List of pattern parts. The component parts for the trousers shall be cut from the specified materials in accordance with the pattern parts indicated:

Item	Pattern nomenclature	No. of cut parts
	Material: Basic	
1.	Front	2
2.	Back	2
3.	Right fly	1
4.	Left fly	1
5.	Facing, side pocket	2
6.	Bearer, side pocket	2
7.	Waistband	2
8.	Buttonhole tab	2
	Material: Cloth, silesia, cotton Type III	
9.	Side pocket	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

Item	Pattern nomenclature	No. of cut parts
	Material: Cloth, silesia, cotton Type I	
10.	Stay, side pocket	2
11.	Crotch lining	2
12.	Left fly interlining	1
	Material: Cloth, rayon twill	
13.	Right fly lining	1
14.	Waistband lining	2
	Material: Cloth, buckram, cotton	
15.	Waistband interlining	2
	Material: Cloth, wool, flannel	
16.	Reinforcement patch	4
	Marker	
17.	Botton turn-up marker	

3.6 Construction.

3.6.1 Manufacturing requirements. The trousers shall be manufactured in strict accordance with the operations and the stitch, seam, and stitching types specified in Table I.

3.6.1.1 Operations. The supplier is not required to follow the exact sequence of the operations as listed in Table I but all operations specified shall be used to manufacture the trousers.

3.6.1.2 Stitches, seams, and stitchings. The stitch, seam, and stitching types specified in Table I shall conform to FED-STD-751. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the trousers.

3.6.1.2.1 Overedge stitching. Overedge or serge stitching shall be done on serging machines with knife attachment properly set to trim the raw edge, when overedging without cutting the material.

3.6.1.2.2 Tacking and backstitching. Ends of seams and stitching produced with stitch type 301 when not caught in other seams or stitching shall be backtacked not less than 1/4 inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch. When stitch type 401 is used, ends of seams and stitching shall be caught in other seams or stitching, and skipped stitches and thread breaks may be repaired using stitch type 301 backstitched not less than 1/2 inch on each side of the skip or break.

3.6.1.3 Shade marking. The component parts of the trousers shall be shade marked to insure uniform shade and size throughout the garment. Any method of shade marking may be used except:

(1) Corrosive metal fastening devices.
(2) Sew-on shade tickets.
(3) Adhesive type tickets whose adhesive discolors or whose adhesive mass adheres to the material on removal of the tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	STITCH TYPE	SEAM OR STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
1.	Cutting. a. Cut the trousers in strict accordance with the patterns furnished by the Government. b. Cut the material in the direction indicated by directional lines on the patterns. c. Cut the component parts for the trousers from one piece of basic material except the following parts may be cut from ends but when so cut, the parts shall harmonize with the shade of the trousers: left and right flies, fly buttonhole tab, pocket bearers and pocket facings. d. Cut the pockets on the straight of the material in accordance with patterns. Cutting of pockets in the direction of the filling is not permitted except when it is essential for economical use of the material.					
2.	Replacement of damaged parts. a. Replace any part containing damages at time of cutting such as holes or serious weakening defects such as smashes, multiple floats and slubs likely to develop into holes. b. Replace any part damaged during the manufacturing process by needle chews which may be expected to develop into a hole, scissors or knife cuts, tears, holes, mends, burns and large exposed drill holes.					
3.	Shade marking. a. Mark or ticket the component parts to insure a uniform shade and proper assembly throughout the trousers except those parts specified in operation 1c, which may be cut from ends and need not match each other. Tickets shall conform to 3.6.1.3. b. The use of metal fastening devices is prohibited on the rayon material.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

OPN NO.	OPERATION	STITCH TYPE	SEAM OR STITCH TYPE	STITCHES PER INCH	THREAD NEEDLE	THREAD BOBBIN OR LOOPER
4.	Overedge stitch trousers. Finished appearance. The overedge stitching shall be securely caught in the fabric. The raw edge of the overedged material shall be properly trimmed.					
	a. Overedge stitch the inseam and outseam of front of trousers and the fly edge of the right front. The overedge stitching on the inseam of left front shall extend from bottom of trouser to fly notch. The overedge stitching on the outseam of fronts shall extend from bottom notch of side pocket to bottom of trouser leg.	503 or 504	EFd-1	6-10	70/2	70/2
	b. Overedge stitch inseam and outseam of back of trousers. The side pocket stay piece with the bottom edge turned up, may be caught to the outseam in the overedge operation.	503 or 504	EFd-1	6-10	70/2	70/2
	c. Overedge stitch crotch seam, seat seam and raw edge at the left end of waistband.	503 or 504	EFd-1	6-10	70/2	70/2
5.	Set side pocket bearers and facings and identification label. Finished appearance. The pocket bearer and facing shall be properly positioned and securely sewn with stitching of uniform gage and without pleats, puckers or other distortion. a. The side pocket bearers and facings shall each be a single piece of basic material.					
	b. Fold under the inside raw edge of bearers and facings 1/4 to 3/8 inch and stitch to the pocket 1/8 inch from the folded edge and continue stitching across the bottom raw edge. A selvage edge need not be turned.	301	LSd-1 or LSbj-1	12-16	A	40/3
	c. Position the identification size label on the lower end of the right pocket so that on the finished trousers, the label will be on the underply and will face the wearer. Stitch the label on all of four sides.	301	SSa-1	12-16	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

TABLE I. MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	STITCH TYPE	SEAM OR STITCH TYPE	STITCHES PER INCH	THREAD NEEDLE	THREAD BOBBIN OR LOOPER
6.	Make left fly.					
	Finished appearance. The left fly shall finish smooth and flat without twists, puckering or distortion. The overedge stitching shall be securely caught in the fabric.					
	a. Position slide fastener on fly and fly interlining with bottom end of chain 1/4 to 1/2 inch above the fly notch. The front edge of chain shall be 5/8 to 3/4 inch from front edge of finished fly at top, tapering to from 3/8 to 1/2 inch at the bottom. Seam fastener tape to fly through the interlining with a double row of stitches 3/16 to 1/4 inch gage.	301 or 401		12-16	A	A
	b. Overedge stitch the back edge of left fly and interlining together.	503 or 504	SSa-1	6-10	70/2	70/2
7.	Make buttonhole tab for right fly.					
	Finished appearance. The buttonhole tab shall finish without distortion with the seams finishing at the edge of the tab and the buttonhole stitching securely caught in the fabric.					
	a. The tab shall be made of two plies of basic material.					
	b. Seam the plies together at top, front and bottom edges with 3/16 to 1/4 inch seam and turn, forcing out all edges.	301	SSe-2 (a)	12-16	A	A
	c. Topstitch the tab 1/16 to 1/8 inch from the seamed edges.	301	SSe-2 (b)	12-16	A	A
	d. Make a 5/8 inch long, horizontal, eyelet-end taper-bar type buttonhole through the center of tab with edge of eyelet 1/2 ±1/8 inch from finished end of tab. The buttonhole shall be well worked over gimp to fit a 22-line button and with the purling on inner side of tab.	But-ton hole		54 stitches per but-tonhole	A	A (silk)
8.	Make right fly.					
	Finished appearance. The right fly shall finish without bulkiness, twists or puckers or pleats.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

OPN NO	OPERATION	STITCH TYPE	SEAM OR STITCHG TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
8.	Make right fly. (Cont'd)					
	a. The fly shall consist of one ply of basic material, one ply of lining, and the buttonhole tab.					
	b. Position the buttonhole tab on the outside of the fly, with raw edges even and the upper edge of tab in line with the notch at the upper front end of fly.					
	c. Seam lining to front edge of fly with a 3/16-inch seam. The seam shall extend from the notch at the lower end of fly, up to the upper edge of buttonhole tab, catching the tab in the stitching.	301		12-16	A	A
	d. In the finished trouser, the upper end of the lining shall extend to top of waistband over the trouser waistband lining and the fly lining extension piece at the lower end shall extend not less than 1/2 inch beyond inseam.					
9.	Assemble right and left flies.					
	Finished appearance. The flies shall be of even length where they join the crotch seam. The fastener parts shall be set so that there is no twisting or puckering when fly is closed.					
	a. Position flies with notches at lower end matching and seam fastener tape to back edge of right fly, stitching 1/4 inch from edge.	301	SSa-1	12-16	A	A
10.	Make waistband lining.					
	Finished appearance. The waistband lining shall be without distortion.					
	a. The waistband lining shall be made of one ply of rayon material and one ply of buckram.					
	b. Overlap rayon on buckram 3/4 inch and stitch 1/8 to 3/16 inch from edge of rayon. Fold rayon over buckram and press.	301 or 401	LSa-1	6-10	40/3	40/3
	or					
	c. Use a commercial, buckram interlined, waistband lining provided the furnished lining conforms to specification requirements.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

TABLE I. MANUFACTURING REQUIREMENTS

OPN NO	OPERATION	STITCH TYPE	SEAM OR STITCH'G TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
11.	Seam darts in back.					
	Finished appearance. The darts shall be properly positioned and finished without pleats, puckers or gathers. In the finished trouser, the darts shall be well tapered to a flat point at lower end.					
	a. Fold the backs. Seam lengthwise along the entire length of the dart, with notch matching. Stitch the entire length of the dart in accordance with marks on the patterns. The outlet of the dart shall be turned and pressed towards the seat seam.	301	OSf-1	12-16	A	A
12.	Seam crotch linings to fronts.					
	a. The crotch lining shall consist of a single ply of silesia material and shall extend not less than 1 inch above fly notch.					
	b. Fold crotch lining lengthwise to form a double thickness and seam to fronts or attach to fronts in the overedge operation.	301	SSa-1	12-16	A	A
		or 503	EFd-1	6-10	70/2	70/2
		or 504	EFd-1	6-10	70/2	70/2
13.	Join fly assembly to fronts.					
	Finished appearance. The seam joining the fly assembly to the fronts shall be without pleats, puckers, twists or other distortions.					
	a. Sew on left fly with 3/8-inch seam with notches matching. Turn the fly to the inside with the joining seam 1/16 to 1/8 inch back of folded edge and press front edge without damage to the fastener.	301	SSa-1	12-16	A	A
	b. Sew on right fly with 3/8-inch seam with notches matching.	301	LSq-2 (a)	12-16	A	A
	c. Press right fly seam open and flat with heated pressing iron with the fastener tape facing towards side seam.					
14.	Attach side pockets.					
	Finished appearance. The edges of the pocket openings shall finish smooth and flat without distortion. Pocket openings shall be of uniform appearance. The bottom front corners of the pockets shall be backstitched, and care shall be taken to avoid notching the pocket on the underside, beyond the width of the side seam outlet.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

OPN NO	OPERATION	STITCH TYPE	SEAM OR STITCHG TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
14.	Attach side pockets. (Cont'd)					
	a. Position the outside of the fronts on the facing of the side pocket in accordance with the notches for the pocket opening as indicated by marks on the patterns.					
	b. Seam the front, facing and pocket material together from notch to notch 3/8 inch from the edge of the front with cotton stay tape for edge of pocket opening caught in the stitching.	301	SSe-2 (a)	12-16	A	A
	c. Cut the depth of the notches for the pocket opening to the seam and turn the pocket to the inside of the front so that the seam will finish on the inside of the pocket 1/8 inch back from the finished edge of the pocket opening.					
	d. Topstitch the front from notch to notch, through the pocket material and facing 1/4 inch from the finished edge of the pocket opening.	301	SSe-2 (b) (shows finished seam)	12-16	A (silk)	A
	e. Turn pocket right side in and seam raw edges from steps of pocket 3/16 to 1/4 inch from edge and continue to seam along the bottom of pocket. Notch pockets, bearer, and facing at top of step and turn.	301	SSae-2 (a)	12-16	40/3	40/3
	f. Tack the ends of the pocket opening through the bearer with a 3/8-to 1/2-inch tack.	301	SSa-1 (each end)	12-16	A	A
	g. In the finished trousers the top of the pocket shall extend into the waistband and be caught in the finished stitching of the waistband lining.					
	h. The finished pocket opening (after bartacking) shall measure 6-1/4 $\pm$1/4 inches.					
15.	Join outseam.					
	Finished appearance. Outseams shall be carefully joined with notches matching, and without twists, puckers or pleats. The seams shall start and finish evenly and lie smooth and flat.					
	a. Join outseams, with the notches matching, with a 3/8-inch seam, catching the side pocket stay in the stitching with its bottom edge turned in.	301 or 401	SSav-2 (b)	12-16	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

TABLE I. MANUFACTURING REQUIREMENTS

OPN NO	OPERATION	STITCH TYPE	SEAM OR STITCHG TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
15.	Join outseams. (Cont'd)					
	b. Spread open the outseams from top edge of trouser to bottom and press smooth and flat with a heated pressing iron or pressing machine and with the pocket stay folded and pressed over the open seam.					
16.	Finish side pocket.					
	a. Turn in the back edge of side pocket, fold the stay piece over the open seam and stitch pocket to stay piece 3/16 to 1/4 inch from the edge along the side seam allowance, with the stitching continued to the front bottom edge of pocket.	301		12-16	A	A
17.	Attach braid.					
	Finished appearance. Braid shall be set on the trouser from top edge of waist to bottom edge of legs, with the top end to finish in the waistband seam. The braid shall be securely and uniformly stitched, properly positioned and shall finish without distortion.					
	a. Position the braid on fronts with back edge of braid aligned with outseam and edge of pocket opening and seam to trouser from top of fronts to lower end of pocket opening 1/16 to 1/8 inch from each edge of braid. Continue stitching from lower end of pocket opening, gradually working braid towards the back to finish centered over the outseams.	301	SSa-1 (each edge)	12-16	A (silk)	A
18.	Sew waistband.					
	Finished appearance. The waistband shall be seamed to the waist smoothly and neatly without fullness, gathers or pleats.					
	a. The waistband shall be made of one ply of basic material.					
	b. Seam waistband to trousers 3/8 inch from edge.	301	SSa-1	12-16	A	A
	c. The raw right front ends of the waistband shall extend 1/4 to 3/8 inch beyond the front edge of the right fly. The overedged portion of the left front ends of the waistband shall finish even with the back edge of the left fly. The raw right and left back ends of the waistband shall finish even with the edges of the back.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

OP'N NO	OPERATION	STITCH TYPE	SEAM OR STITCH'G TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
19.	Press waistband.					
	a. Press waistband seam open and flat with a heated pressing iron or pressing machine.					
20.	Seam front ends of waistband.					
	a. Turn back right fly lining and stitch top end to front and upper edges of waistband, rounding off the corner slightly. Continue the stitching to the buttonhole tab.	301	SSe-2 (a)	12-16	A	A
	b. Turn back the end of the left waistband in line with the joining seam of left fly to front part and stitch across top edge of waistband the width of the fly.	301	SSa-1	12-16	A	A
21.	Join lining to waistband.					
	a. Insert top edge of waistband between rayon and buckram of waistband lining with edge of rayon turned in, and join all plies with a row of imitation handfelled stitches, or waistband lining may be felled by hand.	304 or 404 or Hand		12-16 12-16 7-10	40/3 40/3 40/3	40/3 40/3
	b. Left end of waistband lining shall finish at front edge of trouser, with the end of the waistband lining trimmed slightly back from front edge on an angle. Right end of waistband lining shall extend approximately 1 inch under the fly in the finished trouser.					
22.	Press waistband and lining.					
	a. Turn out front end of left and right waistband, forcing out the corners. Turn waistband lining to inside and press along the top edge of waistband. Trouser waistband lining shall not be exposed beyond top edge of waistband.					
	b. Finished width of waistband shall be 1-3/4 ±1/8 inches.					
23.	Stitch pockets to lower edge of waistband.					
	a. Stitch top end of side pockets to waistband seam allowance with pockets properly positioned and smoothed out.	301	SSa-1	6-10	A	40/3
24.	Finish left fly.					
	Finished appearance. The base of the fly shall be so finished as to avoid twisting, pleating or puckering. The joining seam of left fly to front shall not be exposed on outside of trouser.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

TABLE I. MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	STITCH TYPE	SEAM OR STITCH TYPE	STITCHES PER INCH	THREAD NEEDLE	THREAD BOBBIN OR LOOPER
24.	Finish left fly. (Cont'd)					
	a. Seam back edge of left fly to front from notch to top of waistband uniformly 1-1/2 ±1/8 inches from front edge of fly.	301	SSa-1	12-16	A (silk)	A
25.	Finish right fly.					
	a. Turn in right fly lining to the inside and topstitch front and top edges of fly 1/8 inch from edge. The lining shall not be exposed on the outside of the trouser.	301		12-16	40/3	A (silk)
	b. Turn under the raw edge of fly lining and raisestitch the fly joining seam, catching the turned under portion in the stitching with slide fastener tape.	301	LSq-2 (front edge) SSc-1 (back seam)	12-16	A (silk)	40/3
26.	Join inseam.					
	Finished appearance. Inseams shall be carefully joined with notches matching, and without twists or puckers. The seams shall start and finish evenly and be smooth and flat.					
	a. Join the inseam from the bottom edge of the legs to the crotch with the notches matching as indicated by marks on the patterns.	401	SSa-1	12-16	A	A
	b. The inseam allowance shall be 3/8 inch, except on the back the seam allowance shall taper from 3/8 inch at the knee to 1-1/8 inches at the crotch.					
	c. Press the inseam open.					
27.	Join crotch and seat seam.					
	Finished appearance. The crotch and seat seams shall be joined with proper tension resulting in sufficient elasticity of seam to counteract strain encountered in sitting or stooping. In the joining of the seat seam, the inseams shall meet.					
	a. Measure waist to proper size before joining crotch, seat and waist seam.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

OPN NO.	OPERATION	STITCH TYPE	SEAM OR STITCH TYPE	STITCHES PER INCH	THREAD NEEDLE	THREAD BOBBIN OR LOOPER
27.	Join crotch and seat seam. (Cont'd)					
	b. Place the left and right assemblies together with the edges of the crotch seam aligned and with the waistband on the left assembly aligned with the waistband on the right assembly at the fly opening, and with the notches at the lower end of the flies matching.					
	c. Join the left and right assemblies at the crotch and seat seam from the fly notch to a point 1/2 to 3/4 inch from the top of finished waistband with two rows of stitches not more than 1/32 inch apart, forming a 1/2 inch "V" shaped opening at the back. The left and right assemblies shall be joined at the crotch with a 1/2-inch seam.	401	SSa-2	10-14	A	A
	d. Fold back waistband lining over the joining seat seam, and single stitch each end of the outlet 1/8 to 1/4 inch from seat seam, and with the lower corner diagonally folded and caught in the stitching. Turn and force out upper corners.	301	SSa-1 (each end)	12-16	A	A
28.	Assemble slide fastener.					
	a. Attach slider and securely staple bottom of fastener together with the ends of the chain even and the head of the staple towards the outside.					
29.	Press seams (with heated pressing iron or pressing machine).					
	Finished appearance. The seams shall finish smooth and flat without pleats, puckers or twists.					
	a. Spread open the seat and crotch seams from top of waistband to fly notch and press smooth and flat.					
30.	Stitch right fly lining extension to crotch seams.					
	a. Turn under the raw edges of the right fly lining extension and stitch by machine or hand fell to each side of open crotch seam 1/8 to 1/4 inch from both edges.	301	SSa-1 (each edge)	12-16	40/3	A
	b. The right fly lining shall extend not less than 1/2 inch beyond the inseam in the finished trousers.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

TABLE I. MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	STITCH TYPE	SEAM OR STITCH TYPE	STITCHES PER INCH	THREAD NEEDLE	THREAD BOBBIN OR LOOPER
31.	Finish waistband. Finished appearance. The waistband shall finish smooth, even and flat without gathers, puckers, pleats, or other distortions either in the waistband or the trouser at waistband joining. On the finished trouser the waistband shall be uniformly 1-3/4 ±1/8 inches wide, and the waistband lining shall finish 2-1/2 ±1/8 inches wide.					
	a. Topstitch the waistband seam 1/16 inch from joining seam on trousers' side (not through waistband), catching waistband lining. The stitching shall extend to the stitching of the left (not across) fly and to back edge of right fly.	301	LSbd-2 (b) (shows finished seam)	12-16	A	40/3
32.	Make buttonhole in waistband. Finished appearance. Buttonhole shall be clean cut, well made and correctly positioned. The stitching shall be securely caught in the fabric.					
	a. Make a horizontal eyelet-end, taper-bar type buttonhole cut 5/8 inches long through the left front end of the waistband with the edge of the eyelet 1/2 to 5/8 inch from the front edge. The buttonhole shall be made in the center of the waistband and shall be worked over gimp to fit a 22-line button and have the purling of the buttonhole on the outside.	Buttonhole		54 min. per buttonhole (including tack)	A	A (silk)
33.	Bartack trousers. Finished appearance. The trousers shall not be distorted by the bartacks. The pockets shall lie smooth and flat. The bartacks shall be properly positioned and correctly placed to reinforce the points of strain as specified.					
	a. Bartack both ends of side pocket openings. Bartacks shall be horizontal.	Bartack		28 per bartack	A (silk)	40/3
	b. Bartack the bottom end of the fly horizontally through all plies at the juncture of the crotch seam and fly.	Bartack		28 per bartack	A (silk)	40/3
	c. Bartack front edge of right fly to back edge of left fly with a vertical bartack, with lower end of bartack approximately 3/4 inch above the horizontal bartack at base of fly.	Bartack		28 per bartack	A (silk)	40/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

OPN NO.	OPERATION	STITCH TYPE	SEAM OR STITCH TYPE	STITCHES PER INCH	THREAD NEEDLE	THREAD BOBBIN OR LOOPER
33.	Bartack trousers. (cont'd)					
	d. Bartacks shall be made 3/8 to 1/2 inch long, and shall be stitched through all plies of material at the point of bartacking.					
34.	Sew buttons to trousers.					
	Finished appearance. The buttons shall be securely sewn with the ends of the stitchings securely tacked. The buttons shall be properly aligned with the buttonholes to secure a smooth and complete closure without bulging or misalignment.					
	a. Sew a 22-line button through the waistband lining only in line with the buttonhole in the right tab.	101 or 301		20-22 per button	24/4	
		or		14-16 per button	24/4	24/4
		Hand		4 per button (double thread)	24/4	
	b. Sew a 22-line button on right end of waistband through all plies to correspond with buttonhole on left end of waistband.	301 or 101		14-16 per button	24/4	24/4
		or		20-22 per button	24/4	
		Hand		4 per button (double thread)	24/4	
	c. Sew six 27-line buttons on the inside of waistband lining only. One button shall be positioned on each side seam, one button on each front 4-1/2 to 4-3/4 inches from side seams and two buttons on the back 2-1/4 to 2-1/2 inches from back seam. The center of each button shall be positioned 1/2 to 5/8 inch below top of waistband.	Hand		4 per button (double thread)	24/4	
	d. Shank wrap all hand sewed buttons.	Hand or		4 wraps per button (double thread)	24/4	
		Machine		14-16 stitches per button	24/4	24/4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

TABLE I. MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	STITCH TYPE	SEAM OR STITCH TYPE	STITCHES PER INCH	THREAD NEEDLE	THREAD BOBBIN OR LOOPER
35.	Press trousers. Finished appearance. All pressing shall be done with a heated pressing iron or pressing machine of a type suitable to obtain the desired appearance in accordance with good manufacturing practice. a. Press the top, flies and pockets smooth and flat. b. Press smooth and crease the legs, in the center with the seams matching at the bottom and in the crotch or the inseam in the crotch may be slightly back of the outseam. c. Close flies and waistband.					
36.	Finish leg bottoms. Finished appearance. The turn-up shall finish 2-3/4 to 3 inches deep with the reinforcement patches positioned at the inside bottom of the center front and back without distortion. a. Mark the trousers leg for bottom turn-up with pattern marker. b. Turn under the upper raw edge of reinforcement patch (which becomes the lower edge after hemming) and position on the center of front and back leg 1/16 to 1/8 inch below the mark.					
	c. Seam patch to trousers 1/8 inch from the patches raw and folded edges, catching the turn under in the stitching.	301	SSa-1	12-16 (raw edges) SSb-1 (folded edges)	0	0
	d. Turn all trousers wrong side out. Turn up bottom end of leg and blindstitch to body of leg.	301 or 103	EFc-1 EFc-1	6-8 6-8	0 0	0
	e. Turn trouser right side out and complete pressing.					
37.	Clean trousers. a. Trim all ends of stitching and remove all loose threads; and remove all spots, stains and shade tickets or markings without injury to the material.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

MIL-T-82199(MC)

3.7 Finished measurements. The finished trousers shall conform to the measurements shown in Table II.

Table II. Finished measurements

Size	26	28	30	32	34	36	38	40	42	44	Tolerance
1/2 Waist 1/	13	14	15	16	17	18	19	20	21	22	±1/4
Inseam 2/	As marked on label plus 3 inches 3/										± 1/2

1/ Waist measurement taken from folded edge to folded edge on waistband with waistband buttoned.

2/ Inseam measurement taken along inseam from crotch seam to bottom edge of legs.

3/ Allowance for hemming.

3.7.1 Method of measuring. The trousers shall be fastened and placed flat upon a table except as otherwise indicated.

3.8 Workmanship. The finished trousers shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 First article inspection. When required, the first article submitted in accordance with 3.2, will be inspected as specified in 4.3.2, for compliance with design, construction, workmanship and dimensional requirements.

4.3 Inspection for acceptance. Inspection shall be in accordance with provisions of MIL-STD-105, except where otherwise indicated hereinafter.

4.3.1 Components and material testing. In accordance with 4.4.1 above, components and material shall be tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended or modified or qualified in this specification or applicable purchase documents. All test reports shall contain the individual values obtained in expressing the final result.

4.3.2 Examination of the end items. The defects found during examination of the end item shall be classified in accordance with 4.3.2.1 and 4.3.2.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.3.3. The sample unit for these examinations shall be one pair of trousers.

Examine	Defect	Classification Major A	Major B	Minor
Material defects and damages	a. Any hole.	X		
	b. Any weakening defect such as a smash, multiple float or loose slub.	X		
	c. Shade bar or slub on outside.	X		
	d. Needle chew, cut, tear, mend, burn, or exposed drill hole.	X		
Shaded parts	a. Any outside part shaded.		X	
Cleanness	a. Any spot or stain, clearly noticeable:			
	(1) Outside.		X	
	(2) Thread ends not trimmed, loose threads or two or more shade or size markings not removed.			X
Cutting	a. Any component part not cut in conformance with specified requirement.		X	
Component and assembly	a. Any component part or required operation omitted (unless otherwise classified herein).		X	
	b. Any component not as specified above.		X	
Pressing	a. Burned or scorched.		X	
	b. Omitted by previously pressed (unless otherwise classified).			X
	c. Outseam, inseam, seat seam or crotch seam not pressed open.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
Seams and stitching	a. Accuracy of seaming.			
	1. Seam twisted, puckered, or pleated, affecting appearance.		X	
	2. Any part of trousers caught in an unrelated operation or stitching.		X	
	3. End of any stitching when not caught in other seams or stitching backtacked less than 1/4 inch.			X
	4. Thread break secured by stitching back of the break less than 1/2 inch.		X	
	5. Varying shades of thread used on outside of same trousers.		X	
	b. Gage of stitching (raised or edge stitching or turned under edge).			
	1. Irregular, i.e., unevenly gaged or corresponding stitchings not uniform. To be scored only when condition exists on major portion of seam (i.e., over one half or more of seam).			X
	2. Not within range or gage specified, or varies more than 1/16 inch when no range is specified.			X
	3. Edge or raised stitching sewn too close to edge, resulting in damage to cloth.	X		
	c. Open seams:			
	-up to 1/4 inch inclusive.			X
	-more than 1/4 inch to 3/4 inch inclusive.		X	
	-more than 3/4 inch.	X		
	d. Runoffs.			
	1. On single needle joining seam score as open seam.			
	2. Edge or raise stitching (when not resulting in an open seam):			
	-1/4 to 1/2 inch inclusive.			X
	-over 1/2 inch.		X	
	e. Raw edges.			
	1. On outside:			
	-1/8 to 1/4 inch inclusive.			X
	-more than 1/4 inch to 3/4 inch inclusive.		X	
	-more than 3/4 inch.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	2. On inside:			
	-1/2 to 1 inch inclusive.			X
	-more than 1 inch.		X	
	3. Any raw edge on inside caused by the omission of overedge stitching for a distance of more than 3 inches.		X	
	f. Seam and stitch types.			
	1. Not specified seam or stitch type.		X	
	2. Looper thread of 401 stitch type on outside of trousers.	X		
	g. Stitch tension.			
	1. Loose tension resulting in a loose seam.	X		
	2. Loose tension on raised or edge stitching resulting in loosely exposed bobbin thread or top thread.		X	
	3. Tight tension except seat seam (stitches break when normal strain is applied to seam or stitching).	X		
Note: Puckering is evidence of tight tension. When puckering is evident the seam shall be tested by exerting pull in lengthwise direction of seam.				
	h. Stitches per inch (to be scored only when the condition exists on major portion of seam or stitching).			
	1. Less than minimum specified:			
	-one or two stitches.			X
	-three stitches.		X	
	-four or more stitches.	X		
	2. One or more stitches in excess of maximum specified.			X
	i. Stitches skipped or broken (on edge or raised stitching when seam is seamed, turned and stitched):			
	-1/4 inch to 1/2 inch inclusive.			X
	-more than 1/2 inch.		X	
Buttonholes	a. Stitching not securely caught in fabric, causing stitching to pull away.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	b. Not corresponding to button size so that they do not button properly.		X	
	c. One or more broken stitches in:			
	-one buttonhole.		X	
	-two or more buttonholes.	X		
	d. More than two skipped stitches in:			
	-one buttonhole.			X
	-two or more buttonholes.		X	
	e. Not type specified, incomplete stitching, or uncut.		X	
	f. Ragged edges.		X	
	g. Gimp omitted in:			
	-one buttonhole.			X
	-two or more buttonholes.		X	
	h. Inadequate bar or insecure tacking in:			
	-one buttonhole.		X	
	-two or more buttonholes.	X		
	i. Purling on wrong side.			X
	j. One or more buttonholes omitted or added.	X		
Buttons	a. Missing, loose or broken:			
	-one button.			X
	-two or more buttons.		X	
	b. Shank wrapping omitted or insecure (hand sewn buttons).			X
Bartacks	a. One or more missing, insecure, or misplaced not serving intended purpose.		X	
	b. Less than 3/8 or more than 1/2 inch long.			X
	c. Loose stitch tension on one or more bartacks.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
Waistband	a. Excessively full, twisted, pleated, or puckered: -on outside.		X	
	-on lining.			X
	b. Top of trousers puckered or pleated at joining of waistband.		X	
	c. Lining exposed above top edge of waistband for a distance of 1 inch or more.		X	
	d. Waistband less than 1-5/8 inch or more than 1-7/8 inches wide.			X
	e. Waistband not uniform in width by 1/4 inch or more.		X	
	f. Lining less than 2-3/8 or more than 2-5/8 inches wide.			X
Side pockets	a. Notch exposed at end of opening.	X		
	b. Facing or bearer short,i.e., end of facing not caught in bartacks at end of opening.	X		
	c. Edge of opening stretched or gapped.		X	
	d. Top of pocket caught improperly in top stitching of waistband seam causing fullness, twisting, or distortion on outside of trousers.	X		
	e. Edge of opening caught in outseam stitching more than 1/8 inch beyond bartack.		X	
	f. Distance from left and right opening to waistband seam uneven by more than 1/2 inch.		X	
	g. Fullness of twist on facings, affecting smoothness of opening on outside.		X	
	h. Contour of edge of opening distorted or uneven, or facing exposed on outside.		X	
	i. Edges not properly forced out.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	j. Opening less than 6 or more than 6-1/2 inches long.		X	
	k. Pocketing notched more than 1/4 inch beyond width of outseam allowance on the underside.		X	
	l. Pocketing not completely caught in waistband raise stitching.		X	
Note: Ends of facings partially caught shall not be scored as a defect.				
Darts	a. End of dart not properly tapered, causing bulge or fullness.		X	
	b. Folded edge of darts not turned towards seat seam.			X
Front opening	a. Closed fly twisted, puckered, or bulging.	X		
	b. Left fly facing: -exposed beyong left front. -set more than 1/8 inch inward from front edge of trouser.	X		X
	c. Seam joining right fly to front exposed when fly is closed.	X		
	d. Stitching on left fly less than 1-3/8 inches or more than 1-5/8 inches.			X
	e. Stitching on back edge of left fly not extending to top edge of waistband.		X	
	f. Flies uneven in length by: -1/4 inch to 3/8 inch inclusive. -more than 3/8 inch.	X	X	
	g. Fly bartacks. 1. Bartack not placed horizontally (at bottom end) through all plies at juncture of the crotch seam and fly. 2. Bartack through front edge of right fly to back edge of left fly not placed vertically or lower end more than 1 inch above the bartack at base of fly.			X X

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	h. Any part of fastener assembly omitted, bent or broken affecting function.	X		
	i. Fastener tape set on too loose or too tight, causing bulge, twist or fullness on closed fly.		X	
	j. Top end of fastener tape not caught in waistband joining seam.		X	
	k. Ends of slide fastener chain uneven at bottom by:			
	-more than 1/4 inch to 1/2 inch inclusive.			X
	-more than 1/2 inch.		X	
	l. Slide fastener set above bottom of fly notch more than 1/2 inch.		X	
	m. Fastener staple not securely clinched to bottom end of chain.	X		
	n. Head of fastener staple not towards the outside.			X
	o. Stitching of tape too close to metal edge not permitting slide to pass.	X		
	p. Excessive fullness, twist or pleats on right fly or lining.			X
	q. Right fly lining pleated or twisted under bartack at bottom of opening.			X
	r. Raw edges of right fly extension not turned under, or the turned edges not stitched to edges of crotch seam allowance.		X	
	s. Extension piece extending beyond inseam less than 1/2 inch.			X
	t. Interlining in left fly omitted.		X	
	u. Edge of chain from finished edge of left fly less than 1/2 inch or more than 3/4 inch.			X
	v. Slide fastener tape stitched to left fly facing with one row of stitching.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	w. Buttonhole not centered on left end of waistband by 1/8 inch or more.			X
	x. Waistband buttonhole less than 1/2 inch or more than 5/8 inch from the front edge.		X	
	y. Button and buttonhole not aligned causing bulge, twist or pucker on outside of trousers.		X	
	z. Fly tab.			
	-positioned more than 3/8 inch from waistband joining seam.			X
	-buttonhole and corresponding button out of alignment causing twist or bulge on outside of trousers.		X	
Label	a. Missing, incorrect, illegible.	X		
	b. Misplaced or not securely attached.			X
	c. Not stitched on four sides.			X
Seams	a. Seat seams.			
	1. Outlet omitted.		X	
	2. "V" opening.			
	-omitted.		X	
	-sides of opening uneven in length by more than 1/4 inch.			X
	-less than 3/8 inch or more than 3/4 inch deep.			X
	3. Double stitching more than 1/32 inch apart.		X	
	4. Tight tension stitches break when normal strain is applied in lengthwise direction of the seam:			
	-both rows of stitching at the same place.	X		
	-both rows of stitching at different places.		X	
	-one row of stitching only.			X
	b. Unsightly fullness or pleats on outside of crotch seam.			X
	c. Crotch seam stitching more than 1/4 inch above bartack at base of fly.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
	d. Outseam pleated or twisted at base of side pocket opening.	X		
	e. Inseam staggered at crotch by: -more than 1/4 inch to 3/8 inch inclusive.			X
	-more than 3/8 inch.		X	
	f. Inseam outlet omitted.		X	
Braid	a. Not completely caught in waistband seam.	X		
	b. Not even with edge of side pocket opening by more than 1/16 inch.			X
	c. Bottom of braid not centered over outseam.			X
	d. Twisted, bulging or pleated.	X		
Waistband buttons	a. Buttons on side seams positioned more than 1/4 inch from side seam.			X
	b. One button on each front positioned less than 4-1/2 or more than 4-3/4 inches from side seams.			X
	c. Buttons on back less than 2-1/4 or more than 2-1/2 inches from back seam.			X
	d. Center of button positioned less than 1/2 or more than 5/8 inch below top of waistband.			X
Leg bottoms	a. Turn-up finished less than 2-3/4 or more than 3 inches deep.		X	
	b. Center of reinforcement patches positioned more than 1/2 inch from center of front or back leg.		X	
	c. Blindstitching exposed and visible on outside, affecting appearance.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

4.3.2.2 Size measurements. Any measurement deviating from nominal dimension and tolerance specified in table of measurements (see 3.7),or inseams unequal in length by more than 1/2 inch shall be scored as a size measurement defect.

4.3.2.3 Examination of preparation for delivery requirement. An examination shall be made to determine that packaging, packing and marking requirements of Section 5 of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Material	Any component missing, damaged or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, or inadequate stapling. Bulged or distorted container.
Content (exterior and interior)	Number of trousers per shipping container is more or less than required.

4.3.3 Inspection levels and acceptable quality levels. The inspection levels and acceptable quality levels (AQL's) expressed in defects per 100 units (DHU) shall be as follows:

	AQL's	Inspection level
For 4.3.2.1		II
Major	2.5	
Major and Minor A (combined)	15.0	
Total (Major, Minor A and B combined)	40.0	
For 4.3.2.2.		S-3
One class	4.0	
For 4.3.2.3		S-2
One class	2.5	

4.4 Tests. The method of testing specified in CCC-T-191, wherever applicable, shall be followed.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

5.1.1 Level A. Each pair of trousers, fully buttoned with inseams meeting, shall be neatly folded to an average length of approximately 23 inches. For the larger sizes, it may be necessary to fold the seat area to achieve the desired width of approximately 14-1/2 inches.

5.1.2 Level C. Trousers shall be packaged in accordance with the industry's practice.

5.2 Packing. Packing shall be level A, B or C as specified (6.2).

5.2.1 Level A.

5.2.1.1 Method 1. Thirty-five (35) pairs of trousers of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container with liner, conforming to class-weather resistant, size 3A of MIL-B-17757 and assembled,closed, and strapped in accordance with appendix thereto. No less than 8 ounces of naphthalene flakes or other equivalent moth repellent shall be evenly distributed throughout the contents of each container, except when the trousers are made of moth repellent cloth. In addition, each container shall have the contents completely covered on the top and bottom with a sheet of 60 pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Towards the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.1.2 Method 2. When specified, three level B shipping containers shall be packed in a fiberboard shipping container, conforming to class-weather resistant, size No. 4 of MIL-B-17757 and assembled, closed, and strapped in accordance with appendix thereto. Towards the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2 Level B. Thirty-five (35) pairs of trousers of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container with liner, conforming to class-domestic, size 3A of MIL-B-17757 and assembled and closed in accordance with appendix thereto. The fiberboard used in fabricating the box shall be grade 275. Not less than 8 ounces of naphthalene flakes or other equivalent moth repellent shall be evenly distributed throughout the contents of each container except when the trousers are made of moth repellent cloth. In addition, each container shall have the contents completely covered on the top and bottom with a sheet of 60 pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Towards the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.3 Level C. Trousers, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification rules or regulations of other carriers applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

5.3.1 Label. Each shipping container packed with mixed sizes shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly printed the correct quantity of each contained therein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The trousers are intended for wear by officer's of the U. S. Marine Corps.

6.2 Ordering data. Procurements documents should specify the following:

(a) Title, number and date of this specification.
(b) Sizes required (1.2).
(c) When a first article is not required (3.2).
(d) Level of packaging and packing required (5.1 and 5.2).


6.3 Samples and shade samples. For information regarding availability of sample trousers and of standard shades specified, address inquiry to the procuring activity issuing the invitation for bids.

6.4 First article. Examination, test and approval shall be as specified by the contracting officer (see 3.2).

6.5 Supersession data. This specification includes the requirements of Marine Corps Purchase Description No. 50 (MCSA) dated 28 May 1958 for Trousers, Mess, Black (Officer's).


Preparing activity:
Navy - MC
Project No. 8405-N022

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

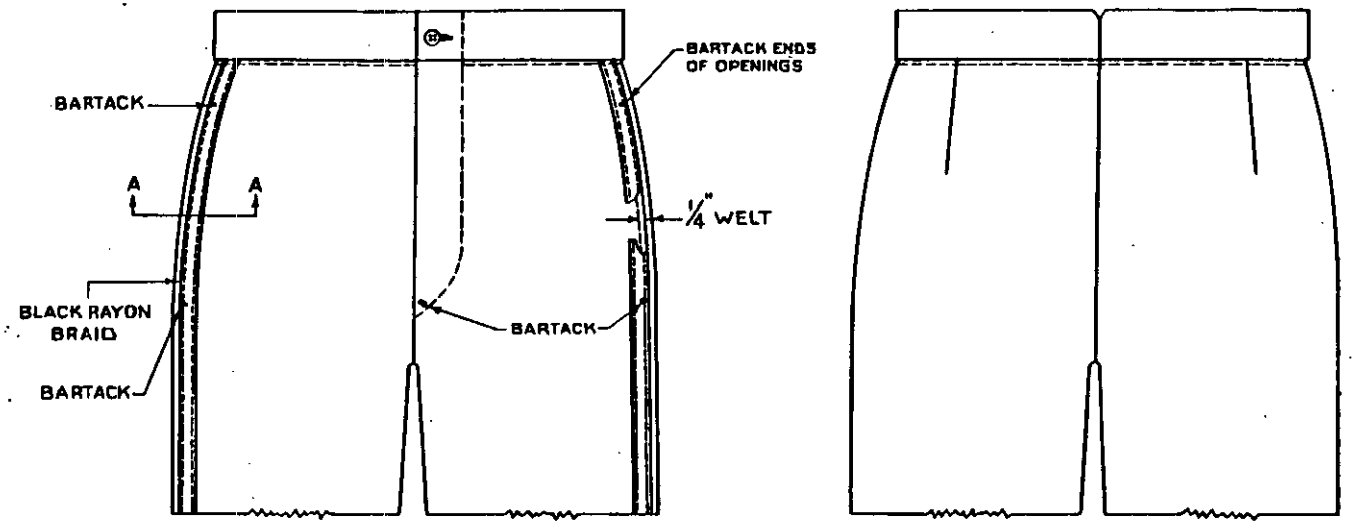


FRONT VIEW

BACK VIEW

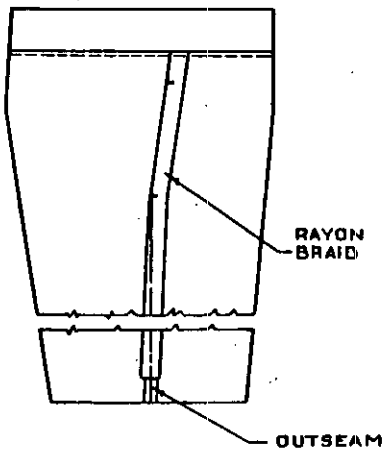


SIDE VIEW

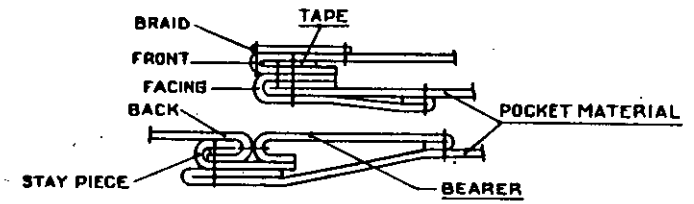

SECTION A A

DETAIL: SIDE POCKET OPENING

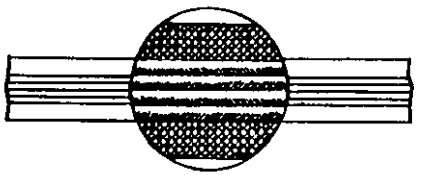

DETAIL: BRAID, BLACK RAYON

32

MIL-T-82199(MC)

FIGURE 1. TROUSERS, MEN'S: MESS, BLACK (OFFICER'S)

M.C.S.A. 826: R.G.F. 14 Nov 68

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

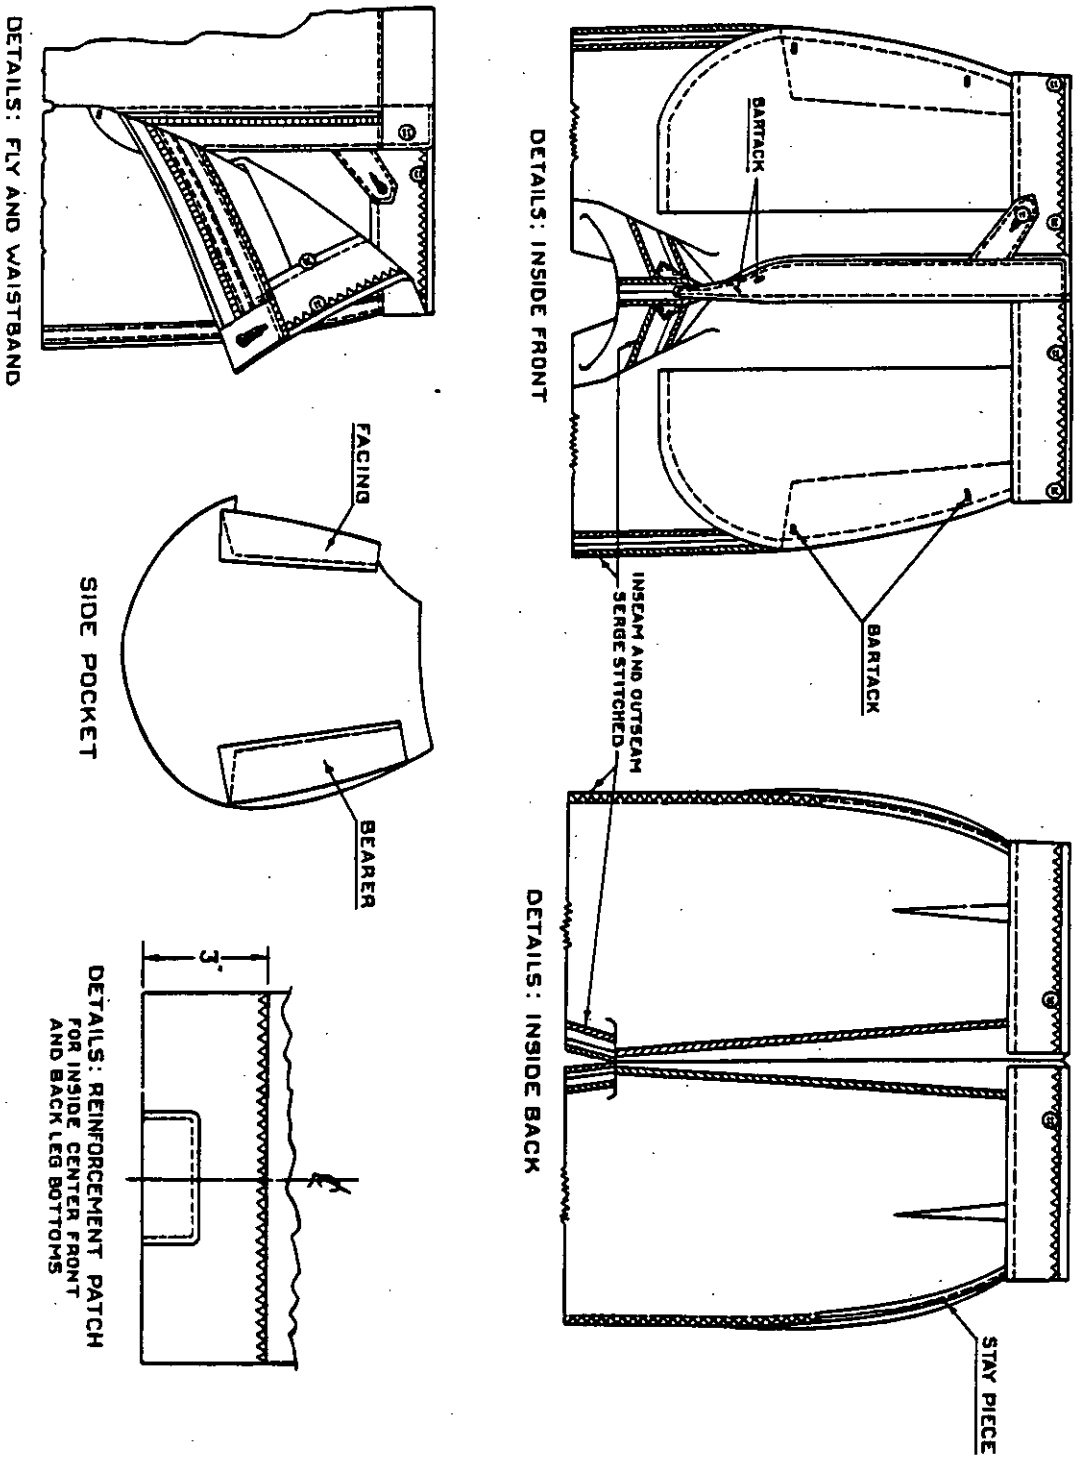


FIGURE 2. TROUSERS, MEN'S: MESS, BLACK (OFFICER'S)

M.C.S.A. 826:R.G.F. 14 Nov 68

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

Commanding General (826)
Marine Corps Supply Activity
1100 South Broad Street
Philadelphia, Pennsylvania 19146

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

ORGANIZATION *(Of submitter)*

CITY AND STATE

CONTRACT NO.

QUANTITY OF ITEMS PROCURED

DOLLAR AMOUNT
$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*

DATE

DD FORM 1 APR 63 1426

REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:56Z
Check the source to verify that this is the current version before use.