
MILITARY SPECIFICATION SHEET

ISOLATORS, RADIO FREQUENCY, STRIPLINE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the isolators described herein shall consist of this document and the latest issue of specification MIL-I-28791.

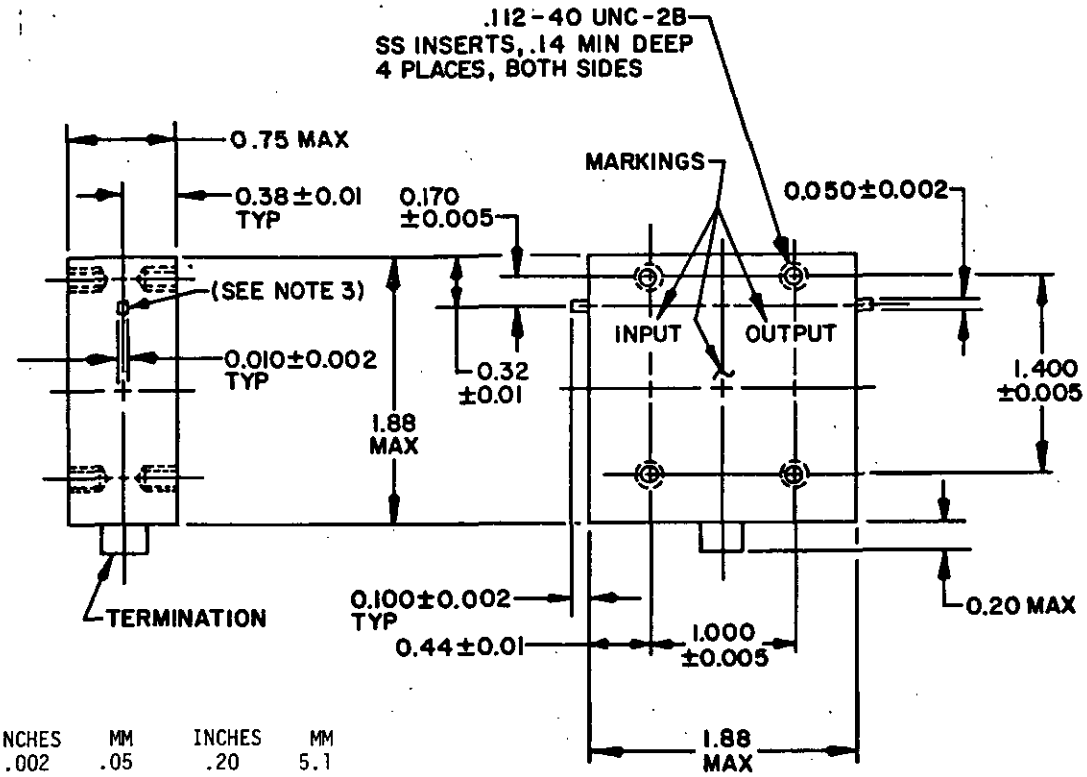


INCHES	MM	INCHES	MM
.002	.05	.20	5.1
.005	.13	.32	8.1
.010	.25	.38	9.7
.050	1.27	.44	11.2
.100	2.54	.75	19.0
.112	2.84	1.000	25.40
.14	3.6	1.400	35.56
.170	4.32	1.88	47.8

NOTES:
1. Metric equivalents are in parentheses.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. This shall be solderable.

FIGURE 1. Dimensions and configuration for dash number 01.

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 202610-20T18:49Z
Check the source to verify that this is the current version before use.

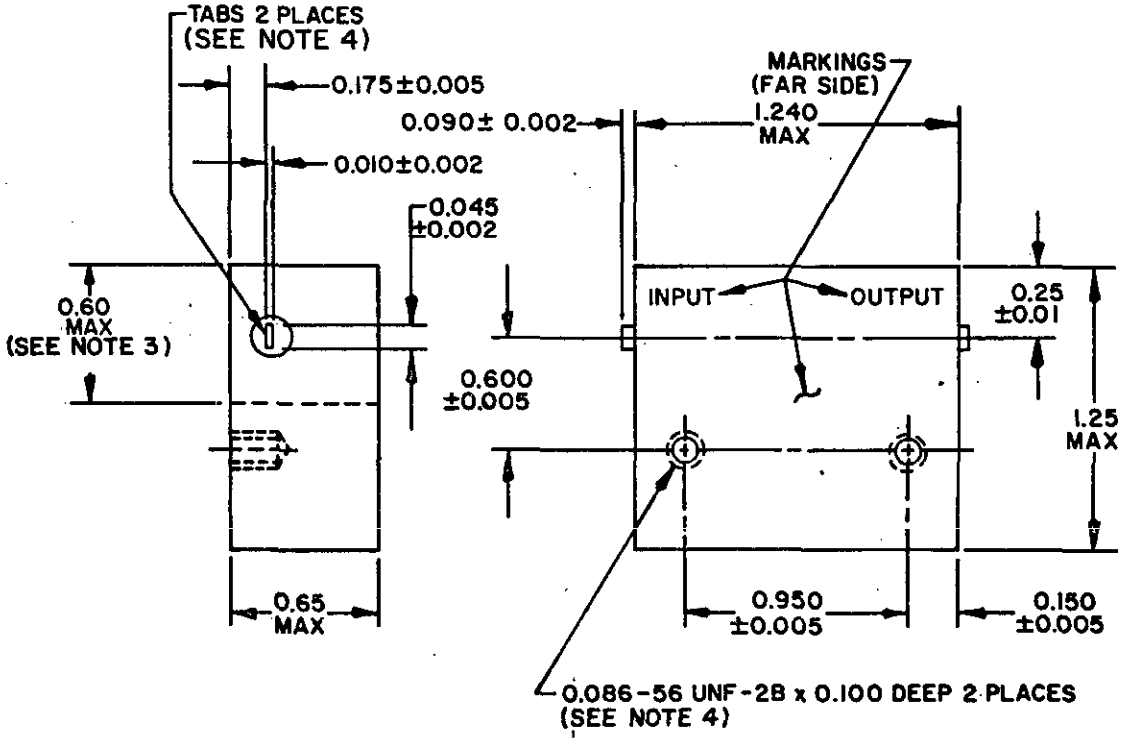

INCHES	MM	INCHES	MM
.002	.05	.150	3.81
.005	.13	.175	4.44
.010	.25	.25	6.4
.045	1.14	.600	15.24
.086	2.18	.65	16.5
.090	2.29	.950	24.13
.100	2.54	1.240	31.50
		1.25	31.8

NOTES:
1. Metric equivalents are in parentheses.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. All or part of this area may be free of paint and may contain blind holes, 2 places.
4. This shall be solderable.

FIGURE 2. Dimensions and configuration for dash number 02.

Source: https://assist.dla.mil -- Downloaded: 20261O-20T18:49Z
Check the source to verify that this is the current version before use.

ENGINEERING DATA:

Frequency range: See table I.

Voltage rating (sea level): 335 V.

Nominal impedance: 50 ohms.

Operating temperature range: See table I.

Power rating: See table I.

Connectors: Input and output connectors shall be solderable tab.

REQUIREMENTS:

Dimensions and configuration: See figures 1 and 2.

Isolation: See table I.

Insertion loss: See table I.

VSWR: See table I.

Marking: See figures 1 and 2.

Salt spray: MIL-STD-202, method 101, test condition B. This test shall be performed under first article inspection after the vibration test. Insertion loss and VSWR shall be measured after the test.

Shock: Test condition J, except only 15 G.

Fungus: Material and finishes shall be fungus inert in accordance with Requirement 4 of MIL-STD-454.

Part number: M28791/5- (dash number from table I).

TABLE I. Electrical requirements.

Dash number	Frequency range	Isolation	Insertion loss	VSWR	Operating temperature range	Input power rating Avg.
	GHz	dB min	dB max	max	°C	Watt min
01	0.95-1.215	20	0.3	1.20:1	-54°C to +71°C	50
02	0.96-1.215	20	0.6	1.25:1	-10°C to +71°C	10

NOTE: Isolators covered by this specification sheet are substituted for the following manufacturers' part number. This information in no way implies that the manufacturer part is suitable as a substitute for the military part number.

Dash number	Manufacturer's code	Manufacturer's part number	FSN
01	05869	712455-2	
01	53720	AER0421	
02	05869	729060-1	
02	55387	UTE1011	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:49Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Air Force - 11, 99
Navy - MC
DLA - ES

User activity:
Navy - OS, SH, MC, AS

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-0933)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:49Z
Check the source to verify that this is the current version before use.