
MILITARY SPECIFICATION SHEET

LINE ASSEMBLIES, RADIO FREQUENCY TRANSMISSION 1-5/8 INCH GAS BARRIER

This specification is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the line assemblies described herein shall consist of this specification and the latest issue of MIL-L-28796.

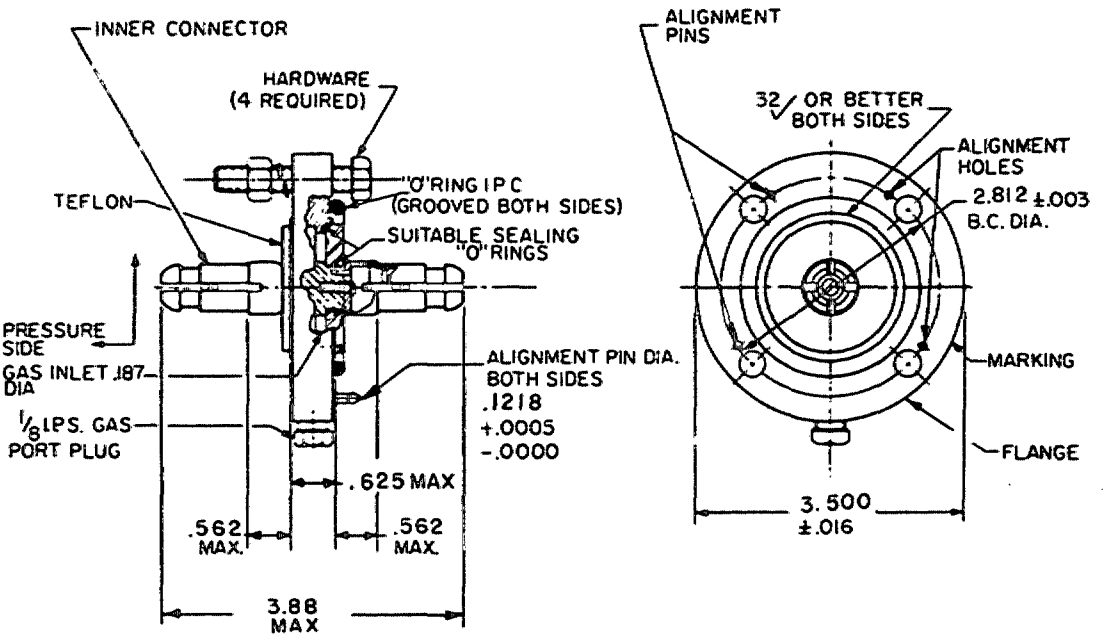

INCHES	MM
.0005	.01
.003	.08
.016	.41
.1218	3.09
.187	4.75
.562	14.27
.625	15.88
2.812	71.42
3.500	88.90
3.88	98.55

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 1. Dimensions and configuration for gas barrier.

Ⓐ denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:52Z
Check the source to verify that this is the current version before use.

FSC 5985

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1 and table 1.

Operating frequency: 400 to 450 MHz.

(A) Weight (approximate): 3 1/2 lbs.

Gaskets: Two each class 2b, grade 50 of ZZ-R-765 shall be supplied with each gas barrier.

Hardware set: Four each, corrosion-resistant steel bolts, nuts, and lockwashers, .3125-18UNC, 2 inches long.

Insertion loss: .1 dB maximum.

VSWR: 1.02:1 maximum.

Impedance: 50 ±.3 ohms.

Velocity of propagation: 99.7 percent minimum.

RF Power handling capability:

Average - 10.0 kilowatts minimum.

Peak - 136 kilowatts minimum.

Dielectric withstanding voltage: 10 kilovolts (ac).

Pressurization:

Test - Gage pressure of 65 (+2, -0) lbf/in^2.

Operating - Gage pressure of 20 ±2 lbf/in^2.

Part number: M28796/3-(and dash number from table I).

TABLE I. Dash numbers and characteristics.

Dash number	Flange per MIL-F-24044/	(A) Inter-connector per MIL-F-24044/ 1/
001	2-05 2/	1-05C
002	2-06 3/	1-05C

1/ The same as MIL-F-24044/1-05C (UG-1161/U), except the overall length is greater (as a result of a thicker polytetrafluoroethylene spacer).

2/ The same as MIL-F-24044/2-05 (CG-3033/U), except as follows:

a. Flange is nonrotatable.
b. Flange has a gas port.
c. Flange width is different.
d. Flange has two pins and two pin holes.
e. Surface roughness.

3/ The same as MIL-F-4044/2-06 (CG-3015/U), except as follows:

a. Flange is nonrotatable.
b. Flange has a gas port.
c. Flange width is different.
d. Flange has two pins and two pin holes.
e. Surface roughness.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:52Z
Check the source to verify that this is the current version before use.

NOTE: REC2695829(Navy) drawing is no longer applicable.

Custodian:
Navy - EC

Review activities:
Navy - SH, OS, AS
DLA - ES

User activity:
Navy - MC

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5985-N491-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:52Z
Check the source to verify that this is the current version before use.