
MILITARY SPECIFICATION SHEET

LINE ASSEMBLIES, RADIO FREQUENCY TRANSMISSION
3-1/8 INCH GAS BARRIER

This specification sheet is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the line assemblies described herein shall consist of this document and the latest issue of Specification MIL-L-28796.

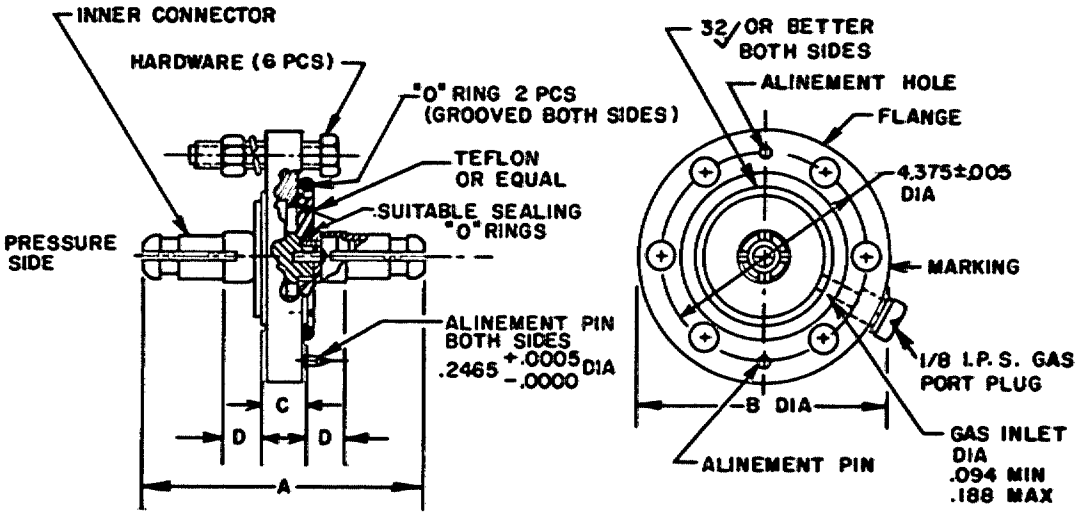

INCHES	MM	INCHES	MM	INCHES	MM
.0005	.013	.2465	6.261	4.375	111.12
.005	.13	.837	21.26	5.07	128.8
.016	.41	.875	22.22	5.188	131.78
.094	2.39	.934	23.72	5.75	146.0
.188	4.80	1.5	38.		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.005 (.13 mm) for three place decimals.

FIGURE 1. Dimensions and configuration for part numbers 001, 002, and 003.

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:52Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions and configuration.

Dash number	Dimensions				Flange per	Inner connection per
	A Max	B	C	D Max		
001	5.07	5.188 ±.016	.934 Max	.875	M24044/2-09 2/	M24044/1-09C 1/
002					M24044/2-10 3/	M24044/1-09C 1/
003 6/	5.75		1.5 ±.016	.837	M24044/2-09 2/ 4/	M24044/1-09C except: 1/ 5/

1/ The same as MIL-F-24044/1-09C(CG-3034/U), except the overall length is greater (as a result of a thicker polytetrafluoroethylene spacer).
2/ The same as MIL-F-24044/2-09(CG-3022/U), except as follows:

(a) Flange is nonrotatable.
(b) Flange has a gas port.
(c) Flange width is different.
(d) Flange has two pins and two pin holes.
(e) Surface roughness.

3/ The same as MIL-F-24044/2-10(CG-3024), except as follows:

(a) Flange is nonrotatable.
(b) Flange has a gas port.
(c) Flange width is different.
(d) Flange has two pins and two pin holes.
(e) Surface roughness.

4/ Outer housing to be brass bar per QQ-B-626 composition 22, 1/2 hard, or brass casting per MIL-B-17512.
5/ Bullet connector to be brass per MIL-N-994 with internal spring expander.
6/ Brass parts to be silver plate per QQ-S-365, type 1, class 2, .0007 thick.

FIGURE 1. Dimensions and configuration for part numbers 001, 002, and 003 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:52Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Operating frequency range:
Part number M28796/4-001 - 400 - 450 MHz.
002 - 400 - 450 MHz.
003 - 200 - 230 MHz.

Gaskets: Two each class 2b, grade 50 of ZZ-R-765 shall be supplied with each gas barrier.

Hardware: Six each of the following shall be supplied with each gas barrier:
For dash numbers 001 and 002:
MS-35307-367 bolt
MS-35649-2384 nut
MS-35338-141 washer
For dash number 003:
MS-35307-370 bolt
MS-35649-2384 nut
MS-35338-141 washer

Insertion loss: .05 dB maximum.

VSWR: 1.02:1 maximum.

Impedance: 50 ohms ±.3.

Dielectric withstanding voltage: 20 kV (dc).

Pressurization:

	M28796/4-001, 002	003
Test:	65 $^{+2}_{-0}$ lb_f/in^2G	65 $^{+2}_{-0}$ lb_f/in^2G
Operating:	20 $^{+2}_{-0}$ lb_f/in^2G	5-30 lb_f/in^2G

RF power handling capability:

	M28796/4-001, 002	003
Average:	24 kW minimum	---
Peak:	390 kW minimum	200 kW minimum

Part number: M28796/4- (dash number from table I).

NOTE: Assemblies covered by this specification are substitutable for the following commercial type:

Dash number	Manufacturers code	Commercial type	NSN
003	97942	337C426	5840-00-014-1491

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:52Z
Check the source to verify that this is the current version before use.

Custodian:
Navy - EC

Review activities:
Navy - SH, OS, AS
DLA - ES

User activity:
Navy - MC

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5985-N459)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:52Z
Check the source to verify that this is the current version before use.