
MILITARY SPECIFICATION SHEET

LINE ASSEMBLIES, RADIO FREQUENCY TRANSMISSION 1-5/8 INCH STRAIGHT SECTIONS, FLANGED

This specification is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the line assemblies described herein shall consist of this specification and the latest issue of MIL-L-28796.

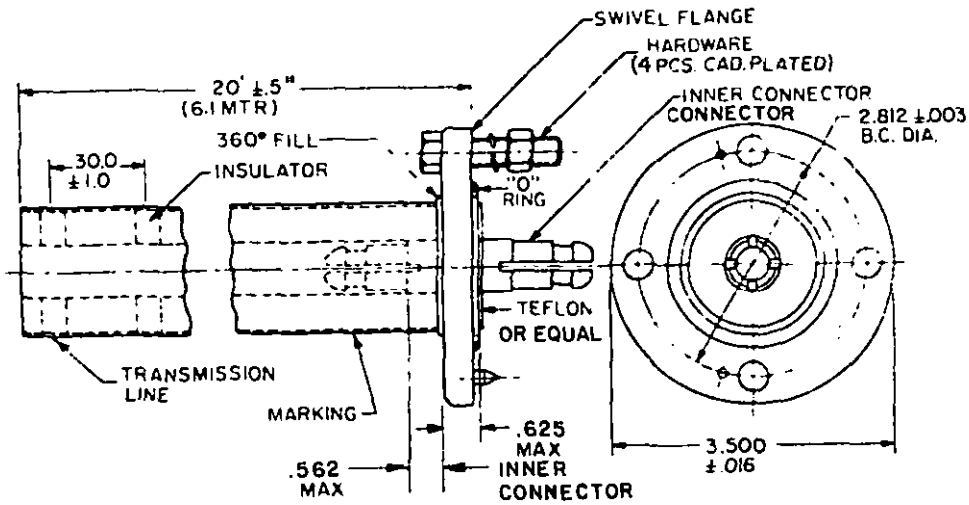


INCHES	MM
.003	.08
.016	.41
.562	14.27
.625	15.88
1.0	25.40
2.812	71.42
3.500	88.90
30.0	762.00

NOTES:
1. Dimensions are in inches, unless otherwise indicated.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 1. Dimensions and configuration for line with one flange.

Ⓐ denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:52Z
Check the source to verify that this is the current version before use.

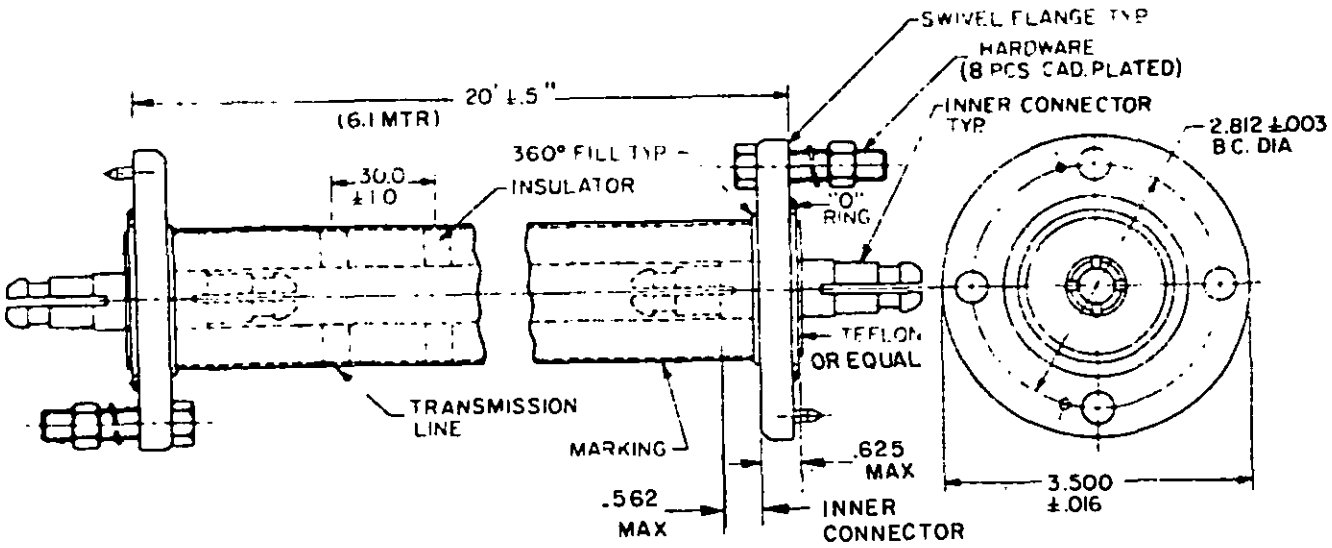

INCHES	MM
.003	.08
.016	.41
.562	14.27
.625	15.88
1.0	25.40
2.812	71.42
3.500	88.90
30.0	762.00

NOTES:
1. Dimensions are in inches, unless otherwise specified.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 2. Dimensions and configuration for line with two flanges.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:52Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figures 1 and 2 and table 1.

Electrical properties: Shall be in accordance with MIL-L-3890/1 and MIL-L-3890/3.

(A) Weight (approximate): 27 lbs.

Gaskets: Class 2b, grade 50 of ZZ-R-765:

1 each - 001 and 002 dash numbers.

2 each - 003 and 004 dash numbers.

(A) Hardware set: Corrosion-resistant steel bolts, nuts, and lockwashers .3125-18UNC, 1 1/2 inches long:

4 each - 001 and 002 dash numbers.

8 each - 003 and 004 dash numbers.

Velocity of propagation: 99.7 percent minimum.

RF power handling capability:

Average - 10.0 kilowatts minimum.

Peak - 136 kilowatts minimum.

Dielectric withstanding voltage: 10 kilovolts (ac).

Pressurization:

Test - Gage pressure of 65 (+2, -0) lbf/in^2.

Operating - Gage pressure of 20 ±2 lbf/in^2.

Part number: M28796/5-(and dash number from table I).

TABLE I. Dash numbers and characteristics.

Dash number	Flange per MIL-F-24044/	Transmission line per MIL-L-3890	Inner connector per MIL-F-24044/	Figure number
001	2-05	3 (RG-382/U)	1-05C	1
002	2-06	1 (RG-153/U)	1-05C	1
003	2-05	3 (RG-382/U)	1-05C	2
004	2-06	1 (RG-153/U)	1-05C	2

Custodian:
Navy - EC

Review activities:
Navy - SH, OS, AS
DLA - ES

User activity:
Navy - MC

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5985-N491-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T18:52Z
Check the source to verify that this is the current version before use.