A-A-51125B
9 January 1991
SUPERSEDING
A-A-51125A
November 25, 1985

COMMERCIAL ITEM DESCRIPTION

BLADES, BAND SAW, CARBON STEEL, METAL CUTTING

The General Services Administration has authorized the use of this commercial item description.

Abstract. This description covers carbon steel band saw blades with a hardened cutting edge. The blades shall be of the standard commercial type that are used for light and medium duty sawing of ferrous and non-ferrous metals in a production environment.

Classification. The blades shall be of the following types. The type, style (tooth form), toothset, blade width, blade thickness, pitch, coil stock or welded blade, length, length tolerance, and quantity to be furnished shall be as specified (see ordering data).

Type I - Flexible back.
  Style A - Standard tooth form.
  Style B - Skip tooth form.
  Style C - Hook tooth form.

Type II - Tempered back.
  Style A - Standard tooth form.
  Style B - Skip tooth form.
  Style C - Hook tooth form.

Salient characteristics.

1. Design. The blade shall be new and of the manufacturer's commercial design in effect on the date of the solicitation. The band saw blade shall be made from carbon steel strip with one hardened toothed edge.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Industrial Plant Equipment Center, ATTN: DIPEC-SSG, 2163 Airways Blvd., Memphis, TN 38114-5051.

AMSC N/A FSC 3455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202640-26T08:51Z
Check the source to verify that this is the current version before use.

2. Material. The blade shall be manufactured from carbon steel in conformance with ASME B94.51M.

3. Blade body. The blade body shall be flexible or tempered type as specified (see ordering data) and conform to ASME B94.51M.

4. Tooth form. The tooth form shall conform to ASME B94.51M and shall be of the standard, skip, or hook tooth style (see ordering data).

5. Blade toothset. Unless otherwise specified (see ordering data), the toothset of the blade to be furnished shall be selected from table I. All toothsets shall conform to ASME B94.51.

TABLE I. Blade toothset.

Toothset designation	Blade toothset
R	Raker
W	Wavy

6. Blade width. Unless otherwise specified (see ordering data), the width of the blade to be furnished shall be selected from table II. The tolerance on blades of 3/4 inch widths and less shall be in conformance with ASME B94.51M. The tolerance on the 1.000 inch blade shall be not less than 0.020 inches and not more than 0.083 inches. The tolerance on the 1.250 inch width blade shall be not less than 0.020 inches and not more than 0.110 inches. The width of the blade supplied shall be consistent within ±0.020 inches.

TABLE II. Blade width.

Width designation	Blade width (in.)	Width designation	Blade width (in.)
1	0.062	6	0.500
2	0.125	7	0.750
3	0.187	8	1.000
4	0.250	9	1.250
5	0.375		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:51Z
Check the source to verify that this is the current version before use.

7. Blade thickness. Unless otherwise specified (see ordering data), the thickness of the blade to be furnished shall be selected from table III. The tolerance of blades 0.024 inch and less shall be +0.0010 inch. The tolerance of blades 0.025 inch or greater shall conform to ASME B94.51M.

TABLE III. Blade thickness.

Thickness designation	Blade thickness (inches)
A	0.014
B	0.020
C	0.025
D	0.032
E	0.035
F	0.042

8. Pitch. Unless otherwise specified (see ordering data), the pitch (teeth per inch) of the blade to be furnished shall be selected from table IV.

TABLE IV. Blade pitch.

Pitch designation	Blade pitch (teeth/inch)	Pitch designation	Blade pitch (teeth/inch)
02	2	12	12
03	3	14	14
04	4	18	18
06	6	24	24
08	8	32	32
10	10		

9. Blade length. The blade shall be furnished in coils or welded lengths as specified by the procuring activity (see ordering data). The length of the coil or the welded length shall be as specified (see ordering data). The tolerance of the blade length shall be as specified (see ordering data). When coils are supplied, there shall be no more than two welds per coil. When welded lengths are supplied, there shall be no more than one weld per blade.

10. Hardness. Blades shall have a tooth hardness of not less than Rockwell "C" 62 and not greater than Rockwell "C" 68. Type I blade body hardness shall be not less than Rockwell "C" 25 and not greater than Rockwell "C" 38. Type II blade body hardness shall be not less than Rockwell "C" 38 and not greater than Rockwell "C" 48.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:51Z
Check the source to verify that this is the current version before use.

11. Marking of blades. The blades shall be tagged, labeled, or marked to identify the blade and manufacturer.

12. Performance. Each band saw blade shall be capable of meeting the sawing requirements specified in table V. The test material shall be AISI 1018 cold drawn steel bars. Sawing shall be performed with a blade tension as recommended by the power metal cutting band saw manufacturer for the specific size band saw blade being procured. Sawing shall be performed on a power metal cutting band saw as appropriate for the specific style and size band saw blade being procured.

TABLE V. Sawing Requirements

Type Blade	Pitch (Teeth/Inch)	Break in Rate of Cut (Square inches/minute)	Test Rate of Cut (Square inches/minute)
I	24-32	.5	1.5
I	10-18	1.0	2.2
I	2-8	1.5	3.0
II	18-32	.5	1.5
II	2-14	1.3	3.0

Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of FED-STD-376, and all other requirements of this commercial item description are met.

If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request shall be made to the contracting officer to determine if the product is acceptable.

The contracting officer has the option of accepting or rejecting the product.

Regulatory requirements. In accordance with section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing suppliers' employees to undue hazards from the recovered materials.

Environmental protection. During the manufacture of the blade, materials hazardous to the ecological system as prohibited by the Federal, state, or local statutes in effect on the date of the contract shall not be used or emitted.

Preservation, packaging, packing, labeling, and marking. Preservation, packaging, packing, labeling, and marking shall be as specified in the contract order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:51Z
Check the source to verify that this is the current version before use.

Quality assurance.

Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection, examination, and test requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections, examinations, or tests set forth in this description where such inspections, examinations, and tests are deemed necessary to assure supplies and services conform to prescribed requirements.

Responsibility for compliance. All items shall meet the requirements specified herein. The inspection set forth in this description shall become a part of the contractors overall inspection system or quality program. The absence of any inspection requirements in the description shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

Sampling inspection. The supplier shall randomly select the number of samples in table VI that is applicable to the quantity of items being purchased. Each sample item shall be inspected to determine conformance with the examination, and the dimensional inspection requirements of this description.

TABLE VI. Sampling plan.

Quantity of items being purchased	Sample size	Acceptance number defective	Rejection number defective
2 - 8	2	0	1
9 - 15	3	0	1
16 - 25	5	0	1
26 - 50	8	1	2
51 - 90	13	1	2
91 - 150	20	2	3
151 - 280	32	3	4
281 - 500	50	5	6
501 - 1,200	80	8	9
1201 - 3,200	125	12	13
3201 - 10,200	200	18	19

Source: https://assist.dla.mil -- Downloaded: 202640-26T08:51Z
Check the source to verify that this is the current version before use.

Any sample failing to meet all requirements specified herein shall be considered a defective item. If the number of defective items is equal to or less than the quantity specified under the "Acceptance, number defective" column of table VI, the supplier shall replace the defective samples with samples that meet all the requirements specified herein, and the entire lot shall be considered acceptable for shipment. If the number of defective samples is equal to or greater than the quantity specified in the "Rejection, number defective" column of table VI, the entire lot shall be considered defective and unsuitable for acceptance. A lot shall consist of all the blades of one style, width, thickness, pitch, and toothset manufactured under essentially the same conditions and all units processed at the same time and presented for acceptance at one time.

Examination. Each blade submitted for sample inspection shall be visually examined to determine conformance with all requirements of this description.

Dimensional test. Each blade submitted for sample inspection shall be tested for conformance with the dimensional requirements of the salient characteristics.

Hardness test. A hardness test shall be performed in accordance with ASTM E 18 to determine conformance with the hardness requirements of salient characteristic number 10.

Performance test. Each blade selected for test shall be tested for conformance with the requirements of table V. The test sample size shall be determined by table VI. The test material shall be ANSI 1018 cold drawn steel bars of a thickness suitable for testing the blade being furnished. The sawing test shall be performed on a metal cutting band saw with sufficient horsepower to test the specific blade being procured. A full flow or mist type coolant system shall be used where applicable. Before the test is conducted, five cuts shall be made within the time limits specified in table V under the heading "Break in" time. During the next five cuts, the feed pressure shall be gradually increased so that on the tenth cut the time shall be within the limits specified in table V under the heading "Test". Without further adjustment to the saw, ten cuts shall be made within the time limits specified in table V under the heading "Test".


NOTES:

Ordering data. Purchasers should select the preferred options permitted herein, and include the following information in procurement documents:

a. Title, number, and date of this commercial item description
b. Type
c. Style (tooth form)
d. Toothset
e. Blade width
f. Blade thickness
g. Pitch
h. Coil stock or welded blade
i. Length
j. Length tolerance
k. Quantity

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:51Z
Check the source to verify that this is the current version before use.

CID based part identification number (PIN). The following part identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor. Where applicable, Arabic numbers shall be substituted for Roman numerals. Refer to the salient characteristics for origination of the correct letters or numbers to complete the PIN.

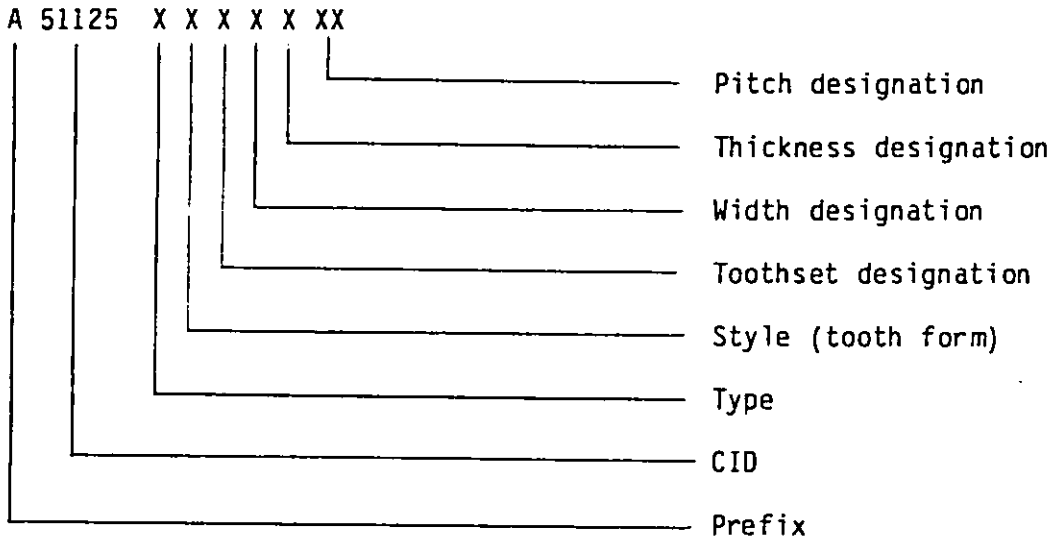

Cross reference of classification changes. Classification changes from the previous issue are as follows:

A-A-51125A	A-A-51125B
Type I, sizes listed	Sizes deleted (PIN number added)
Type II, sizes listed	Sizes deleted (PIN number added)

Federal Standard FED-STD-376 is available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19120-5099.

ASME B94.51M is available from the American Society of Mechanical Engineers, United Engineering Center, 345 East 47th Street, New York, NY 10018-3363.

ASTM E 18 is available from the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:51Z
Check the source to verify that this is the current version before use.

MILITARY INTEREST:

Custodians:
Army - AL
Air Force - 99

Review activities:
Navy - YD
Air Force - 84
DLA - GS

User activity:
Navy - MC

CIVIL AGENCY COORDINATION ACTIVITY:

DOT - NHT
GSA - FSS

PREPARING ACTIVITY:
DLA - IP

Project 3455-0136

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:51Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER A-A-51125B	2. DOCUMENT DATE (YYMMDD) 91 01 09

3. DOCUMENT TITLE
BLADES, BAND SAW, CARBON STEEL, METAL CUTTING

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME Defense Industrial Plant Equipment Center ATTN: DIPEC-SSG	b. TELEPHONE (Include Area Code) (1) Commercial (901) 775-6269	(2) AUTOVON 683-6269
c. ADDRESS (Include Zip Code) 2163 Airways Blvd. Memphis, TN 38114-5051	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:51Z
Check the source to verify that this is the current version before use.