[INCH-POUND]
A-A-51136B
21 JULY 1999
SUPERSEDING
A-A-51136A
23 January 1990

COMMERCIAL ITEM DESCRIPTION

# TOOL HOLDER, THREADING TOOL TYPE, LATHE

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) covers tool holders and associated threading tools used on general-purpose lathes for cutting right-hand, 60-degree UN, class 2A threads in ferrous metals.

2. CLASSIFICATION. Tool holders and threading tools shall be of the following types and sizes. The type and size to be furnished shall be as specified (see 7.2(b)).

Type I - Tool holder, rigid
Type II - Tool holder, spring or gooseneck form

Size - See tables I and II

TABLE I. Type I tool holder sizes.

| Tool holder size | Thickness of shank, inch | Height of shank, inches | Length of holder, inches | Radial length of formed threading tool, inches (minimum) |
|---|---|---|---|---|
| 00 | 3/8 | 7/8 | 3 1/8 | 13/16 |
| 01 | 1/2 | 1 1/8 | 3 /38 | 1 |
| 02 | 5/8 | 1 3/8 | 4 | 1 7/32 |
| 03 | 3/4 | 1 5/8 | 5 | 1 1/4 |
| 04 | 7/8 | 1 3/4 | 5 3/4 | 1 1/4 |

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent to: Defense Supply Center Richmond (DSCR), ATTN: DSCR-VBD, 8000 Jefferson Davis Highway, Richmond, VA 23297-5610.

AMSC N/A FSC 3460

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:51Z
Check the source to verify that this is the current version before use.

TABLE II. Type II tool holder sizes.

| Tool holder size | Thickness of shank, inch | Height of shank, inches | Length of holder, inches | Radial length of formed threading tool, inches (minimum) |
|---|---|---|---|---|
| 10 | 3/8 | 7/8 | 5 1/2 | 13/16 |
| 11 | 1/2 | 1 1/8 | 6 1/2 | 1 |
| 12 | 5/8 | 1 3/8 | 7 1/2 | 1 7/32 |
| 13 | 3/4 | 1 5/8 | 8 1/2 | 1 1/4 |

## 3. SALIENT CHARACTERISTICS.

3.1 General requirements. The tool holder shall be new and one of the manufacturer's current models capable of operation in accordance with the requirements herein. Unless otherwise specified (see 7.2(c)), the tool holder and threading tool shall be capable of cutting a right-hand, 60-degree UN, class 2A thread in accordance with American Society of Mechanical Engineers (ASME) Standard B1.1, "Unified Inch Screw Threads (UN and UNR Thread Form)". The tool holder shall have a tool-holding head rotated clockwise 34 degrees from the shank with a horizontal tapped boss fitted with an adjusting screw to control tool edge height. Style B tool holders shall be a gooseneck-form head to provide resilient tool mounting.

3.2 Materials. The tool holders shall be made of drop-forged alloy steel, heat-treated to a Rockwell C 40-48 hardness, or alloy steel, surface hardened to a Rockwell C 50-58 hardness when tested in accordance with ASME standard E18, "Rockwell Hardness and Rockwell Superficial Hardness of Metallic Materials".

3.3 Clamping device. A clamping device shall firmly support the threading tool on tool-holding head.

3.4 Threading tool. A threading tool shall be furnished. The threading tool shall be a single-point, radial form of high-speed tool steel hardened to a Rockwell C 63-67 hardness and shall be ground to an included angle of 60 degrees on the periphery. The threading tool shall be capable of being resharpened by grinding the top edge only.

## 4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:51Z
Check the source to verify that this is the current version before use.

## 5. QUALITY ASSURANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description; conform to the producer's own drawings, specifications, standards, and quality assurance practices; and be the same product as that which the supplier offers for sale on the commercial market. The government reserves the right to require proof of such conformance.

## 6. PACKAGING

6.1 Preservation, packing, and marking. For acquisition purposes, the products shall be preserved, packed, and marked as specified in the acquisition order (see 7.2(d)).

## 7. NOTES

7.1 Sources of documents

7.1.1 FAR. The FAR may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402-0001.

7.1.2 ASME standards. Copies of ASME standards may be obtained from the American Society of Mechanical Engineers, 345 East 47th Street, New York, NY 10017.

7.2 Ordering data. Acquisition documents must specify the following information:

a. Title, number, and date of this document
b. Product classification (type and size) (see 2)
c. Type of thread being cut, if different (see 3.1)
d. Packaging requirements (see 6.1)

7.3 Part identification number (PIN). The following part identification numbering system is for government purposes and does not constitute a requirement for the contractor.

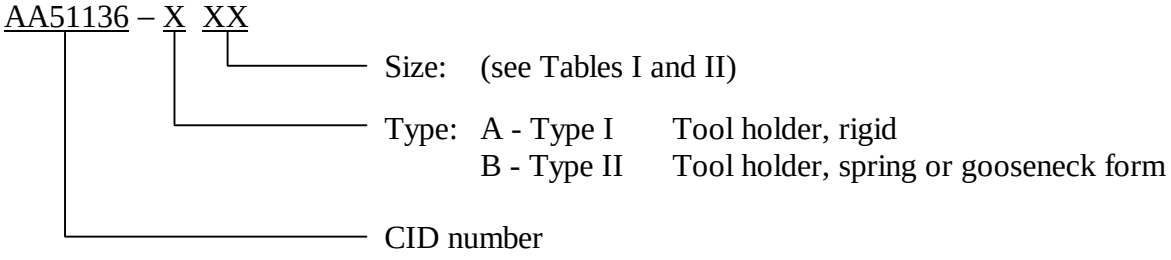




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:51Z
Check the source to verify that this is the current version before use.

7.4 Cross reference of classification changes. Cross reference between this CID and the proceeding document is as follows:

| A-A-51136A | A-A-51136B |
|---|---|
| Style I | Type I |
| Style II | Type II |

MILITARY INTERESTS:

Custodians:
Air Force - 99
Army - AL
Navy - SH

Reviewers:
Air Force - 84
Navy - MC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 6FET

Preparing activity:
DLA - GS

(Project 3460-0175)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:51Z
Check the source to verify that this is the current version before use.