INCH-POUND

A-A-51136C
19 April 2006
SUPERSEDING
A-A-51136B
21 July 1999

COMMERCIAL ITEM DESCRIPTION

TOOL HOLDER, THREADING TOOL TYPE, LATHE

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) covers tool holders and associated threading tools used on general-purpose lathes for cutting right-hand, 60-degree UN, class 2A threads in ferrous metals.

2. CLASSIFICATION. The tool holders and threading tools shall be of the following types and sizes.

2.1 The type to be furnished shall be as specified (see 7.5(b)).

Type A - Tool holder, rigid
Type B - Tool holder, spring or gooseneck form

2.2 The size to be furnished shall be as specified in table I or II (see 7.5(c)).

TABLE I. Type I tool holder sizes.

Tool holder size	Thickness of shank (inch)	Height of shank (inches)	Length of holder (inches)	Radial length of formed threading tool, inches (minimum)
00	3/8	7/8	3-1/8	13/16
01	1/2	1-1/8	3-3/8	1
02	5/8	1-3/8	4	1-7/32
03	3/4	1-5/8	5	1-1/4
04	7/8	1-3/4	5-3/4	1-1/4

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: STDZNMGT@dla.mil or Defense Supply Center Richmond (DSCR), ATTN: DSCR-VEB, 8000 Jefferson Davis Highway, Richmond, VA 23297-5616.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:51Z
Check the source to verify that this is the current version before use.

TABLE II. Type II tool holder sizes.

Tool holder size	Thickness of shank (inch)	Height of shank (inches)	Length of holder (inches)	Radial length of formed threading tool, inches (minimum)
10	3/8	7/8	5-1/2	13/16
11	1/2	1-1/8	6-1/2	1
12	5/8	1-3/8	7-1/2	1-7/32
13	3/4	1-5/8	8-1/2	1-1/4

3. SALIENT CHARACTERISTICS

3.1 General requirements. The tool holder shall be new and one of the manufacturer's current models capable of operation in accordance with the requirements herein. Unless otherwise specified (see 7.5(d)), the tool holder and threading tool shall be capable of cutting a right-hand, 60-degree UN, class 2A thread in accordance with ASME B1.1, "Unified Inch Screw Threads". The tool holder shall have a tool-holding head rotated clockwise 34 degrees from the shank with a horizontal tapped boss fitted with an adjusting screw to control tool edge height. Type II tool holders shall be a gooseneck-form head to provide resilient tool mounting.

3.2 Materials. The tool holder shall be made of drop-forged alloy steel heat-treated to a Rockwell C 40-48 hardness or alloy steel surface hardened to a Rockwell C 50-58 hardness when tested in accordance with ASTM E18, "Standard Test Method for Rockwell Hardness and Rockwell Superficial Hardness of Metallic Materials".

3.3 Clamping device. A clamping device shall firmly support the threading tool on the tool-holding head.

3.4 Threading tool. A threading tool shall be furnished. The threading tool shall be a single-point radial form of high-speed tool steel hardened to a Rockwell C 63-67 hardness and shall be ground to an included angle of 60 degrees on the periphery. The threading tool shall be capable of being resharpened by grinding the top edge only.

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:51Z
Check the source to verify that this is the current version before use.


5.2 Market acceptability. The product offered must have been previously sold either to the government or on the commercial market.

6. PACKAGING

6.1 Preservation, packing, and marking. Preservation, packing, and marking shall be as specified in the acquisition order (see 7.5(e)).

7. NOTES

7.1 Part or identification number (PIN). The following PIN procedure is for government purposes and does not constitute a requirement for the contractor.

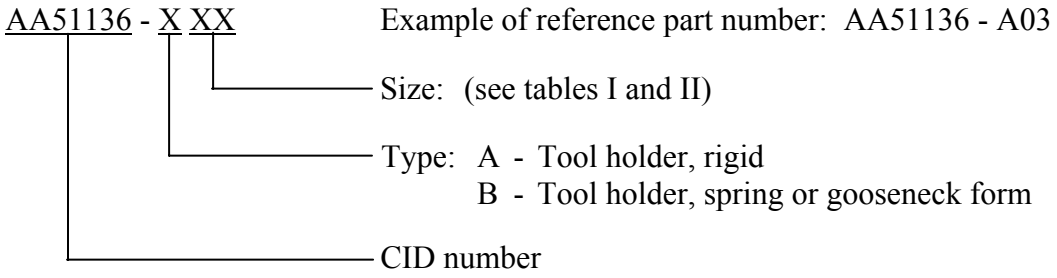

7.2 Sources of documents.

7.2.1 ASME standards. Copies of ASME standards may be obtained from the American Society of Mechanical Engineers, Three Park Avenue, New York, NY 10016-5990. Electronic copies of ASME standards may be obtained from http://www.asme.org/.

7.2.2 ASTM standards. Copies of ASTM standards may be obtained from ASTM International, 100 Barr Harbor Drive, P.O. Box C700, West Conshohocken, PA 19428-2959. Electronic copies of ASTM standards may be obtained from http://www.astm.org/.

7.2.3 FAR. The FAR may be obtained from the Superintendent of Documents, P.O. Box 371954, Pittsburgh, PA 15250-7954. Electronic copies of FAR documents may be obtained from http://www.arnet.gov/far/.

7.5 Ordering data. The acquisition order should specify the following:

a. CID document number, revision, and CID PIN.
b. Type of tool holder (see 2.1).
c. Size of tool holder (see 2.2).
d. Type of thread being cut, if different (see 3.1).
e. Preservation, packing, and marking (see 6.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:51Z
Check the source to verify that this is the current version before use.

7.6 Subject term (key word) listing.

ferrous
gooseneck
metal
rigid
spring

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - SH
Air Force - 99

Review Activities:
Navy - MC
Air Force - 84

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

Preparing Activity:
DLA - GS6

(Project 3460-2005-002)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:51Z
Check the source to verify that this is the current version before use.