A-A-51147A
January 8, 1991
SUPERSEDING
A-A-51147
February 27, 1986

COMMERCIAL ITEM DESCRIPTION

BLADES, BAND SAW, CARBON STEEL, WOOD CUTTING

The General Services Administration has authorized the use of this commercial item description.

Abstract. This description covers carbon steel wood cutting band saw blades. The blades shall be of the standard, commercial type that are used for sawing wood in a production environment.

Classification. The blades shall be of the following types and styles. The type, style (tooth form), toothset, blade width, blade thickness, pitch, coil stock or welded blade, length, length tolerance, and quantity to be furnished shall be as specified (see ordering data).

Type I - Flexible back.
  Style B - Hook tooth form.
  Style C - Skip tooth form.

Type II - Tempered back.
  Style A - Skip tooth form.
  Style B - Hook tooth form.

Salient characteristics.

1. Design. The blade shall be new and of the manufacturer's commercial design in effect on the date of the solicitation. The band saw blade shall be made from carbon steel strip with one hardened toothed edge.

2. Material. The blade shall be manufactured from carbon steel in conformance with ASME B94.51M.

Beneficial comments recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Industrial Plant Equipment Center, ATTN: DIPEC-SSG, 2163 Airways Blvd., Memphis, TN 38114-5051.

AMSC N/A FSC 3230

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:51Z
Check the source to verify that this is the current version before use.

3. Blade body. The blade body shall be of the flexible or tempered type as specified (see ordering data) and conform to ASME B94.51M.

4. Tooth form. The tooth form shall conform to ASME B94.51M and shall be of the hook or skip tooth style as specified (see ordering data).

5. Blade toothset. Unless otherwise specified (see ordering data), the toothset of the blade to be furnished shall be selected from table I. The raker and alternate toothset shall conform to ASME B94.51M. The modified raker toothset shall be defined as a transverse setting of individual teeth as illustrated in figure 1, one to the right, one to the left, one to the right, one to the left, and one straight. More or less individual teeth set to the right or left may be provided in accordance with the toothset configurations currently available in the commercial market.

TABLE I. Blade toothset.

Toothset designation	Blade toothset
R	Raker
M	Modified Raker
A	Alternate




FIGURE 1. Modified raker toothset.

6. Blade width. Unless otherwise specified (see ordering data), the width of the blade to be furnished shall be selected from table II. The tolerance on blades of 3/4 inch width and less shall be in conformance with ASME B94.51M. The tolerance on the 1.000 inch width blades shall be not less than 0.020 inches, and not more than 0.083 inches. The tolerance on the 1.250 inch width blade shall be not less than 0.020 inches, and not more than 0.110 inches. The tolerance on 2.000 inch width blade shall be not less than 0.020 inch, and not more than 0.145 inches. The width of the blade supplied shall be consistent on each blade within $\pm$0.020 inches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:51Z
Check the source to verify that this is the current version before use.

TABLE II. Blade width.

Width designation	Blade width (inches)	Width designation	Blade width (inches)
1	0.250	5	0.750
2	0.375	6	1.000
3	0.500	7	1.250
4	0.625	8	2.000

7. Blade thickness. Unless otherwise specified (see ordering data), the thickness of the blade to be furnished shall be selected from table III. The tolerance of the blades shall conform to ASME B94.51M.

TABLE III. Blade thickness.

Thickness designation	Blade thickness (inches)
A	0.025
B	0.032
C	0.035

8. Pitch. Unless otherwise specified (see ordering data), the pitch (teeth per inch) of the blade to be furnished shall be selected from table IV.

TABLE IV. Blade pitch.

Pitch designation	Blade pitch (teeth/inch)
01	1.3
02	2.0
03	3.0
04	4.0
06	6.0
08	8.0
10	10.0

9. Blade. The blade shall be furnished in coils or welded lengths as specified by the procuring activity (see ordering data). The length of the coil or the welded length shall be as specified (see ordering data). The tolerance of the blade length shall be specified (see ordering data). When coils are supplied, there shall be no more than two welds per coil. When welded lengths are supplied, there shall be no more than one weld per blade.

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:51Z
Check the source to verify that this is the current version before use.

10. Hardness. Band saw blades shall have a tooth hardness of not less than 62 Rockwell C and not greater than 66 Rockwell C. Type I blade body hardness shall be not less than 25 Rockwell C and not greater than 38 Rockwell C. Type II blade body hardness shall be not less than 38 Rockwell C and not greater than 48 Rockwell C.

11. Marking of blade. The blade shall be tagged, labeled, or marked to identify the blade and manufacturer.

12. Performance. Each band saw blade shall be capable of meeting the sawing requirements specified in table V. The test material shall be clear white oak with a moisture content of not more than 6 percent. The test samples shall be 1 inch thick, 6 inches wide, and 36 inches long. Sawing shall be performed on a power band saw as appropriate for the specific type, style, and size band saw blade being procured.

TABLE V. Sawing requirements.

Type blade	Blade width (inches)	Rate of cut (inches/minute)
I	less than 11/16	30
I	greater than 11/16	60
II	less than 11/16	30
II	greater than 11/16	60

Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of FED-STD-376, and all other requirements of this commercial item description are met.

If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request shall be made to the contracting officer to determine if the product is acceptable.

The contracting officer has the option of accepting or rejecting the product.

Regulatory requirements. In accordance with section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing suppliers' employees to undue hazards from the recovered materials.

Environmental protection. During the manufacture of the band saw blades, materials hazardous to the ecological system as prohibited by the Federal, state, or local statutes in effect on the date of the contract shall not be used or emitted.

Source: https://assist.dla.mil -- Downloaded: 202640-26T08:51Z
Check the source to verify that this is the currentversion before use.

Preservation, packaging, packing, labeling and marking. Preservation, packaging, packing, labeling, and marking shall be as specified in the contract order.

Quality assurance.

Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection, examination, and test requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections, examinations, or tests set forth in this description where such inspections, examinations, and tests are deemed necessary to assure supplies and services conform to prescribed requirements.

Responsibility for compliance. All items shall meet the requirements specified herein. The inspection set forth in this description shall become a part of the contractors overall inspection system or quality program. The absence of any inspection requirements in the description shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

Sampling inspection. As a minimum sampling inspection, the supplier shall randomly select the number of samples in table VI that is applicable to the quantity of items being purchased. Each sample item shall be inspected to determine conformance with the examination, and all tests specified herein. Any sample failing to meet all requirements specified herein shall be considered a defective item. If the number of defective items is equal to or less than the quantity specified under the "Acceptance, number defective" column of table VI, the supplier shall replace the defective samples with items that meet all the requirements specified herein, and the entire lot shall be considered acceptable for shipment. If the number of defective samples is equal to or greater than the quantity specified in the "Rejection, number defective" column of table VI, the entire lot shall be considered defective and unsuitable for acceptance. A lot is defined as all items presented at one time for acceptance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:51Z
Check the source to verify that this is the current version before use.

TABLE VI. Sampling plan.

Quality of items being purchased	Sample size	Acceptance number defective	Rejection number defective
2 - 8	2	0	1
9 - 15	3	0	1
16 - 25	5	0	1
26 - 50	8	1	2
51 - 90	13	1	2
91 - 150	20	2	3
151 - 280	32	3	4
281 - 500	50	5	6
501 - 1,200	80	8	6
1,201 - 3,200	125	12	13
3,201 - 10,000	200	12	19

Examination. Each blade submitted for sample inspection shall be visually examined to determine conformance with all requirements of this description.

Dimensional test. Each blade submitted for sample inspection shall be tested for conformance with the dimensional requirements of the salient characteristics.

Hardness test. A hardness test shall be performed in accordance with ASTM E-18 to determine conformance with the hardness requirements of paragraph 10 of the salient characteristics.

Performance test. The test sample size shall be determined by table VI. The sawing test shall be performed on a band saw with sufficient horsepower to test the specific blade being procured. The sawing test shall be performed with a blade tension as recommended by the power band saw manufacturer for the specified size band saw blade being procured. The blade speed shall be as recommended by the blade manufacturer. Twelve lengthwise cuts shall be made with each blade being tested. The last ten cuts shall meet or exceed the rate of cut requirements of table V.


Ordering data. Purchasers should select the preferred options permitted herein, and include the following information in procurement documents:

a. Title, number, and date of this commercial item description
b. Type
c. Style (tooth form)
d. Toothset
e. Blade width
f. Blade thickness
g. Pitch
h. Coil stock or welded blade

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:51Z
Check the source to verify that this is the current version before use.

i. Length
j. Length tolerance
k. Quantity

CID based part identification number (PIN). The following part identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor. Where applicable, Arabic numbers shall be substituted for Roman numerals. Refer to the salient characteristics for origination of the correct letters or numbers to complete the PIN.

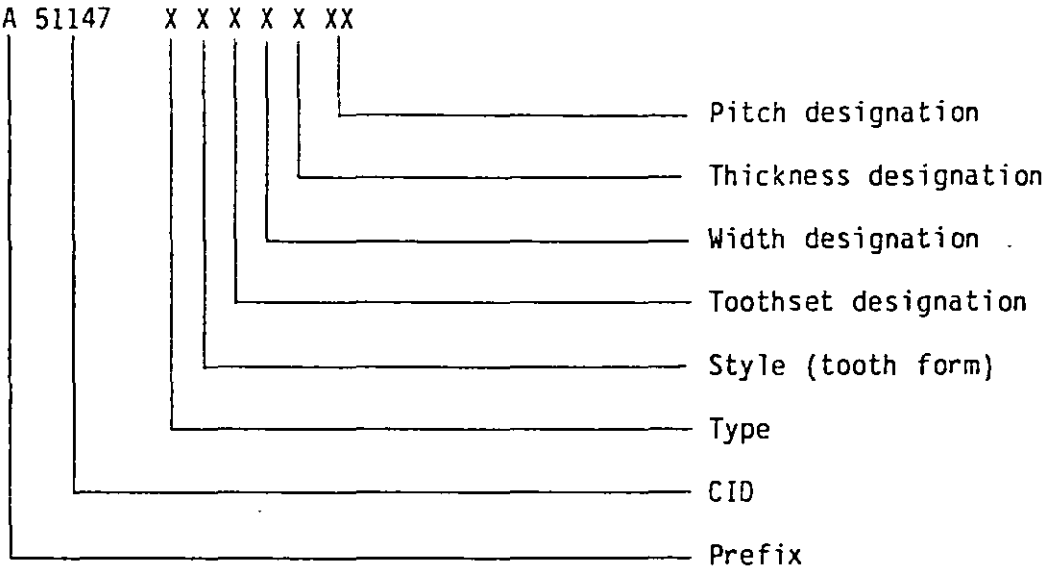

Cross reference of classification changes. Classification changes from the previous issue(s) are as follows:

A-A-51147	A-A-51147A
Type I	
Style A	Deleted
Style B	Sizes deleted (PIN added)
Style C	New
Type II	
Style A	Sizes deleted (PIN added)
Style B	Sizes deleted (PIN added)

Federal Standard FED-STD-376 is available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19120-5099.

ASME B94.51M is available from the American Society of Manufacturing Engineers, United Engineering Center, 345 East 47th Street, New York, NY 10018-3363.

ASTM E-18 is available from the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.

Source: https://assist.dla.mil -- Downloaded: 202640-26T08:51Z
Check the source to verify that this is the current version before use.

MILITARY INTEREST:

Custodians

Army - ME
Navy - SH
Air Force - 99

Review Activities

Army - AL
Navy - YD
Air Force - 84
DLA - GS

User Activity

Navy - MC

CIVIL AGENCY COORDINATION ACTIVITY:

GSA - FSS

PREPARING ACTIVITY:

DLA - IP

Project 3455-0137

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:51Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER A-A-51147A	2. DOCUMENT DATE (YYMMDD) 91 02 04

3. DOCUMENT TITLE: BLADES, BAND SAW, CARBON STEEL, WOOD CUTTING

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME Defense Industrial Plant Equipment Center ATTN: DIPEC-SSG	b. TELEPHONE (Include Area Code) (1) Commercial: (901)775-6269 (2) AUTOVON: AV 683-6269
c. ADDRESS (Include Zip Code) 2163 Airways Blvd. Memphis, TN 38114-5051	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

DD Form 1426, OCT 89 — Previous editions are obsolete. — 198/290

Source: https://assist.dla.mil - Downloaded: 2026-10-26T08:51Z
Check the source to verify that this is the current version before use.