MIL-C-52286/27(ME)
4 May 1970

MILITARY SPECIFICATION SHEET

CABLE ASSEMBLY, POWER ELECTRICAL, 4 CONDUCTOR, ONE END W/WATERTIGHT MALE PLUG CONNECTOR, OTHER END W/WATERTIGHT FEMALE PLUG CONNECTOR AND WATERTIGHT MALE DUMMY PLUG CONNECTOR

The complete requirements for procuring the cable assembly described herein shall consist of this document and the issue in effect of MIL-C-52286(ME).

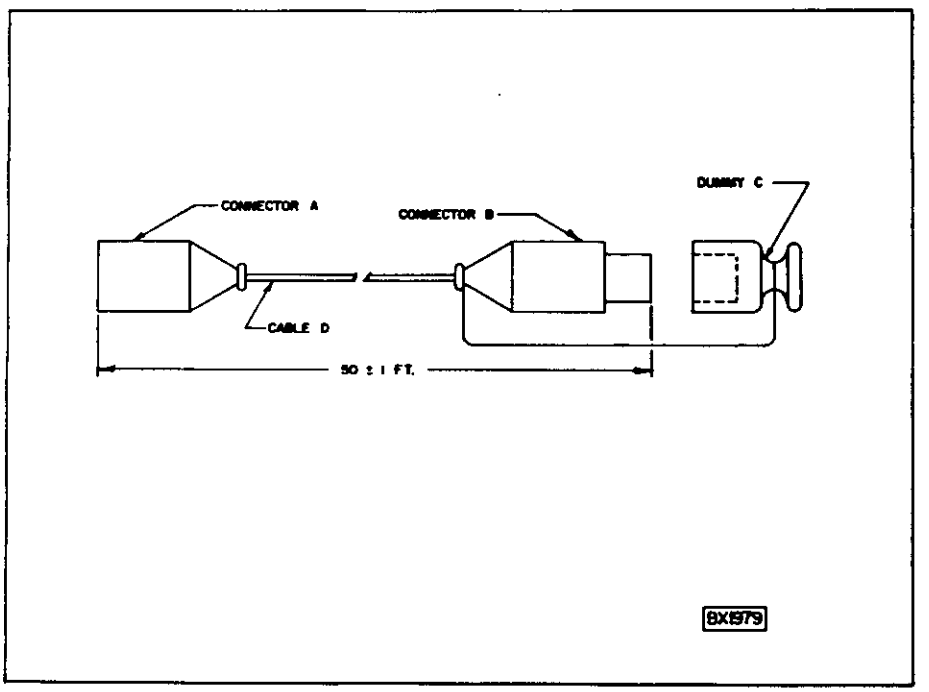

FSC 6150

Source: https://assist.dla.mil -- Downloaded: 202640-22T21:13Z
Check the source to verify that this is the currentversion before use.

REQUIREMENTS:

Dimensions and configuration: See above figure and MIL-C-52286B(ME) figures as specified.

Connector A - see figure 44
Connector B - see figure 40
Dummy C - see figure 27
Cable D - CO-04 HGF (4/12) 0665
Minimum bond between connectors and cable: 200 pounds.

Custodian:

Army - ME

Preparing activity:

Army - ME

Project No. 6150-A108

Source: https://assist.dla.mil -- Downloaded: 202640-22T21:13Z
Check the source to verify that this is the currenversion before use.