INCH-POUND

MIL-DTL-83723/37B
23 May 2003
SUPERSEDING
MIL-C-83723/37A(USAF)
1 October 1975

DETAIL SPECIFICATION SHEET

CONNECTOR, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), PLUG, (BAYONET COUPLING, PREWIRED, SOCKET CONTACT), (SERIES I, CLASSES A, G, AND R), (SHELL SIZE 8 FOR INSERTS 8-2, 8-3, AND 8-4 ONLY)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-83723.

Inactive for new design as of 25 May 1993.

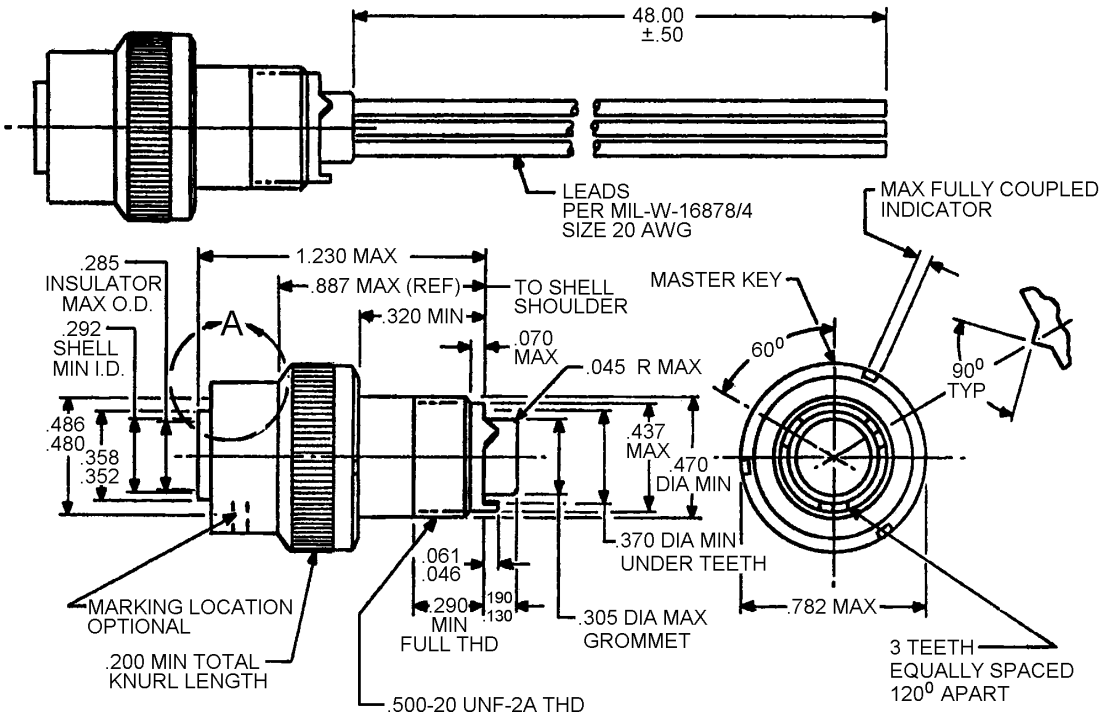


FIGURE 1. Completed assembly.

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

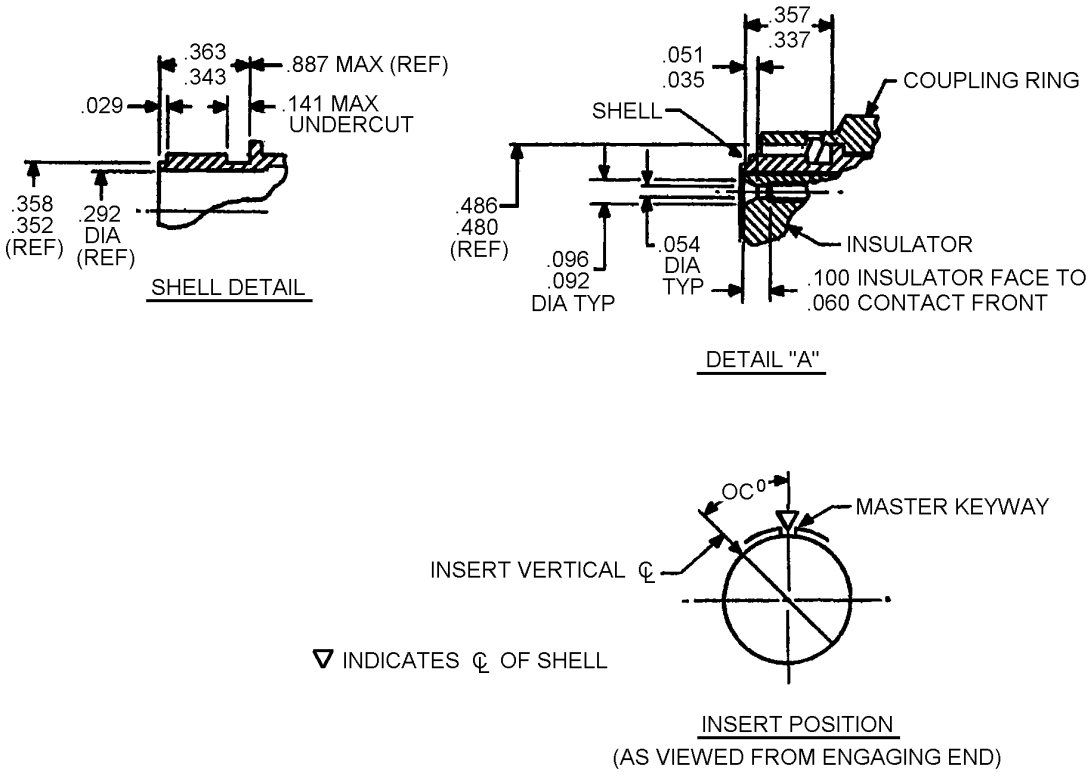


FIGURE 1. Completed assembly – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

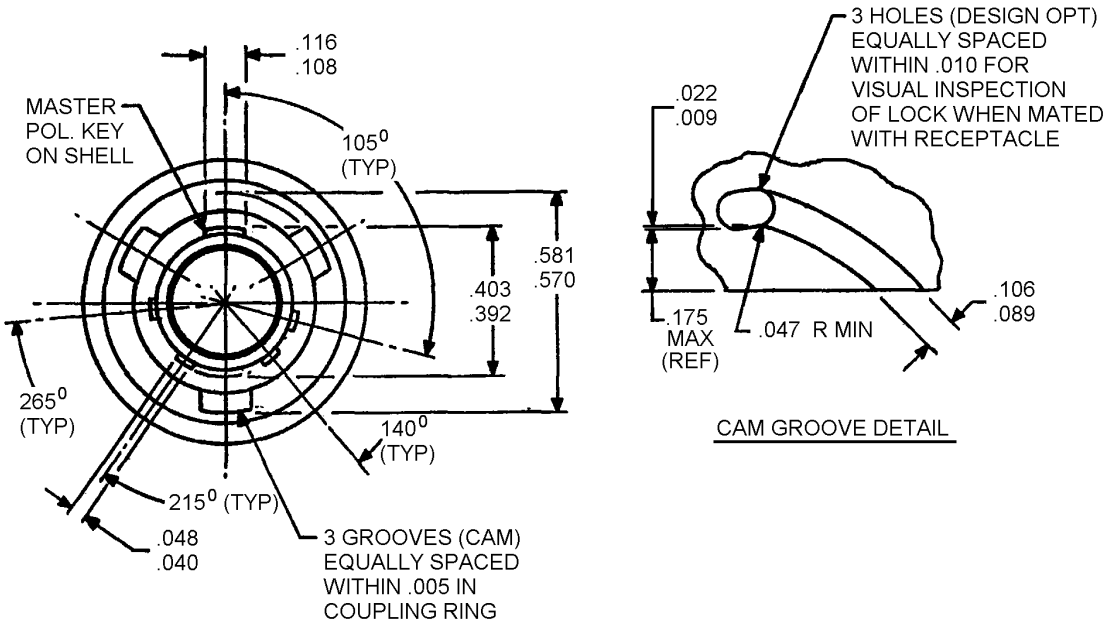


FIGURE 1. Completed assembly – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

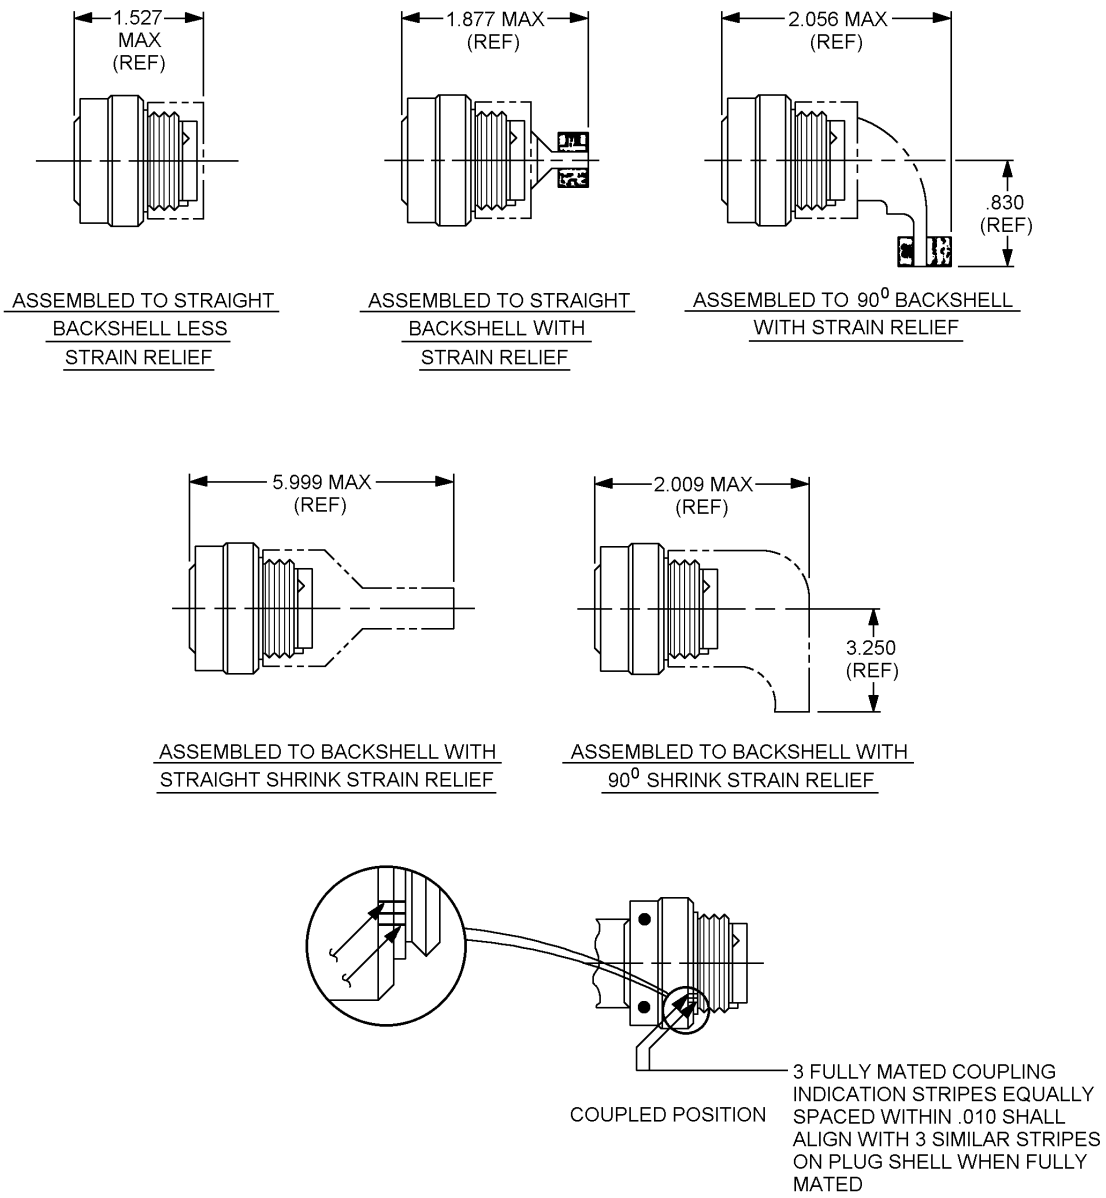


FIGURE 1. Completed assembly – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

NOTES:

1. For alternate polarizing positions, the connector insert is rotated in respect to the shell.
2. In “Normal Position” (Position ”N”) the insert vertical centerline coincides with the centerline of the master key of the shell.
3. In “alternate Positions” (Positions “W”, “Y”, and “Z”) the socket insert is rotated OC degrees clockwise relative to centerline of the master key of the shell.
4. Fully mated coupling indication stripes and polarization stripes shall be color coded blue. Stripes shall have minimum width of .050 on coupling ring and minimum width of .040 on the shell.
5. Four keys (MMC) and insert shall be located within .0035 either side of (TP) relative to master key (MMC) and shell 0. D. (MMC).
6. Dimensions in inches. Unless otherwise specified, tolerance shall be .XX ± .010 and .XXX ± .005 angular X° ± -0’ and X° ± 30’.
7. Contacts in this connector are nonremovable.


FIGURE 1. Completed assembly – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figure 1.
For insert arrangements: See MIL-STD-1669.
Rear hardware shall be in accordance with MIL-C-83723/16, /23, and MIL-C-85049/31, /51, /52, /60.
Contacts and leads shall be furnished in assembled configuration.
Connector assembly must include a backshell to meet moisture sealing requirements.
Shell material: Class A and R – Aluminum alloy in accordance with SAE-AMS-QQ-A-367.
Class G – Corrosion resistant steel in accordance with SAE-AMS-QQ-S-763.
Circumferential color bands specified in MIL-C-26482 do not apply.
Connector identification marking specified in MIL-C-26482 does not apply. Marking shall be as specified in the Part or Identifying Number (PIN) below.

PIN example:

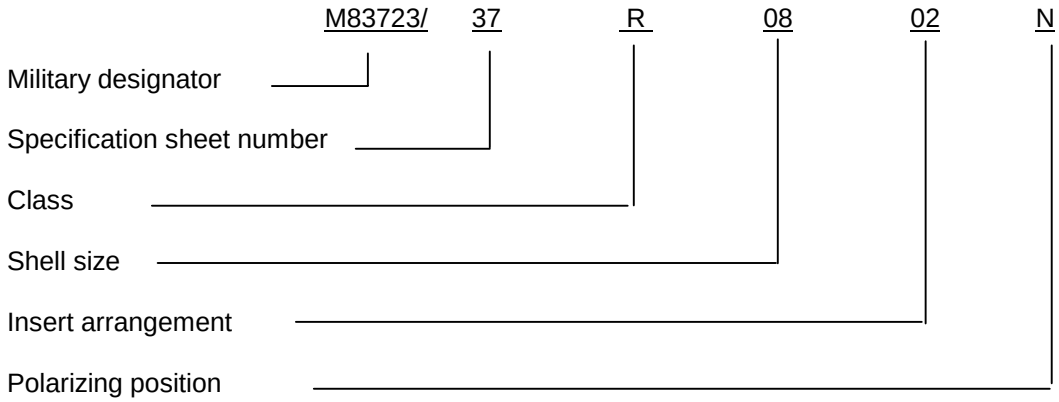

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-4415-003)

Review activities:
Air Force - 70, 80, 84, 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. **The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.**
2. **The submitter of this form must complete blocks 4, 5, 6, and 7, and send to preparing activity.**
3 **The preparing activity must provide a reply within 30 days from receipt of the form.**

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1.** DOCUMENT NUMBER **MIL-DTL-83723/37B**	**2.** DOCUMENT DATE *(YYYYMMDD)* **2003/05/23**

3. DOCUMENT TITLE
CONNECTOR, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING), PLUG, (BAYONET COUPLING, PREWIRED, SOCKET CONTACT), (SERIES I, CLASSES A, G, AND R), (SHELL SIZE 8 FOR INSERTS 8-2, 8-3, AND 8-4 ONLY)

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible.*
Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include zip code)*	d. TELEPHONE *(Include Area Code)* (1) Commercial (2) DSN *(if applicable)*	**7.** DATE SUBMITTED *(YYYYMMDD)*

8. PREPARING ACTIVITY

a. NAME Defense Logistics Agency Defense Supply Center, Columbus	b. TELEPHONE *(Include Area Code)* (1) Commercial **614-692-0565** (2) DSN **850-0565**
c. ADDRESS *(Include Zip Code)* DSCC-VAI 3990 E. Broad St. Columbus, Ohio 43213	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Standardization Program Office (DLSC-LM) 8725 John J. Kingman Road,Suite 2533 Fort Belvoir, Virginia 22060-6621 Telephone (703) 767-6888 DSN 427-6888

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:19Z
Check the source to verify that this is the current version before use.