INCH-POUND

MIL-DTL-83723/77C
20 October 2000
SUPERSEDING
MIL-C-83723/73B
27 December 1981

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING),
PLUG, (RFI, BAYONET COUPLING, CRIMP SOCKET CONTACT),
(SERIES III, CLASSES G, R, AND W)

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein
shall consist of this specification and MIL-DTL-83723.

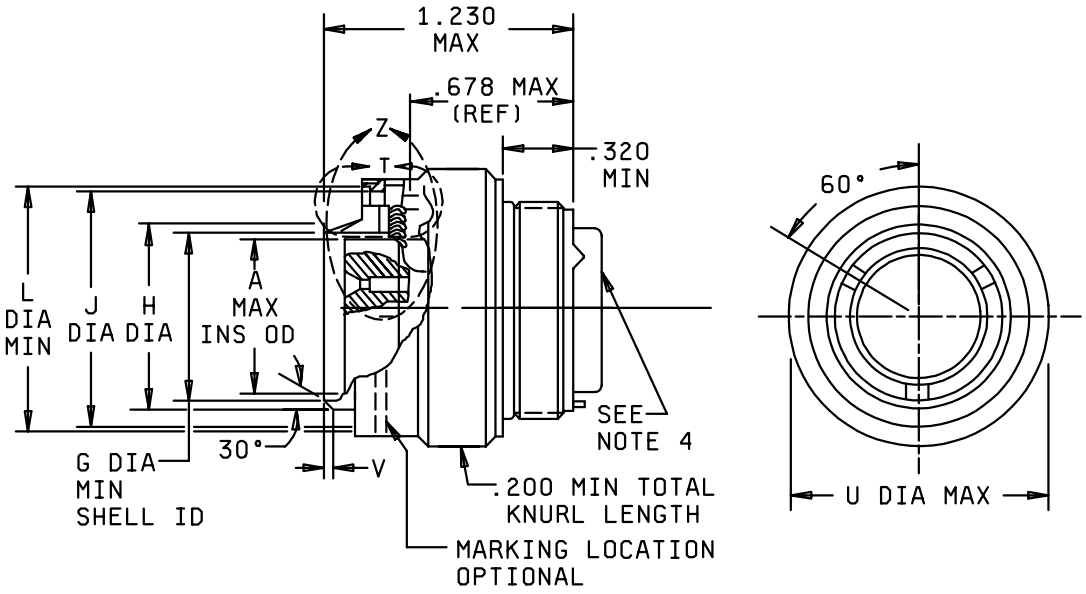

FIGURE 1. Dimensions and configurations.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

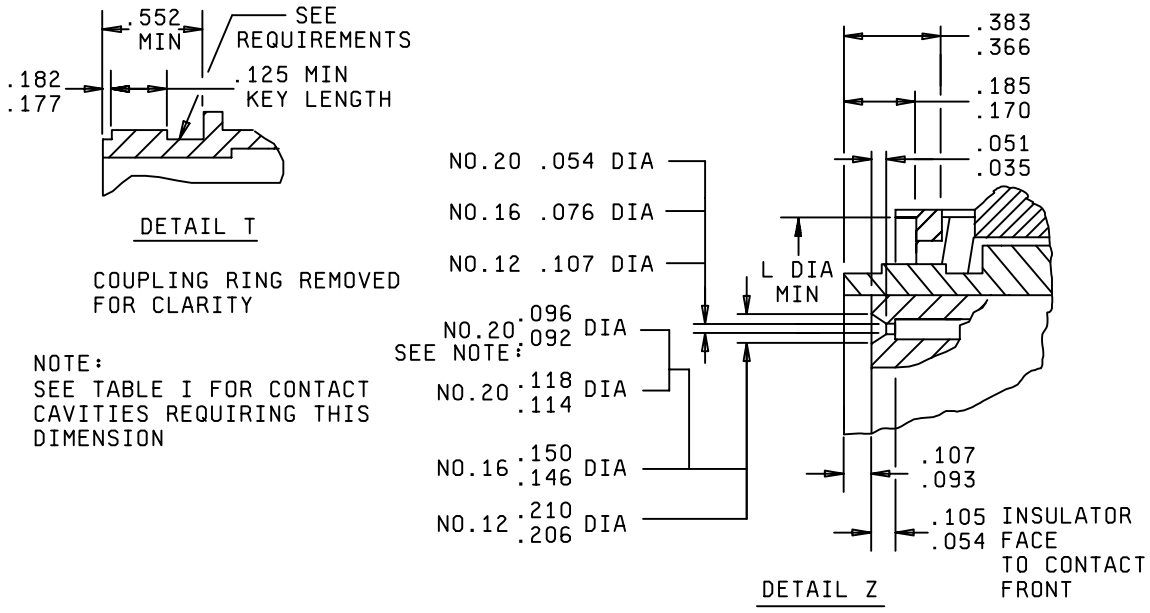

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

Shell size	A max	G min	H	J	L min	U max	V
8	.312	.352	.415 .424	.540 .545	.632	.776	.025
10	.388	.428	.517 .526	.662 .667	.760	.906	.031
12	.558	.598	.687 .696	.832 .837	.930	1.078	.031
14	.627	.667	.756 .765	.901 .906	.999	1.141	.031
16	.772	.794	.883 .892	1.028 1.033	1.126	1.266	.031
18	.860	.900	.989 .998	1.134 1.139	1.232	1.375	.031
20	.985	1.025	1.114 1.123	1.261 1.266	1.357	1.510	.031
22	1.110	1.150	1.239 1.248	1.384 1.389	1.482	1.625	.031
24	1.235	1.275	1.364 1.373	1.511 1.516	1.607	1.760	.031

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.015	0.38	.206	5.23	.662	16.81	.985	25.02	1.261	32.03
.035	0.89	.210	5.33	.667	16.94	.998	25.35	1.266	32.16
.051	1.30	.312	7.92	.678	17.22	.999	25.37	1.275	32.39
.054	1.37	.320	8.13	.687	17.45	1.025	26.04	1.357	34.47
.076	1.93	.352	8.94	.696	17.68	1.028	26.11	1.364	34.65
.092	2.34	.366	9.30	.756	19.20	1.033	26.24	1.373	34.87
.093	2.36	.383	9.73	.760	19.30	1.078	27.38	1.375	34.93
.096	2.44	.388	9.86	.765	19.43	1.110	28.19	1.384	35.15
.105	2.67	.415	10.54	.772	19.61	1.114	28.30	1.389	35.28
.107	2.72	.424	10.77	.776	19.71	1.123	28.52	1.482	37.64
.114	2.90	.428	10.87	.794	20.17	1.126	28.60	1.510	38.35
.118	3.00	.517	13.13	.832	21.13	1.134	28.80	1.511	38.38
.125	3.18	.526	13.36	.837	21.36	1.139	28.93	1.516	38.51
.146	3.71	.540	13.72	.860	21.84	1.141	28.98	1.607	40.82
.150	3.81	.545	13.84	.883	22.43	1.150	29.21	1.625	41.28
.170	4.32	.552	14.02	.892	22.66	1.230	31.24	1.760	44.70
.177	4.50	.558	14.17	.900	22.86	1.232	31.29		
.182	4.62	.598	15.19	.901	22.89	1.235	31.37		
.185	4.70	.627	15.93	.906	23.01	1.239	31.47		
.200	5.08	.632	16.05	.930	23.62	1.248	31.70		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ± .005 (0.13 mm) for three place decimals and ± .01 (0.25 mm) for two place decimals and ± 1 for all angles.
4. Rear accessory interchangeability dimensions shall be in accordance with MIL-DTL-83723.

FIGURE 1. Dimensions and configuration - Continued.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

For insert arrangements, see MIL-STD-1554 and table I.

TABLE I. Insert arrangements requiring reduced diameters for raised seal barriers on contact cavities as indicated.

Shell size	Insert arrangements	Contact cavities
8	03	1, 2, 3
10	06	1, 2, 3, 4, 5, 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

For connector accessories : See MIL-C-85049.

This connector mates with MIL-DTL-83723/72, 74, 79, 80, 81 and MIL-C-83723/93 and 94.

Part or Identifying Number (PIN) example:

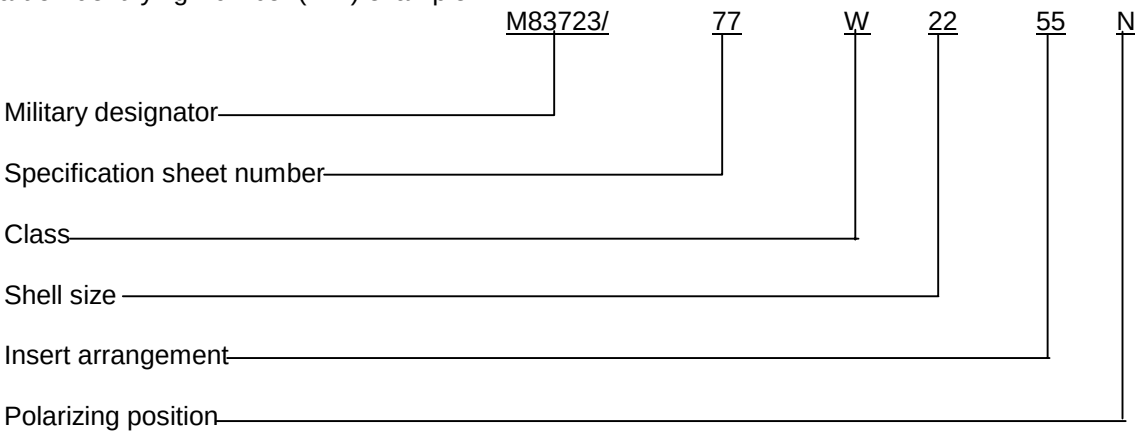

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 11
DLA - CC

Review activities:
Army - AR, MI
Navy - EC
Air Force - 19, 80

Preparing activity:
DLA - CC

(Project 5935-4281-08)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.