INCH-POUND

MIL-DTL-83723/78D
15 September 2006
SUPERSEDING
MIL-DTL-83723/78C
20 October 2000

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, (CIRCULAR, ENVIRONMENT RESISTING),
PLUG, (RFI, BAYONET COUPLING, CRIMP PIN CONTACT),
(SERIES III, CLASSES G, R, AND W)

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein
shall consist of this specification sheet and MIL-DTL-83723.

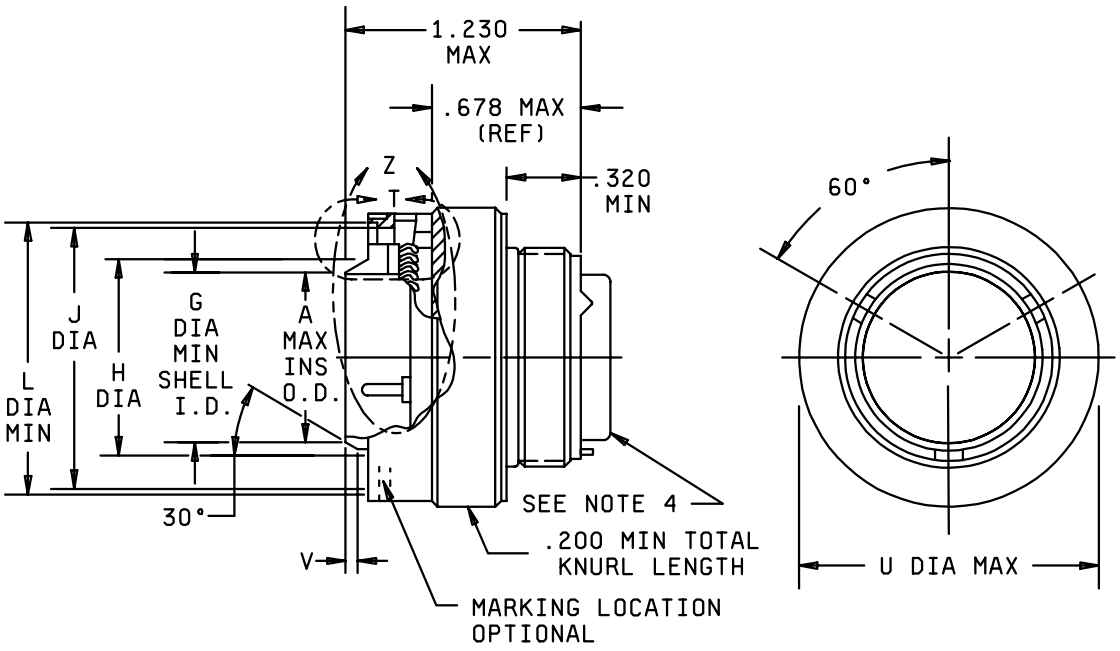



FIGURE 1. Dimensions and configurations.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

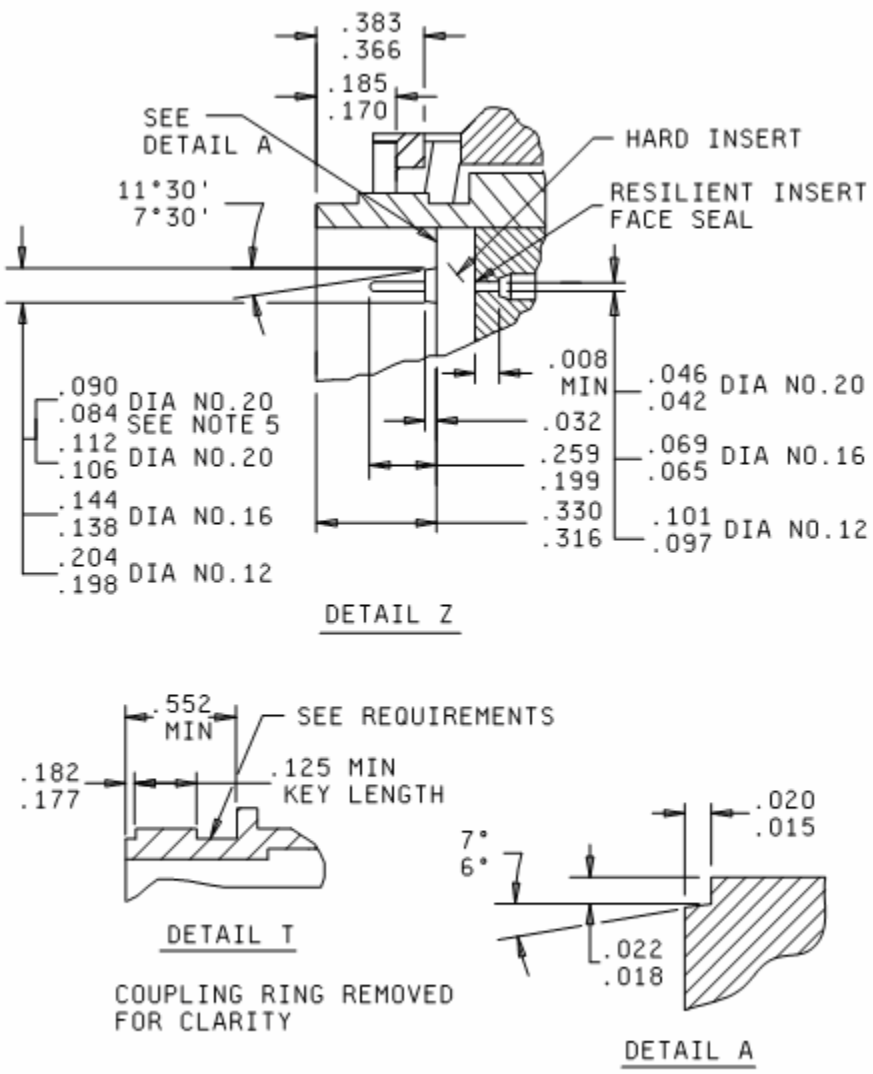



FIGURE 1. Dimensions and configurations - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

| Shell size | A max | G min | H | J | L min | U max | V |
|---|---|---|---|---|---|---|---|
| 8 | .312 | .352 | .415<br>.424 | .540<br>.545 | .632 | .776 | .025 |
| 10 | .388 | .428 | .517<br>.526 | .662<br>.667 | .760 | .906 | .031 |
| 12 | .558 | .598 | .687<br>.696 | .832<br>.837 | .930 | 1.078 | .031 |
| 14 | .627 | .667 | .756<br>.765 | .901<br>.906 | .999 | 1.141 | .031 |
| 16 | .772 | .794 | .883<br>.892 | 1.028<br>1.033 | 1.126 | 1.266 | .031 |
| 18 | .860 | .900 | .989<br>.998 | 1.134<br>1.139 | 1.232 | 1.375 | .031 |
| 20 | .985 | 1.025 | 1.114<br>1.123 | 1.261<br>1.266 | 1.357 | 1.510 | .031 |
| 22 | 1.110 | 1.150 | 1.239<br>1.248 | 1.384<br>1.389 | 1.482 | 1.625 | .031 |
| 24 | 1.235 | 1.275 | 1.364<br>1.373 | 1.511<br>1.516 | 1.607 | 1.760 | .031 |

FIGURE 1. Dimensions and configurations - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

| Inches | mm | Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|---|---|
| .008 | 0.20 | .177 | 4.50 | .552 | 14.20 | .900 | 22.86 | 1.232 | 31.29 |
| .015 | 0.38 | .182 | 4.62 | .558 | 14.17 | .901 | 22.89 | 1.235 | 31.37 |
| .018 | 0.48 | .185 | 4.70 | .598 | 15.19 | .906 | 23.01 | 1.239 | 31.47 |
| .020 | 0.51 | .200 | 5.08 | .627 | 15.93 | .930 | 23.62 | 1.248 | 31.70 |
| .022 | 0.56 | .204 | 5.18 | .632 | 16.05 | .985 | 25.02 | 1.261 | 32.03 |
| .025 | 0.64 | .259 | 6.58 | .662 | 16.81 | .989 | 25.12 | 1.266 | 32.16 |
| .031 | 0.79 | .312 | 7.92 | .667 | 16.94 | .998 | 25.35 | 1.275 | 32.39 |
| .032 | 0.81 | .316 | 8.03 | .678 | 17.22 | .999 | 25.37 | 1.357 | 34.47 |
| .042 | 1.07 | .320 | 8.13 | .687 | 17.45 | 1.025 | 26.04 | 1.373 | 34.87 |
| .046 | 1.17 | .330 | 8.38 | .696 | 17.68 | 1.028 | 19.84 | 1.375 | 34.93 |
| .065 | 1.65 | .352 | 8.94 | .756 | 19.20 | 1.033 | 26.24 | 1.384 | 35.15 |
| .069 | 1.75 | .366 | 9.30 | .760 | 19.30 | 1.078 | 27.38 | 1.389 | 35.28 |
| .090 | 2.29 | .383 | 9.73 | .765 | 19.43 | 1.110 | 28.19 | 1.482 | 37.64 |
| .097 | 2.46 | .388 | 9.86 | .772 | 19.61 | 1.114 | 28.30 | 1.510 | 38.35 |
| .101 | 2.57 | .415 | 10.54 | .776 | 19.71 | 1.123 | 28.52 | 1.511 | 38.38 |
| .106 | 2.69 | .424 | 10.77 | .794 | 20.17 | 1.126 | 28.60 | 1.516 | 38.51 |
| .112 | 2.84 | .428 | 10.87 | .832 | 21.13 | 1.134 | 28.80 | 1.607 | 40.82 |
| .125 | 3.18 | .517 | 13.13 | .837 | 21.26 | 1.139 | 28.93 | 1.625 | 41.28 |
| .138 | 3.51 | .526 | 13.36 | .860 | 21.84 | 1.141 | 28.98 | 1.760 | 44.70 |
| .144 | 3.66 | .540 | 13.72 | .883 | 22.43 | 1.150 | 29.21 | | |
| .170 | 4.32 | .545 | 13.84 | .892 | 22.66 | 1.230 | 31.24 | | |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ± .005 (0.13 mm) for three place decimals and ± .01 (0.25 mm) for two place decimals and ± 1 for all angles.
4. Rear accessory interchangeability dimensions shall be in with MIL-DTL-83723.
5. See table I for contact cavities requiring this dimension.

FIGURE 1. Dimensions and configurations - Continued.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

For insert arrangements, see MIL-STD-1554 and table I.

TABLE I. Insert arrangements requiring reduced diameters for raised seal barriers on contact cavities as indicated.

| Shell size | Insert arrangements | Contact cavities |
|---|---|---|
| 8 | 03 | 1, 2, 3 |
| 10 | 06 | 1, 2, 3, 4, 5, 6 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.


For connector accessories, see SAE-AS85049.

This connector mates with MIL-C-83723/71 and MIL-DTL-83723/73.

Mating force: Shall not exceed the values specified in the procurement document by more than 20 percent.

RFI spring strip shall have a minimum of six finger per inches and shall point to rear of connector.

Part or Identifying Number (PIN) example:

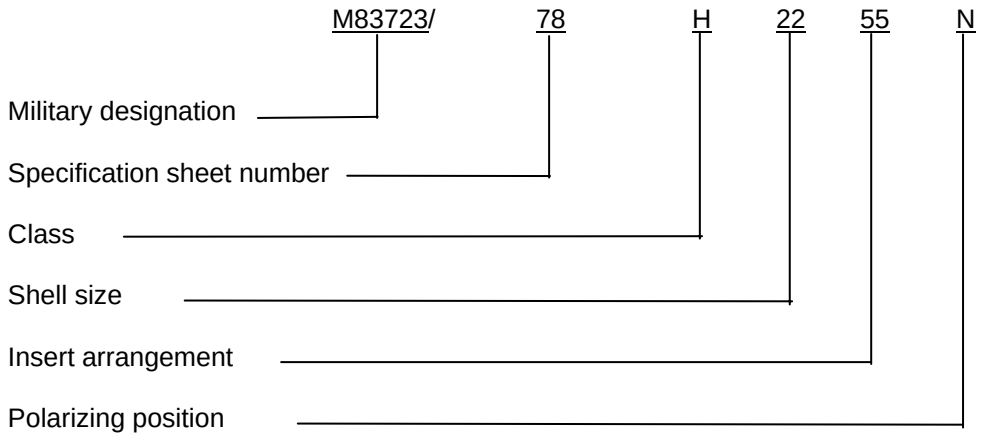


Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-83723, this document references the following:

MIL-C-83723/71
MIL-DTL-83723/73
MIL-STD-1554
SAE-AS85049



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

Review activities:
Army - AR, MI
Navy - EC
Air Force – 19

(Project 5935-2005-062)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:22Z
Check the source to verify that this is the current version before use.