The documentation and process conversion measures necessary to comply with this revision shall be completed by 18 September 1999.

INCH-POUND

MIL-PRF-19500/444D
18 June 1999
SUPERSEDING
MIL-S-19500/444C
14 January 1994

PERFORMANCE SPECIFICATION SHEET

SEMICONDUCTOR DEVICE, DIODE, SILICON, SWITCHING
TYPES 1N5711-1 AND 1N5711UR-1
JAN, JANTX, JANTXV, JANJ, JANS, JANHC, AND JANKC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for Schottky barrier diodes. Five levels of product assurance are provided for each encapsulated device type as specified in MIL-PRF-19500. Two levels of product assurance are provided each unencapsulated device type.

1.2 Physical dimensions. See figure 1, similar to DO-35, figure 2 (UR package, DO-213AA), and figure 3 (JANHC and JANKC).

1.3 Maximum ratings.

TYPE	V_{RWM}	I_O	$R_{\theta JL}$ 1/	T_{STG} and T_J
	V(pk)	mA dc	°C/W	
1N5711-1	50	33 2/	250	-65°C to +150°C
1N5711UR-1	50	33 3/	100	-65°C to +150°C

1/ Lead length = .375 inch (9.52 mm) except for surface mount.
2/ At T_L = +130°C and L = .375 inch (9.52 mm), derate I_O to 0 at +150°C.
3/ At T_{EC} = +140°C, derate I_O to 0 at +150°C.

1.4 Primary electrical characteristics.


Limits	$V_{(BR)1}$ I_R = 10 µA dc	V_{F1} I_F = 1 mA dc	V_{F2} I_F = 15 mA dc	I_{R1} V_R = 50 V dc	C V_R = 0, f = 1 MHz V_{sig} = 50 m V(pk)	τ_{CL} I_F = 5.0 mA	$Z_{\theta JX}$
	V dc	V dc	V dc	nA dc	pF	ps	°C/W
Minimum	70						
Maximum		0.410	1.0	200	2.0	100	40

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Defense Supply Center Columbus, ATTN: DSCC-VAT, 3990 East Broad St., Columbus, OH 43216-5000, by using the addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5961

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

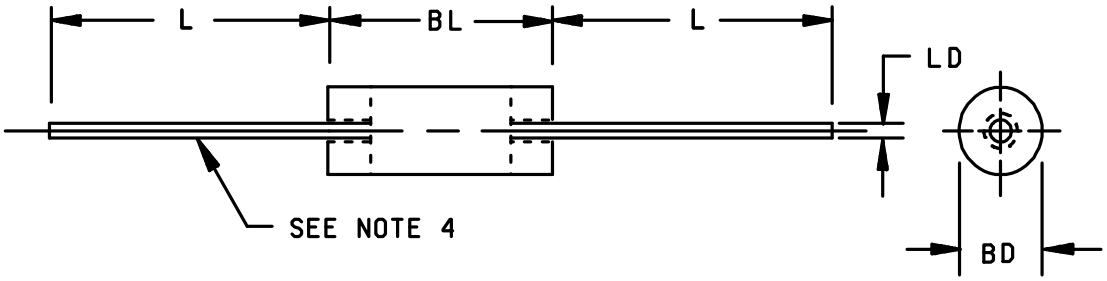


Dimensions					
	Inches		Millimeters		
Ltr	Min	Max	Min	Max	Notes
BL	.150	.170	3.81	4.32	3
LD	.068	.076	1.73	1.93	3, 4
L	1.000	1.500	25.40	38.10	
BD	.014	.022	0.36	0.56	

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Dimensions BL and LD include all components of the diode periphery except the sections of the leads over which the diameter is controlled.
4. Dimension BD shall be measured at the largest diameter.
5. In accordance with ANSI Y14.5M, diameters are equivalent to ϕx symbology.

FIGURE 1. Physical dimensions for 1N5711-1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

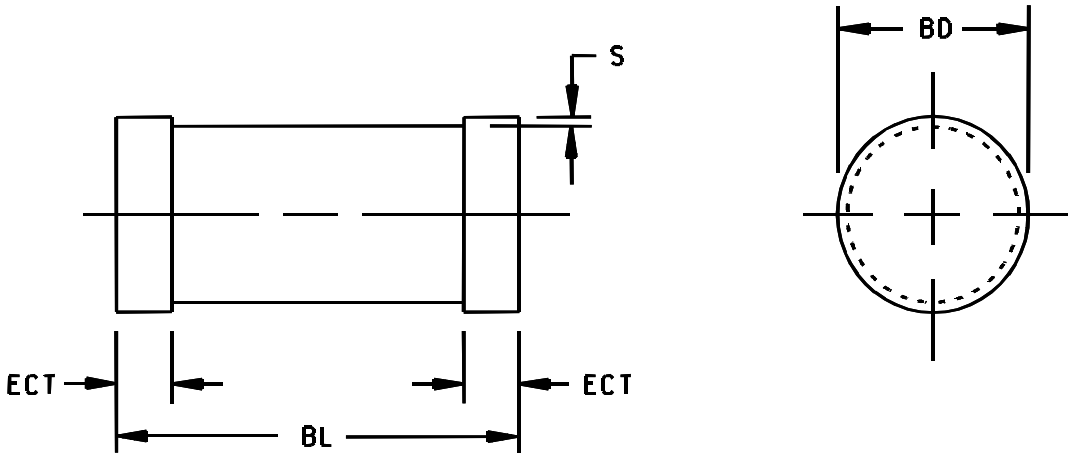


Dimensions					
	Inches		Millimeters		
Ltr	Min	Max	Min	Max	Notes
BD	.063	.067	1.60	1.70	
ECT	.016	.022	0.41	0.55	
BL	.130	.146	3.30	3.71	
S	.001 Min		0.03 Min		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. In accordance with ANSI Y14.5M, diameters are equivalent to ϕx symbology.

FIGURE 2. Physical dimensions, 1N5711UR-1 (DO-213AA).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

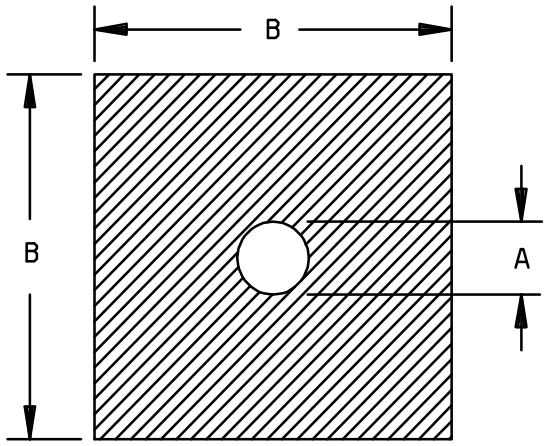

Dimensions					
	Inches		Millimeters		
Ltr	Min	Max	Min	Max	Notes
A	.0049	.0051	.124	.129	
B	.0130	.0170	.330	.430	

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Element evaluation accomplished utilizing TO-5 package.
4. The physical characteristics of the die are:

Metallization:
Top (anode): Al.
Back (cathode): Au.
Al thickness: 25,000 Å minimum.
Gold thickness: 4,000 Å minimum.
Chip thickness: .010 inches (.25 mm) ±.002 inches (.05 mm).

FIGURE 3. Physical dimensions, JANHCA and JANKCA die.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATION

MILITARY

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

STANDARD

MILITARY

MIL-STD-750 - Test Methods for Semiconductor Devices.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Defense Printing Service Detachment Office, Building 4D (Customer Service), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWING

Defense Electronics Supply Center.

C68001 - Test Fixture for Effective Minority Carrier Lifetime.

(Copies of DESC drawing C68001 are available from Defense Supply Center Columbus, DSCC-VAT, Columbus, OH 43216-5000.)

2.2 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Associated specification. The individual item requirements shall be in accordance with MIL-PRF-19500, and as specified herein.

3.2 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500, and as follows:

EC ..... End cap.
UR ..... Surface mount case outline, round end cap.
α_{CL} ..... Effective carrier lifetime.

3.3 Interface requirements and physical dimensions. The Interface requirements and physical dimensions shall be as specified in MIL-PRF-19500, MIL-HDBK-6100, and figures 1 (similar to D0-35), 2 (D0-213AA), and 3 (die) herein.

3.3.1 Lead finish. Lead finish shall be solderable as defined in MIL-PRF-19500, MIL-STD-750, and herein.

3.3.2 Diode construction. All devices shall be metallurgically bonded double plug construction in accordance with the requirements of category I or II (see MIL-PRF-19500).

3.4 Marking. Marking shall be in accordance with MIL-PRF-19500.

3.4.1 UR devices. "UR" devices shall be marked with a cathode band only. Initial container package marking will be in accordance with MIL-PRF-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

3.5 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, and table I herein.

3.6 Electrical test requirements. The electrical test requirements shall be the subgroups specified in 4.4.2, 4.4.3, and table I herein..

3.7 Qualification. Devices furnished under this specification shall be products that are authorized by the qualifying activity for listing on the applicable qualified manufacturers list before contract award (see 4.2 and 6.5).

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3)

c. Conformance inspection (see 4.3).

4.1.1 Sampling inspection. Sampling inspection shall be in accordance with MIL-PRF-19500 and as specified herein, except that lot accumulation period shall be 6 months in lieu of 6 weeks.

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500.

4.2.1 Group E inspection. Qualification inspection shall be in accordance with MIL-PRF-19500 and table II herein.

4.2.2 JANHC and JANKC devices. Qualification shall be in accordance with MIL-PRF-19500.

4.2.3 JANJ devices. For JANJ level, 3.3.1 through 3.3.1.3 of MIL-PRF-19500 shall apply, except as modified herein. Supplier imposed requirements as well as alternate screens, procedures, and/or controls shall be documented in the QM plan and must be submitted to the Qualifying Activity for approval. When alternate screens, procedures, and/or controls are used, in lieu of the JANJ screens herein equivalency shall be proven and documented in the QM Plan. Radiation characterization may be submitted in the QM plan at the option of the manufacturer, however, paragraph 3.3.1.1 of MIL-PRF-19500 is not required. Die lot control and rework shall be in accordance with MIL-PRF-19500 paragraph 3.13 and D 3.13.2.1 for JANS level. Lot formation and conformance inspection requirements for JANJ shall be those used for JANTXV devices as a minimum.

4.2.4 JANJ Qualification. For JANJ qualification, 4.4.2.1 herein shall be performed as required by the Qualifying Activity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

4.3 Screening (JAN, JANTX, JANTXV, JANJ, and JANS levels only). Screening shall be in accordance with table IV of MIL-PRF-19500, and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen (see table IV of MIL-PRF-19500)	Measurement	
	JANS Level	JANJ Level
1a	Required	Not Required
1b	Required	Required
2	Not Required	Not Required
3a	Required	Required
3b	Not Applicable	Not Applicable
3c 1/	Required (see 4.3.3)	Required (see 4.3.3)
4, 5, 6 and 7a	Not Applicable	Not Applicable
7b	Required	Required
8	Required	Not Required
9 and 10	Not Applicable	Not Applicable
11	Required I_{R1} and V_{F1}	Required I_{R1} and V_{F1}
12	Required, see 4.3.1	Required, see 4.3.1
13 3/	Required. Subgroup 2and 3 of table I herein; $\Delta I_{R1} \leq 100$ percent of initial reading or 25 nA whichever is greater; $\Delta V_{FM1} \leq \pm 20$ mV dc.	Required. Subgroup 2and 3 of table I herein; $\Delta I_{R1} \leq 100$ percent of initial reading or 25 nA whichever is greater; $\Delta V_{FM1} \leq \pm 20$ mV dc.
14a	Not Applicable	Not Applicable
14b	Optional 2/	Optional 2/
15	Required	Required Attributes data only, film or non-film techniques may be utilized.
16	Required	Required
17	Not Applicable	Required, subgroup 2 of table I herein.

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

4.3 Screening (JAN, JANTX, JANTXV, JANJ, and JANS levels only)- continued.

Screen (see table IV of MIL-PRF-19500)	Measurement	
	JANTXV and JANTX Level	JAN level
1a	Not Required	Not Required
1b	Required (JANTXV only)	Not Required
2	Not Required	Not Required
3a	Required	Required in accordance with MIL-PRF-19500, JANTX level
3b	Not Applicable	Not Applicable
3c 1/	Required (see 4.3.3)	Required (see 4.3.3)
4, 5, 6 and 7a	Not Applicable	Not Applicable
7b	Required	Not Required
8	Not Required	Not Required
9 and 10	Not Applicable	Not Applicable
11	Required. I_{R1} and V_{F1}	Not Applicable
12	Required. See 4.3.1, t = 48 hours	Not Applicable
13 3/	Subgroup 2 of table I herein; $\Delta I_{R1} \leq 100$ percent of initial reading or 50 nA whichever is greater; $\Delta V_{F1} \leq \pm 40$ mV dc.	Not Applicable
14a	Not Applicable	Not Applicable
14b	Optional 2/	(Not required)
15 and 16	Not Required	Not Required
17	Not Applicable	Not Applicable

1/ Thermal impedance shall be performed any time after sealing provided temperature cycling is performed in accordance with table IV of MIL-PRF-19500, screen 3 prior to this thermal test.
2/ Per MIL-PRF-19500
3/ Test within 24 hours after removal from test.

4.3.1 Burn-in conditions. Burn-in conditions are as follows:

High temperature reverse bias (HTRB), MIL-STD-750 method 1038, test condition A, V_R = 40 V; T_A = +150°C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

4.3.2 Screening (JANHC or JANKC). Screening of JANC die shall be in accordance with MIL-PRF-19500. As a minimum, die shall be 100-percent probed in accordance with group A, subgroup 2 (excluding thermal impedance).

4.3.3 Thermal impedance ($Z_{\theta JX}$ measurements). The $Z_{\theta JX}$ measurements shall be performed in accordance with MIL-STD-750, method 3101 to identify and remove atypical devices.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with MIL-PRF-19500, and table I herein. The following test conditions shall be used for $Z_{\theta JX}$, group A inspection:

a. I_M measurement current ..... 1 mA to 10 mA.
b. I_H forward heating current..... 50 mA to 200 mA.
c. t_H heating time ..... 10 ms.
d. t_{MD} measurement delay time ..... 70 µs maximum.

4.4.2 Group B inspection . Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table VIa (for JANS) and table VIb (for JAN, JANTX, and JANTXV) of MIL-PRF-19500, and as follows. Electrical measurements (end-points) shall be in accordance with table I, group A, subgroup 2 herein.

4.4.2.1 Group B inspection, table VIa (JANS) of MIL-PRF-19500.

Subgroup	Method	Condition
B4	1037	I_O = 33 mA; V_R = 50 V(pk); f = 60 Hz; T_A = room ambient as defined in 4.5 of MIL-STD-750; $t_{on} = t_{off}$ = 3 minutes minimum for 2,000 cycles; (see 4.5.1).
B5	1038	High temperature reverse bias (HTRB), test condition A, V_R = 40 V; T_A = +150°C.
B6	3101 or 4081	$R_{\theta JL}$ = 250°C/W .375 inch (9.52 mm) lead length (non-surface mount). $R_{\theta JEC}$ = 100°C/W (UR suffix devices).

4.4.2.2 Group B inspection, table VIb (JAN, JANTX, JANTXV, and JANJ) of MIL-PRF-19500.

Subgroup	Method	Condition
B3	1038	High temperature reverse bias (HTRB), test condition A, V_R = 40 V; T_A = +150°C.
B4		See 4.5.4.
B5		Not applicable.
B6	1032	T_A = +150°C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table VII of MIL-PRF-19500, and as follows. Electrical measurements (end-points) shall be in accordance with table I, group A, subgroup 2 herein.

Subgroup	Method	Condition
C2	2036	(Not applicable to surface mount devices); Lead fatigue conditions: Test condition E; .062 inch (1.57 mm) lead restriction from case. Tension conditions: Test condition A; 4 pounds, 15 seconds.
C3	2056	Nonoperating (not required for double plug metallurgical bonded device).
C3	2006	20,000 g's; Y1, Y2, X1 (Not required for double plug metallurgical bonded device).
C6	1038	High temperature reverse bias (HTRB), V_R = 40 V; T_A = +150°C.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Steady-state operation life. This test shall be conducted with a half-sine wave of the specified peak voltage impressed across the diode in the reverse direction followed by a half-sine waveform of the specified average rectified current. The forward conduction angle of the rectified current shall not be greater than 180° nor less than 150°.

4.5.2 Effective carrier lifetime (T_{CL}). This test shall be measured with the device installed in the test fixture, drawing C68001 using the test setup shown on figure 5 herein. Adjust the signal generator to 54 MHz and maximum output in order to obtain a sufficient trigger signal for the oscilloscope. Adjust the sensitivity of the oscilloscope to 5 mV/cm. With the device in the test fixture, adjust the output of the amplifier until the peak amplitude of the forward current is 5 mA or 5 cm as seen on the oscilloscope. Change sensitivity of scope to 2 mV/cm. Under these conditions, the effective carrier lifetime is related to the amplitude designated as "T_{CL}" shown on figure 6. This amplitude has the calibration of 200 ps/cm.

4.5.3 Thermal resistance. Thermal resistance measurement shall be in accordance with MIL-STD-750, method 3101 or 4081. Forced moving air or draft shall not be permitted across the device during test. The maximum limit for $R_{\theta JL}$ under these test conditions shall be as shown in group E. The following conditions shall apply when using method 3101:

a. I_M ..... 1 mA to 10 mA.
b. I_H ..... 25 mA to 100 mA.
c. t_H ..... 25 seconds minimum.
d. t_{MD} ..... 70 µs maximum.

4.5.3.1 Temperature reference point, leaded devices:

LS = Lead spacing = .375 inch (9.52 mm) as defined on figure 4 below:

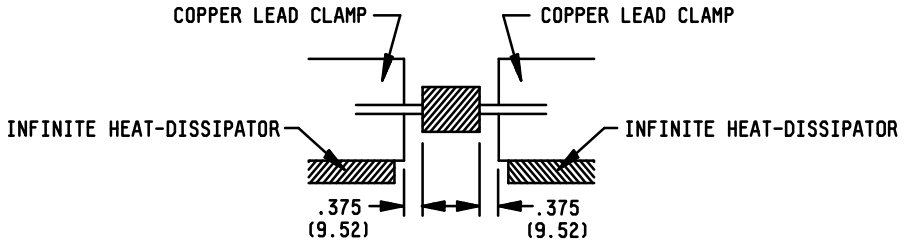


FIGURE 4. Mounting conditions.

4.5.3.2 Temperature reference point, surface mount. The temperature reference point shall be the hottest point on the external package surface. As an alternate, the temperature reference point may be the temperature of a liquid stream used to cool the device during testing.

4.5.4 Decap internal visual scribe and break. Scratch glass at cavity area with diamond scribe. Carefully snap open. Using 30X magnification examine the area where die (or bonding material) are in contact with the plugs, verify metallurgical bonding area.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection .

Inspection 1/	MIL-STD-750		Symbol	Limit		Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical examination	2071					
Subgroup 2						
Forward voltage	4011	I_F = 1 mA dc	V_{F1}		0.410	V dc
Forward voltage	4011	I_F = 15 mA dc	V_{F2}		1.0	V dc
Reverse current	4016	DC method; V_R = 50 V dc	I_{R1}		200	nA dc
Breakdown voltage	4021	I_R = 10 µA dc	$V_{(BR)1}$	70		V dc
Thermal impedance	3101	see 4.4.1	$Z_{\theta JX}$		40	°C/W
Subgroup 3						
High temperature operation		T_A = +150°C				
Reverse current	4016	DC method; V_R = 50 V dc	I_{R2}		200	µA dc
Low temperature operation		T_A = -55°C				
Forward voltage	4011	I_F = 1 mA dc	V_{F3}		0.55	V dc
Forward voltage	4011	I_F = 15 mA dc	V_{F4}		1.0	V dc
Breakdown voltage	4021	I_R = 10 µA dc	$V_{(BR)2}$	70		V dc
Subgroup 4						
Capacitance	4001	V_R = 0 V; f = 1 Mhz; $V_{(sig)}$ = 50 mV (pk) max	C		2.0	Pf
Effective carrier lifetime (see 4.5.2)	----	(see DESC drawing C68001)	τ_{CL}		100	ps
Subgroups 5, 6, and 7						
Not applicable						

1/ For sampling plan, see MIL-PRF-19500.
2/ Effective carrier lifetime needs to be performed only one time per wafer lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

TABLE II. Group E inspection (all quality levels) - For qualification only

Inspection	MIL-STD-750		Qualification
	Method	Conditions	
Subgroup 1			22 devices c = 0
Temperature cycling (air to air)	1051	500 cycles	
Hermetic seal	1071		
Fine leak Gross leak			
Electrical measurements		See group A, subgroup 2 (V_{F1} and I_{R1})	
Subgroup 2			22 devices c = 0
Steady-state dc blocking life	1038	See 4.3.1, 1000 hrs	
Electrical measurements		See group A, subgroup 2 (V_{F1} and I_{R1})	
Subgroup 3			
Not applicable			
Subgroup 4			22 devices c = 0
Thermal resistance surface mount (UR)	3101 or 4081	$R_{\theta JEC}$ = 100°C/W (maximum) at zero lead length. +25°C ≤ T_R ≤ +35°C, (see 4.5.3) at T_H ≥ 25 s	
Thermal resistance leaded	3101 or 4081	$R_{\theta JEC}$ = 250°C/W (maximum) at .375 inches (9.52 mm) lead length. +25°C ≤ T_R ≤ +35°C, (see 4.5.3) at T_H ≥ 25 s in still air.	
Subgroup 6			3 devices c = 0
ESD testing	1020		

1/ For sampling plan, see MIL-PRF-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

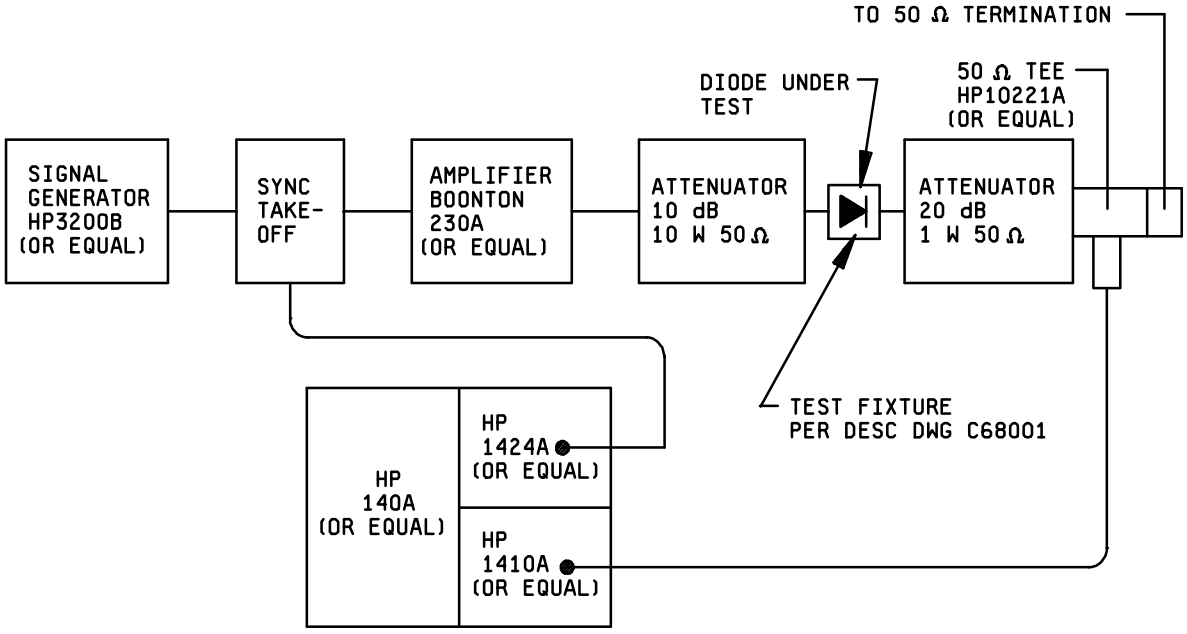


FIGURE 5. Test setup for diode lifetime measurement.

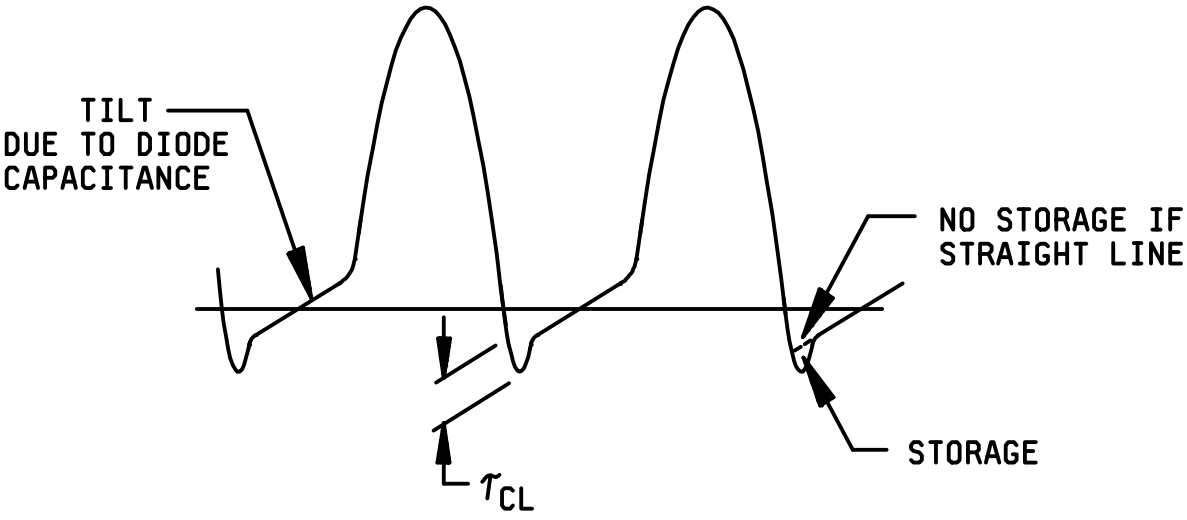


FIGURE 6. Oscilloscope display in diode lifetime measurement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of material is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Points' packaging activity within the Military Department or Defense Agency, or within the Military Departments' System Command. Packaging data retrieval is available from the managing Military Departments' or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

5.2 Marking. Unless otherwise specified (see 6.2), marking shall be in accordance with MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Notes. The notes specified in MIL-PRF-19500 are applicable to this specification.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Issue of DODISS to be cited in the solicitation.

b. Lead finish as specified (see 3.3.1).

c. Product assurance level, type designator, and for die acquisition the JANHC and JANKC identification (see figure 3 and 6.3).

6.3 Suppliers of die. The qualified die suppliers with the applicable letter version (e.g., JANHCA1N5711) will be identified on the QML.

JANC ordering information	
PIN	Manufacturer
	55801
1N5711-1 1N5711-1	JANHCA1N5711 JANKCA1N5711

6.4 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

6.5 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List QML-19500 whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or purchase orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from Defense Supply Center Columbus, DSCC-VQE, Columbus, OH 43216.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 11
NASA - NA
DLA - CC

Review activities:
Army - AR, MI, SM
Navy - AS, CG, MC
Air Force - 19, 85, 99

Preparing activity:
DLA - CC

(Project 5961-1812)RP

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-PRF-19500/444D	2. DOCUMENT DATE 99/06/18

3. DOCUMENT TITLE SEMICONDUCTOR DEVICE, DIODE, SILICON, SWITCHING TYPES 1N5711-1 AND 1N5711UR-1 JAN, JANTX, JANTXV, JANJ, JANS, JANHC, AND JANKC

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER		
a. NAME (Last, First, Middle initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) Commercial DSN FAX EMAIL	7. DATE SUBMITTED

8. PREPARING ACTIVITY				
a. Point of Contact Alan Barone	b. TELEPHONE Commercial 614-692-0510	DSN 850-0510	FAX 614-692-6939	EMAIL alan_barone@dscc.dla.mil
c. ADDRESS Defense Supply Center Columbus ATTN: DSCC-VAT Columbus, OH 43216-5000	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** Defense Standardization Program Office (DLSC -LM) 8725 John J. Kingman Road, Suite 2533 Fort Belvior, Virginia 22060-6221 Telephone (703) 767-6888 DSN 427-6888			

DD FORM 1426, FEB 99 (EG) PREVIOUS EDITIONS ARE OBSOLETE WHS/DIOR, Feb 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.