The documentation and process conversion measures necessary to comply with this revision shall be completed by 29 October 1999.

INCH-POUND

MIL-PRF-19500/456D
29 July 1999
SUPERSEDING
MIL-S-19500/456C
18 November 1993

PERFORMANCE SPECIFICATION SHEET

SEMICONDUCTOR DEVICE, TRANSISTOR, NPN, SILICON, HIGH-POWER
TYPE 2N5302 and 2N5303, JAN, JANTX, JANTXV, AND JANS

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for NPN, silicon, high-power transistors. Four level of product assurance are provided for each device type as specified in MIL-PRF-19500.

1.2 Physical dimensions. See figure 1 (similar to TO-3). See 3.3.

1.3 Maximum ratings.

Type	P_T 1/ T_A = +25°C	P_T 1/ T_C = +100°C	V_{CBO}	V_{CEO}	V_{EBO}	I_B	I_C	T_J and T_{STG}	$R_{\theta JC}$
	W	W	V dc	V dc	V dc	A dc	A dc	°C	°C/W Max
2N5302	5	115	60	60	5.0	7.5	30	-65 to +200	0.875
2N5303	5	115	80	80	5.0	7.5	20	-65 to +200	0.875

1/ Derate linearly, 1.14 mW/°C above T_C = +100°C.
Derate linearly, 28.57 mW/°C above T_A = +25°C.

1.4 Primary electrical characteristics.

	h_{FE2} 1/	h_{FE2} 1/	$\lvert h_{FE} \rvert$	$V_{BE(sat)2}$ 1/		$V_{CE(sat)2}$ 1/		C_{obo}	Pulse response	
	V_{CE} = 2 V dc I_C = 15 A dc	V_{CE} = 2 V dc I_C = 10 A dc	V_{CE} = 10 V dc I_C = 1 A dc f = 1 MHz	I_C = 15 A dc I_B = 1.5 A dc		I_C = 15 A dc I_B = 1.5 A dc		V_{CB} = 10 V dc I_E = 0 100 kHz ≤ f ≤ 1 MHz	t_{on}	t_{off}
	2N5302	2N5303	V dc	2N5302 V dc	2N5303 V dc	2N5302 V dc	2N5303 V dc	pF	µs	µs
Min	15	15	2							
Max	60	60	40	1.8	2	1	1.5	800	1.1	3.0

1/ Pulsed (see 4.5.1).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Defense Supply Center Columbus, ATTN: DSCC-VAC, 3990 East Broad St., Columbus, OH 43216-5000, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5961

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:10Z
Check the source to verify that this is the current version before use.

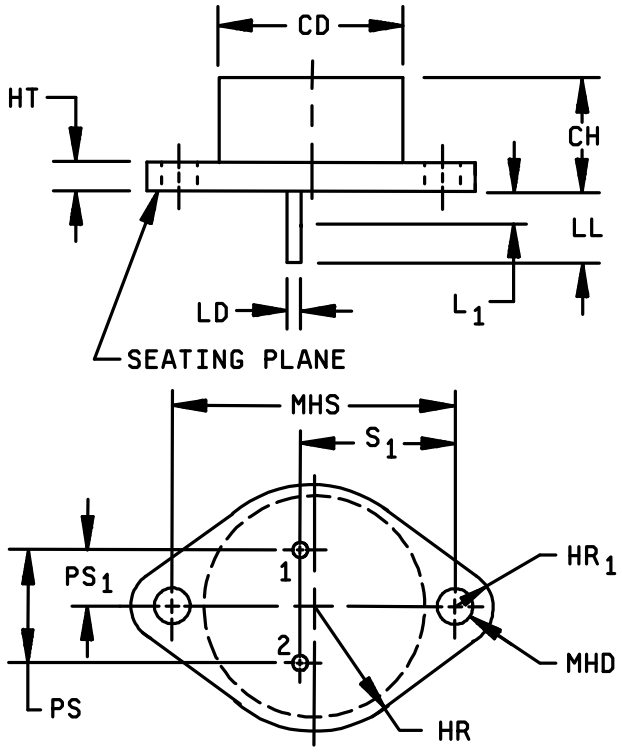


FIGURE 1. Physical dimensions – (similar to TO-3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:10Z
Check the source to verify that this is the current version before use.

Ltr	Dimensions				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
CD		.875		22.23	
CH	.270	.380	6.86	8.89	
HR	.495	.525	12.57	13.34	4
HR_1	.131	.188	3.33	4.78	4
HT	.060	.135	1.52	3.43	
LD	.038	.043	0.97	1.09	4,6
LL	.312	.500	7.92	12.70	
L_1		.050		1.27	
MHD	.151	.161	3.84	4.09	4
MHS	1.177	1.197	29.90	30.40	
PS	.420	.440	10.67	11.18	3,4
PS_1	.205	.225	5.21	5.72	3,4
s_1	.655	.675	16.64	17.15	

NOTES:
1. Dimensions are in inches. Lead 1 is emitter, lead 2 is base, and case is collector.
2. Metric equivalents are given for general information only.
3. These dimensions should be measured at points .050 inch (1.27 mm) +.005 inch (0.13 mm) -.000 inch (0.00 mm) below seating plane. When gauge is not used, measurement will be made at the seating plane.
4. Two places.
5. The seating plane of the header shall be flat within .001 inch (0.03 mm) concave to .004 inch (0.10 mm) convex inside a .930 inch (23.62 mm) diameter circle on the center of the header and flat within .001 inch (0.03 mm) concave to .006 inch (0.15 mm) convex overall.
6. Lead diameter shall not exceed twice LD within L_1.
7. In accordance with ANSI Y14.5M, diameters are equivalent to ϕx symbology.

FIGURE 1. Physical dimensions – (similar to TO-3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:10Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATION

DEPARTMENT OF DEFENSE

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

STANDARD

DEPARTMENT OF DEFENSE

MIL-STD-750 - Test Methods for Semiconductor Devices.

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Defense Automated Printing Service, 700 Robbins Avenue, Building 4D (DPM – DODSSP), Philadelphia, PA 19111-5094.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated specifications or specification sheets), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Associated specification. The individual item requirements shall be in accordance with MIL-PRF-19500, and as specified herein.

3.2 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500.

3.3 Interface requirements and physical dimensions. The Interface requirements and physical dimensions shall be as specified in, MIL-PRF-19500 and figure 1, (similar to TO-3), herein.

3.3.1 Lead finish. Lead finish shall be solderable in accordance with MIL-PRF-19500, MIL-STD-750, and herein.

3.4 Marking. Marking shall be in accordance with MIL-PRF-19500.

3.5 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in paragraph 1.3, 1.4, and table I.

3.6 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table I herein.

3.7 Qualification. Devices furnished under this specification shall be products that are authorized by the qualifying activity for listing on the applicable qualified manufacturers list before contract award (see 4.2 and 6.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:10Z
Check the source to verify that this is the current version before use.

4. VERIFICATION

4.1 Classification of Inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3)

c. Conformance inspection (see 4.4).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

4.3 Screening (JANS, JANTX and JANTXV levels). Screening shall be in accordance with MIL-PRF-19500 (table IV), and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen (see table IV of MIL-PRF-19500)	Measurement	
	JANS level	JANTX JANTXV levels
9	I_{CEX1} and h_{FE2}	Not applicable
11	I_{CEX1} and h_{FE2}; $\Delta I_{CEX1} \leq$ 100 percent of initial value or 50 µA dc, whichever is greater. $\Delta h_{FE2} \leq \pm$20 percent of initial value.	I_{CEX1} and h_{FE2}
12	See 4.3.1	See 4.3.1
13	Subgroups 2 and 3 of table I herein; $\Delta I_{CEX1} \leq$ 100 percent of initial value or 50 µA dc whichever is greater; $\Delta h_{FE2} \leq \pm$15 percent of initial value.	Subgroup 2 of table I herein; $\Delta I_{CEX1} \leq$ 100 percent of initial value or 100 µA dc, whichever is greater; $\Delta h_{FE2} \leq$ 20 percent of initial value.

4.3.1 Power burn-in conditions. Power burn-in conditions are as follows:

T_J = +187.5°C ±12.5°C, $V_{CE} \geq$ 10 V dc, $T_A \leq$ +35°C

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500, and as specified herein.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with MIL-PRF-19500, and table I herein. Electrical measurements (end-points) shall be in accordance with the applicable inspections of table I, group A, subgroup 2 herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:10Z
Check the source to verify that this is the current version before use.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in tables VIa (JANS) and VIb (JAN, JANTX, and JANTXV) of MIL-PRF-19500 and paragraphs 4.4.2.1 and 4.4.2.2 herein. Electrical measurements (end-points) shall be in accordance with the applicable inspections of table I, group A, subgroup 2 herein.

4.4.2.1 Group B inspection, table VIa (JANS) of MIL-PRF-19500.

Subgroup	Method	Condition
B4	1037	V_{CB} = 20 V dc; P_D = 5 W at T_A = room ambient as defined in 4.5 of MIL-STD-750; $t_{on} = t_{off}$ = 3 minutes minimum for 2,000 cycles. No heat sink or forced air cooling on devices shall be permitted.
B5	1027	V_{CB} = 20 V dc; T_A = +125°C ±25°C for 96 hours; P_T = 5 W at T_A = +125°C or adjusted as required by the chosen T_A to give an average lot, T_J = +275°C.

4.4.2.2 Group B inspection, table VIb (JAN, JANTX and JANTXV) of MIL-PRF-19500.

Subgroup	Method	Condition
B3	1037	For solder die attach: $V_{CB} \geq$ 10 V dc; $T_A \leq$ 35°C, 2,000 cycles. No heat sink or forced air cooling on devices shall be permitted.
B3	1026	For eutectic die attach: $V_{CB} \geq$ 10 V dc; $T_A \leq$ 35°C, adjust P_T to achieve T_J = 175°C minimum.

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table VII of MIL-PRF-19500, and as follows. Electrical measurements (end-points) shall be in accordance with table I, group A, subgroup 2 herein.

4.4.3.1. Group C inspection, table VII of MIL-PRF-19500.

Subgroup	Method	Conditions
C6	1037	For solder die attach: $V_{CB} \geq$ 10 V dc; $T_A \leq$ 35°C, 6,000 cycles. No heat sink or forced air cooling on devices shall be permitted.
C6	1026	For eutectic die attach: $V_{CB} \geq$ 10 V dc; $T_A \leq$ 35°C, adjust P_T to achieve T_J = 175°C minimum.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Pulse measurements. Conditions for pulse measurement shall be as specified in section 4 of MIL-STD-750.

4.5.2 Thermal resistance. Thermal resistance measurements shall be conducted in accordance with method 3131, MIL-STD-750. The following details shall apply:

a. Collector current magnitude during power application shall be 3.14 A dc.

b. Collector to emitter voltage magnitude shall be 20 V dc.

c. Reference temperature measuring point shall be the case.

d. Reference point temperature shall be +25°C ≤ T_R ≤ +75°C and recorded before the test is started.

e. Mounting arrangement shall be with heat sink to header.

f. Maximum limit of $R_{\theta JC}$ shall be 0.875°C/W.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:10Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical examination	2071					
Subgroup 2						
Collector - emitter breakdown voltage	3011	Bias condition D; I_C = 200 mA dc pulsed (see. 4.5.1)	$V_{(BR)CEO}$			
2N5302				60		V dc
2N5303				80		V dc
Collector - emitter cutoff current	3041	Bias condition D;	I_{CEO}		10.0	µA dc
2N5302		V_{CE} = 60 V dc				
2N5303		V_{CE} = 80 V dc				
Emitter - base cutoff current	3061	Bias condition D; V_{EB} = 5 V dc	I_{EBO}		5.0	µA dc
Collector - emitter cutoff current	3041	Bias condition A; V_{BE} = 1.5 V dc;	I_{CEX1}		5.0	µA dc
2N5302		V_{CE} = 60 V dc				
2N5303		V_{CE} = 80 V dc				
Collector - base cutoff current	3036	Bias condition D;	I_{CBO}		5.0	µA dc
2N5302		V_{CE} = 60 V dc				
2N5303		V_{CE} = 80 V dc				
Base - emitter saturated voltage	3066	Test condition A; I_C = 10 A dc; I_B = 1 A dc; pulsed (see 4.5.1)	$V_{BE(sat)1}$		1.7	V dc
Base - emitter saturated voltage	3066	Test condition A; I_C = 15 A dc; I_B = 1.5 A dc pulsed (see 4.5.1)	$V_{BE(sat)2}$			
2N5302					1.8	V dc
2N5303					2.0	V dc
Base - emitter saturated voltage	3066	Test condition A; I_C = 20 A dc; pulsed (see 4.5.1);	$V_{BE(sat)3}$			
2N5302		I_B = 2 A dc			2.5	V dc
2N5303		I_B = 4 A dc			2.5	V dc
Base - emitter voltage (nonsaturated)	3066	Test condition B; V_{CE} = 2 V dc; pulsed (see 4.5.1);	V_{BE1}			
2N5302		I_C = 15 A dc			1.8	V dc
2N5303		I_C = 10 A dc			1.5	V dc

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:10Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 2 - Continued						
Base - emitter voltage (unsaturated)	3066	Test condition B; V_{CE} = 4 V dc, pulsed (4.5.1)	V_{BE2}			
2N5302		I_C = 30 A dc			3.0	V dc
2N5303		I_C = 20 A dc			2.5	V dc
Collector - emitter saturated voltage	3071	I_C = 10 A dc; I_B = 1 A dc; pulsed (see 4.5.1)	$V_{CE(sat)1}$			
2N5302					0.75	V dc
2N5303					1.0	V dc
Collector - emitter saturated voltage	3071	I_C = 15 A dc; I_B = 1.5 A dc; pulsed (see 4.5.1)	$V_{CE(sat)2}$			
2N5302					1.0	V dc
2N5303					1.5	V dc
Collector - emitter saturated voltage	3071	I_C = 20 A dc; pulsed (see 4.5.1);	$V_{CE(sat)3}$			
2N5302		I_B = 2 A dc			2.0	V dc
2N5303		I_B = 4 A dc			2.0	V dc
Collector - emitter saturated voltage 2N5302 (only)	3071	I_C = 30 A dc; pulsed (see 4.5.1); I_B = 6 A dc	$V_{CE(sat)4}$		3.0	V dc
Forward-current transfer ratio	3076	V_{CE} = 2 V dc; I_C = 1 A dc; pulsed (see 4.5.1)	h_{FE1}	40		
Forward-current transfer ratio	3076	V_{CE} = 2 V dc; pulsed (see 4.5.1);	h_{FE2}			
2N5302		I_C = 15 A dc		15	60	
2N5303		I_C = 10 A dc		15	60	
Forward-current transfer ratio	3076	V_{CE} = 4 V dc; pulsed (see 4.5.1);	h_{FE3}			
2N5302		I_C = 30 A dc		5		
2N5303		I_C = 20 A dc		5		
Subgroup 3						
High-temperature operation:		T_A = +150°C				
Collector to emitter cutoff current	3041	Bias condition A; V_{BE} = 1.5 V dc;	I_{CEX2}		50	µA dc
2N5302		V_{CE} = 60 V dc				
2N5303		V_{CE} = 80 V dc				

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:10Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 3 - Continued						
Low-temperature operation:		T_A = -55°C				
Forward current transfer ratio 2N5302 2N5303	3076	V_{CE} = 2 V dc; pulsed (see 4.5.1); I_C = 15 A dc I_C = 10 A dc	h_{FE4}	 7 7		
Subgroup 4						
Small-signal short-circuit forward-current transfer ratio	3206	V_{CE} = 10 V dc; I_C = 1 A dc; f = 1 kHz	h_{fe}	40	240	
Magnitude of small-signal short-circuit forward-current transfer ratio	3306	V_{CE} = 10 V dc; I_C = 1 A dc; f = 1 MHz	$\lvert h_{fe} \rvert$	2	40	
Open circuit output capacitance	3236	V_{CB} = 10 V dc; I_E = 0; 100 kHz < f ≤ 1 MHz	C_{obo}		800	pF
Switching parameters:						
Pulse delay time		See figure 2	t_d		0.2	µs
Pulse rise time		See figure 2	t_r		0.9	µs
Pulse storage time		See figure 2	t_s		2.0	µs
Pulse fall time		See figure 2	t_f		1.0	µs
Subgroup 5						
Safe operating area (continuous dc)	3051	T_C = 25°C; power application time ≥ 1 sec, 1 cycle (see figures 3 and 4)				
Test 1						
2N5302		V_{CE} = 6.67 V dc; I_C = 30 A dc				
2N5303		V_{CE} = 10 V dc; I_C = 20 A dc				
Test 2						
2N5302, 2N5303		V_{CE} = 20 V dc; I_C = 10 A dc				

See footnote at end of table.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:10Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection – Continued.


Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 5 - Continued						
Test 3						
2N5302, 2N5303		V_{CE} = 40 V dc; I_C = 3 A dc				
Test 4						
2N5302		V_{CE} = 50 V dc; I_C = 600 mA dc				
2N5303		V_{CE} = 60 V dc; I_C = 600 mA dc				
Safe operating area (clamped switching)		T_A = 25°C; V_{CE} = 15 V dc; (see figures 5 and 6)				
2N5302		Clamp voltage = 60 V dc; I_C = 30 A dc				
2N5303		Clamp voltage = 80 V dc; I_C = 20 A dc				
Electrical measurements		See table I, group A, subgroup 2				
Subgroups 6 and 7						
Not applicable						

1/ For sampling plan see MIL-PRF-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:10Z
Check the source to verify that this is the current version before use.

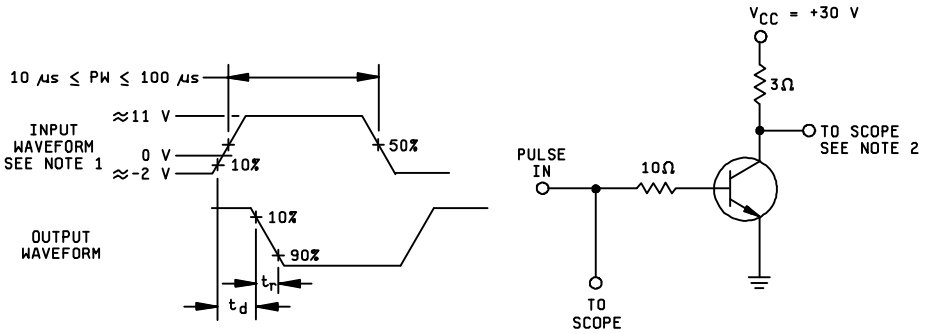

t_d AND t_r TIME TEST CIRCUIT

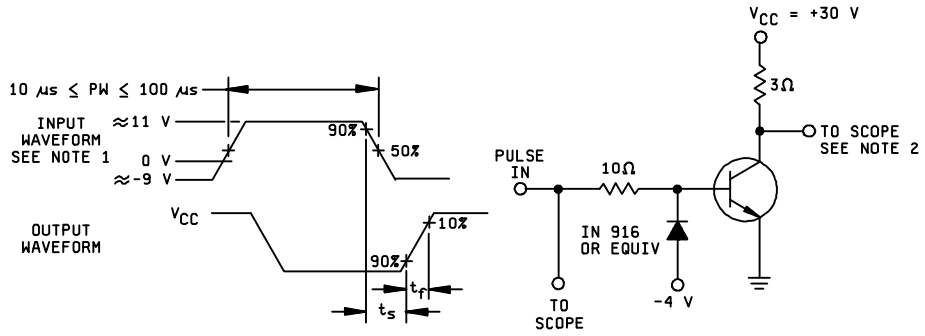

t_s AND t_f TIME TEST CIRCUIT

NOTES:

1. The rise time (t_r) of the applied pulse shall be ≤ 2 ns; duty cycle ≤ 2 percent; generator source impedance shall be 50 Ω.
2. Output sampling oscilloscope: Z_{IN} ≥ 100 kΩ; C_{IN} ≤ 12 pF; rise time ≤ 0.2 ns.

FIGURE 2. Pulse response test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:10Z
Check the source to verify that this is the current version before use.

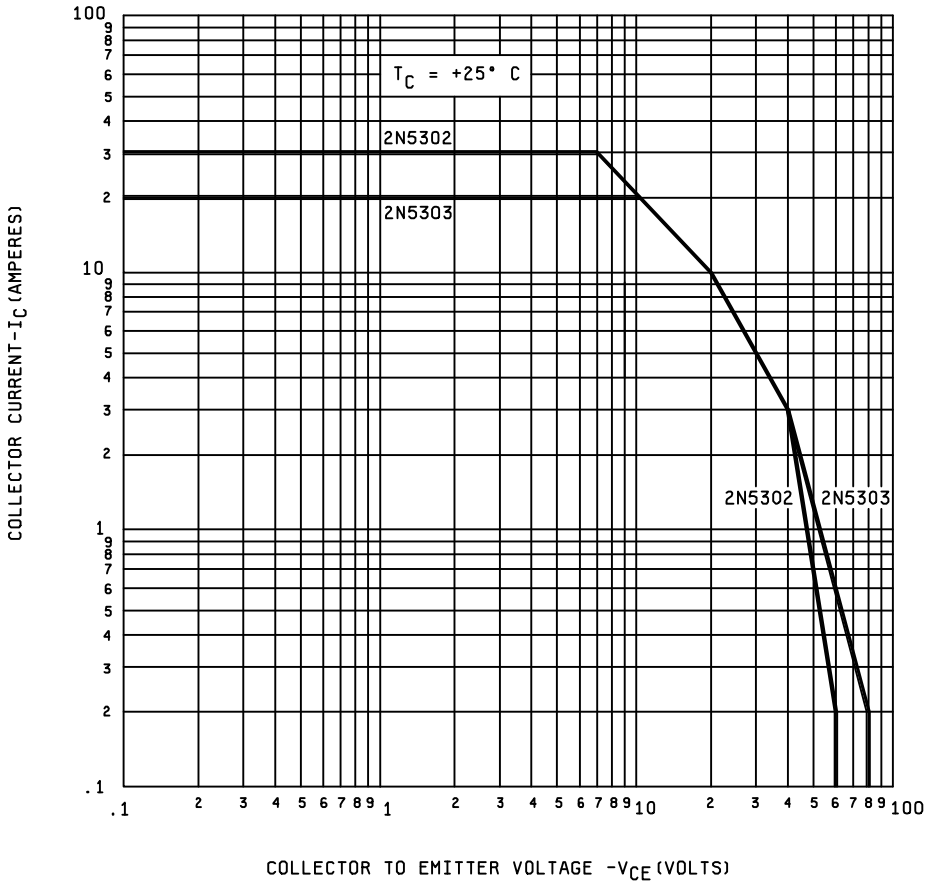


FIGURE 3. Maximum safe operating area graph dc.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:10Z
Check the source to verify that this is the current version before use.


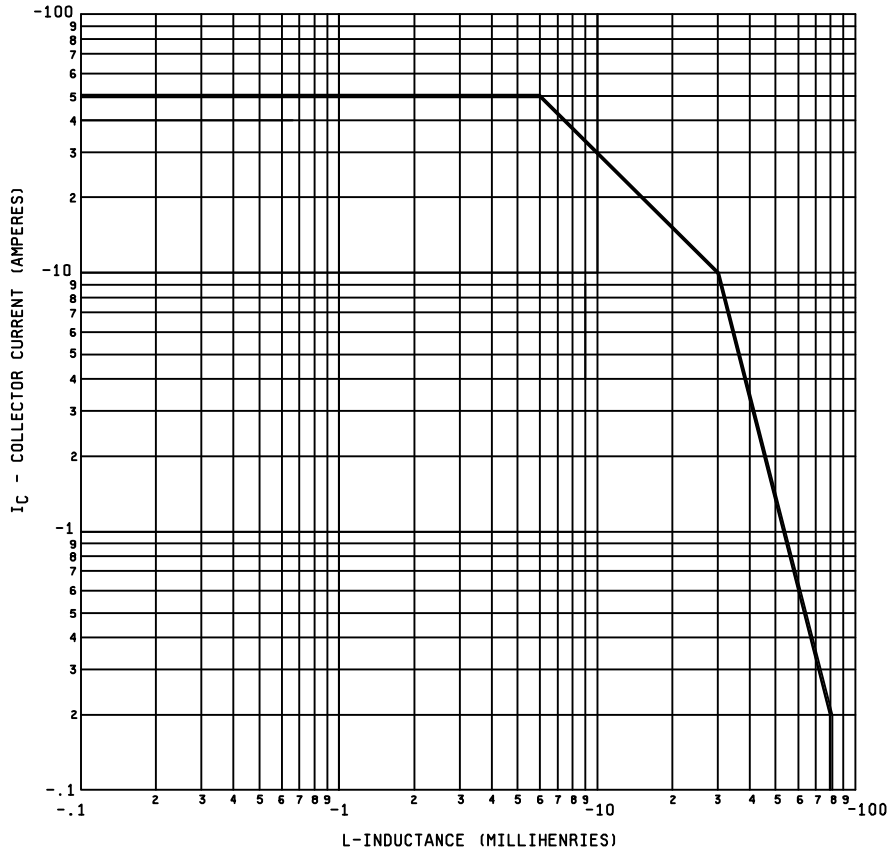


FIGURE 4. Safe operating area for switching between saturation and cutoff (unclamped inductive load).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:10Z
Check the source to verify that this is the current version before use.

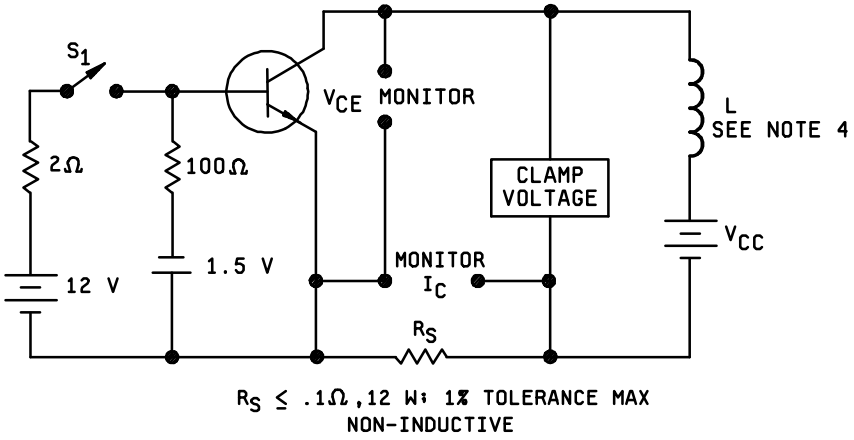

*L = 2.0 mH (2 each 1 mH, 50 A, .001 Ω, Sanford Miller CK-50, or equivalent).

Procedure:

1. With switch S1 closed, set the specified test conditions.
2. Open S1. Device fails if the clamp voltage if not reached.
3. Perform specified endpoints tests.

FIGURE 5. Clamped inductive sweep test circuit.

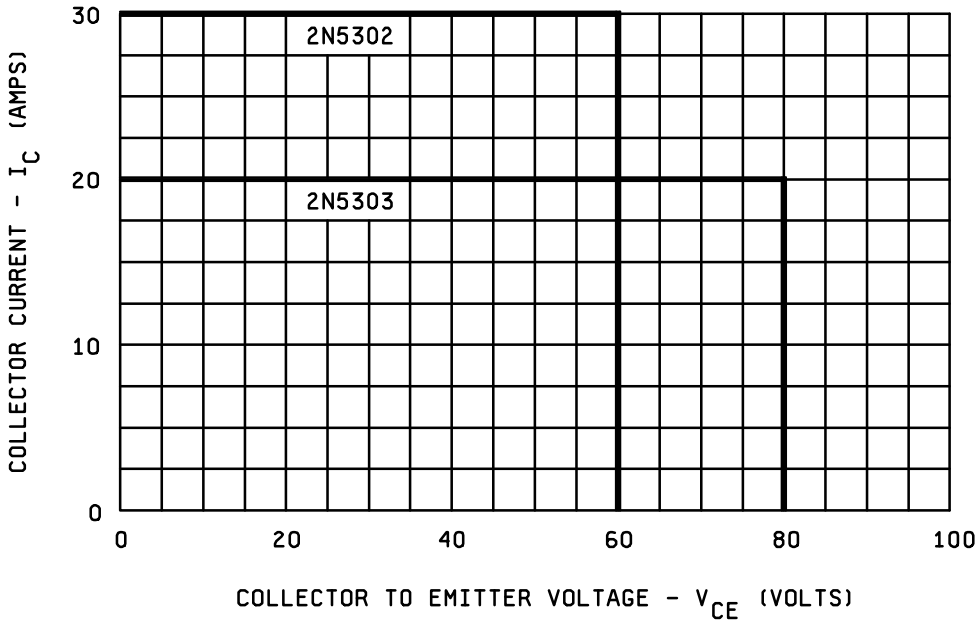


FIGURE 6. Safe operating area for switching between saturation and cutoff (clamped inductive load).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:10Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of material is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Points' packaging activity within the Military Department or Defense Agency, or within the Military Departments' System Command. Packaging data retrieval is available from the managing Military Departments' or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

6.1 Notes. The notes specified in MIL-PRF-19500 are applicable to this specification.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Issue of DODISS to be cited in the solicitation.

b. Lead finish as specified.

c. Type designation and product assurance level.

6.3 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

6.4 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturer's List QML-19500 whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or purchase orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from Defense Supply Center Columbus, DSCC-VQE, Columbus, OH 43216.

Custodians:
Army - CR
Navy - EC
Air Force - 11
NASA - NA
DLA - CC

Review activities:
Army - AR, AV, MI, SM
Navy - AS, CG, MC
Air Force – 13, 19

Preparing activity:
DLA - CC

(Project 5961-2182)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:10Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7, and send to preparing activity.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-PRF-19500/456D	2. DOCUMENT DATE *(YYYYMMDD)*

3. DOCUMENT TITLE

SEMICONDUCTOR DEVICE, TRANSISTOR, NPN, SILICON, HIGH-POWER, TYPE: 2N5302, 2N5303, JAN, JANTX, JANTXV, AND JANS

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE *(Include Area Code)* (1) Commercial (2) DSN *(If applicable)*	7. DATE SUBMITTED *(YYYYMMDD)*

8. PREPARING ACTIVITY

a. NAME Alan Barone	b. TELEPHONE *(Include Area Code* (1) Commercial 614-692-0510 (2) DSN 850-0510
c. ADDRESS *(Include Zip Code)* DSCC-VAC 3990 East Broad Street Columbus, Ohio 43216-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Standardization Program Office (DLSC-LM) 8725 John J. Kingman Road, Suite 2533 Fort Belvoir, Virginia 22060-6221 Telephone (703)767-6888 DSN 427-6888

DD Form 1426, FEB 1999 (EG) PREVIOUS EDITIONS ARE OBSOLETE.

WHS/DIOR, Feb 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:10Z
Check the source to verify that this is the current version before use.