The document and process conversion measures necessary to comply with this revision shall be completed by 30 November 1999

INCH-POUND

MIL-PRF-19500/526D
30 August 1999
SUPERSEDING
MIL-S-19500/526C
20 March 1995

PERFORMANCE SPECIFICATION SHEET

SEMICONDUCTOR DEVICE, TRANSISTOR, NPN, SILICON, POWER
TYPES 2N3879 JAN, JANTX AND JANTXV

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for NPN, silicon, power transistors. Three levels of product assurance are provided for each device type as specified in MIL-PRF-19500.

1.2 Physical dimensions. See figure 1 (TO-66).

1.3 Maximum ratings. (T_A = +25°C, unless otherwise specified).

P_T 1/ T_C = +25°C	V_{CBO}	V_{CEO}	V_{EBO}	I_B	I_C	T_J and T_{STG}	$R_{\theta JC}$
W	V dc	V dc	V dc	A dc	A dc	°C/W	°C/W
35	120	75	7	5	7	-65 to +200	5

1/ Derate linearly 200 mW/°C for T_C > +25°C.

1.4 Primary electrical characteristics.

	h_{FE1} 1/	h_{FE2} 1/	$V_{BE(SAT)1}$	$V_{CE(SAT)1}$	C_{obo}	$\|h_{fe}\|$	Switching (see table I and figure 2 herein)	
	V_{CE} = 5.0 V dc I_C = 0.5 A dc	V_{CE} = 5.0 V dc I_B = 4.0 A dc	I_C = 4.0 V dc I_B = 0.4 A dc	I_C = 4.0 V dc I_B = 0.4 A dc	V_{CB} = 10 V dc I_E = 0 0.1 MHz ≤ f ≤ 1 MHz	V_{CE} = 10 V dc I_C = 500 mA dc f = 10 MHz	t_{on}	t_{off}
			V dc	V dc	pF		µs	µs
Min	40	20				4		
Max		80	2.0	1.2	175	20	0.44	1.2

1/ Pulsed (see 4.5.1).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Defense Supply Center Columbus, ATTN: DSCC-VAC, 3990 East Broad Street, Columbus, OH 43216-5000, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 5961

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:48Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATION

DEPARTMENT OF DEFENSE

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

STANDARD

MILITARY

MIL-STD-750 - Test Methods for Semiconductor Devices.

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Defense Automated Printing Service, Building 4D (DPM-DODSSP), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated specifications or specification sheets), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Qualification. Devices furnished under this specification shall be products that are authorized by the qualifying activity for listing on the applicable qualified manufacturer's list before contract award (see 4.2 and 6.3).

3.2 Associated specification. The individual item requirements shall be in accordance with MIL-PRF-19500 and as specified herein.

3.3 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500.

3.4 Interface requirements and physical dimensions. The interface requirements and physical dimensions shall be as specified in MIL-PRF-19500 and on figure 1 herein.

3.4.1 Lead finish. Lead finish shall be solderable in accordance with MIL-STD-750, MIL-PRF-19500, and herein. Where a choice of lead finish or formation is desired, it shall be specified in the acquisition requirements (see 6.2).

3.5 Marking. Marking shall be in accordance with MIL-PRF-19500.

3.6 Electrical performance characteristics. Unless otherwise specified, the electrical performance characteristics are as specified in 1.3, 1.4, and table I herein.

3.7 Electrical test requirements. The electrical requirements shall be the subgroups specified in table I herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:48Z
Check the source to verify that this is the current version before use.

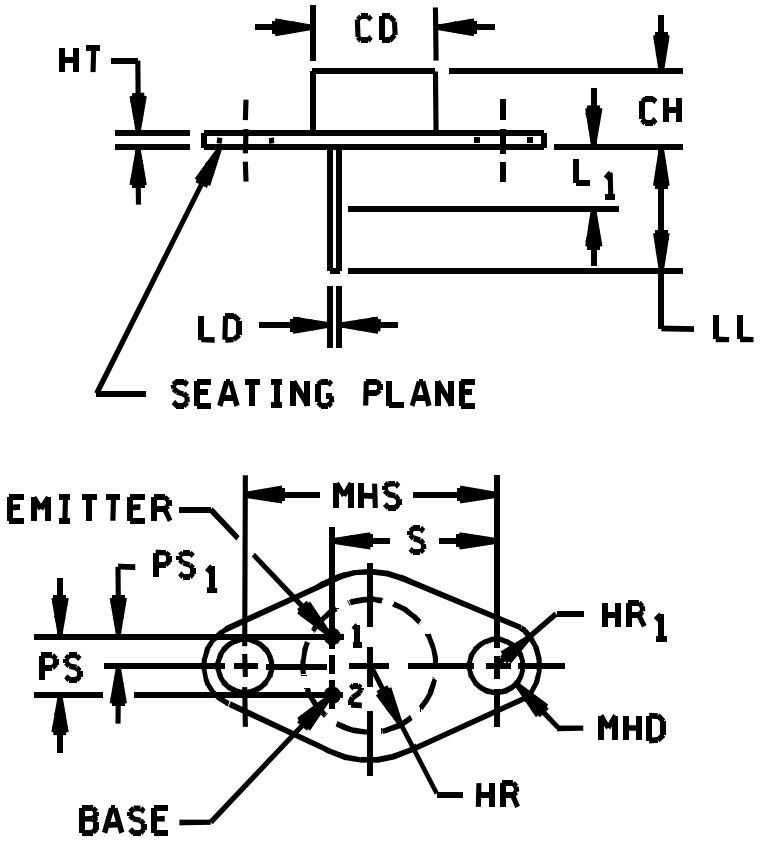


FIGURE 1. Physical dimensions (TO-66).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:48Z
Check the source to verify that this is the current version before use.

Symbol	Dimensions				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
CH	0.250	0.340	6.35	8.64	
LD	0.028	0.034	0.71	0.86	3,7,10
CD	0.470	0.500	11.94	12.70	3,10
PS	0.190	0.210	4.83	5.33	4
PS_1	0.093	0.107	2.36	2.72	4
HT	0.050	0.075	1.27	1.91	
LL	0.360	0.500	9.14	12.70	3,9
L_1		0.050		1.27	9
MHD	0.142	0.152	3.61	3.86	7,10
MHS	0.958	0.962	24.33	24.43	
HR		0.350		8.89	
HR_1	0.115	0.145	2.92	3.68	8
S	0.570	0.590	14.48	14.99	

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Body contour is optional within zone defined by CD and PS_1.
4. These dimensions should be measured at points 0.050 inch (1.27 mm) 0.055 inch (1.40 mm) below seating plane. When gauge is not used measurement will be made at the seating plane.
5. Both terminals.
6. At both ends.
7. Two holes.
8. The collector shall be electrically connected to the case.
9. LD applies between L_1 and LL. Diameter is uncontrolled in L_1.
10. In accordance with ANSI Y14.5M, diameters are equivalent to ∅x symbology.

FIGURE 1. Physical dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:48Z
Check the source to verify that this is the current version before use.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3)

c. Conformance inspection (see 4.4).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500.

4.3 Screening (JANTX and JANTXV levels only). Screening shall be in accordance with table IV of MIL-PRF-19500, and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen (see table IV of MIL-PRF-19500)	Measurement
	JANTX and JANTXV levels
3c 1/ 2/	Thermal impedance (see 4.5.3)
9	I_{CEX1}
11	h_{FE2}; I_{CEX1}
12	See 4.3.1
15	ΔI_{CEX1} = 100 percent of initial value or 1 mA dc, whichever is greater. Δh_{FE2} = ± 25 percent of initial value; subgroup 2 of table I herein.

1/ Thermal impedance shall be performed any time after sealing provided temperature cycling is performed in accordance with MIL-PRF-19500 screen 3, prior to this thermal test.

2/ $Z_{\theta JX}$ is not required in screen 13 if already previously performed.

4.3.1 Power burn-in. Power burn-in conditions are as follows:

T_J = +187.5°C, ±12.5°C; $V_{CB} \geq$ +10 V dc; T_A = room ambient as defined in the general requirements of MIL-STD-750, paragraph 4.5.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with MIL-PRF-19500 and table I herein. The following test conditions shall be used for $Z_{\theta JX}$, group A inspection: $Z_{\theta JX} \leq 5.0$°C/W.

a. I_M measurement current ..... 1 to 10 mA.

b. I_H forward heating current..... 0.5 A to 1.0 A.

c. t_H heating time ..... 10 ms.

d. t_{MD} measurement delay time ..... 70 µs maximum.

End-point electrical measurements shall be in accordance with the applicable steps of table I, subgroup 2 herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:48Z
Check the source to verify that this is the current version before use.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified. Separate samples may be used for each step. In the event of a group B failure, the manufacturer may pull a new sample at double size from either the failed assembly lot or from another assembly lot from the same wafer lot. If the new "assembly lot" option is exercised, the failed assembly lot shall be scrapped. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2 herein.

Step	Method	Condition
1	1039	Steady-state life: Test condition B, 340 hours, V_{CB} = 10 - 30 V dc, T_J = 150°C min. No heat sink or forced-air cooling on the devices shall be permitted. n = 45 devices, c = 0
2	1039	The steady state life test of step 1 shall be extended to 1,000 hours for each die design. Samples shall be selected from a wafer lot every twelve months of wafer production, however, Group B shall not be required more than once for any single wafer lot. n = 45, c = 0.
3	1032	High-temperature life (non-operating), T_A = +200°C. n = 22, c = 0

4.4.2.1 Group B sample selection. Samples selected from group B inspection shall meet all of the following requirements:

a. For JAN, JANTX, and JANTXV samples shall be selected randomly from a minimum of three wafers (or from each wafer in the lot) from each wafer lot. See MIL-PRF-19500.

b. Must be chosen from an inspection lot that has been submitted to and passed group A, subgroup 2, conformance inspection. When the final lead finish is solder or any plating prone to oxidation at high temperature, the samples for life test (group B for JAN, JANTX, and JANTXV) may be pulled prior to the application of final lead finish.

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table VII of MIL-PRF-19500. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2 herein.

4.4.3.1 Group C inspection, table VII (JAN, JANTX, and JANTXV) of MIL-PRF-19500.

Subgroup	Method	Condition
C2	2036	Test condition A; weight = 10 pounds; t = 15 s..
C6		Not applicable

4.4.3.2 Group C sample selection. Samples for subgroups in group C shall be chosen at random from any lot containing the intended package type and lead finish procured to the same specification which is submitted to and passes group A tests for conformance inspection. Testing of a subgroup using a single device type enclosed in the intended package type shall be considered as complying with the requirements for that subgroup.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Pulse measurements. Conditions for pulse measurements shall be as specified in section 4 of MIL-STD-750.

4.5.2 Thermal resistance. Thermal resistance measurements shall be performed in accordance with method 3161 of MIL-STD-750. $R_{\theta JC}$ (max) = 5°C/W.

a. Collector current magnitude during power applications shall be 0.55 A dc.

b. Collector to emitter voltage magnitude shall be 20 V dc.

c. Reference temperature point shall be the case.

d. Reference point temperature shall be +25°C ≤ T_R +25°C ≤ +75°C and recorded before the test is started.

e. Mounting arrangement shall be with heat sink to header.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:48Z
Check the source to verify that this is the current version before use.

4.5.3 Thermal impedance $Z_{\theta JX}$ measurements for screening. The $Z_{\theta JX}$ measurements shall be performed in accordance with MIL-STD-750C, method 3161. The maximum limit (not to exceed the group A, subgroup 2 limit) for $Z_{\theta JX}$ in screening (table II of MIL-PRF-19500) shall be derived by each vendor by means of statistical process control. When the process has exhibited control and capability, the capability data shall be used to establish the fixed screening limit. In addition to screening, once a fixed limit has been established, monitor all future sealing lots using a random five piece sample from each lot to be plotted on the applicable X, R chart. If a lot exhibits an out of control condition, the entire lot shall be removed from the line and held for engineering evaluation and disposition. One hundred percent Safe Operating Area (SOA) testing may be performed in lieu of thermal impedance testing herein provided that the appropriate conditions of temperature, time current, and voltage to achieve die attach integrity are submitted to the qualifying activity.

4.5.3.1 Thermal impedance $Z_{\theta JX}$ measurements for initial qualification or requalification. The $Z_{\theta JX}$ measurements shall be performed in accordance with MIL-STD-750C, method 3161 (read and record data ($Z_{\theta JX}$). $Z_{\theta JX}$ shall be supplied on one lot (500 pieces minimum) and a thermal response curve shall be submitted. Twenty-two of these samples shall be serialized and provided to the qualifying activity for correlation prior to shipment of parts. Measurements conditions shall be in accordance with 4.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:48Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 1 2/						
Visual and mechanical 3/ examination	2071	n = 45 devices, c = 0				
Solderability 3/	2026	n = 15 leads, c = 0				
Resistance to 3/ 4/ solvent	1022	n = 15 devices, c = 0				
Temp cycling 3/	1051	Test condition C, 25 cycles. n = 22 devices, c = 0				
Heremetic seal	1071	n = 22 devices, c = 0				
Fine leak Gross leak						
Electrical measurements		Group A, subgroup 2				
Bond strength 3/	2037	Precondition T_A = +250°C at t = 24 hrs or T_A = +300°C at t = 2 hrs, n = 11 wires, c = 0				
Subgroup 2						
Breakdown voltage, collector to emitter	3011	Bias condition C; I_C = 200 mA dc; pulsed (see 4.5.1)	$V_{(BR)CEO}$		75	V dc
Collector to emitter cutoff current	3041	Bias condition D; V_{CE} = 50 V dc	I_{CEO}		5	mA dc
Collector to emitter cutoff current	3041	Bias condition A; V_{CE} = 100 V dc; V_{BE} = 1.5 V dc	I_{CEX1}		4	mA dc
Emitter to base cutoff current	3061	Bias condition D; V_{EB} = 7 V dc	I_{EBO}		10	mA dc
Collector to base cutoff current	3036	Bias condition D; V_{CB} = 120 V dc	I_{CBO}		25	mA dc
Base emitter voltage (nonsaturated)	3066	Test condition B; I_C = 4.0 A dc; V_{CE} = 2.0 V dc; pulsed (see 4.5.1)	V_{BE}		1.8	V dc
Base emitter voltage (saturated)	3066	Test condition A; I_C = 4.0 A dc; I_B = 0.4 V dc; pulsed (see 4.5.1)	$V_{BE(SAT)}$		2.0	V dc
Collector to emitter saturated voltage	3071	I_C = 4.0 A dc; I_B = 0.4 V dc; pulsed (see 4.5.1)	$V_{CE(SAT)}$		1.2	V dc

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:48Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 2 continued						
Forward-current transfer ratio	3076	V_{CE} = 5.0 V dc; I_C = 0.5 A dc; pulsed (see 4.5.1)	h_{FE1}	40		
Forward-current transfer ratio	3076	V_{CE} = 5.0 V dc; I_C = 4.0 A dc; pulsed (see 4.5.1)	h_{FE2}	20	80	
Forward-current transfer ratio	3076	V_{CE} = 2.0 V dc; I_C = 4.0 A dc; pulsed (see 4.5.1)	h_{FE3}	12	100	
Thermal impedance	3131	See 4.5.3	$Z_{\theta JX}$		5.0	°C/W
Subgroup 3						
High temperature operation:		T_A = +150°C				
Collector to emitter cutoff current	3041	Bias condition A; V_{CE} = 100 V dc; V_{BE} = 1.5 V dc	I_{CEX2}		4.0	mA dc
Low temperature operation:		T_A = -55°C				
Forward-current transfer ratio	3076	V_{CE} = 5.0 V dc; I_C = 0.5 A dc; pulsed (see 4.5.1)	h_{FE4}	10		
Subgroup 4						
Pulse response	3251	Test condition A except test circuit and pulse requirements in accordance with figure 2 herein.				
Turn-on time		V_{CC} = 30 V dc; I_C = 4.0 A dc; I_B = 0.4 A dc	$t_{(on)}$		0.44	µs
Turn-off time		V_{CC} = 30 V dc; I_C = 4.0 A dc; I_B = -I_B = 0.4 A dc	$t_{(off)}$		1.2	µs
Magnitude of common emitter small-signal short-circuit forward-current transfer ratio	3306	V_{CE} = 10 V dc; I_C = 500 mA dc; f = 10 MHz	$\|h_{fe}\|$	4	20	
Open circuit output capacitance	3236	V_{CB} = 10 V dc; I_E = 0; 0.1 MHz ≤ f ≤ 1.0 MHz	C_{obo}		175	pF

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:48Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 5						
Safe operating area (continuous dc)	3051	T_C = +25°C; t = 1 s, 1 cycle; (see figure 3)				
Test 1		V_{CE} = 5 V dc; I_C = 7 A dc				
Test 2		V_{CE} = 28 V dc; I_C = 1.25 A dc				
Test 3		V_{CE} = 40 V dc; I_C = 500 mA dc				
Test 4		V_{CE} = 75 V dc; I_C = 100 mA dc				
Safe operating area (switching)	3053	Load condition C, (unclamped inductive load) (see figure 4) T_C = +25°C; duty cycle ≤ 5 percent; R_S = 0.1 ohm; $t_r = t_f \leq 2$ µs				
Test 1		$t_p \approx 50$ µs (vary to obtain I_C); R_{BB1} = 5.0 ohms; V_{BB1} = 10 V dc; R_{BB2} = 50 ohms; V_{BB2} = 4 V dc; I_C = 4 A dc; L = 125 µH; V_{CC} = 10 V dc; R of inductor = 0.1 ohm				
Test 2		$t_p \approx 25$ µs (vary to obtain I_C); R_{BB1} = 5.0 ohms; V_{BB1} = 10 V dc; R_{BB2} = 50 ohms; V_{BB2} = 1.5 V dc; I_C = 1 A dc; L = 250 µH; V_{CC} = 10 V dc; R of inductor = 0.1 ohm				
Safe operating area (switching)	3053	Load condition B; T_A = +25°C; I_C = 7 A dc; V_{CC} = 45 V dc; Clamped voltage = 75 V dc, duty Cycle ≤ 5 percent; R_{BB1} = 5.0 ohms; V_{BB1} = 10 V dc; R_{BB2} = 50 ohms; V_{BB2} = -4 V dc; L = 250 µH; R of inductor = 0.1 ohm; R_L = as required to limit I_C.				

See footnotes at end of table.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:48Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.


Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroups 6 and 7 Not applicable						

1/ For sampling plan, see MIL-PRF-19500.
2/ For resubmission of failed subgroup A1, double the sample size of the failed test or sequence of tests.
3/ Separate samples may be used.
4/. Not required for laser marked devices.
5/ L = 5 mH (2 each Essex Stancor C-2688 in parallel 1A, 0.5 ohm, or equivalent (see 4.5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:48Z
Check the source to verify that this is the current version before use.

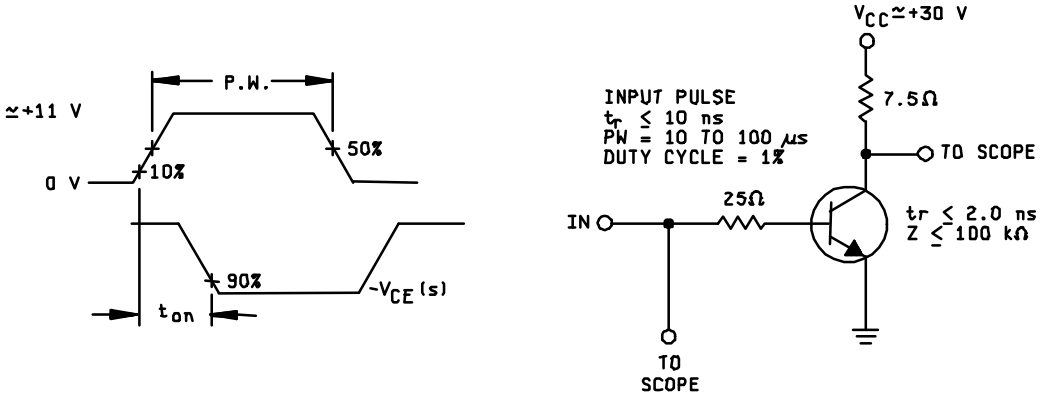

TURN-ON (t_{on}) TIME TEST CIRCUIT

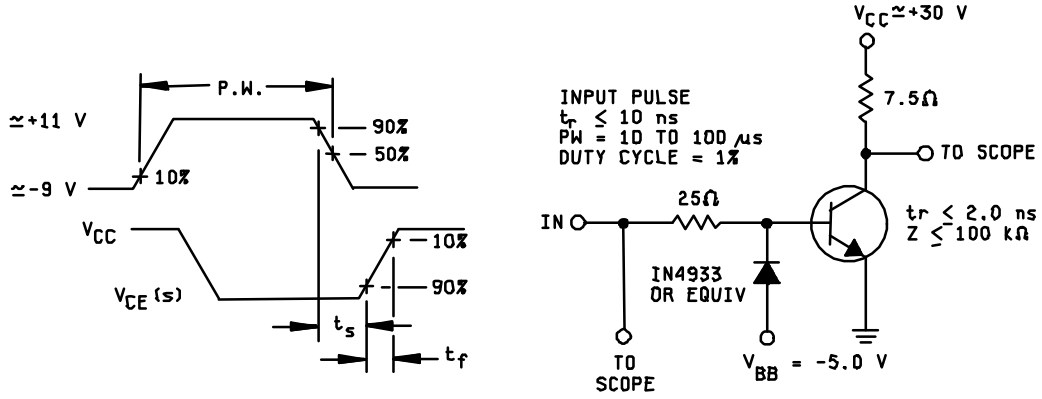

TURN-OFF (t_{off}) TIME TEST CIRCUIT

FIGURE 2. Switching time test circuits.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:48Z
Check the source to verify that this is the current version before use.

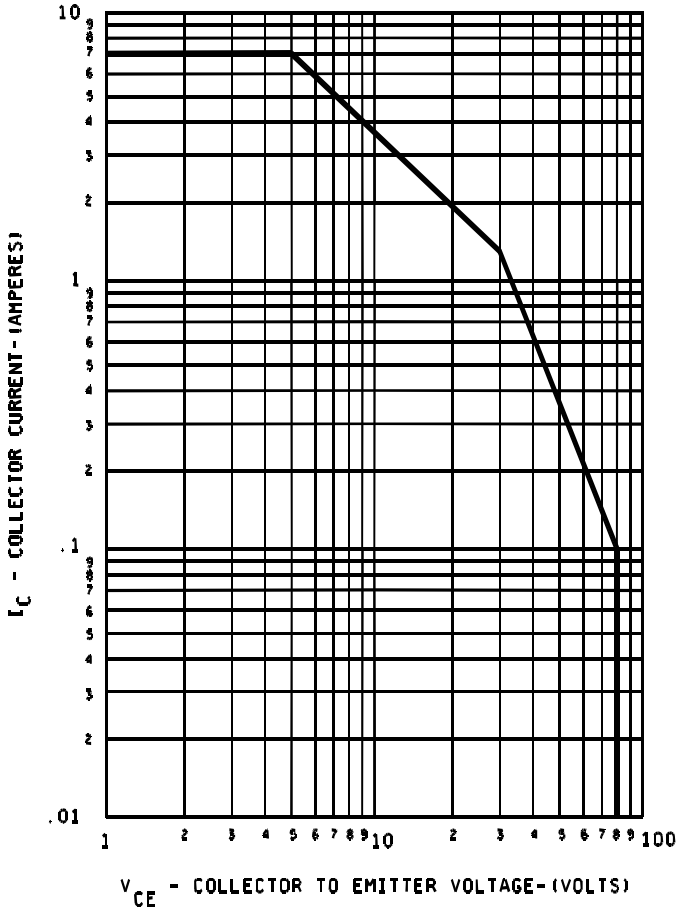


FIGURE 3. Maximum safe operating graph (continuous dc).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:48Z
Check the source to verify that this is the current version before use.

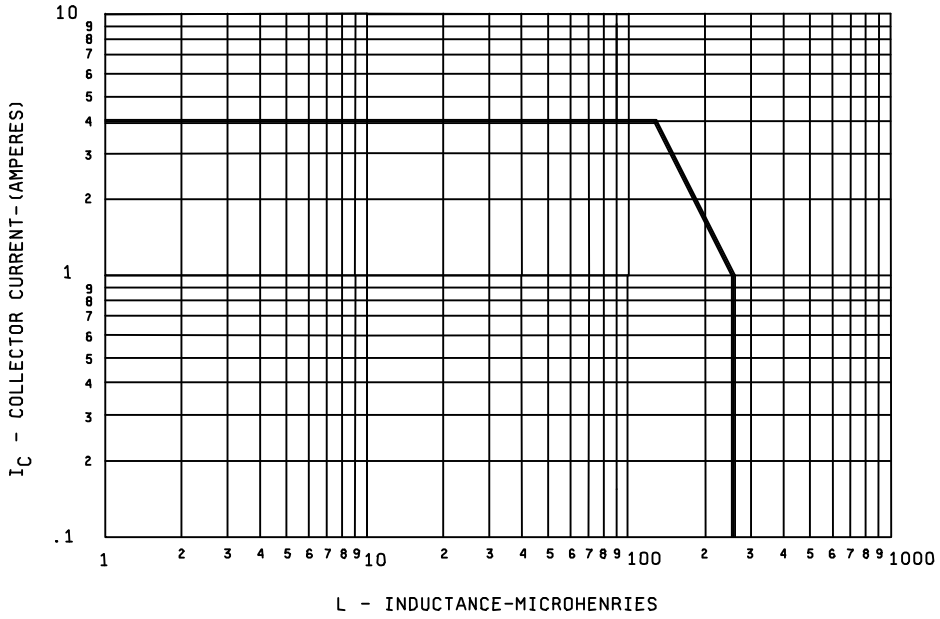


FIGURE 4. Safe operating area for switching between saturation and cutoff (unclamped load).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:48Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. Packaging shall prevent mechanical damage of the devices during shipping and handling and shall not be detrimental to the device. When actual packaging of material is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Points' packaging activity within the Military Department or Defense Agency, or within the Military Departments' System Command. Packaging data retrieval is available from the managing Military Departments' or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Notes. The notes specified in MIL-PRF-19500 are applicable to this specification.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Issue of DODISS to be cited in the solicitation (see 2.2.1).

b. The lead finish as specified (see 3.4.1).

c. Type designation and quality assurance level.

d. Packaging requirements (see 5.1).

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturer's List QML No.19500 whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or purchase orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from Defense Supply Center Columbus, ATTN: DSCC-VQE, 3990 East Broad Street, Columbus, OH 43216-5000.

6.4 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Air Force – 13, 19

Preparing activity:
DLA - CC

(Project 5961-2076)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:48Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-PRF-19500/526D	2. DOCUMENT DATE 990830

3. **DOCUMENT TITLE**
SEMICONDUCTOR DEVICE, TRANSISTOR, NPN, SILICON, POWER TYPES 2N3879 JAN, JANTX AND JANTXV

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) COMMERCIAL DSN FAX EMAIL	7. DATE SUBMITTED

8. PREPARING ACTIVITY

a. Point of Contact Alan Barone	b. TELEPHONE Commercial 614-692-0510 DSN 850-0510 FAX 614-692-6939 EMAIL alan_barone@dscc.dla.mil
c. ADDRESS Defense Supply Center Columbus, ATTN: DSCC-VAC, 3990 East Broad Street, Columbus, OH 43216-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Standardization Program Office (DLSC-LM) 8725 John J. Kingman, Suite 2533, Fort Belvoir, VA 22060-6221 Telephone (703) 767-6888 DSN 427-6888

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:48Z
Check the source to verify that this is the current version before use.