The documentation and process conversion measures necessary to comply with this revision shall be completed by 20 December 1999.

INCH-POUND

MIL-PRF-19500/533E
20 September 1999
SUPERSEDING
MIL-S-19500/533D
20 September 1993

PERFORMANCE SPECIFICATION SHEET

SEMICONDUCTOR DEVICE, DIODE, SILICON, VOLTAGE REGULATOR
TYPES 1N6309 THROUGH 1N6355; 1N6309US THROUGH 1N6336US;
PLUS C AND D TOLERANCE SUFFIX,
JAN, JANTX, JANTXV, JANJ AND JANS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for microminiature 500 mW, silicon, metallurgically bonded, voltage regulator diodes with voltage tolerances of 5 percent, 2 percent, and 1 percent. Five levels of product assurance are provided for each encapsulated device type as specified in MIL-PRF-19500.

1.2 Physical dimensions. See figure 1 (DO-35) and figure 2 (surface mount).

1.3 Maximum ratings. Maximum ratings are as shown in columns 6, 7 and 9 of table II herein and as follows:

P_T = 500 mW (D0-35) at T_L = + 75°C, L = 0.375 inch (9.53 mm); both ends of case or diode body to heat sink at L = 0.375 inch (9.53 mm). (Derate I_Z to 0.0 mA dc at +175°C).
P_T = 500 mW (surface mount) at T_{EC} = 125°C. (Derate to 0 at 175°C).
-65°C ≤ T_{op} ≤ +175°C; -65°C ≤ T_{STG} ≤ +175°C.

1.4 Primary electrical characteristics. Primary electrical characteristic columns 2, 5 and 11 of table II herein and as follows:

2.4 V dc ≤ V_Z ≤ 200 V dc (nominal).
1N6309D through 1N6355D are 1 percent voltage tolerance.
1N6309C through 1N6355C are 2 percent voltage tolerance.
1N6309 through 1N6355 are 5 percent voltage tolerance.

$R_{\theta JL}$ = 200°C/W (maximum) at L = 0.375 inch (9.53 mm) (D0-35) non surface mount.

$R_{\theta JL}$ = 50°C/W (maximum) at L = 0 inch nonsurface mount.

$R_{\theta JEC}$ (end cap) = 50°C/W (maximum) surface mount.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Defense Supply Center Columbus, ATTN: DSCC-VAC, 3990 East Broad Street, Columbus, OH 43216-5000, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5961
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:52Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATION

DEPARTMENT OF DEFENSE

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

STANDARD

MILITARY

MIL-STD-750 - Test Methods for Semiconductor Devices.

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Defense Automated Printing Service, Building 4D (DPM-DODSSP), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated specifications or specification sheets), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Qualification. Devices furnished under this specification shall be products that are authorized by the qualifying activity for listing on the applicable qualified manufacturer's list before contract award (see 4.2 and 6.3).

3.2 Associated specification. The individual item requirements shall be in accordance with MIL-PRF-19500 and as specified herein.

3.3 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500 and as follows.

T_{EC} .....Temperature of endcap.

C .....2 percent voltage tolerance.

D .....1 percent voltage tolerance.


EC .....End cap.

US .....Unleaded square endcap.

3.4 Interface requirements and physical dimensions. The interface requirements and physical dimensions shall be as specified in MIL-PRF-19500 and on figures 1 (DO - 35) and figure 2 (surface mount) herein.

3.4.1 Lead finish. Lead finish shall be solderable as defined in MIL-PRF-19500, MIL-STD-750, and herein. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:52Z
Check the source to verify that this is the current version before use.

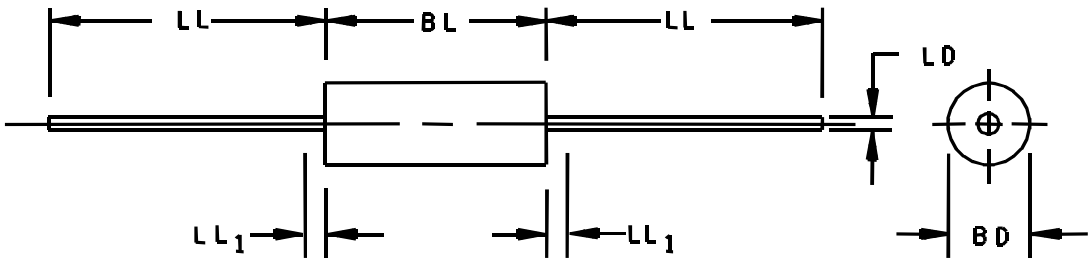


Ltr	Dimensions				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
BD	0.060	0.090	1.52	2.29	
BL	0.120	0.200	3.05	5.08	
LD	0.018	0.022	0.46	0.56	
LL	1.000	1.500	25.40	38.10	
LL_1		0.050		1.27	3

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Lead diameter not controlled in this zone to allow for flash, Lead finish build-up and minor irregularities other than slugs.

FIGURE 1. Physical dimensions (DO-35).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:52Z
Check the source to verify that this is the current version before use.

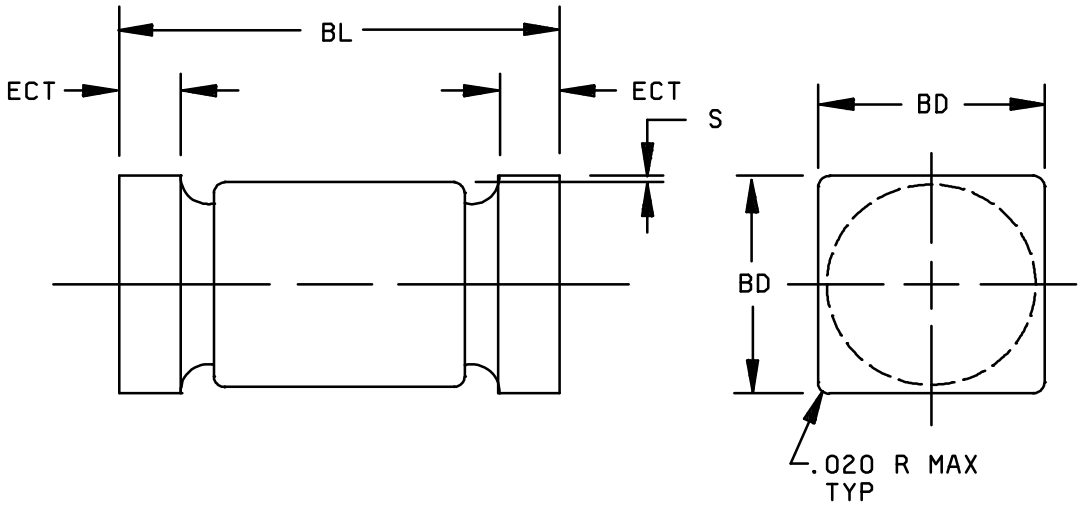

Symbol	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
BD	0.070	0.096	1.78	2.16
ECT	0.019	0.028	0.48	0.71
BL	0.165	0.195	4.19	4.95
S	0.003 min		0.08 min	

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. In accordance with ANSI Y14.5M, diameters are equivalent to ϕx symbology.

FIGURE 2. Physical dimensions surface mount device, "US".

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:52Z
Check the source to verify that this is the current version before use.

3.4.2 Diode construction. All devices shall be metallurgically bonded, thermally matched, non-cavity, double plug construction in accordance with MIL-PRF-19500, and 3.4.2.1 and 3.4.2.2 herein.

3.4.2.1 Metalurgical bond for diodes with V_Z greater than 6.8 V dc. Category I bonds as defined in accordance with MIL-PRF-19500 shall be utilized.

3.4.2.2 Metalurgical bond for diodes with V_Z less than or equal to 6.8 V dc. Category I or category III bonds as defined in accordance with MIL-PRF-19500 shall be utilized.

3.4.3 Marking. Marking shall be in accordance with MIL-PRF-19500.

3.4.3.1 Marking of US version devices. Marking of US devices shall be in accordance with MIL-PRF-19500.

3.4.3.2 Polarity. The polarity shall be indicated with a contrasting color band to denote the cathode end. Alternately, for surface mount (US) devices, a minimum of three evenly spaced contrasting color dots around the periphery of the cathode end may be used. No color coding will be permitted.

3.5 Selection of tight tolerance devices. The C and D suffix devices shall be selected from JAN, JANTX, JANTXV, JANJ and JANS devices which have successfully completed all applicable screening, and groups A, B, and C testing as 5 percent tolerance devices. All sublots of C and D suffix devices shall pass group A, subgroup 2, at tightened tolerances. Tighter tolerances for mounting clip temperature shall be maintained for reference purposes to establish correlation. For C and D tolerance levels, T_L = 25, +1, -3° C at 0.375” from body or equivalent.

3.6 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, and table I herein.

3.7 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table I herein.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3)

c. Conformance inspection (see 4.4).

4.1.1 Sampling and inspection. Sampling and inspection shall be in accordance with MIL-PRF-19500, and as specified herein except, lot accumulation shall be 3-months in lieu of 6-weeks.

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500.

4.2.1 Group E inspection. Group E inspection shall be conducted in accordance with MIL-PRF-19500 and herein.

4.2.3 JANJ qualification. For JANJ level, 3.3.1 through 3.3.1.3 of MIL-PRF-19500 shall apply, except as modified herein. Supplier imposed requirements as well as alternate screens, procedures, and/or controls shall be documented in the QM plan and must be submitted to the Qualifying Activity for approval. When alternate screens procedures, and/or process controls are used in lieu of the JANJ screens herein equivalency shall be proven and documented in the QM Plan. Radiation characterization may be submitted in the QM plan at the option of the manufacturer, however, paragraph 3.3.1.1 of MIL-PRF-19500 is not required. Lot formation and Conformance Inspection requirements for JANJ shall be those used for JANTXV devices as a minimum. Die lot controls and rework requirements shall be in accordance with MIL-PRF-19500 paragraphs 3.13 and D.3.13.2.1 for JANS level.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:52Z
Check the source to verify that this is the current version before use.

4.3 Screening (JANTX, JANTXV, JANJ, and JANS levels only). Screening shall be in accordance with table IV of MIL-PRF-19500, and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen (see table IV of MIL-PRF-19500)	Measurement	
	JANS Level	JANJ Level
1a 1b	Required Required	Not Required Required
2	Not Required	Not Required
3a 3b 3c 1/	Required Not Applicable Required (see 4.5.7)	Required Not Applicable Required (see 4.5.7)
4, 5, 6 and 7a	Not Applicable	Not Applicable
7b	Required	Required
8	Required	Not Required
9	Required on Nom V_Z > 10 V I_{R1} V_{Z2} and Z_Z	Required on Nom V_Z > 10 V I_{R1} V_{Z2} and Z_Z
10	Required on Nom V_Z > 10 V	Required on Nom V_Z > 10 V
11	Required I_{R1} V_{Z2}; $\Delta I_{R1} \leq$ 100 percent of value or 50 nA dc, whichever is greater. $\Delta V_{Z2} \leq \pm$ 1 percent of initial value.	Required I_{R1} V_{Z2}; $\Delta I_{R1} \leq$ 100 percent of value or 50 nA dc, whichever is greater. $\Delta V_{Z2} \leq \pm$ 1 percent of initial value.
12	Required see 4.3.1	Required see 4.3.1, t = 240 hrs (min)
13 2/	Required Subgroup 2 and 3 of table I herein; $\Delta I_{R1} \leq$ 100 percent of initial reading or 50 nA whichever is greater; $\Delta V_{Z2} \leq$ 1 percent of initial reading.	Required Subgroup 2 and 3 of table I herein; $\Delta I_{R1} \leq$ 100 percent of initial reading or 50 nA whichever is greater; $\Delta V_{Z2} \leq$ 1 percent of initial reading.
14a 14b	Not Applicable Optional	Not Applicable Optional
15	Required	Not Required
16	Required	Required

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:52Z
Check the source to verify that this is the current version before use.

4.3 Screening (JANTX, JANTXV, JANJ, and JANS levels only) Continued.

Screen (see table IV of MIL-PRF-19500)	Measurement
	JANTXV and JANTX Level
1a 1b	Not Required Required (JANTXV only)
2	Not Required
3a 3b 3c 1/	Required Not Applicable Required (see 4.5.7)
4, 5, 6 and 7a	Not Applicable
7b	Required
8	Not Required
9	Not Applicable
10	Not Applicable
11	Required I_{R1} and V_{Z2}
12	See 4.3.1
13 2/	Subgroup 2 of table I herein; $\Delta I_{R1} \leq$ 100 percent of initial reading or 50 nA whichever is greater; $\Delta V_{Z2} \leq$ 1 percent of initial reading.
14a 14b	Not Applicable Optional
15, 16 and 17	Not Required

1/ Thermal impedance may be performed any time after sealing provided temperature cycling is performed in accordance with MIL-PRF-19500, screen 3 prior to this thermal test.

2/ $Z_{\theta JX}$ need not be performed in screen 13, if performed prior to screen 13.

4.3.1 Power burn-in conditions. Power burn-in conditions are as follows:

I_Z = shall be equal to 100 percent of column 7 of table II minimum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:52Z
Check the source to verify that this is the current version before use.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500, and as specified herein.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with table V of MIL-PRF-19500. End-point electrical measurements shall be in accordance with subgroup 2, table I herein. The following test conditions shall be used for $Z_{\theta JX}$, group A inspection: $Z_{\theta JX} \leq 15°C/W$.

I_M .....1 mA to 10 mA
I_H .....2 A minimum
t_H .....10 ms
t_{MD} .....70 µs maximum

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table VIa (JANS) and table VIb (JAN, JANTX, JANTXV and JANJ) of MIL-PRF-19500, and herein. Electrical measurements (end-points) and delta requirements shall be in accordance with subgroup 2, table I and 4.5.9 herein.

4.4.2.1 Group B inspection, table VIa (JANS) of MIL-PRF-19500.

Subgroup	Method	Condition
B3	4066	T_A = Room ambient as defined in the general requirements of MIL-STD-750, paragraph 4.5. I_{ZSM} = column 9 of table II herein (shall be performed on each sublot).
B3	1071	Condition E.
B4	1037	I_Z = shall be equal to 100 percent of column 7 of table II minimum 2,000 cycles.
B5	1027	I_{ZM} = column 7 of table II for 96 hours. T_A = +125°C or adjusted as required, to give an average lot T_J = +275°C. (frequency of test is per wafer lot). Mounting conditions in accordance with figure 4 herein. or I_Z = 50 percent of column 7 of table II for 1,000 hours. Adjust T_A or I_Z to achieve T_J = 175°C (min). (frequency is per inspection lot). Leaded samples from the same lot may be used in lieu of the U suffix sample life test.

4.4.2.2 Group B inspection, table VIb (JAN, JANTX, JANTXV and JANJ) of MIL-PRF-19500.

Subgroup	Method	Condition
B2	1071	Condition E.
B3	1027	I_Z = shall be equal to 50 percent of column 7 of table II minimum. Adjust T_A or I_Z to achieve T_J = 150°C minimum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:52Z
Check the source to verify that this is the current version before use.

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table VII of MIL-PRF-19500 and as follows. Electrical measurements (end-points) shall be in accordance with subgroup 2, table I herein.

Subgroup	Method	Condition
C2	2036	Condition A; 4 pounds; t = 15 seconds ± 3 s (not applicable to "US" suffix devices).
		Condition E, 8 ounces, t = 15 seconds ± 3 s (not applicable to "US" suffix devices).
C3	1071	Condition E.
C6	1026	I_Z = shall be equal to 50 percent of column 7 of table II minimum Adjust T_A or I_Z to achieve T_J = 150°C minimum.
C7		Not Applicable
C8	4071	(For JAN, JANJ, JANTX and JANTXV only); I_Z = column 4 of table II; T_1 = +25°C ± 5°C, T_2 = +125°C (see 4.5.5); αV_Z = Col. 15 of table III; sampling plan = 22 devices, c = 0.

4.4.4 Group E inspection. Group E inspection shall be conducted in accordance with the conditions specified for subgroup testing in table IX of MIL-PRF-19500 and as follows. Electrical measurements (end-points) shall be in accordance with subgroup 2, table I herein.

Subgroup	Method	Condition	Sampling Plan
E1	1056	20 cycles of thermal shock from liquid N_2 (-195°C) to +150°C fluoro bath. The diode under test (DUT) shall be stabilized at the temperature extremes for 20 seconds (minimum); transfer time ≤ 5 seconds continuously monitor during the last five cycles V_f at 500 mA pk (with an open-circuit voltage clamped at 3 V maximum) on Tektronix 576 scope or equivalent throughout temperature excursions and at temperature extremes for any discontinuity, instability, hysteresis or other anomaly shall cause for rejection of the device. 20 cycles.	22 devices c = 0
E2	1037	I_Z = shall be equal to 100 percent of column 7 of table II minimum 10,000 cycles.	22 devices c = 0
E3		N/A	
E4	3101 or 4081	See 4.5.8	45 devices c = 0
E5, E6 and E7		N/A	

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows:

4.5.1 Pulse measurements. Conditions for pulse measurement shall be as specified in section 4 of MIL-STD-750.

4.5.2 Surge current (I_{ZSM}). The peak currents shown in column 9 of table II shall be applied in the reverse direction and these shall be superimposed on the current (I_Z = column 4); a total of 5 surges at 1 minute intervals. Each individual surge shall be 0.5 -square-wave-pulse of 8.3 ms duration or an equivalent sine wave with the same effective rms current.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:52Z
Check the source to verify that this is the current version before use.

4.5.3 Regulator voltage measurements. The test current shall be applied until thermal equilibrium is attained (90 ± 2 seconds minimum) prior to reading the breakdown voltage. For this test, the diode shall be suspended by its leads with mounting clips whose inside edge is located at 0.375 inch (9.53 mm) from the body and the mounting clips shall be maintained at a temperature of +25°C +8°C, -2°C. US suffix devices shall be mounted at the end caps. This measurement may be performed after a shorter time following application of the test current than that which provides thermal equilibrium if correlation to stabilized readings can be established to the satisfaction of the qualifying activity.

4.5.4 Voltage regulation. For values of V_{Z2} (nominal) from 6.8 V dc to 200 V dc, current at 10 percent of I_{ZM} (column 7) shall be maintained for a period of 90 ± 5 seconds, and then V_Z shall be recorded. The current shall then be increased to 50 percent of I_{ZM} (column 7) and maintained for a period of 90± 5 seconds, and then V_Z shall be recorded. The voltage change shall not exceed the applicable limits as shown in table II, column 8. During this test, the diode shall be suspended by its leads with mounting clips whose inside edge is located between 0.375 inch (9.53 mm) and 0.500 inch (12.70 mm) from the device body and the mounting clips shall be maintained at a temperature of + 25°C + 8°C, -2°C. US suffix devices shall be mounted by the end caps. For values of V_{Z2} (nominal) from 2.4 V dc to 6.2 V dc, the lower test current shall be 2 mA dc and the higher current shall be 20 mA dc.

4.5.5 Temperature coefficient of regulator voltage (αV_Z). The device shall be temperature stabilized with current applied prior to reading regulator voltage at the specified ambient temperature.

4.5.6 Noise density. Noise density shall be measured using a noise density test circuit as shown in figure 3. Place a low-noise resistor, equivalent in value to the dynamic impedance of the diode under test, in the test clips and adjust test current (I_{ZT}) to 250 µA dc and measure output-noise voltage. Remove the resistor, insert diode under test in test clips, readjust test current to 250 µA dc and measure output-noise voltage again. To obtain noise density (N_D), subtract rms resistor output-noise voltage from rms diode output-noise voltage and divide by product of overall system gain and square root of bandwidth. All measurements shall be made at +25°C.

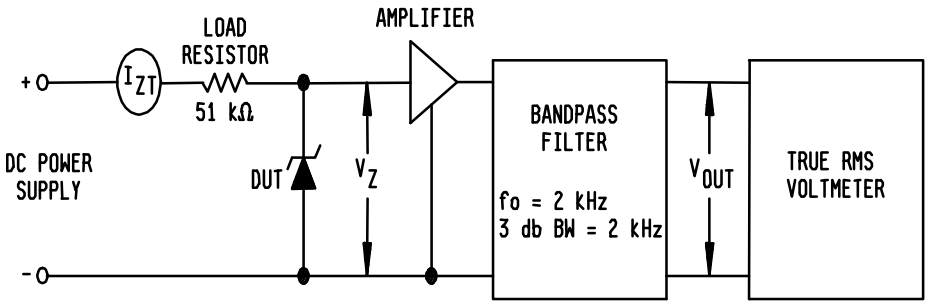

NOTES:
1. Input voltage and lead resistance should be high so that zener can be driven from a constant current source.
2. Input impedance of band pass filter should be high compared with the dynamic impedance of the diode under test.
3. Filter bandwidth characteristics shall be as follows:

f_o = 2,000 Hz
Shape factor, -40 db to -3 db, approximately 2.
Passband at the -3 db is 1,000 Hz ± 50 Hz to 3,000 Hz ± 150 Hz.
Passband at the -40 db is 500 Hz ± 50 Hz to 6,000 Hz ± 600 Hz.

FIGURE 3. Circuit for determination of noise density.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:52Z
Check the source to verify that this is the current version before use.

4.5.7 Thermal impedance ($Z_{\theta JX}$ measurements). The thermal impedance($Z_{\theta JX}$) measurements shall be performed in accordance with MIL-STD-750, method 3101. The maximum limit for $Z_{\theta JX}$ in screening (table IV of MIL-PRF-19500) shall be developed by the supplier using statistical techniques and shall not exceed the group A, subgroup 2 limit.

4.5.8 Thermal resistance. Thermal resistance measurement shall be in accordance with MIL-STD-750, method 3101 or 4081. Read and record data in accordance with group E herein and shall be included in the qualification report. Forced moving air or draft shall not be permitted across the device during test. The maximum limit for $R_{\theta JL}$ under these test conditions shall be $R_{\theta JL}$ (max) = 200°C/W, for surface mount $R_{\theta JEC}$ = 50°C/W. The following conditions shall apply:


a. I_M ..... 1 mA to 10 mA.

b. I_H ..... 200 mA to 400 mA.

c. t_H ..... 25 seconds minimum.

d. t_{MD} ..... 70 µs maximum.

LS = lead spacing = 0.375 inch for non surface mount devices and 0 inch for surface mount devices as defined on figure 4 below:

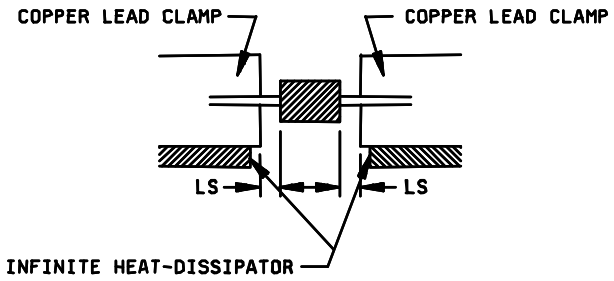

NOTES:

1. The lead temperature, T_L shall be measured on a lead at a point adjacent to the heat sink clamp (reference point).
2. The clamping force on each lead shall be 4 ± 0.5 pounds.
3. The Device under test (DUT) shall be shielded from drafts.
4. The heat sink clamps shall be placed equal distance from each end of the diode body.
5. For surface mount devices, the end caps shall be clamped to the heat sinks.

FIGURE 4. Mounting conditions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:52Z
Check the source to verify that this is the current version before use.

4.5.9 Delta requirements. Delta requirements shall be as specified below: 2/ 3/

Step	Inspection	MIL-STD-750		Symbol	Limit 1/	Unit
		Method	Conditions			
1.	Regulator voltage	4022	I_Z = column 4 of table II and (see 4.5.3).	ΔV_{Z2}	± 1 percent of initial value.	
2.	Reverse current	4016	DC method, V_R = column 10 of table II.	ΔI_{R1}	100 percent of initial value or 50 nA dc, whichever is greater.	
3.	Small-signal breakdown impedance	4051	I_Z = column 4 of table II, I_{SIG} = 10 percent of I_Z	ΔZ_Z	± 35 percent of initial value or 2 Ω, whichever is greater.	

1/ Column references are to table II herein.
2/ The delta measurements for table VIa (JANS) of MIL-PRF-19500 are as follows:
a. Subgroup 4, steps 1, 2 and 3.
b. Subgroup 5, steps 1, 2 and 3.
3/ The delta measurements for table VIb (JAN, JANTX, JANTXV and JANJ) of MIL-PRF-19500 are as follows:
a. Subgroup 3, step 1.

.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:52Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limits 2/		Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical examination	2071					
Subgroup 2						
Thermal impedance	3101	See 4.4.1	$Z_{\theta JX}$		15	°C/W
Forward voltage	4011	I_F = 1 A dc, pulsed (see 4.5.1)	V_F		1.4	V dc
Reverse current leakage	4016	DC method; V_R = column 10 of table II	I_{R1}		Column 11	µA dc
Regulator voltage (see 4.5.3)	4022	I_{Z1} = 250 µA dc	V_{Z1}	Column 3		V dc
Regulator voltage (see 4.5.3)	4022	I_{Z2} = column 4 of table II	V_{Z2}	Column 2 -5, -2, -1 percent	Column 2 +5, +2, 1 percent	V dc
Subgroup 3						
High-temperature operation		T_A = +150°C				
Reverse current	4016	DC method; V_R = column 10 of table II	I_{R2}		Column 12	µA dc
Subgroup 4						
Small-signal reverse breakdown impedance	4051	I_Z = column 4 of table II, I_{SIG} = 10 percent of I_{Z2}	Z_Z		Column 5	Ohms
Knee impedance	4051	I_{ZK} = 250 µA dc, I_{SIG} = 25 µA rms	Z_{ZK}		Column 6	ohms
Noise density (see 4.5.6)		I_{Z1} = 250 µA dc	N_D		Column 14	$\mu V/\sqrt{Hz}$
Subgroup 5						
Not applicable						
Subgroup 6						
Surge current	4066	T_A = +25°C ± 5°C (see 4.5.2); I_{ZSM} = column 9 of table II herein (shall be performed on each sublot).				
Electrical measurements		See table I, subgroup 2 herein.				

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:52Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limits 2/		Unit
	Method	Conditions		Min	Max	
Subgroup 7						
Not applicable						
Subgroup 8		Sampling plan 22 devices, c = 0				
Voltage regulation		See 4.5.4	$V_{Z(reg)}$		Column 8	V dc
Temperature coefficient of regulator voltage	4071	JANS level, I_Z = column 4 of table II, T_1 = +25°C ± 5°C; T_2 = +125°C (see 4.5.5)	αV_Z		Column 15	%/°C

1/ For sampling plan, see MIL-PRF-19500.
2/ Column references are to table II herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:52Z
Check the source to verify that this is the current version before use.

TABLE II. Characteristics and ratings.

Col 1	Col 2	Col 3	Col 4	Col 5	Col 6	Col 7	Col 8	Col 9	Col 10	Col 11	Col 12	Col 13	Col 14
Type	V_{Z2} nom at I_{Z2} 1/	V_{Z1} min at I_{Z1} 250 µA	I_{Z2} test current	Z_Z at I_{Z2}	Z_{ZK} at 250 µA	I_{ZM}	$V_{Z(reg)}$	I_{ZSM} surge	V_R	I_{R1} at +25°C	I_{R2} at T_A = +150°C	N_D at 250 µA 1-3 kHz	α_{vz}
	V	V	mA	Ω	Ω	mA	V	A	V	µA	µA	µv√Hz	%/°C
1N6309	2.4	1.1	20	30	1,200	177	1.50	2.50	1.0	100	200	1	-.085
1N6310	2.7	1.2	20	30	1,300	157	1.50	2.20	1.0	60	150	1	-.080
1N6311	3.0	1.3	20	29	1,400	141	1.50	2.00	1.0	30	100	1	-.075
1N6312	3.3	1.5	20	24	1,400	128	1.60	1.80	1.0	5	20	1	-.070
1N6313	3.6	1.8	20	22	1,400	117	1.60	1.65	1.0	3	12	1	-.065
1N6314	3.9	2.0	20	20	1,700	108	1.60	1.50	1.0	2	12	1	-.060
1N6315	4.3	2.4	20	18	1,700	99	0.90	1.40	1.0	2	12	1	-.045 +.020
1N6316	4.7	2.8	20	16	1,500	90	0.50	1.27	1.5	5	12	1	-.028 +.032
1N6317	5.1	3.3	20	14	1,300	83	0.40	1.17	2.0	5	12	1	-.020 +.035
1N6318	5.6	4.3	20	8	1,200	76	0.40	1.10	2.5	5	10	2	+.050
1N6319	6.2	5.2	20	3	800	68	0.30	0.97	3.5	5	10	5	+.060
1N6320	6.8	6.0	20	3	400	63	0.35	1.23	4.0	2	50	5	+.062
1N6321	7.5	6.6	20	4	400	57	0.40	1.16	5.0	2	30	5	+.068
1N6322	8.2	7.5	20	5	400	52	0.40	1.07	6.0	1	10	20	+.075
1N6323	9.1	8.4	20	6	500	47	0.50	0.97	7.0	1.00	10	40	+.076
1N6324	10.0	9.1	20	6	500	43	0.50	0.89	8.0	1.00	10	80	+.079
1N6325	11.0	10.0	20	7	550	39	0.50	.083	8.5	1.00	10	100	+.082
1N6326	12.0	11.0	20	7	550	35	0.55	0.77	9.0	1.00	10	100	+.083
1N6327	13.0	11.9	9.5	8	550	33	0.55	0.71	9.9	0.05	10	100	+.079
1N6328	15.0	13.8	8.5	10	600	28	0.70	0.62	11.0	0.05	10	100	+.082
1N6329	16.0	14.7	7.8	12	600	27	0.75	0.58	12.0	0.05	10	100	+.083
1N6330	18.0	16.6	7.0	14	600	24	0.85	0.52	14.0	0.05	10	100	+.085
1N6331	20.0	18.5	6.2	18	500	21	0.95	0.47	15.0	0.05	10	100	+.086
1N6332	22.0	20.4	5.6	20	500	19	1.05	0.43	17.0	0.05	10	100	+.087
1N6333	24.0	22.3	5.2	24	500	18	1.15	0.39	18.0	0.05	10	100	+.088
1N6334	27.0	25.2	4.6	27	500	16	1.30	0.35	21.0	0.05	10	100	+.090
1N6335	30.0	28.0	4.2	32	500	14	1.45	0.31	23.0	0.05	10	100	+.091
1N6336	33.0	30.9	3.8	40	600	13	1.60	0.28	25.0	0.05	10	100	+.092
1N6337	36.0	33.7	3.4	50	600	12.0	1.75	0.260	27.0	0.05	10	100	+.093
1N6338	39.0	36.6	3.2	55	700	11.0	1.90	0.240	30	0.05	10	100	+.094
1N6339	43.0	40.4	3.0	65	800	9.9	2.10	0.220	33	0.05	10	80	+.095
1N6340	47.0	44.2	2.7	75	900	9.0	2.25	0.200	36	0.05	10	80	+.095

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:52Z
Check the source to verify that this is the current version before use.

TABLE II. Characteristics and ratings - Continued.

Col 1	Col 2	Col 3	Col 4	Col 5	Col 6	Col 7	Col 8	Col 9	Col 10	Col 11	Col 12	Col 13	Col 14
Type	V_{Z2} nom at I_{Z2} 1/	V_{Z1} min at I_{Z1} 250 µA	I_{Z2} test current	Z_Z at I_{Z2}	Z_{ZK} at 250 µA	I_{ZM}	$V_{Z(reg)}$	I_{ZSM} Surge	V_R	I_{R1} at +25°C	I_{R2} at T_A = +150°C	N_D at 250 µA 1-3 kHz	α_{vz}
	V	V	mA	Ω	Ω	mA	V	A	V	µA	µA	$\mu v\sqrt{Hz}$	%/°C
1N6341	51.0	48.0	2.5	85	1,000	8.3	2.50	0.180	39	0.05	10	80	+.096
1N6342	56.0	52.7	2.2	100	1,200	7.6	2.70	0.170	43	0.05	10	80	+.097
1N6343	62.0	58.4	2.0	125	1,300	6.8	2.90	0.150	47	0.05	10	80	+.097
1N6344	68.0	64.1	1.8	155	1,500	6.3	3.20	0.130	52	0.05	10	80	+.098
1N6345	75.0	70.8	1.7	180	1,600	5.7	3.40	0.125	56	0.05	10	80	+.098
1N6346	82.0	77.4	1.5	220	1,800	5.2	3.80	0.115	62	0.05	10	80	+.099
1N6347	91.0	86.0	1.4	270	2,100	4.7	4.20	0.100	69	0.05	10	80	+.099
1N6348	100.0	94.5	1.3	340	2,400	4.3	4.40	0.095	76	0.05	10	80	+.110
1N6349	110.0	104.0	1.1	500	2,800	3.9	4.80	0.085	84	0.05	10	80	+.110
1N6350	120.0	113.0	1.0	600	3,200	3.5	5.20	0.080	91	0.05	10	80	+.110
1N6351	130.0	122	0.95	850	4,100	3.3	5.60	0.070	99	0.05	10	80	+.110
1N6352	150.0	141	0.85	1,000	4,500	2.8	7.00	0.065	114	0.05	10	80	+.110
1N6353	160.0	151	0.80	1,200	5,000	2.7	7.50	0.060	122	0.05	10	80	+.110
1N6354	180.0	170	0.68	1,500	5,600	2.4	9.00	0.050	137	0.05	10	80	+.110
1N6355	200.0	189	0.65	1,800	6,500	2.1	12.00	0.045	152	0.05	10	80	+.110

1/ 1N6309D through 1N6355D are 1 percent voltage tolerance.
1N6309C through 1N6355C are 2 percent voltage tolerance.
1N6309 through 1N6355 are 5 percent voltage tolerance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:52Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. Packaging shall prevent mechanical damage of the devices during shipping and handling and shall not be detrimental to the device. When actual packaging of material is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Points' packaging activity within the Military Department or Defense Agency, or within the Military Departments' System Command. Packaging data retrieval is available from the managing Military Departments' or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Notes. The notes specified in MIL-PRF-19500 are applicable to this specification.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Issue of DODISS to be cited in the solicitation (see 2.2.1).

b. The lead finish as specified (see 3.4.1).

c. Type designation and quality assurance level.

d. Packaging requirements (see 5.1).

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturer's List QML No.19500 whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or purchase orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from Defense Supply Center Columbus, ATTN: DSCC-VQE, 3990 East Broad Street, Columbus, OH 43216-5000.

6.4 Substitution information.

6.4.1 Substitutability of 2 percent and 1 percent tolerance devices. Devices of tighter tolerance are a direct one way substitute for the looser tolerance devices (example: JANTX1N6309D-1 substitutes for JANTX1N6309-1).

6.5 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 11
NASA – NA
DLA - CC

Review activities:
Air Force - 19
Navy - TD

Preparing activity:
DLA - CC

(Project 5961-2078)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:52Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-PRF-19500/533E	2. DOCUMENT DATE 990920

3. **DOCUMENT TITLE**
SEMICONDUCTOR DEVICE, DIODE, SILICON, ZENER, VOLTAGE REGULATOR, SOLID GLASS NONCAVITY CONSTRUCTION, TYPES 1N6309 THROUGH 1N6355; 1N6309US THROUGH 1N6336US; PLUS C AND D TOLERANCE SUFFIX, JAN, JANTX, JANTXV, JANJ AND JANS

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) COMMERCIAL DSN FAX EMAIL	7. DATE SUBMITTED

8. PREPARING ACTIVITY

a. Point of Contact Alan Barone	b. TELEPHONE Commercial 614-692-0510 DSN 850-0510 FAX 614-692-6939 EMAIL alan_barone@dscc.dla.mil
c. ADDRESS Defense Supply Center Columbus, ATTN: DSCC-VAC, 3990 East Broad Street, Columbus, OH 43216-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Standardization Program Office (DLSC-LM) 8725 John J. Kingman, Suite 2533, Fort Belvoir, VA 22060-6221 Telephone (703) 767-6888 DSN 427-6888

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:52Z
Check the source to verify that this is the current version before use.