INCH-POUND
MIL-PRF-8565/19
w/AMENDMENT 2
13 December 2012
SUPERSEDING
MIL-PRF-8565/19
w/AMENDMENT 1
21 September 2011

PERFORMANCE SPECIFICATION SHEET

BATTERY, STORAGE, AIRCRAFT, MEDIUM RATE, MAINTENANCE-FREE, 24-VOLT, 15-AMPERE-HOUR

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-8565.

REQUIREMENTS:

1. Part or identifying number. The part or identifying number (PIN) of the battery covered by this specification sheet shall be D8565/19-1.

2. Dimensions and weight. The dimensions of the battery shall be as shown on figure 1. The weight of the battery shall be not greater than 50.0 pounds (22.7 kilograms) or less than 44.5 pounds (20.2 kilograms) (see 3.8.3 and 4.5.3 of MIL-PRF-8565). In addition, the weight of any production battery shall vary by not greater than ±2.2 pounds (1.0 kilogram) from the average weight of the three approved qualification sample batteries, but shall not exceed the maximum 50.0 pound limit nor be less than the minimum 44.5 pound limit.

3. Capacity. The rated capacity of the battery shall be not less than 15.0 ampere-hours (Ah). See 3.8.6 as modified herein.

4. Recharge characteristics. The battery, after being discharged at the 1C-rate to 20.0 volts, shall successfully recharge to its full capacity in 2.0 ±0.1 hours when constant potential charged at 28.25 ±0.25 volts with a charge current limit of 50 ±1 amperes at 24º C (75º F) and 49º C (120º F) (see 4.4.1 of MIL-PRF-8565, 4.5.10.2 and 6.11.7.1 of MIL-PRF-8565/19).

5. Design characteristics. The battery shall use a starved-electrolyte, sealed electrochemical technology with pressure-regulated, self-resealing safety valve(s). Electrolyte leakage or spillage from the battery shall not occur during aerobatic maneuvers of the aircraft.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:35Z
Check the source to verify that this is the current version before use.

6. Service life. The battery's service life (useful life) in the aircraft shall be not less than 3 years. The battery shall require no scheduled maintenance during the 3 years (see 3.8.9, 4.5.10, and 6.11.7.3 of MIL-PRF-8565/19).

7. Qualification inspection and conformance inspection. Table I lists the required inspections.

8. MIL-PRF-8565 variance. The battery shall comply with MIL-PRF-8565 except as follows:

8.1 The following paragraphs and figures are not applicable:

3.8.5 Vent tubes.
3.8.7 Constant voltage discharge.
3.8.8 Strength of receptacle.
4.5.5 Strength of vent tubes test.
4.5.8 Constant voltage discharge.
4.5.9 Strength of receptacle test.
4.5.11 Capacity discharge at 49º C (120º F).
4.5.12 Charge and discharge test at low temperature.
4.5.30 Wormgear retaining pin hardness.
Figure 3. Battery mounting.

8.2 Modify the following paragraphs and table to delete "18.0 volts" and insert "20.0 volts".

4.5.6 Electrical test preparation, first sentence.
4.5.7 Capacity discharge, second sentence.
4.5.17 Temperature rise and float test, step 4.5.17.e, second sentence.
4.5.22 Ground storage test, step 4.5.22.d and 4.5.22.i.
4.5.23 Physical integrity at high temperature test. Steps 4.5.23.b and 4.5.23.k.
Table III. Capacity performance requirements, requirement number (1).

8.3 Modify the following paragraphs:

3.5.4 Venting. Delete paragraph and replace with: "Each battery shall contain a vent port on the cover as shown on figure 1 of MIL-PRF-8565/19. This vent shall allow escape of any hydrogen gas generated from the cells."

3.5.5 Receptacles. Delete the second sentence and replace with the following: "The battery's electrical interface to the aircraft shall be a receptacle conforming to M83723/71W2028N. It shall be positioned and electrically connected as shown on figures 1 and 2, respectively, of MIL-PRF-8565/19."

3.5.10 Heaters. In 3.5.10.b, delete the text and insert the following: "Heater current shall be not greater than 3.0 amperes. The rated current of each heater control device shall be compatible with the heater current."

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:35Z
Check the source to verify that this is the current version before use.

8.4 Add the following paragraphs:

"3.5.11 Mounting holes. The mounting surfaces that surround each of the mounting holes shall be free of coating as specified on figure 1 of MIL-PRF-8565/19. This shall apply to the top and bottom of the mounting surface."

"3.5.12 Resistors. The battery shall contain two resistors (R1 and R2) connected in accordance with the schematic diagram shown on figure 2 of MIL-PRF-8565/19. Resistor R1 shall have a resistance of 3320 ohms ±1%, rating of 1/8 watt at 70° C (158° F), and conform to MIL-R-10509/7, Style RN55. Resistor R2 shall have a resistance of 453 ohms ±1%, rating of 1/8 watt at 70° C (158° F), and conform to MIL-R-10509/7, Style RN55."

8.5 Modify the following paragraph:

3.6.5 Marking for batteries with heaters. At the end of the third sentence, insert: "(see figure 2 of MIL-PRF-8565/19)."

8.6 Add the following paragraph:

"3.6.7 Label for marking installation and removal date. Label #4 shall be located as shown on figure 1 of MIL-PRF-8565/19 and shall contain the following text:

First placed in service: _____**_____

Remove from service: _____**_____

** Leave blank, surface prepared to allow for printing.

"Lettering height shall be at least 0.25 inch and marking shall be white or black print."

8.7 Modify the following paragraphs:

3.8.6 Capacity and electrical performance. Delete the entire text and insert: "The rated capacity of the battery shall be not less than 15 ampere-hours at a discharge rate of 15 amperes to a 20-volt endpoint at a temperature of 24º C (75º F). See requirement 3 of MIL-PRF-8565/19."

3.8.9 Cycling. Delete the text.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:35Z
Check the source to verify that this is the current version before use.

8.8 Add the following paragraphs:

"3.8.9.1 Qualification inspection. The battery terminal discharge voltage shall be not less than 20.0 volts when the battery is tested over the temperature range of -29° C (-20° F) to 63° C (145° F), and shall be not less than 19.0 volts when the battery is tested at a temperature of -40° C (-40° F), when performing the discharge-charge cycles as specified in 4.5.10.1 of MIL-PRF-8565/19. The battery shall also comply with the service life requirement specified in requirement 6 of MIL-PRF-8565/19."

"3.8.9.2 Conformance inspection. The battery terminal discharge voltage shall be not less than 20.0 volts when performing each of the 100 discharge-charge-rest cycles as specified in 4.5.10.2 of MIL-PRF-8565/19. The battery shall also comply with requirement 4 of MIL-PRF-8565/19 and with the service life requirement specified in requirement 6 of MIL-PRF-8565/19."

8.9 Modify the following paragraphs:

3.8.16 Output performance. Delete the text and insert: "The battery shall maintain a terminal voltage of not less than 20.0 volts at 24° C (75° F) and 63° C (145° F) and not less than 19.0 volts at -40° C (-40° F) when tested in accordance with 4.5.28.1 of MIL-PRF-8565/19."

3.8.17 Cold and hot temperature charge. Delete the title and first sentence and insert: "Ultra-cold temperature charge. The battery capacity shall be not less than 13.5 ampere-hours after being tested in accordance with 4.5.29 of MIL-PRF-8565/19."

8.10 Add the following paragraphs:

"3.8.18 Vibration. The battery shall maintain a voltage of not less than 20.0 volts during each of the discharges of steps 4.5.19.c, 4.5.19.d, and 4.5.19.h of MIL-PRF-8565/19. The battery shall also meet the requirements specified in 3.7 and 3.8.10 of MIL-PRF-8565 after being tested in accordance with 4.5.19 of MIL-PRF-8565/19."

"3.8.19 Hot-temperature charge. The battery shall perform as follows after being tested in accordance with 4.5.32 of MIL-PRF-8565/19."

"a. Sample 1 (stabilized at 49° C (120° F)): This sample shall provide not less than 15.0 ampere-hours of capacity after each of the discharges of steps 4.5.32.b and 4.5.32.f of MIL-PRF-8565/19. The terminal voltage of the battery shall be not less than 20.0 volts after being discharged in accordance with step 4.5.32.d of MIL-PRF-8565/19. The battery shall also meet the requirements of 3.7 of MIL-PRF-8565."

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:35Z
Check the source to verify that this is the current version before use.

"b. Sample 2 (stabilized at 68° C (154° F): This sample shall provide not less than 13.5 ampere-hours of capacity after each of the discharges of steps 4.5.32.b and 4.5.32.f of MIL-PRF-8565/19. The terminal voltage of the battery shall be not less than 20.0 volts after being discharged in accordance with step 4.5.32.d of MIL-PRF-8565/19. The battery shall also meet the requirements of 3.7 of MIL-PRF-8565."

8.11 Modify the following paragraphs:

4.4.2 Constant potential charging method. In the second sentence, delete "not less than 8 times the capacity rating of the battery being tested" and insert "50.0 ±1.0 amperes".

4.5.10 Cycling test. Delete the text and insert "The following test will demonstrate the battery's capability of being repeatedly discharged, charged and rested over a specific maintenance-free operational period and varying operational temperature environments. The battery shall be discharged-charged-open circuited (rested) in accordance with the following methods and table II of MIL-PRF-8565/19."

8.12 Add the following paragraphs and table:

"4.5.10.1 Qualification testing. This test consists of the following steps.

"a. Constant potential charge the battery in accordance with 4.4.2 of MIL-PRF-8565/19.

"b. First sequence (cycles 1 through 700).

"(1) Room temperature environment:

"(a) Stabilize the battery temperature at 23° C ±5° C (73° F ±9° F). Perform steps 4.5.10.1.b(1)(b) through 4.5.10.1.b(1)(c) of MIL-PRF-8565/19.

"(b) Discharge the battery at a rate of 30 amperes for 6.75 minutes. Examine the battery for the requirements of 3.8.9.1 of MIL-PRF-8565/19.

"(c) Immediately after completing step 4.5.10.1.b(1)(b), constant potential charge the battery at 28.75 ±0.25 volts for the remainder of the one hour.

"(d) Repeat above steps 4.5.10.1.b(l)(b) through 4.5.10.1.b(l)(c) for a total of 700 cycles.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:35Z
Check the source to verify that this is the current version before use.

"c. Second sequence (cycles 701 through 715).

"(1) Hot temperature environment:

"(a) Stabilize the battery temperature at 63° C +2° C/-0° C (145° F +4° F/-0° F), and discharge the battery in accordance with figure 3 of MIL-PRF-8565/19. Examine the battery for the requirements of 3.8.9.1 of MIL-PRF-8565/19.

"(b) Immediately after completing step 4.5.10.1.c(1)(a), constant potential charge the battery at 27.25 ±0.25 volts for 80 minutes.

"(c) Stabilize the battery temperature at 49° C +2° C/-0° C (120° F +4° F/-0° F) , and discharge the battery in accordance with figure 3 of MIL-PRF-8565/19. Examine the battery for the requirements of 3.8.9.1 of MIL-PRF-8565/19.

"(d) Immediately after completing step 4.5.10.1.c(1)(c), constant potential charge the battery at 27.25 ±0.25 volts for 80 minutes.

"(e) Repeat above steps 4.5.10.1.c(l)(c) through 4.5.10.1.c(l)(d) for a total of 14 cycles.

"d. Third sequence (cycles 716 through 731).

"(1) Cold temperature environment:

"(a) Stabilize the battery temperature at -29° C +0° C/-2° C (-20° F +0° F/-4° F), and discharge the battery in accordance with figure 3 of MIL-PRF-8565/19. Examine the battery for the requirements of 3.8.9.1 of MIL-PRF-8565/19.

"(b) Immediately after completing step 4.5.10.1.d(1)(a), constant potential charge the battery at 31.00 ±0.25 volts for 80 minutes.

"(c) Repeat above steps 4.5.10.1d(l)(a) through 4.5.10.1.d(l)(b) for a total of 14 cycles.

"(d) Stabilize the battery temperature at -40° C +0° C/-2° C (-40° F +0° F/-4° F), and discharge the battery in accordance with figure 3 of MIL-PRF-8565/19. Examine the battery for the requirements of 3.8.9.1 of MIL-PRF-8565/19.

"(e) Stabilize the battery temperature at -20° C +0° C/-2° C (-4° F +0° F/-4° F), and discharge the battery in accordance with figure 4 of MIL-PRF-8565/19. Examine the battery for the requirements of 3.8.9. 1 of MIL-PRF-8565/19.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:35Z
Check the source to verify that this is the current version before use.

"4.5.10.2 Conformance inspection. Subject the battery to 100 cycles of discharge-charge-open circuit (rest) under the ambient conditions specified in 4.4.1 of MIL-PRF-8565. This test consists of the following steps.

"a. Constant potential charge the battery in accordance with 4.4.2 of MIL-PRF-8565/19.

"b. Discharge the battery at 15 amperes for a period of 1.0 hour. Examine the battery for the requirements of 3.8.9.2 of MIL-PRF-8565/19.

"c. Immediately constant potential charge the battery in accordance with 4.4.2 of MIL-PRF-8565/19.

"d. Open circuit (rest) the battery for 1.0 hour.

"e. Repeat steps 4.5.10.2.b through 4.5.10.2.d of MIL-PRF-8565/19 for a total of 100 cycles.

"f. DELETED.

"g. DELETED.

"h. Examine the battery to ensure compliance with the requirements as specified in 3.8.9.2 of MIL-PRF-8565/19."

8.13 Modify the following paragraphs:

4.5.19 Vibration test. Delete the text and insert: "This test consists of the following steps.

"a. Mount the battery, including electrical connector and cables, to the vibration test apparatus in accordance with 4.4.5 of MIL-PRF-8565.

"b. Constant potential charge each battery in accordance with 4.4.2 of MIL-PRF-8565/19.

"c. Discharge the battery at the 1C-rate for 10.0 minutes. Monitor the battery's terminal voltage during discharge. Examine the battery for the requirements of 3.8.18 of MIL-PRF-8565/19.

"d. Charge the battery in accordance with 4.4.2 of MIL-PRF-8565/19 during the vibration exposure. Subject the battery to the random vibration test levels shown on figure 5 of MIL-PRF-8565/19. The vibration test time for each axis shall be 180.0 +1.0/-0.0 minutes. Conduct the vibration along each of the battery's three mutually perpendicular axes. After each axis of vibration, discharge the battery at the 1 C-rate for 10.0 minutes. Monitor the battery's terminal voltage during discharge. Examine the battery for the requirements of 3.8.18 of MIL-PRF-8565/19.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:35Z
Check the source to verify that this is the current version before use.

"e. Dismount the battery from the vibration test apparatus.

"f. Discharge the battery at the 6.5C-rate for 3.0 minutes.

"g. Charge the battery in accordance with 4.4.2 of MIL-PRF-8565/19.

"h. Discharge the battery at the 1C-rate to 20.0 volts. Examine the battery for the requirements of 3.8.18 of MIL-PRF-8565/19.

"i. Charge each battery in accordance with 4.4.2 of MIL-PRF-8565/19.

"j. Examine the battery for the requirements of 3.8.18 of MIL-PRF-8565/19."

4.5.26 Shelf life test. Delete the text and insert:

"Constant potential charge the battery in accordance with 4.4.2. Store the battery for not less than 18 months in an uncontrolled temperature environment (such as an unheated, uncooled warehouse) where the ambient temperature shall be within the range of -40° C to +38° C (-40° F to +100° F). Bring the battery to the test facility. Constant current charge the battery in accordance with 4.4.3. Stabilize the battery at room temperature (see 4.4.1). Discharge the battery at the 1-C rate to 20.0 volts. Constant current charge the battery in accordance with 4.4.3. Subject the battery to the cycling test of 4.5.10.2 of MIL-PRF-8565/19. Examine the battery for the requirements of 3.8.9 and 3.8.13.2.

8.14 Add the following paragraph:

"4.5.28.1 Aircraft load profile. Perform the test of 4.5.28 three times. The test temperature for steps 4.5.28.b and 4.5.28.c of MIL-PRF-8565 shall be -40° C (-40° F) on the first sequence, 24° C (75° F) on the second sequence, and 63° C (145° F) on the third sequence. The discharge of 4.5.28.c of MIL-PRF-8565 shall use the load profile shown on figure 3 of MIL-PRF-8565/19, followed by a 5-minute charge at 28.25 volts (12-ampere current limit), followed by the load profile shown in figure 4 of MIL-PRF-8565/19. For the sequence at -40° C (-40° F), the heater circuit shall be energized during the 5-minute charge period. (See 4.4.1 of MIL-PRF-8565.) Examine the battery for the requirements of 3.8.16 of MIL-PRF-8565/19."

8.15 Modify the following paragraph:

4.5.29 Cold and hot temperature charge test. Delete the title and first sentence and insert: "Ultra-cold temperature charge test. The test temperature for 4.5.29.b and 4.5.29.d of MIL-PRF-8565 shall be -40° C (-40° F). The discharges of 4.5.29.c and 4.5.29.f of MIL-PRF-8565 shall be conducted at the lC-rate to 20.0 volts. (See 4.4.1 of MIL-PRF-8565.) Examine the battery for the requirements of 3.8.17 of MIL-PRF-8565/19."

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:35Z
Check the source to verify that this is the current version before use.

8.16 Add the following paragraphs:

"4.5.32 Hot temperature charge test. This test consists of the following steps.

"a. Constant potential charge each sample in accordance with 4.4.2 of MIL-PRF-8565/19.

"b. Stabilize the temperature of sample 1 at 49° C (120° F) and sample 2 at 68° C (154° F). Keep the ambient air temperature at the specified values for each sample while discharging each sample at the lC-rate to 20.0 volts. Examine the battery for the requirements of 3.8.19 of MIL-PRF-8565/19.

"c. Stabilize the temperature of both sample 1 and sample 2 at 24° C (75° F) (see 4.4.1 of MIL-PRF-8565). Keep the ambient air temperature at 24° C (75° F) while constant potential charging each sample in accordance with 4.4.2 of MIL-PRF-8565/19.

"d. Stabilize the temperature of sample 1 at 49° C (120° F) and sample 2 at 68° C (154° F). Keep the ambient air temperature at the specified values for each sample while discharging each sample in accordance with figure 3 of MIL-PRF-8565/19. Examine the battery for the requirements of 3.8.19 of MIL-PRF-8565/19.

"e. Stabilize the temperature of sample 1 at 49° C (120° F) and sample 2 at 68° C (154° F). Keep the ambient air temperature at the specified values for each sample while constant potential charging each sample in accordance with 4.4.2 of MIL-PRF-8565/19.

"f. Immediately after completing step 4.5.32.e of MIL-PRF-8565/19, place each battery in a 24 °C (75 °F) environment and discharge each battery at the 1 C-rate to 20.0 volts.

"g. Examine the battery for the requirements of 3.8.19 of MIL-PRF-8565/19."

"6.11.7 Additional application information. The following information is provided for users of the D8565/19-1 battery.

"6.11.7.1 Aircraft charging system. The aircraft electrical system used for charging the battery should have a voltage output in the range of 28 - 29 volts and a current output in the range of 10-50 amperes.

"6.11.7.2 Initial installation date. The initial installer will write the date the battery is first installed in an aircraft (date first placed in service) and the removal date in the space provided on the battery's identification marking (see 3.6.3 of MIL-PRF-8565 and figure 1 of MIL-PRF-8565/19).

"6.11.7.3 Service life. The battery's service life (useful life) in aircraft is limited to 3 years. A battery will not be used in aircraft after 3 years from the date first installed in an aircraft (see requirement 6 of MIL-PRF-8565/19).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:35Z
Check the source to verify that this is the current version before use.

"6.11.7.4 Removal date from aircraft. The battery will be removed from aircraft service 3 years after the date it was first installed in an aircraft.

"6.11.7.5 Uses other than for aircraft. The battery may be used for applications other than aircraft, such as ground applications, beyond the specified 3-year service life limitation if the battery is deemed satisfactory for such purposes by the user activity.

"6.11.7.6 Maintenance-free. The battery will require no periodically scheduled maintenance during its service life (see 6.15.10 of MIL-PRF-8565).

"6.11.8 Environmental characteristics. Battery performance should not be adversely affected when operating in a sand and/or dust environment. Battery materials should not support fungus growth. The battery should operate safely in an atmosphere containing ignitable or explosive fumes."

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:35Z
Check the source to verify that this is the current version before use.

TABLE I. Qualification inspection and conformance inspection of batteries.

Test Number	Examinations and tests	Qualification inspection					Conformance inspection		
		Sample Number			Requirement Paragraph 1/	Test Paragraph	Group A Sample 1 100%	Group B Sample number	
		1	2	3				1	2
1	Incoming Inspection	X	X	X	3.8.1 (G)	4.5.1 (G)	X	X	X
2	Visual and Mechanical Examination	X	X	X	Reqmt 5 (N), 3.5 (N), 3.6 (N), 3.8.2 (G), Table II (G)	4.5.2 (G)	X	X	X
3	Dimensions and Weight	X	X	X	Reqmt 2 (N), 3.8.3 (G)	4.5.3 (G)	X 2/	X	X
4	Dielelectric Strength and Insulation Resistance Test	X	X	X	3.7 (G), 3.8.4 (G)	4.5.4 (G)	X 2/	X	X
5	Electrical Test Preparation	X	X	X	--	4.5.6 (G)		X	X
6	Capacity Discharge	X	X	X	Reqmts 3 (N), 8.2 (N), 3.8.6 (S)	4.5.7 (G)	X	X	X
7	Output Performance	X	X	X	3.8.16 (S)	4.5.28.1 (N)			
8	Hot Temperature Charge Test	X	X		3.7 (G), 3.8.19 (N)	4.5.32 (N)			
9	Ultra Cold Charge Test			X	3.7(G), 3.8.17(S)	4.5.29 (S)			
10	Cycling Test	X			Reqmt 4 (S), Reqmt 6 (S), 3.8.9 (S)	4.5.10 (S)		X	
11	Discharge While Inverted		X		3.5.9 (G), Reqmt (5) of Table III (G)	4.5.13 (G)			
12	Altitude Test		X		3.5.9 (G), 3.7 (G), 3.8.10 (G)	4.5.14 (G)			X
13	Shock Test (Basic Design)	X			3.7 (G), 3.8.10 (G)	4.5.15 (G)		X	
14	Temperature Shock Test	X			3.7 (G), 3.8.10 (G)	4.5.16 (G)		X	
15	Temperature Rise and Float Test		X		Reqmt 8.2 (S), 3.7 (G), 3.8.11 (G), Reqmt (1)of Table III (G)	4.5.17 (S)			X
16	Battery Gas Emission Test		X		3.8.10 (G), 3.8.12 (G)	4.5.18 (G)			
17	Ground Storage Test			X 3/	Reqmt 8.2 (S), 3.8.13.1 (G)	4.5.22 (G)			
18	Vibration Test		X		3.7 (G), 3.8.10 (G), 3.8.18 (N)	4.5.19 (S)			
19	Humidity Test		X		3.7 (G), 3.8.10 (G)	4.5.20 (G)			X
20	Salt Fog Test	X			3.7 (G), 3.8.10 (G)	4.5.21 (G)		X	
21	Deep Discharge Recovery Test			X	3.7 (G), 3.8.13.3 (G)	4.5.27 (G)			
22	Physical Integrity at High Temperature Test	X			3.7 (G), 3.8.10 (G), Reqmt (1) of Table III (G)	4.5.23 (G)			
23	Shock Test (Crash Safety)	X			3.8.10 (G), 3.8.15 (G)	4.5.25 (G)			
24	Shelf Life Test			X	3.8.9 (G), 3.8.13.2 (G)	4.5.26 (G)			
25	Final Examination	X	X	X	3.7 (G), 3.8.4 (G)	4.5.31 (G)		X	X


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:35Z
Check the source to verify that this is the current version before use.

1/ The notations in parentheses specify the source of the paragraph. "(G)" means the paragraph as shown in MIL-PRF-8565. "(S)" shows that the paragraph has been modified by this specification sheet. "(N)" indicates that a new paragraph or requirement has been added by MIL-PRF-8565/19.
2/ See sample information in test paragraph.
3/ The manufacturer requesting qualification to this specification may submit an additional (fourth) test sample to expedite the qualification test program.
4/ For nonmetallic battery container designs, two outer nonmetallic battery containers shall be furnished for inspection.

TABLE II. Life cycling temperature conditions (qualification inspection).

Test Cycle	Test Temperature - °C (°F)	CP Charging Voltage (Volts)	Minimum Battery Terminal Voltage (Volts)
1 – 700	24 (75)	28.75 ± 0.25	20.0
701	63 (145)	27.75 ± 0.25	20.0
702 - 715	49 (120)	27.75 ± 0.25	20.0
716 - 729	- 29 (- 20)	31.00 ± 0.25	20.0
730	- 40 (- 40)	NA	19.0
731	- 20 (- 4)	NA	20.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:35Z
Check the source to verify that this is the current version before use.

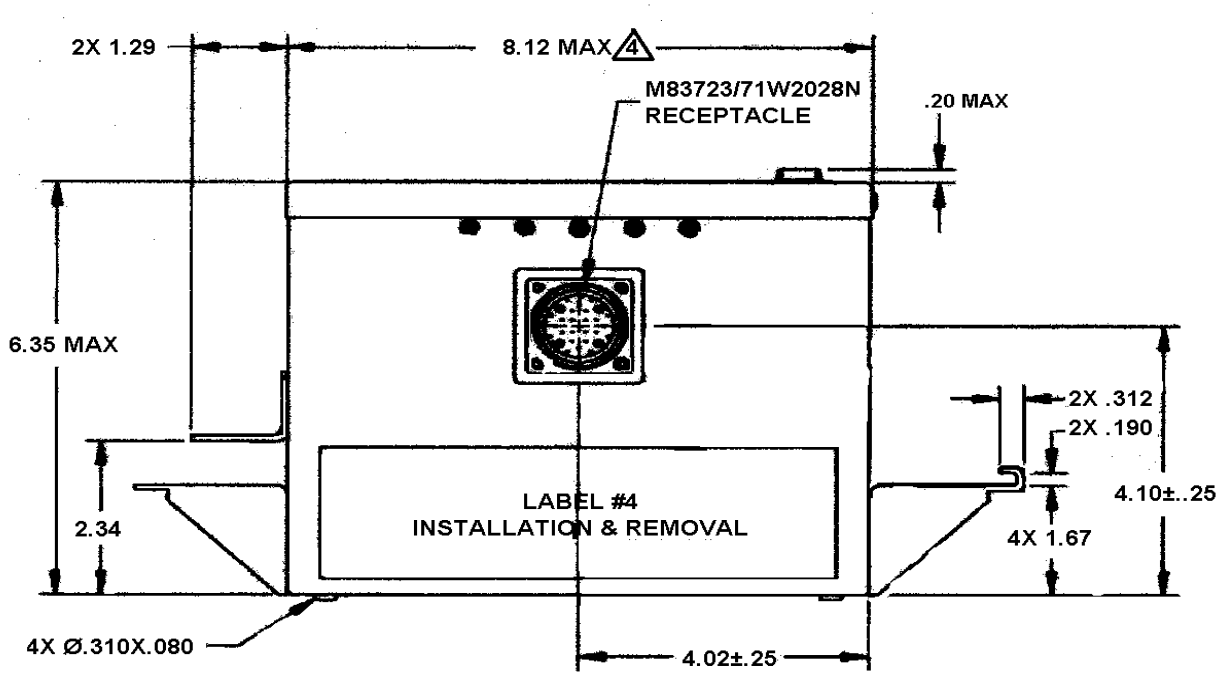


Front View

NOTES:

1. All dimensions are in inches.
2. Unless otherwise specified, tolerances are ± 0.06 for 2-place decimals (.XX), ± 0.030 for 3-place decimals (.XXX) and ±1° for angles.
3. Abbreviations used in this figure are maximum (MAX) and minimum (MIN).
4. Cover fasteners are allowed to extend 0.080 inch beyond cover dimension.

FIGURE 1. Dimensions and configuration for PIN D8565/19-1 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:35Z
Check the source to verify that this is the current version before use.

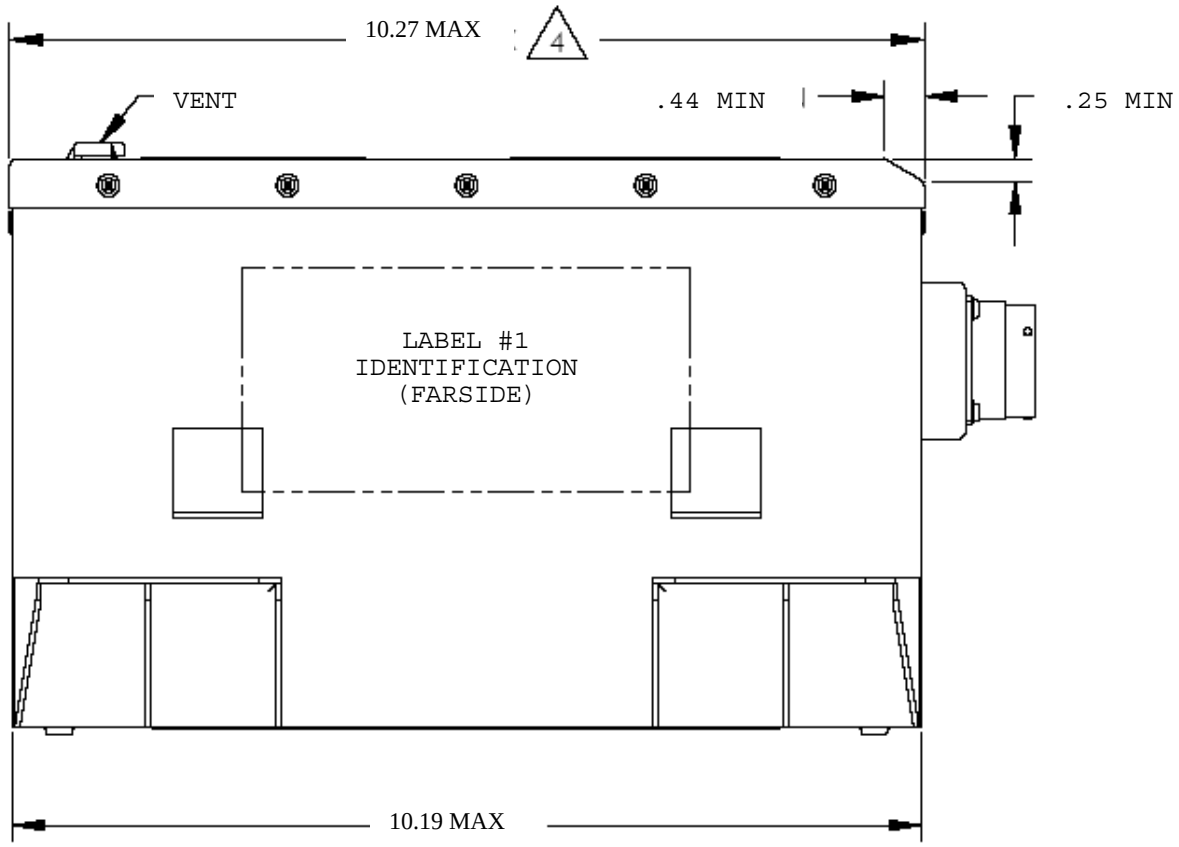


Side View

NOTES:

1. All dimensions are in inches.
2. Unless otherwise specified, tolerances are ±0.06 for 2-place decimals (.XX), ±0.030 for 3-place decimals (.XXX) and ±1° for angles.
3. Abbreviations used in this figure are maximum (MAX) and minimum (MIN).
4. Cover fasteners are allowed to extend 0.080 inch beyond cover dimension.

FIGURE 1. Dimensions and configuration for PIN D8565/19-1 – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:35Z
Check the source to verify that this is the current version before use.

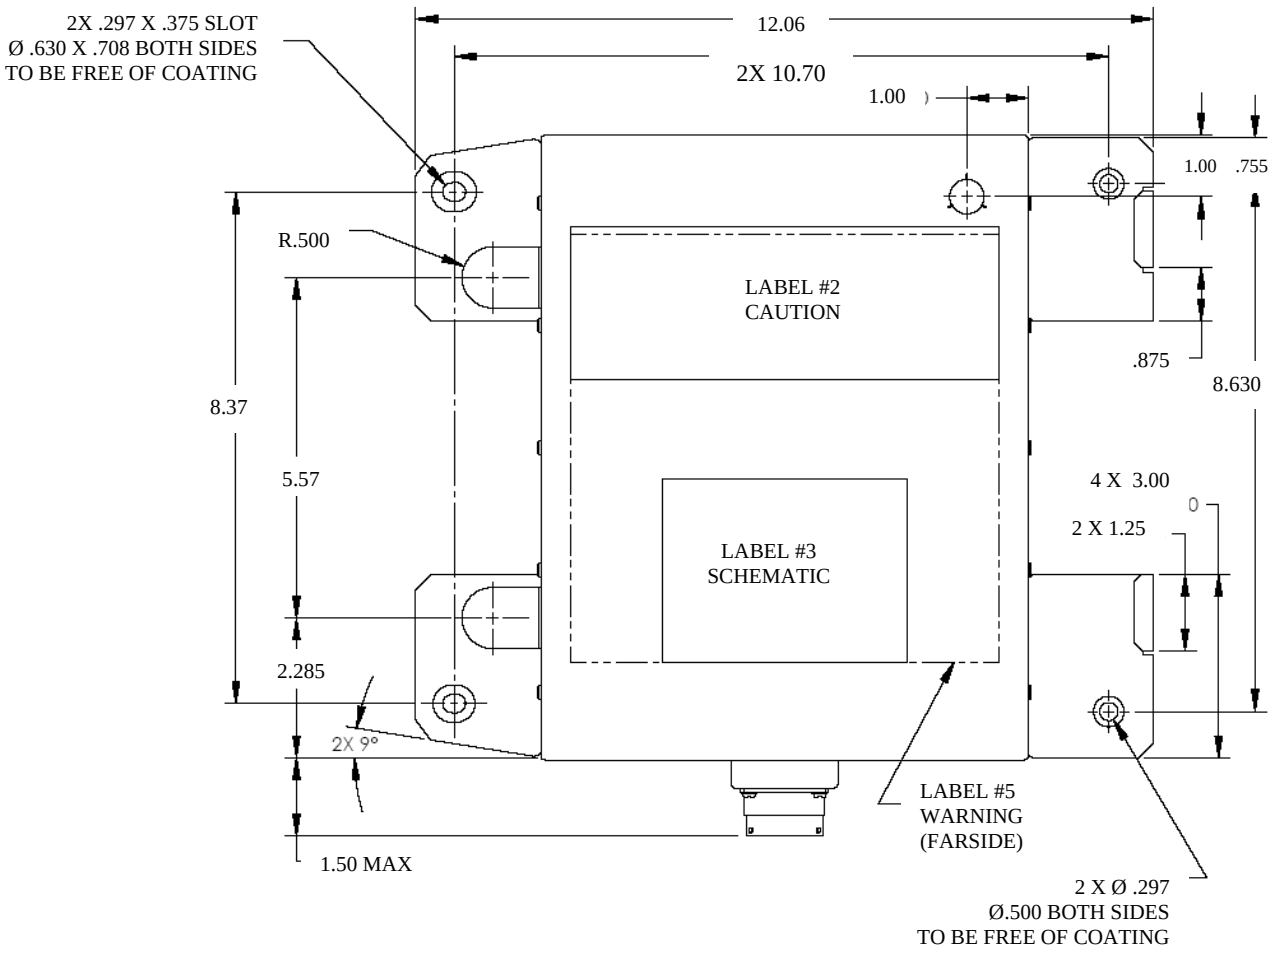

Top View

NOTES:

1. All dimensions are in inches.
2. Unless otherwise specified, tolerances are ±0.06 for 2-place decimals (.XX), ±0.030 for 3-place decimals (.XXX) and ±1° for angles.
3. Abbreviations used in this figure are maximum (MAX) and minimum (MIN).
4. Cover fasteners are allowed to extend 0.080 inch beyond cover dimension.

FIGURE 1. Dimensions and configuration for PIN D8565/19-1 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:35Z
Check the source to verify that this is the current version before use.

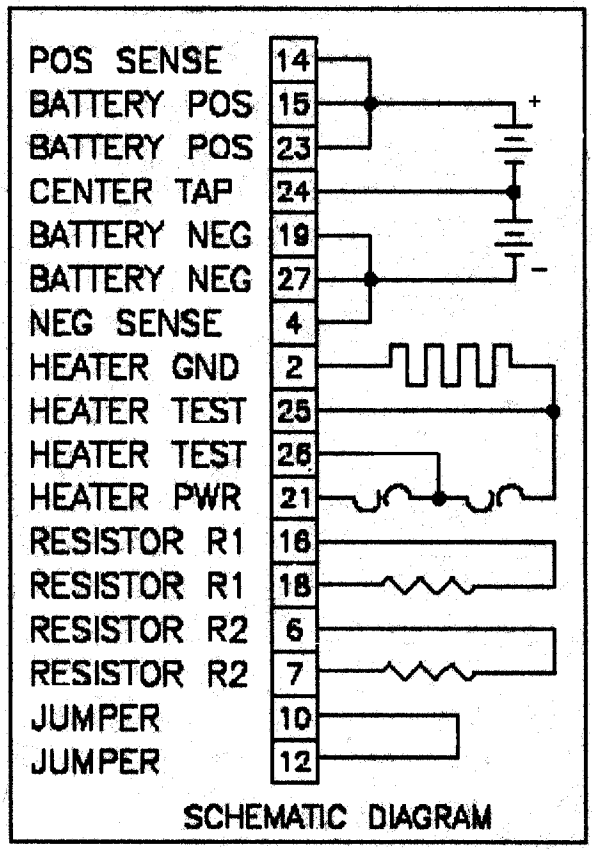


FIGURE 2. PIN D8565/19-1 electrical schematic for label #3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:35Z
Check the source to verify that this is the current version before use.

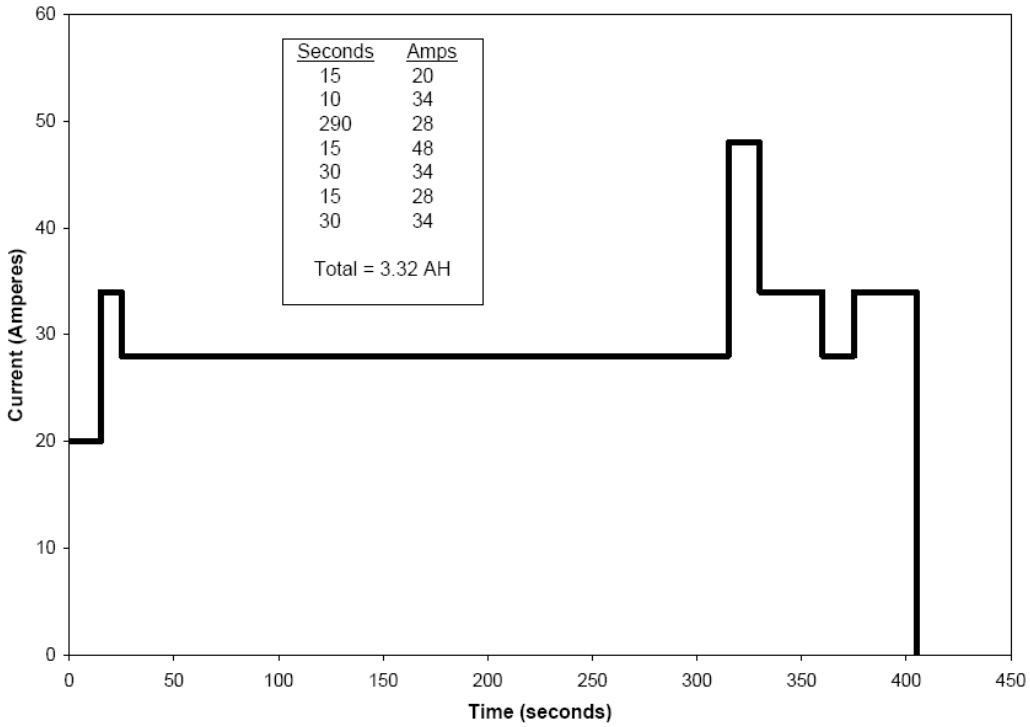


FIGURE 3. Aircraft start-up load profile.

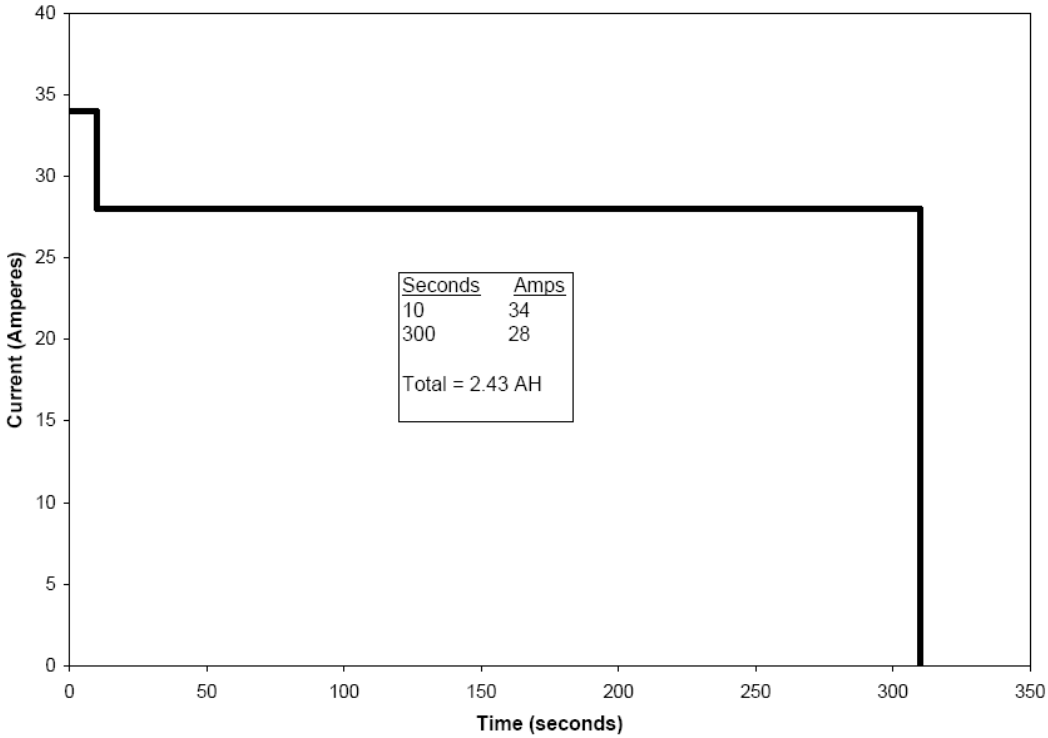


FIGURE 4. Aircraft emergency load profile.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:35Z
Check the source to verify that this is the current version before use.

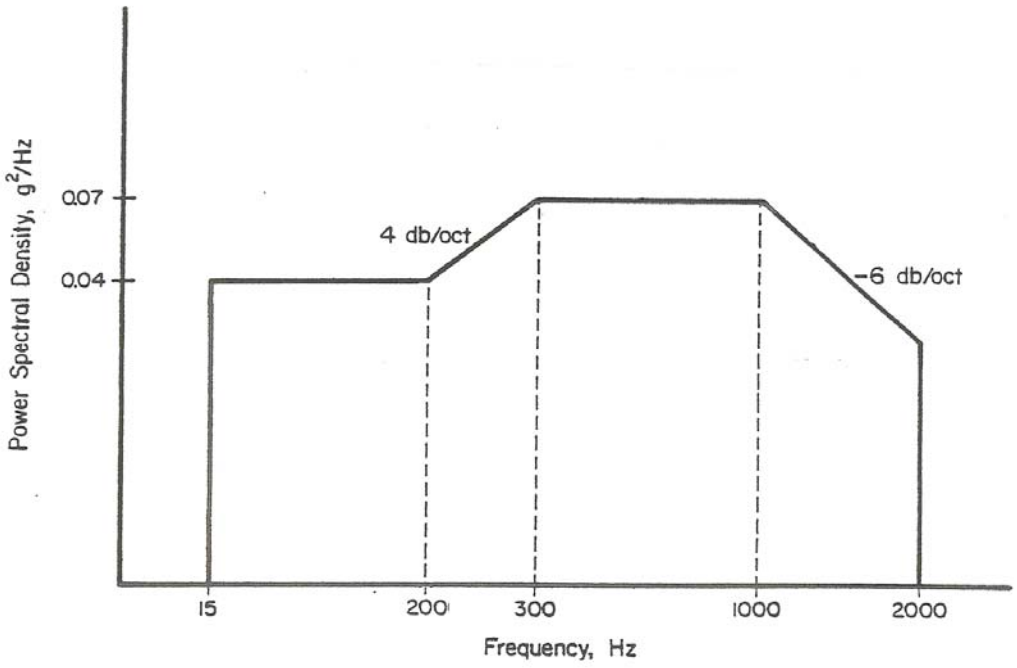


FIGURE 5. PIN D8565/19-1 random vibration test levels.

Referenced documents. In addition to MIL-PRF-8565, this document references the following:

MIL-R-10509/7

8.17 Amendment notations. The margins of this specification sheet are marked with vertical lines to indicate where modifications generated by this amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Navy - AS
Air Force - 99
DLA - CC

Review activity:
Air Force - 11

Preparing activity:
Navy – AS
(Project 6140-2013-001)

Agent:
Navy – SH

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:35Z
Check the source to verify that this is the current version before use.