INCH-POUND

MIL-C-19677C(MC)
14 NOVEMBER 1990
SUPERSEDING
MIL-C-19677B(MC)
6 June 1966

MILITARY SPECIFICATION

CLASP, NECKTIE: METAL; GOLD COLOR

This specification is approved for use by the U.S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for one type of necktie clasp.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commanding General (PSE-C), Marine Corps Research, Development, and Acquisition Command, Washington, DC 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC/NA FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:31Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

PPP-B-676	- Boxes, Setup

MILITARY

MIL-B-17757	- Boxes, Shipping, Fiberboard (Modular Sizes)

STANDARDS

FEDERAL

FED-STD-151	- Metals; Test Methods

MILITARY

MIL-STD-105	- Sampling Procedures And Tables For Inspection By Attributes
MIL-STD-129	- Marking For Shipment And Storage

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents order desk, Bldg 4D, 700 Robins Avenue, Philadelphia, PA 19111-5094).

2.1.2 Other Government documents, drawings, and publications. The following other Government publication forms are a part of this specification to the extent specified herein. Unless otherwise specified, the issue is that cited in the solicitation.

DRAWING

MARINE CORPS

75C5003A0000	- Clasp, Necktie, Metal; Gold Color

(Copies should be obtained from the contracting officer or his authorized representative.)

LAWS AND REGULATIONS

U.S. POSTAL SERVICE MANUAL

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:31Z
Check the source to verify that this is the current version before use.

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

2.2 Non-Government publications. The following documents(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted shall be those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation.

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Standard samples. Standard samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.2 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.4), in accordance with 4.4.

3.3. Material.

3.3.1 Copper alloy. When tested as specified in 4.6.1, the front bar and back grip of the necktie clasp shall be made from a copper alloy having a chemical composition of 84.0 to 86.0 percent copper, .05 percent maximum lead, .05 percent minimum iron, remainder zinc, .15 percent maximum other elements. The copper alloy shall be free from pits, scale (including red oxide), dents, nicks, cracks, deep scratches, segregations and foreign inclusions that cannot be removed in latter processing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:31Z
Check the source to verify that this is the current version before use.

3.3.2 Wire spring. The stainless steel spring shall be class 1, bright finish, 0.032 inch diameter, type 302 of ASTM A313.

3.3.3 Lacquer. The lacquer shall be pale, clear synthetic lacquer. Pigmented lacquer will not be permitted.

3.4 Design and construction. The design of the front bar in the finished necktie clasp shall be true impressions of the dies extracted from the hub furnished by the Government (see 3.5). The necktie clasp shall be made of the materials specified and constructed to include the components and construction details shown on the drawing (see 2.1.2) and as specified herein. A forcer may be used to bring up the Marine Corps insignia design and there shall be no sharp or rough edges or corners. The impression of the forcer shall be regular and symmetrical upon the back of the clasp.

3.4.1 Finish. The necktie clasp shall be highly polished to a mirror-like finish on all surfaces, including edges and backs, except inside surface of grip, which shall be bright and clean. The necktie clasp shall be thoroughly lacquered. The dry lacquer film shall be uniform in appearance, continuous, level, adherent, and essentially free from lint, dust, or other foreign inclusions, and shall withstand the tests specified in 4.6.2 and 4.6.3. The finished necktie clasp shall match the standard sample for color and finish.

3.5 Hubs, dies and tools. The hub furnished by the Government shall be used only for making the contractor's working dies. Upon completion of the contract, the hub shall be returned to the point designated by the contracting officer. The contractor shall be held responsible for the loss, damage, or mutilation of the hub while in his possession. Determination of cost of replacing the lost, broken or damaged hub shall be made by the Government. Dies and tools shall be furnished by the contractor and unless otherwise specified, shall remain his property.

3.6 Marking. The white, bristol board card (see 5.1.1) shall be printed on the front lower edge with the following information:

NSN: 8455-00-552-9645

CONTRACTOR: _____

CONTRACT NUMBER: _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:31Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements. This does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Certification of compliance. Where certificates of compliance are permitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4)

2. Quality conformance inspection (see 4.5)

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in MIL-STD-105.

4.4 First article inspection. When a first article is required, inspection and testing shall be made on a completely fabricated necktie clasp for all provisions of this specification.

4.5 Quality conformance inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:31Z
Check the source to verify that this is the current version before use.

4.5.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all requirements of referenced specifications. Testing shall be performed on the copper base alloy referenced in 3.3.1 for chemical composition. The lot shall be expressed in terms of 1 pound and the requirements shall be applicable to lot average with two determinations for each element. The result shall be reported to the nearest 0.1 percent for copper an 0.01 percent for remaining elements. The sample unit shall be 8 ounces or equivalent of a composite sample.

4.5.2 Examination of the end item. The end item shall be examined for the defects listed in 4.5.2.1 and 4.5.2.2. The sample unit shall be one completely fabricated necktie clasp. The inspection level shall be II (see 6.5).

4.5.2.1 Examination of necktie clasps for visual characteristics. Defects numbered 1 through 9 shall be classified as Major when seriously affecting serviceability or appearance and Minor when affecting serviceability or appearance but not seriously.

Examine	Defect	Classification Major (*)		Minor
Color and finish	Color or finish does not compare favorably with standard or approved sample.	101		
	Abraded, scuffed, scratched or otherwise damaged.		1	
	Stain or discoloration, clearly noticeable,		2	
	Any surface (except inside of grip) not mirror-like finish.		3	
Lacquering	Lacquer coating hazy, cloudy or powdering.			201

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:31Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	(*)	Minor
	Foreign matter imbedded in finish of front bar.		4	
	Lacquer not smooth, not continuous and not adherent, i.e., flaking, blistering, peeling or runs, sags or drops.			202
	Tacky finish.			203
	Coating of lacquer omitted.	102		
Construction	Not type of construction specified, i.e., not with wire spring and crocodile grip.	103		
	Poor "gripping action", i.e., not capable of serving its purpose effectively.	104		
	Any "side-play" of the alligator clamp when pressure is applied and released.			204
	Any component missing, damaged, broken, bent or misshaped.		5	
Emblem-design	Design details are altered, or do not conform to Government hub, drawing or approved sample.	105		
	Any significant detail of the insignia not clear, marred, missing, reduced or obliterated, i.e., does not compare favorably with approved sample,		6	
	Any detail struck over, resulting in double impression.	106		

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:31Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	(*)	Minor
Workmanship	Surface or edge not clean, not smooth or not free from burrs, drag, step or tool marks.		7	
	Metal mark on exposed surface, such as nick, dent or scratch.		8	
	Component not fabricated from material specified.	107		
	Metal cracked or fractured.		9	

4.5.2.2 Examination for dimensions. Any dimension that is not within the specified tolerances shall be classified as a defect. The inspection level shall be S-2 (see 6.5).

4.5.2.3 Testing of the end item. Testing of the completely fabricated clasps, shall be performed in accordance with Table I for the characteristics shown therein. There shall be one determination per sample unit and the results shall be reported as pass or fail. The sample unit shall be one clasp. The requirements are applicable to the individual unit. The inspection level shall be S-1 (see 6.5).

Table I. - End Item Testing

Characteristic	Rqmt Para.	Test Method
Liver of sulphur test for lacquer	3.4.1	4.6.2
Tackiness test for lacquering	3.4.1	4.6.3

4.5.3 Examination for count of clasps in intermediate containers. Clasps packaged for shipment shall be examined to determine conformance with package markings and specified quantity. The sample unit for this examination shall be one box (interior package). Any box containing less than the specified or

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:31Z
Check the source to verify that this is the current version before use.

marked quantity of clasps shall be classified as a defect. The inspection level shall be S-2 (see 6.5).

4.5.4 Inspecting packaging. An inspection shall be made to determine that packaging, packing and marking requirements are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of containers in the inspection lot. The inspection level shall be S-2 (see 6.5).

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of location, sequence or method of application.
Materials	Any component missing.
	Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps, loose strapping, inadequate stapling.
	Bulging or distortion of containers.
Content	Number per container is more or less than required.

4.6 Tests.

4.6.1 Chemical composition test. Chemical composition shall be determined in accordance with Test Method 111 of FED-STD-151. Results shall be evaluated to determine compliance with the requirements in 3.3.1.

4.6.2 Liver of sulphur test for lacquer. Necktie clasps to be tested shall be immersed in a two percent by weight of dry liver of sulphur (potassium sulfide) and distilled water solution, at a temperature of 100° F. to 110° F. for a period of three minutes. The clasps shall then be removed and rinsed in warm, then cold, then hot water, after which they shall be wiped gently with an absorbent cellulose material, allowed to air dry at room

Source: https://assist.dla.mil -- Downloaded: 202610-19T06:31Z
Check the source to verify that this is the current version before use.

temperature for a period of one hour and then examined. There shall be no change in the appearance of the face and grip of the clasp except that the following staining will be permissible:

(a) A very slight overall yellowing.

(b) Not more than five occasional dark spots on the face of the clasp, and three spots on the grip, widely distributed, the spots not to exceed 1/32 inch in largest dimension or equivalent, and occurring on not more than five percent of the clasps tested.

4.6.3 Tackiness test for lacquering. A piece of tissue paper, pressed against the finished lacquered portions of the clasp at room temperature (60-80 degrees F.) for 15 seconds with any pressure capable of being exerted by the thumb and two fingers, shall not adhere to the clasp and shall fall free when pressure is released.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or commercial as specified (see 6.2).

5.1.1 Level A. Necktie clasps shall be individually mounted on a white bristol board card having a minimum thickness of 0.013 inch and measuring not less than 3-1/4 inches long by 1-1/2 inches wide. The card shall be notched 5/16 inch deep at the center of one of the 1-1/2 inch wide ends, with the bottom end of the notch 3/16 inch wide, to accommodate the necktie clasp. Each mounted necktie clasp shall be individually and completely and thoroughly wrapped with white anti-tarnish tissue paper having a minimum basis weight of 10 pounds per ream (24 by 36-500). As an alternate for the tissue wrap, a transparent plastic envelope may be used. Sixty (60) wrapped necktie clasps shall be packaged in a set-up box conforming to type I, variety 1, class A, style 4 of PPP-B-676, with the thickness of the paper-board to be not less than 0.040 inch. The box shall be 7 inches long, 5-5/8 inches wide, and 2-1/2 inches deep, maximum outside overall dimensions with cover.

5.1.2 Commercial. The necktie clasps shall be packaged in accordance with manufacturer's commercial practice.

5.2 Packing. Packing shall be level A, B or commercial as specified (see 6.2).

5.2.1 Level A.

Source: https://assist.dla.mil -- Downloaded: 202610-19T06:31Z
Check the source to verify that this is the current version before use.

5.2.1.1 Method 1. Twelve set-up boxes (720 necktie clasps) shall be packed in a shipping container, conforming to type CF, class weather-resistant, variety DW, grade V15c, size No. 1A of MIL-B-17757. Shipping containers shall be assembled, closed and reinforced as specified in the appendix thereto.

5.2.1.2 Method 2. When specified, twelve (12) level B shipping containers (144 set-up boxes) shall be packed in a shipping container conforming to type CF, class weather-resistant, variety DW, grade V15c, size No. 4 of MIL-B-17757. Shipping containers shall be assembled, closed and reinforced as specified in the appendix thereto.

5.2.2 Level B. Twelve set-up boxes (720 necktie clasps) shall be packed in a shipping container, conforming to type CF, class-domestic, variety DW, size No. 1A of MIL-B-17757. The fiberboard used in fabricating boxes shall be grade 275. Shipping containers shall be assembled and closed as specified in the appendix thereto.

5.2.3 Level C. The necktie clasps packaged as specified in 5.1 shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with the Uniform Freight Classification Rules or regulations of other carriers applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or order, the shipping container shall be marked in accordance with requirements of MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The necktie clasps are intended for wear by male personnel of the Marine Corps.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Whether first article is required (see 3.2).
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(d) Acceptance criteria required (see 6.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:31Z
Check the source to verify that this is the current version before use.

6.3 Sample. For information regarding the availability of sample necktie clasp specified, address inquiry to the procuring activity issuing the invitation for bids.

6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209 and the requirements of this specification. The sample(s) presented for inspection may be first article, preproduction samples, first production of sample(s) taken from the first lot depending on the contractor's history and will be as directed by the Contracting Officer. The Contracting Officer should include specific instruction in all acquisition instruments regarding arrangements for selection, inspection, and approval of the first article.

6.5 Acceptance criteria. The acceptance criteria below are recommended for use. The acceptance criteria as specified in the contract or purchase order shall be binding. Unless otherwise specified, the following acceptance criteria are in accordance with MIL-STD-105.

6.5.1 For end item visual examination. An acceptance quality level (AQL), expressed in terms of defects per hundred units, of 2.5 for major defects and 10.0 for major and minor combined is recommended.

6.5.2 For end item dimensional examination. An AQL, expressed in terms of defects per hundred units, of 4.0 is recommended.

6.5.3 For testing end item. An AQL, expressed in terms of defects per hundred units, of 6.5 is recommended.

6.5.4 Examination of count in intermediate containers. An AQL, expressed in defects per hundred units, of 2.5 is recommended.

6.5.5 Inspection of packaging. An AQL, expressed in terms of defects per hundred units, of 2.5 is recommended.

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:31Z
Check the source to verify that this is the current version before use.


6.7 Subject term (Key word) listing.

Enlisted
Male


Preparing activity:
Navy - MC
Project No. 8455-N479

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:31Z
Check the source to verify that this is the current version before use.


REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
A	REV. FORMAT		
E	SUPERSEDES MCDWG. # P. 212	8/7/14	

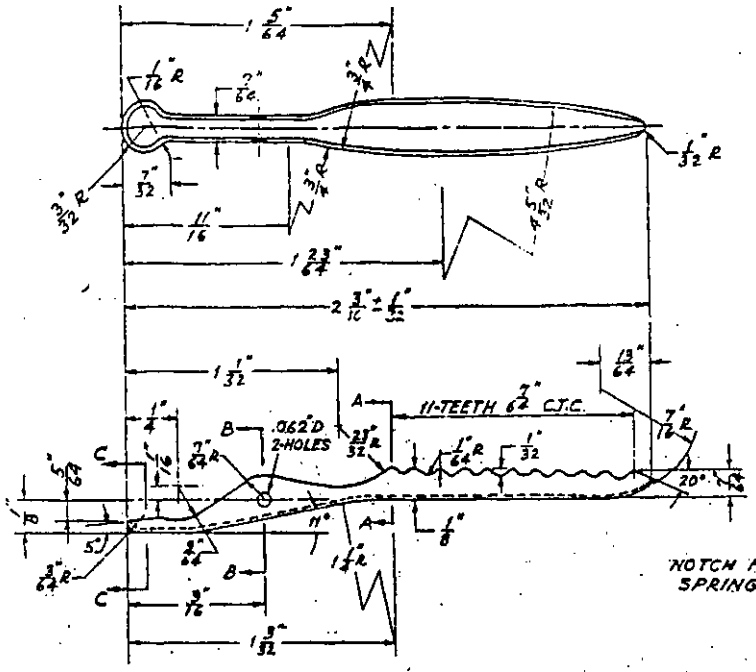

GRIP
SCALE: #/1
BRASS SHEET, 1-REQ'D

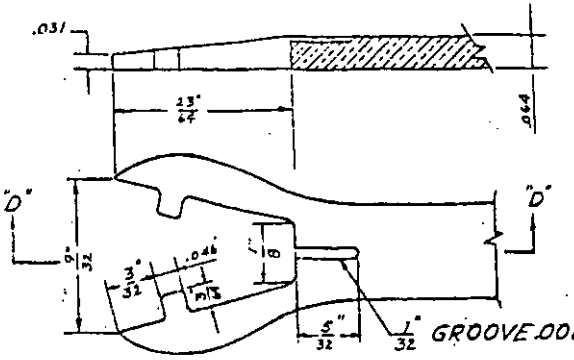


NOTCHING HUB & SPRING GROOVE DETAIL
SCALE: 8/1

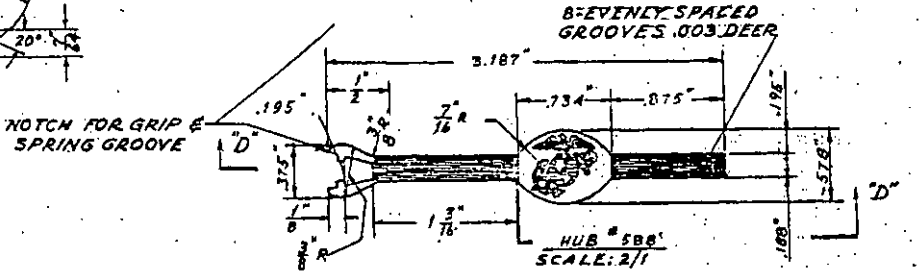


HUB #5B8
SCALE: 2/1


NOTE: SPRING SHALL BE OF SUFFICIENT LENGTH SO THAT THE ENTIRE 9/64 INCH BENT EXTENSION OF THE ONE LEG SHALL BE COMPLETELY FLAT AND BE SECURED WITHIN THE SPRING GROOVE OF THE FRONT BAR.

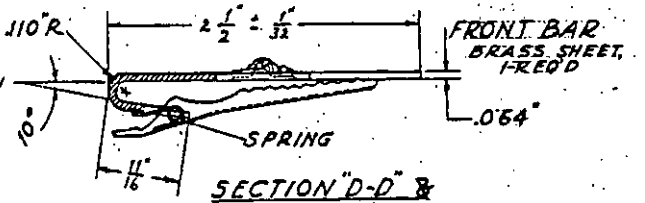


SECTION "D-D" & ASSEMBLY




SECTION "A-A"
SCALE: 4/1




SECTION "C-C"
SCALE: 4/1



SECTION "B-B"
SCALE 1/1

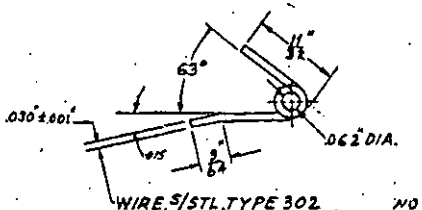

SPRING



BOTTOM VIEW ASSEMBLY

NOTE.
ANY COMMERCIAL TYPE ALLIGATOR GRIP IS PERMITTED EXCEPT THE GRIP SHALL BE EQUAL TO OR BETTER THAN THAT SHOWN HEREIN AND PROVIDED WHEN THE GRIP IS OPEN 1/8 INCH THE TOP OF THE TEETH ARE IN A PARALLEL LINE WITH THE BACK OF THE FRONT BAR THE END OF THE GRIP SHALL NOT BE VISIBLE WHEN VIEWED FROM THE FRONT.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ON FRACTION ± 1/64"
DECIMALS ± .005"
ANGLES-PLUS OR MINUS 5°
SPEC. NO. MIL-C-19677 B(MC)
DATE: 6 JUNE 1966

CHECKED
PREPARED R.B. 8-7-14
M.C. SUPPLY ACTIVITY

MARINE CORPS SUPPLY ACTIVITY
1100 S. BROAD ST. PHILADELPHIA, PA. 19146

CLASP, NECKTIE, METAL GOLD COLOR. (2 1/2-INCH LENGTH)

SIZE D | CODE IDENT. NO. 01483 | 75C5003A0000
SCALE: AS SHOWN

MIL-C-19677C(MC)

Source: https://assist.dla.mil -- Downloaded: 202610-19T06:31Z
Check the source to verify that this is the current version before use.