INCH-POUND

MIL-I-19689C(MC)
7 JANUARY 1991
SUPERSEDING
MIL-I-19689B(MC)
18 January 1971

MILITARY SPECIFICATION

INSIGNIA, OFFICER CANDIDATE AND PLATOON LEADERS CLASS

This specification is approved for use by the U.S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for distinctive metal insignia.

1.2 Classification. The insignia shall be of the following types and classes, as specified (see 6.2):

Type I - Insignia, Officer Candidate
Type II - Insignia, Platoon Leaders Class
Class 1 - gold
Class 2 - silver

2. APPLICABLE DOCUMENTS

2.1 Government documents.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commanding General (PSE-C), Marine Corps Research, Development, and Acquisition Command, Washington, DC 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC-NA FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:33Z
Check the source to verify that this is the current version before use.

2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

PPP-B-676	- Boxes, Setup

MILITARY

MIL-B-17757	- Boxes, Shipping, Fiberboard (modular sizes).

STANDARDS

FEDERAL

FED-STD-151	- Metals, Test Methods

MILITARY

MIL-STD-105	- Sampling Procedures And Tables For Inspection By Attributes
MIL-STD-129	- Marking For Shipment And Storage

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094)

2.1.2 Other Government documents and publications. The following other Government documents and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

LAWS AND REGULATIONS
U.S. Postal Service Manual

(Application for copies of the manual should be addressed to the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:33Z
Check the source to verify that this is the current version before use.

2.2 Non-government publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

UNIFORM CLASSIFICATION COMMITTEE, AGENT
Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT
National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association, Inc. , Tariff Order Section, 1616 P. Street, N.W., Washington, D. C. 20026.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These douments also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3 REQUIREMENTS

3.1 Standard samples. Standard samples are furnished solely for guidance and information to the contractor (see 6.3). Variation from the specification may appear in the sample, in which case the specification shall govern.

3.2 First article. Unless otherwise specified (see 6,2), a sample shall be subjected to first article inspection (see 6.4) in accordance with 4.4.

3.3 Materials

3.3.1 Copper base alloy. When tested as specified in 4.6.6, the chemical composition of the copper base alloy shall be 84.0 to 86.0 percent copper, 0.05, percent maximum lead, 0.05 percent

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:33Z
Check the source to verify that this is the current version before use.

maximum iron, 0.15 percent maximum total other elements and remainder percent zinc. The color shall be the basis of acceptability of the metal for composition except in case of dispute, when an analysis shall be made. The alloy shall be free from pits, scale (including red oxide), dents, nicks, cracks, deep scratches, segregations and foreign inclusions that cannot be removed in later processing.

3.3.2 Plating. Type I insignia and type II, class 2 insignia shall be plated with nickel and rhodium. Type II, class 1 insignia shall be plated with 24-karat gold.

3.3.3 Hard solder. Hard solder shall be an alloy of silver having a melting point of not less than 1,075°F.

3.3.4 Lacquer. Lacquer shall be a pale, clear, synthetic lacquer. The use of pigmented lacquer shall not be permitted.

3.4 Design. The stamped design of the insignia shall be true impressions of the dies extracted from hubs furnished by the Government

3.5 Hubs and dies. The hubs shall be furnished by the Government and the dies shall be furnished by the contractor. The hub furnished by the Government shall be used only for making the contractor's working dies. The contractor's dies shall be tooled and polished to remove any dents, nicks, scratches or imperfections. Unless otherwise specified (see 6.2), dies furnished by the contractor shall remain his property. Upon completion of the contract, the hubs shall be returned to a point designated by the contracting officer. The contractor shall be held responsible for the loss, damage or mutilation of these hubs while in his possession. Determination of cost of replacing any lost, broken or damaged hubs shall be made by the Government.

3.6 Construction. Dies shall be sunk in a manner to insure a well defined diestruck edge, and the insignia shall be accurately finished to the die struck edge. All edges shall be clean and smooth, free from burrs, drag, step or rough edges.

3.6.1 Attaching device. The attaching device shall be the prong amd wing type clutch fastener shown in Figure 1. The clutch shall be made from any type brass amd the prong shall be made from nickel silver (63 to 66.5 percent copper, 16.5 to 19.5 percent nickel, 0.10 percent maximum lead, 0.25 percent maximum manganese, and the remainder zinc). Clutch fasteners shall withstand the test specified in 4.6.1. Prongs shall be soldered or electronically fused to the back of the insignia, located as shown in Figure 1. The soldered parts shall be completely joined

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:33Z
Check the source to verify that this is the current version before use.

without excess solder. All flux shall be removed and the joint shall be clean, strong, smooth, free from burned or reduced areas, and shall withstand the tests specified in 4.6.2.

3.6.2 Plating.

3.6.2.1 Gold plating. Type II, class 1 insignia shall be acid test gold plated. Prior to plating, the insignia shall be cleaned of matter that may affect the gold plating. The plating shall be nonporous, continuous and unbroken over the entire plated surface. There shall be no cut-through, peeled or blistered plating. The use of white metals as an undercoating for gold shall not be permitted. The plating shall withstand the test specified in 4.6.3.

3.6.2.2 Nickel and rhodium plating. Type I insignia and type II, class 2 insignia shall have a nickel underplating not less than 0.0003 inch thick and shall then be plated with rhodium. The rhodium plating shall be done with not less than 1 gram per 1,000 square inches of surface, and for the purpose of this specification, the insignia shall be considered properly plated with rhodium if the test specified in 4.6.4 is met. Prior to plating, the insignia shall be cleaned of all matter that may affect the plating. The plating shall be nonporous, continuous and unbroken over the entire plated surface. There shall be no cut-through, peeled or blistered plating.

3.6.3 Lacquering. The fronts and edges of type II, class 1 insignia shall be thoroughly lacquered, or the entire insignia may be lacquered. The dry lacquer film shall be continuous, level, adherent, and free from lint, dust or other foreign inclusions that may affect appearance or serviceability. The lacquered insignia shall withstand the test for tackiness specified in 4.6.5.

3.7 Finish. The fronts and edges of all insignia shall have a mirror-like finish. Backs shall be clean and smooth. The color of the gold plated insignia shall be that of 24-karat gold. The color of the rhodium plated insignia shall be that of silver. The face and edges of all insignia shall match that of the standard sample for color and finish; however, such finishing shall not be carried to the point where edges are so rounded or so detailed in design as to fail to meet requirements of 3.4.

3.8 Finished dimensions.

3.8.1 Type I. The overall finished dimensions of type I insignia shall be 7/8 inch wide by 1/2 inch high. The finished dimensions of the individual letters shall be 3/8 inch wide by

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:33Z
Check the source to verify that this is the current version before use.

1/2 inch high. Angled corners of the letter shall finish on a 45° angle, and beveled edges of the letters shall finish on a 45° angle with a 1/64 inch bevel. The segments of the letters and the connecting bars between the letters shall be 1/8 inch wide. The finished thickness of the insignia shall be 0.062 inch minimum (min) at the letters and 0.049 inch min at the connecting bars.

3.8.2 Type II: The overall finished measurements of type II insignia shall be 1-3/16 inches wide by 1/2 inch high. The finished dimensions of the individual letters shall be as follows: The letters P and C shall be 3/8 inch at the widest parts by 1/2 inch high, and the letter L shall be 11/32 inch wide at the bottom edge by 1/2 inch high. Angled corners of the letters shall finish on a 45° angle, and beveled edges of the letters shall finish on a 45° angle with a 1/64 inch bevel. The segments of the letters and the connecting bars between the letters shall be 1/8 inch wide. The finished thickness of the insignia shall be 0.062 inch min at the letters and 0.049 inch min at the connecting bars.

3.9 Marking. The contractor shall stamp his trademark or other identifying mark legible and inconspicuously on the back of each insignia. The mounting cardboard (see 5.1.1) shall be printed on the front lower edge with the following information:

Nomenclature_____
NSN_____
Contract number_____
Name of contractor_____

3.10 Workmanship The finished insignia shall conform to the quality and grade of product established by this specification.

4 QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the government. The government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:33Z
Check the source to verify that this is the current version before use.

this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable

practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Certificate of compliance. When a certificate of compliance is submitted, the Government reserves the right to check test such items and determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4)

b. Quality conformance inspection (see 4.5)

4.3 Inspection conditions. When specified in the contract or purchase order, all inspections shall be performed in accordance with MIL-STD-105.

4.4 First article inspections. When a first article is required (see 6.2), inspection and testing shall be made on a completely fabricated insignia for all provisions of this specification. The presence of any defect or failure to pass any of the test shall be cause for rejection of the first article. The number of units to be inspected shall be specified by the contracting officer.

4.5 Quality conformance inspection.

4.5.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document. In addition, testing shall be perfomed on the component listed in Table I for the characteristic shown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:33Z
Check the source to verify that this is the current version before use.

TABLE I. Component testing

Component	Characteristic	Rgmt para	Test method	Rqmt appl to spl unit	Lot avg	No. Determinations per sample unit	Results rptd as	Sample Inspt Unit
Copper base alloy	Chemical composition	3.3.1	4.6.6	-	X	2 for each element	To nearest 0.1 percent	8 oz or equivalent

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:33Z
Check the source to verify that this is the current version before use.

MIL-I-19689C(MC)

4.5.2 Certificate of compliance. Components and materials listed below may be accepted on the basis of a contractor's certification of compliance for characteristics indicated:

Component	Characteristic	Rqmt para.
Gold for plating	Material identification and karat	3.3.2
	White metal not used as undercoating	3.6.2.1
Hard solder	Material identification	3.3.3
Lacquer	Material identification	3.3.4
Clutch and prong	Material identification	3.6.1

4.5.3 Examination of the end item. The defects found during examination shall be classified in accordance with 4.5.3.1 and 4.5.3.2. The sample unit for these examinations shall be one insignia of each type and class. All defects shall be as indicated below, except those numbered 1 thru 20 in classification column, which shall be classified as listed below. The inspection level shall be II (see 6.5).

Major defect - When seriously affecting serviceability or appearance

Minor defect - When affecting serviceability or appearance but not seriously.

4.5.3.1 General defects. General defects shall be classified as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:33Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Critical	Major	Minor
Color and finish	Does not compare favorably with standard or approved sample.		101	
	Face or any edge not mirror-like finished.		102	
	Surfaces not smooth.	1		
	Discoloration or stain clearly noticeable.	2		
	Abraded,scuffed, scratched or otherwise damaged.	3		
Plating	Not plated.		103	
	Not type specified.		104	
	Plating is not smooth, not continuous or not adherent		105	
	Cut through or porous.		106	
Lacquering	Not lacquered or area of no film.		107	
	Area of thin film.			201
	Lacquer not clear.			202
	Not adherent, i.e., blistered, flaking or peeling.	4		
	Foreign matter imbedded.	5		
	Discoloration clearly noticeable.	6		
	Coating not continuous, and level, i.e., runs, drips, or drops.	7		

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:33Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Critical	Major	Minor
	Coating is blushed, cloudy or hazy.			203
	Tacky finish.			204
Design	Detail altered and does not conform to Government hub.		108	
	Any warp, twist or distortion producing irregular surface contour or outline.	8		
	Detail struck over, resulting in a double impression.		109	
Material	Not fabricated of the specified material.		110	
Construct-ion and workmanship	Not one-piece stamping.		111	
	Not trimmed to die struck edge.	9		
	Not pierced where required.		112	
	Piercing not clean and smooth, e.g., any burrs, cutter drill or file marks.	10		
	Design or shape altered by piercing.	11		
	Dent, pit, dig, gouge, nick, pores. metal mark, or mutilation.	12		
	Distorted, bent, malformed, or otherwise impaired.	13		
	Burr, fin, rough or sharp edge, drag or step.	14		
	Metal cracked or fractured.		113	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:33Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Critical	Major	Minor
Attaching device	Not specified type, size or material.		114	
	Any component missing.		115	
	Defective, e.g., any part damaged or malformed affecting use.	15		
	Not positioned as specified.	16		
	Clutch will not engage prong, or is loose fit.	17		
Soldering	Prong not completely joined by solder.	18		
	Any area burned or reduced in soldering.	19		
	Flux or excess solder not removed.			205
	Prong is loose.		116	
	Prong is bent out of shape or otherwise impaired.	20		

4.5.3.2 Examination of finished dimensions. Any dimension that is not within the specified tolerances shall be classified as a defect. The inspection level shall be S-2 (see 6.5)

4.5.4 Examination of packaging. An inspection shall be made to determine compliance with packaging, packing and marking requirements in Section 5. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 (see 6.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:33Z
Check the source to verify that this is the current version before use.

Examine	Defect
Markings (exterior) interior)	Omitted, incorrect, illegible, of and improper size, location, sequence or method of application.
Materials	Any component missing. Any componenet damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps, loose strapping, inadequate stapling. Bulging or distortion of containers.
Weight or content (exterior and interior)	Number of intermediate containers is more or less than required; gross/net weight exceeds requirements.

4.5.4.1 Examination for count of insignia in intermediate containers. Insignia packaged for shipment shall be examined to determine conformance with package markings and specified quantity. The sample unit for this examination shall be one box (intermediate container). Any box containing less than the specified or marked quantity of insignia shall be classified as a defect. The inspection level shall be S-2 (see 6.5). The lot size shall be the number of intermediate containers in one shipping container.

4.6 Testing of the end item. Testing of the completely fabricated insignia shall be performed in accordance with Table II for the characteristics shown therein. The sample unit shall be two completely fabricated insignia of each type and class. The requirements are applicable to the individual unit. The inspection level shall be S-1 (see 6.5).

4.6.1 Test for clutch fastener. Insignia shall have the clutch fasteners removed and replaced at least 10 times. After being so tested, it shall be impossible to shake the clutch off or remove it by hand without first releasing the clutch spring.

4.6.2 Tests for soldered and fused joints. Insignia to be tested shall be placed in an oven maintained at 1075°F±10°F for not less than 15 minutes. While at the specified temperature, the insignia shall be lifted by one of the prongs without the soldered parts separating. Fused prongs shall be bent back and forth, at room temperature, through an angle of 90° at least ten times or until prong breaks without separation at the fused joint.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:33Z
Check the source to verify that this is the current version before use.

TABLE II End Item Testing

Characteristic	Rqmt para	Test method	No. Determinations per sample unit	Results reported as
Test for clutch fastener	3.6.1	4.6.1	1	Pass or fail
Test for soldered or fused joints	3.6.1	4.6.2	1	Pass or fail
Test for acid test gold plating	3.6.2.1	4.6.3	1	Pass or fail
Test for continuity of rhodium plating	3.6.2.2	4.6.4	1	Pass or fail
Nickel underplating Material identification	3.6.2.2	Std. Comm'l	1	Pass or fail
Plating thickness	3.6.2.2	Std. Comm'l	1	To nearest 0.00001 inch
Tackiness test for lacquer film	3.6.3	4.6.5	1	Pass or fail

MIL-I-19689C(MC)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:33Z
Check the source to verify that this is the current version before use.

4.6.3 Test for acid test gold plating. Pieces selected may be unlacquered or have the lacquer completely removed with an organic solvent. The test acid shall be applied as follows: place a drop of test acid (each drop to be 1/8 inch diameter min) on three different spots on the gold plated surface of the insignia, allowing the drops to remain on the insignia for not less than 2 minutes. If visible chemical action appears, such as evolution of gas, the plating will be considered porous, cut through, peeled, blistered, or insufficient, thereby failing to meet specification requirements. The plating may be considered satisfactory if no visible chemical action appears. The test acid applied at room temperature shall consist of a solution containing 50 percent by volume of CP nitric acid (specific gravity 1.42) and equal volume of distilled water.

4.6.4 Test for continuity of rhodium plating. Test samples or rhodium placed insignia shall be immersed for 1 minute in a "liver of sulphur" solution (2 percent potassium sulfide and 98 percent water by weight) at a temperature of 100°F±10°F. After removal, the insignia shall be washed clean in water, dried, and examined. There shall be no perceptible change in brightness on the plated surfaces,except along the edges, there may be a slight darkening.

4.6.5 Tackiness test for lacquer film. At room temperature (60° to 80°), press a piece of tissue paper against the lacquered surfaces of the insignia for 15 seconds, using any pressure capable of being exerted between thumb and two fingers. The tissue paper shall not adhere to the insignia, but shall fall free when pressure is released.

4.6.6 Chemical composition test. Chemical composition of the copper base alloy shall be determined in accordance with test method 111 of FED-STD-151. Results shall be evaluated to determine compliance with the requirements specified in 3.3.1.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2.

5.1.1 Level A. Each insignia shall be individually mounted on an approximately 1-1/2 by 1-1/2 inch card and wrapped completely in tissue paper. In lieu of the tissue wrapping, the insignia may be individually packaged in an individual polyethylene bag measuring approximately 2 by 2-1/2 inches with a 1-inch lip along the open 2-inch dimension. The polyethylene flexible film shall be 0.0015 inch thick and transparent. Prior to or during the heat seal closing, excess air within the bag

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:33Z
Check the source to verify that this is the current version before use.

shall be expelled. Each bag shall contain a label (see 5.3).

5.1.2 Intermediate packaging. Seventy (70) insignia, unit packaged as specified in 5.1.1, of one type only, shall be packaged in a set-up paperboard box conforming to type I, variety 1, class A, style 4 of PPP-B-676, with the paperboard to be not less than 0.040 inch thick. Dimensions of the box shall be 7 inches in length, 5-1/2 inches in width, and 2-1/2 inches in depth.

5.1.3 Commercial. Insignia shall be packaged in accordance with manufacturer's commercial practice.

5.2 Packing. Packing shall be level B or commercial, as specified (see 6.2).

5.2.1 Level B. Eight-hundred and forty (840) insignia, 12 intermediate packages of one type only, packaged as specified in 5.1.1 shall be packed in a fiberboard shipping container conforming to class-domestic, variety DW, size No. 1A of MIL-B-17757 and assembled, closed and reinforced in accordance with appendix thereto. The fiberboard used in fabricating boxes shall be grade 275.

5.2.2 Commercial. Insignia shall be packed to insure acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules, National Motor Freight Classification Rules, U.S. Postal Service Manual or regulations of other carriers applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or purchase order, the intermediate amd shipping containers shall be marked in accordance with the requirements of MIL-STD-129. A white paper label with the following information legibly printed or stamped thereon in black shall be inserted within each polyethylene bag in order to permit ready identification or the mounting card may be stamped (see 3.9).

Nomenclature
Stock number
Contract number
Name of contractor

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but it is not mandatory.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:33Z
Check the source to verify that this is the current version before use.

6.1 Intended use. The insignia are intended for wear by personnel of the U. S. Marine Corps, officer candidates and members of the platoon leaders class.

6.2 Acquisition requirements. Acquisition documents should specify the following:

(a) Title, number and date of this specification.
(b) Type required (see 1.2).
(c) When a first article is not required (see 3.2).
(d) Selection of applicable level of packaging and packing (see 5.1 and 5.2).
(e) Acceptance criteria.

6. 3 Standard sample. For information regarding the availability of standard sample, address inquiry to the procuring activity issuing the invitation for bids.

6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.5 Acceptance criteria. The acceptance criteria below are recommended for use. The acceptance criteria as specified in the contract or purchase order shall be binding. Unless otherwise specified, the following acceptance criteria are in accordance with MIL-STD-105.

6.5.1 For end item visual examination. An acceptance quality level (AQL), expressed in terms of defects per hundred units, of 2.5 for major defects and 10.0 for total (major and minor combined) defects is recommended.

6.5.2 For end item dimensional examination. An AQL, expressed in terms of defects per hundred units, of 4.0 is recommended.

6.5.3 For packaging examination. An AQL, expressed in terms of defects per hundred units, of 2.5 is recommended.

6.5.4 Examination of count in intermediate containers. An AQL, expressed in defects per hundred units, of 2.5 is recommended.

6.5.5 Testing of the end item. An AQL, expressed in defects

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:33Z
Check the source to verify that this is the current version before use.

per hundred units, of 6.5 is recommended.

6.6 Figures. Figures are furnished for information only. To the extent of any inconsistencies between the written specification and the figures, the specification shall govern.

6.7 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

6.8 Subject term (key word) listing.
Badges
Student
Group

Preparing activity:
Navy-MC
Project No. 8455N477

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:33Z
Check the source to verify that this is the current version before use.

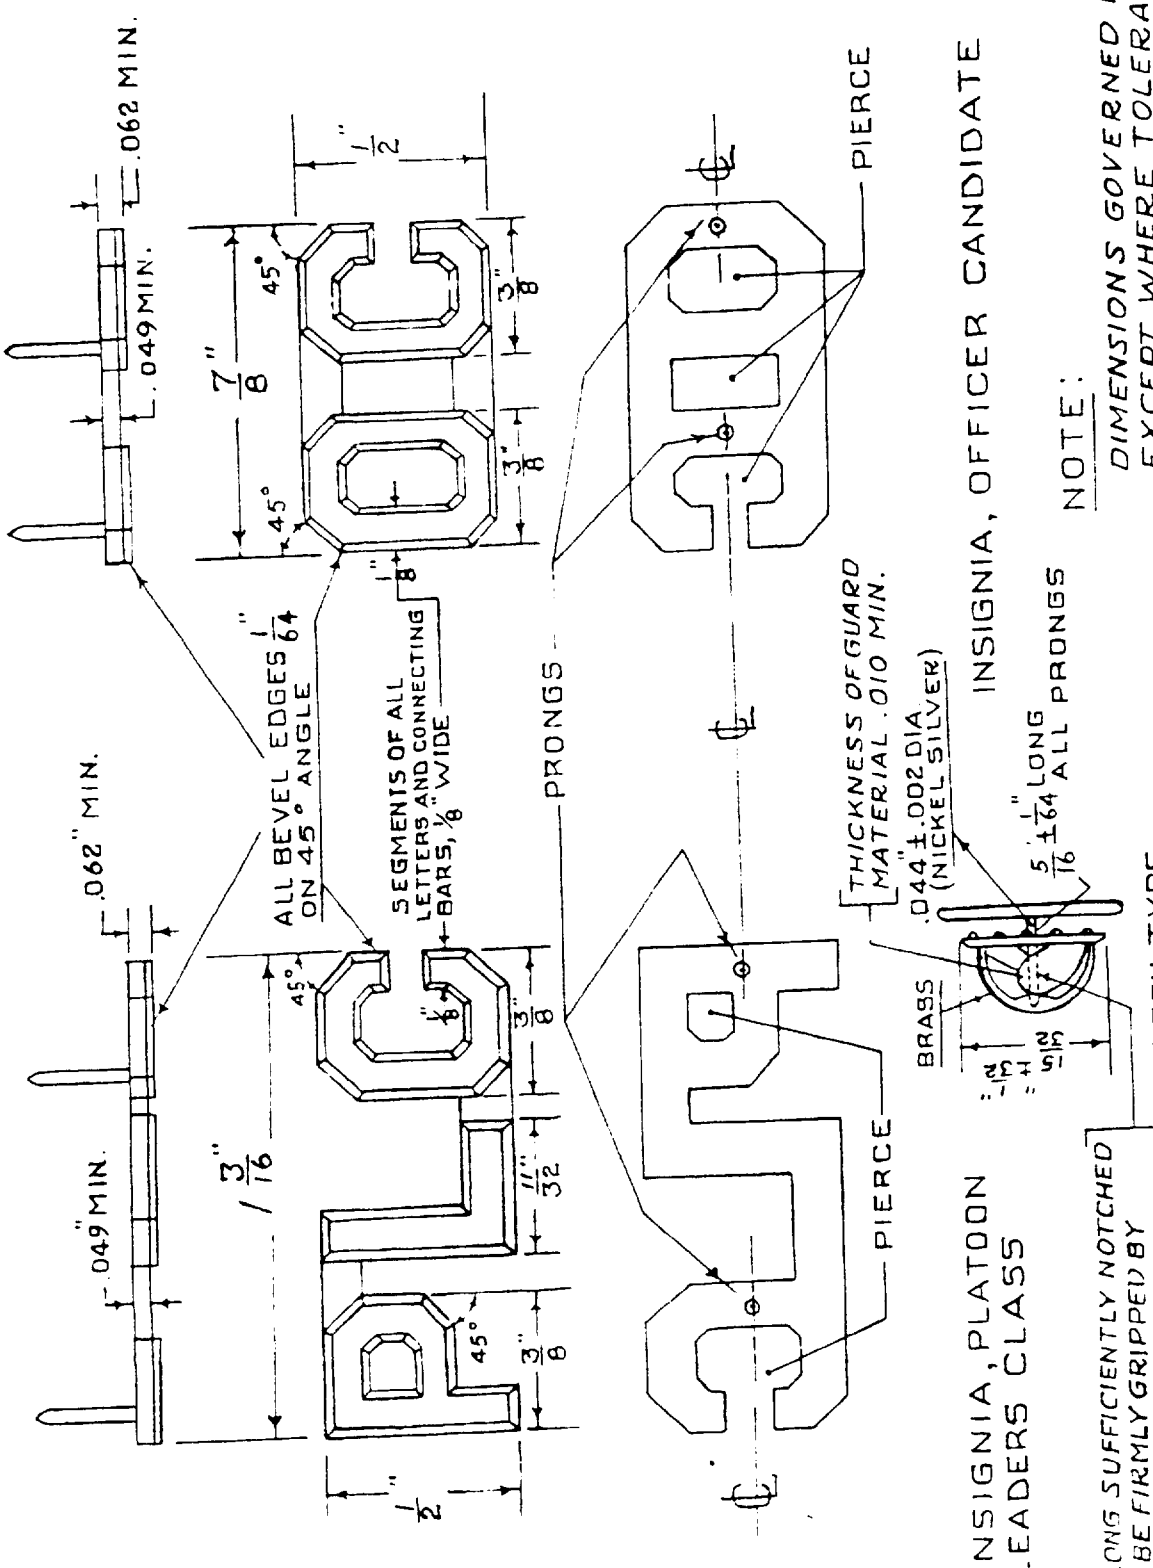


FIGURE 1. INSIGNIA, OFFICER CANDIDATE: AND INSIGNIA, PLATOON LEADERS CLASS

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:33Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:33Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-J-19689C(MC)	7 JANUARY 1991

3. DOCUMENT TITLE

INSIGNIA, OFFICER CANDIDATE AND PLATOON LEADERS CLASS

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
Commanding General, Marine Corps Research, Development, and Acquisition Command (PSE-C)	(1) Commercial (202) 696-1186/87/88	(2) AUTOVON 226-1186/87/88
c. ADDRESS (Include Zip Code) Washington, DC 20380-0001	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 Previous editions are obsolete 198/290

Source: https://assist.dla.mil -- Downloaded: 2020-10-19T00:33Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:33Z
Check the source to verify that this is the current version before use.