MIL-S-19672B(SHIPS)
20 November 1972
SUPERSEDING
MIL-S-19672A(SHIPS)
4 May 1959
(See 6.6)

MILITARY SPECIFICATION

SHOES, SWIM, CORAL

1. SCOPE

1.1 Scope. This specification covers lightweight coral swim shoes for use by swimmers.

1.2 Classification. The shoes shall be furnished in the following sizes and widths, as specified (see 6.2).

Sizes:
6; 6-1/2; 7; 7-1/2; 8; 8-1/2; 9; 9-1/2; 10; 10-1/2; 11; 11-1/2; 12; 12-1/2
Widths:
Narrow (N)
Medium (M)
Wide (W)

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

FEDERAL
V-L-61 - Laces, Nylon.
V-T-295 - Thread, Nylon.
QQ-A-250/11 - Aluminum Alloy 6061, Plate and Sheet.
TT-I-542 - Ink, Marking, Laundry, Black.
CCC-D-950 - Dyeing and Aftertreating Processes for Cotton Cloths.
PPP-B-636 - Boxes, Shipping, Fiberboard.

MILITARY
MIL-C-50 - Copper Alloy, Number 260 Cartridge Brass, 70 Percent, Sheet Strip, Plate Bar, and Discs.
MIL-F-495 - Finish, Chemical, Black, for Copper Alloys.
MIL-M-19595 - Magnetic Effect Limits for Nonmagnetic Equipment Used in the Proximity of Magnetic Influence Ordnance.

STANDARDS

FEDERAL
FED-STD-191 - Textile Test Methods.
FED-STD-595 - Colors.
FED-STD-601 - Rubber, Sampling and Testing.
FED-STD-751 - Stitch, Seam and Stitching.

MILITARY
MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

FSC 8430

Source: https://assist.dla.mil -- Downloaded: 202610-19T06:31Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

UNIFORM CLASSIFICATION COMMITTEE
Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 south Riverside Plaza, Chicago, Illinois 60606.)

NATIONAL CLASSIFICATION BOARD
National Motor Freight Classification Rules

(Application for copies should be addressed to National Motor Freight Traffic Association, Inc., 1616 "P" Street, N.W., Washington, D.C. 20036.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Sample for first article inspection. Prior to beginning production, a sample shall be tested as specified in 4.2 (see 6.3).

3.2 Description. The shoe shall be a plain toe, blucher style with a nylon duck upper and full length rubber outsole. The shoe shall be a sewed-vulcanized fabrication and include half bellows tongue, full cotton fabric insole, lace and drain eyelets, and nylon laces as shown on figure 1.

3.2.1 Lasts. Lasts shall conform to table I.

Table I - Lasts (size 8 shoe).

	Width			Grade between each full size
	Narrow (N)	Medium (M)	Wide (W)	
Length of bottom	10-13/16	10-13/16	10-13/16	1/3
Width of ball	2-1/2	3-8/12	3-10/12	1/12
Width of heel	2-3/8	2-15/32	2-9/16	Blend
Heel to crown	12-7/8	13-3/8	13-7/8	3/8
Waist	9	9-1/2	10	1/4
Ball girth	9-1/8	9-5/8	10-1/8	1/4
Toe spring	3/4	3/4	3/4	Blend

3.2.2 Height. Height of shoes shall be standard commercial grade between sizes. Inside back height for size 8 shoe shall be 5-1/4 inches.

3.3 Material. Material shall be as specified herein. Material not definitely specified shall be of good commercial quality, and free from defects that will affect the intended use.

3.3.1 Rubber. Rubber shall be natural rubber, synthetic rubber, or a mixture of natural and synthetic rubber. When tested in accordance with table II, rubber compounds shall be of the composition and physical requirements specified herein.

3.3.1.1 Upper compound. The upper compound shall conform to the following:

(a) Minimum percent rubber . . . . . 66 (by weight)
(b) Minimum percent new rubber . . . . . 66 (by weight)
(c) Tensile strength, minimum . . . . . 1,400 pounds per square inch (psi)
(d) Tensile strength, after accelerated aging, minimum . . . . . 1,050 psi
(e) Ultimate elongation, percent minimum 400

Source: https://assist.dla.mil -- Downloaded: 202610-19T06:31Z
Check the source to verify that this is the current version before use.

ble pulling meter using the weight dial b. Hold meter switch depressed wh

3.3.1.2 Lining compound. The lining compound shall conform to the following:

(a)	Minimum percent rubber	63 (by weight)
(b)	Minimum percent new rubber	42 (by weight)

3.3.1.3 Outsole compound. The outsole compound shall conform to the following:

(a)	Minimum percent rubber	45 (by weight)
(b)	Minimum percent new rubber	45 (by weight)
(c)	Resistance to abrasion, minimum	35 (see table II)

3.3.1.3.1 Color. The color of the outsole compound shall be gray to conform to #36118 of FED-STD-595.

3.3.2 Fabrics. Fabrics for components shall be as specified herein. When tested in accordance with table II, fabrics shall meet the requirements specified herein.

3.3.2.1 Nylon duck. Nylon duck for the upper shall be woven from not less than three ply twisted thread in both warp and filling and shall conform to the following requirements:

Nominal weight per square yard, minimum	14 ounces
Thread count:	
Warp, minimum	38 per inch
Filling, minimum	23 per inch
Tensile strength:	
Warp, minimum	600 pounds
Filling, minimum	350 pounds

3.3.2.1.1. Color. Nylon duck shall be dyed colorfast to match the color specified in 3.3.1.3.1. When tested in accordance with table III the nylon duck shall show good colorfastness when exposed to light, salt water, and soap.

3.3.2.2 Cotton fabrics. Cotton fabrics shall be as specified herein. The fabrics shall be preshrunk, unbleached, and treated to resist fungi. The mildew inhibitor used shall be 2, 2' methylene-bis (4 chloro-phenol). Dyeing and aftertreating shall conform to CCC-D-950.

3.3.3 Thread. Nylon thread shall conform to type I, class 1, of V-T-295. The color shall be as specified in 3.3.1.3.1. The thread shall be colorfast to light, salt water, and soap.

3.3.4 Laces. Laces shall conform to type I of V-L-61 and shall be 36 inches in length. The color shall be as specified in 3.3.1.3.1 and shall be colorfast to light, salt water, and soap. A lace shall be inserted through the bottom eyelet of the outside quarter of each shoe.

3.3.5 Eyelets. Lace and drain eyelets and washers shall be fabricated from the same material, and shall be either brass conforming to MIL-C-50, or aluminum alloy 6061, conforming to condition T6 of QQ-A-250/11 (see 6.3). Exterior finish of the eyelets shall be natural, matte. Brass eyelets shall have a black finish in accordance with MIL-F-495; aluminum eyelets shall be commercially anodized to a dull gray or dull black color.

3.3.5.1 Lace eyelets. Lace eyelets shall be a rolled rim grommet with inside washer. The grommet and washer shall be equal in size, style, and weight to those commercially designated as number 505 eyelets and 303 washers, respectively.

3.3.5.2 Drainage eyelets. Screened drainage eyelets shall have a 0.345 ± 0.005 inch diameter head. Outside diameter of the barrel shall be 0.218 ± 0.002 inch. Barrel length shall be 0.185 ± 0.005 inch.

3.3.5.3 Washers. Washers shall have an outside diameter of 0.463 ± 0.005 inch, an inside diameter of 0.220 (+ 0.005, -0) inch, and a thickness of 0.009 ± 0.003.

3.3.6 Ink, marking, indelible. Ink shall conform to TT-I-542.

3.4 Construction.

3.4.1 Quarter. The quarter shall be cut from an integral piece of nylon duck as shown on figure 2.

Source: https://assist.dla.mil -- Downloaded: 202610-19T06:31Z
Check the source to verify that this is the current version before use.

3.4.1.1 Lace eyelet stay. The lace eyelet stay shall be cotton fabric, nominal weight 5.8 ounces per square yard. The stay shall be not less than 1-3/8 inches wide, shall extend the full length of the quarter, and be coated on one side with the lining compound.

3.4.1.2 Drain eyelet stay. The drain eyelet stay shall be cotton fabric, nominal weight 5.5 ounces per square yard. The stay shall be approximately 2 by 2 inches. The upper corners shall be rounded and the back side contoured to butt against the counter. The stay shall extend to the bottom of the quarter and shall be coated on one side with the lining compound.

3.4.1.3 Counter. The counter shall be cotton fabric, nominal weight 5.4 ounces per square yard. The counter shall be approximately 2 inches high at the mid-section and approximately 6 inches long. The counter shall be coated on one side with a good grade of stiffening compound to a thickness of 0.060 inch.

3.4.1.3.1 Counter bind. The counter bind shall be cotton fabric, nominal weight 2.8 ounces per square yard, cut straight 1/2-inch wide and finished folded to a width of 1/4 inch.

3.4.1.4 Quarter bind. The quarter bind shall be woven nylon fabric, 7.0 ± 0.5 ounces per square yard. The bind shall be cut bias and full folded to a finish width of 5/8 inch. The color of the quarter bind shall be as specified in 3.3.1.3.1.

3.4.2 Tongue. The tongue shall be cut from an integral piece of nylon duck as shown on figure 3.

3.4.2.1 Tongue bind. The tongue bind shall be as specified in 3.4.1.4.

3.4.3 Vamp. The vamp shall be cut from an integral piece of nylon duck as shown on figure 4.

3.4.3.1 Inside toe cap. The inside toe cap shall be knitted cotton fabric, nominal weight 5.5 ounces per square yard. The cap shall be coated on one side with the lining compound; shall cover the entire inside toe area and extend approximately 1-1/4 inches back from the point of the toe.

3.4.4 Sole. The sole shall be as shown on figure 5.

3.4.4.1 Outsole. The outsole shall be fine crepe curl of outsole compound, 0.150 inch thick at the ball, and 0.200 inch thick at the heel. The outsole shall be plain edge.

3.4.4.1.1 Foxing. Foxing shall be of the upper compound, under the outsole type. The foxing shall be 1/2 inch wide and 0.025 to 0.040 inch in thickness.

3.4.4.2 Binder sole. The binder sole shall be cotton fabric, 5.4 ± 0.5 ounces per square yard. The sole shall be frictioned on both sides and coated on one side with the lining compound to a total thickness of 0.025 inch.

3.4.4.3 Filler sole. The filler sole shall be a good grade of stiffening compound 0.050 to 0.060 inch thick.

3.4.4.4 Insole. The insole shall be cotton fabric, 7.2 ± 0.5 ounces per square yard. The insole shall be coated on one side with a good grade of stiffening compound and laminated to the stiffening compound coated side of a cotton fabric 5.4 ± 0.5 ounces per square yard; coated on one side with a good grade of stiffening compound, total thickness of insole 0.100 inch.

3.5 Fabrication. The fabrication described herein is considered the minimum necessary to produce the finished shoe and is not intended to either limit the number of, or to prescribe the sequence of operations.

3.5.1 Stitches, seams, and stitching. Stitches, seams, and stitching shall conform to FED-STD-751 as specified herein. Seam stitches shall be U.S. standard stitch, type 301 or 401, 8 to 10 stitches per inch. Overedge stitches shall be U.S. standard stitch type 503, 8 to 10 stitches per inch. Thread shall be nylon as specified in 3.3.3.

Source: https://assist.dla.mil -- Downloaded: 202610-19T06:31Z
Check the source to verify that this is the current version before use.

3.5.2 Quarter. Lace eyelet stay (see 3.4.1.1) shall be placed inside quarter, coated side against quarter. Overedge stay to quarter and overedge quarter all around. Seam counter (see 3.4.1.3) inside quarter with counter bind (see 3.4.1.3.1), seam type 301 or 401, LSp-2. Place drain eyelet stay (see 3.4.1.2) inside quarter on each side of the instep, coated side against quarter, and secure with two drain eyelets (see 3.3.5) through each stay. Eyelets shall be approximately 7/8 inch on center and approximately one inch above the bottom of the outsole.

3.5.3 Tongue. Top of tongue shall be binded with tongue bind (see 3.4.2.1), seam type 301 or 401, BSc-1. Secure tongue to quarter by overedging along sides and bottom and by stitching near the rear of eyelet stay. Tongue and quarter shall be binded with quarter bind, (see 3.4.1.4) seam type 301 or 401 BSc-1.

3.5.4 Lace eyelets. Lace eyelets (see 3.3.5.1) shall be installed on each side of the quarter. The center of the eyelets shall be approximately 5/8 inch from the front edge of the quarter. There shall be four pairs of eyelets in each shoe properly spaced between the top and bottom of the quarter.

3.5.5 Vamp. Inside toe cap (see 3.4.3.1) shall be installed, coated side against vamp. Vamp shall be folded under along instep approximately 1/4 inch and secured to quarter and tongue, seam type 301 or 401 LSb-2.

3.5.6 Sole. The sole (see 3.4.4) shall be assembled and the entire shoe shall be vulcanized under pressure to insure a compact unit. The bond between the upper and sole shall not be less than 1/2 inch. As an alternate to figure 5, the sole bottom assembly shall be as follows:

(a) The upper shall be lasted to the insole.
(b) The toe binder shall be cemented and applied to the toe area. The toe binder shall overlap the lasted margin and be flush with the edge of the shoe.
(c) The filler sole shall be applied inside the lasting margin.
(d) The binder sole shall be cemented and applied and shall cover the lasted area.
(e) The foxing shall be cemented around the uppers with the lower edge of the foxing under the top edge of the outer sole.
(f) The outersole shall be cemented and adhered to the bottom of the shoe.

3.6 Marking. Each shoe shall be stamped inside the quarter with the letters "US", shoe size, width, contract or order number and the contractor's name as follows:

US
8-1/2 (M)
Contract or order No.
Contractor's name

3.6.1 Stamping. Stamping shall be block letters in black ink conforming to TT-I-542; 3/8 inch high in first line, 7/32 inch second line; and 3/16 inch third and fourth line.

3.7 Tolerance. Dimensional tolerance for the finished shoes shall be within the limit of plus or minus 3-1/2 percent of the dimensions specified.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 First article inspection. First article inspection shall consist of the examination and tests specified in tables II, III and IV.

4.3 Quality conformance inspection. Quality conformance inspection shall be in accordance with the provisions of MIL-STD-105, except where otherwise indicated herein. In addition to sampling inspection as set forth in MIL-STD-105, process inspection shall be performed during manufacture of the shoes to determine compliance with all required operations and processes which cannot be determined in the completely fabricated shoes and to assure that good workmanship has been employed. Any deviation from requirements or poor workmanship found in process inspection may be cause for rejection of the item or items.

Source: https://assist.dla.mil -- Downloaded: 202610-19T06:31Z
Check the source to verify that this is the current version before use.

4.3.1 Inspection of components and materials.

4.3.1.1 Testing of components. In addition to the quality assurance provisions of the subsidiary specifications and drawings, testing shall be performed on components and materials listed in tables II and III for the characteristics shown. In table II the requirements shall be applicable to the lot average. In table III, the requirement shall be applicable to the individual unit, the inspection level shall be S-1 and the acceptable quality level (AQL) shall be 6.5.

4.3.2 Inspection of the end item.

4.3.2.1 Examination of the end item. The defects found during examination of the end product shall be classified in accordance with paragraph 4.3.2.1.1. The applicable inspection levels and acceptable quality levels (AQLs) shall be as indicated in paragraph 4.3.2.1.3.

4.3.2.1.1 Visual and dimensional examination of shoes. The shoes shall be examined for defects as set forth in table IV. The sample unit shall be one completely fabricated shoe and the selection shall be by pairs. The sample unit for pairing defects shall be one pair. Defects of pairing shall be classified as a single defect.

Table II - Testing of rubber compounds.

Component and lot size expressed in terms of	Characteristic	Requirement paragraph	Test method	Number determination per sample unit	Results reported as numerically to
			FED-STD 601		
Upper compound (1 batch)	Composition[1/]	3.3.1.1	Method No. 16101	2	Nearest per cent
	Tensile strength (before aging)	3.3.1.1	4111	3	Nearest 10 psi
	Tensile strength (after aging)	3.3.1.1	4111 and 7001	3	Nearest 10 psi
	Ultimate elongation	3.3.1.1	4121	3	Nearest 5 percent
Lining compound (1 batch)	Composition[1/]	3.3.1.2	16101	2	Nearest per cent
Outsole compound (1 batch)	Composition[1/]	3.3.1.3	16101	2	Nearest per cent
	Resistance to abrasion	3.3.1.3	14111	3	Nearest index unit

[1/] Testing for composition need not be performed providing the contractor furnishes a certificate of compliance for each batch of compound.

Procedure for sampling and preparation of test samples of rubber compounds indicated in table II. A lot shall consist of from 1 to 5 batches of each type compound. One 6-inch by 6-inch piece shall be cut from each batch in the lot and remilled into a single composite unit. The composite test piece of upper compound shall be 6 inches by 6 inches, 0.10-inch thick. The composite test piece of outsole compound shall be 6 inches by 6 inches, 0.250-inch thick. The sample unit shall be 2 pieces of each compound. The test pieces shall be vulcanized in the same manner as the end item.

Source: https://assist.dla.mil -- Downloaded: 202610-19T06:31Z
Check the source to verify that this is the current version before use.

Table III - Testing of cotton and duck fabrics.

Component and lot size expressed in terms of	Characteristic	Requirement paragraph	Test method	Number determination per sample unit	Results reported as: Numerically to nearest	Results reported as: Pass or fail	Sample unit
Nylon duck (1 yd full width)	Material identification	3.3.2.1	FED-STD-191 Method 1530	1	-	X	
	Yarn ply warp	3.3.2.1	Standard commercial	1	-	X	
	Filling	3.3.2.1	Standard commercial	1	-	X	
	Weight/Sq Yd	3.3.2.1	Method 5041	5	0.1 oz	-	1 yard full width
	Thread count warp	3.3.2.1	Method 5050	5	Number	-	
	Filling	3.3.2.1	Method 5050	5	Number	-	
	Tensile strength warp	3.3.2.1	Method 5100	5	1 pound	-	
	Filling	3.3.2.1	Method 5100	5	1 pound	-	
	Color fastness: Salt water and soap	3.3.2.1.1	Method 5632	1	-	Good, fair, or poor	
	Light	3.3.2.1.1	Method 5660	1	-		
Quarter & tongue binding (1 yd full width or gross yds as applicable)	Material identification	3.4.1.4 3.4.2.1	Method 1530	1	-	X	1/4 yd full width or 3 yds for gross yds
	Weight/sq yd	3.4.1.4 3.4.2.1	Method 5041	5	0.1 oz	-	
Cotton fabrics (1 yd full width each type and weight)	Material identification	3.4.1.1 to 3.4.1.3.1, 3.4.3.1, 3.4.4.2, 3.4.4.4	Method 1200	1	-	X	2 yds full width each type and weight
	Weight/sq yd	3.4.1.1 to 3.4.1.3.1, 3.4.3.1, 3.4.4.2, 3.4.4.4	Method 5041	5	0.1 oz	-	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:31Z
Check the source to verify that this is the current version before use.

Table IV - Visual and dimensional examination.

Examination for	Defect	Major	Minor
Pairing	Not properly mated (i.e., not right and left of same size)	X	
	Height variation between shoes of more than 1/4 inch	X	
	Height variation between shoes of 1/8 inch to 1/4 inch		X
Cleanness	Any spot or stain clearly noticeable		X
Color	Exterior not specified color	X	
	Exterior color not uniform		X
Material	Any component not fabricated of the specified material	X	
Design	Design not as specified	X	
Construction and workmanship General (applicable to all components and assemblies unless otherwise indicated herein)	Any component missing	X	
	Any cut, tear, hole, rip, mend, weak place or other deficiencies seriously affecting serviceability	X	
	Defective or damaged component affecting serviceability but not seriously (e.g., malformed lace eyelet)		X
	Any component misplaced, seriously affecting serviceability (e.g., tongue misplaced or creased to an extent where it will cause discomfort to user)	X	
	Any component misplaced affecting serviceability, but not seriously (e.g., drain eyelets slightly out of alignment)		X
	Any operation omitted	X	
	Any operation not properly performed seriously affecting serviceability	X	
	Any operation not properly performed affecting serviceability but not seriously (e.g., eyelet reversed on assembly)		X
Seams and stitching[1/]	Not specified seam or stitch type	X	
	Any row of stitching missing	X	
	Raw edge showing which should be concealed		X
	Irregular or uneven stitching affecting appearance		X
	Less than 8 but not less than 6 stitches per inch		X

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-19T06:31Z
Check the source to verify that this is the current version before use.

Table IV - Visual and dimensional examination. (continued)

Examination for	Defect	Major	Minor
Seams and stitching 1/ (continued)	Less than 6 stitches per inch	X	
	Loose stitch tension resulting in a loosely secured seam	X	
	Tight stitch tension resulting in puckering of fabric or assembly	X	
	Any open seam	X	
Rubber components	Not securely bonded or vulcanized where required	X	
	Burned gum	X	
	Porous or imbedded foreign matter	X	
	Poor or incomplete vulcanization	X	
Eyelets	One or two eyelets not securely clinched (i.e., can be turned by hand but are not expected to become detached in use)		X
	More than two eyelets not securely clinched but are not expected to become detached in use	X	
	Any eyelet not securely clinched and is expected to become detached in use	X	
	Eyelets not in proper alignment interfering with proper lacing	X	
Marking	Missing, incomplete, incorrect, not applied in the specified manner, misplaced, illegible or size or color not as specified		X

1/ When one or more stitches are broken or when two or more continuous skipped stitches or run-offs occur in a single stitched seam or on both rows of stitching in a double stitched seam, it shall be classified as a major defect. When one or more stitches are broken or when two or more continuous skipped stitches or run-offs occur in only one row of stitching in a double stitched seam, it shall be classified as a minor defect.

4.3.2.1.2 Examination of preparation for delivery. An examination will be made to determine that packaging, packing and marking as required by section 5 of this specification are complied with. Defects will be scored in accordance with table V below. The sample unit shall be one shipping container fully prepared for delivery. The lot size shall be the number of containers in the inspection lot. The inspection level and acceptable quality level shall be as indicated in paragraph 4.3.2.1.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:31Z
Check the source to verify that this is the current version before use.

Table V - Examination of preparation for delivery defects.

Examination	Defect
Markings, exterior and interior	Incorrect; illegible; of improper size, location, sequence, or method of application
Materials	Any nonconforming component; component missing, damaged, or otherwise defective affecting serviceability
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps, loose strapping, etc. Bulging or distortion of containers
Weight or content, exterior and interior	Number per container is more or less than required, gross/net weight exceeds requirement

4.3.2.1.3 Inspection levels and acceptable quality levels (AQLs). The inspection levels and the acceptable quality levels, expressed in defects per 100 units, shall be in accordance with table VI.

Table VI - Inspection and quality levels.

	Inspection level	AQL Major	AQL Total
For examination in paragraph 4.3.2.1.1	II	2.5	6.5
For examination in paragraph 4.3.2.1.2	S-2	-	2.5

5. PREPARATION FOR DELIVERY

(The preparation for delivery requirements specified herein apply only for direct Government procurements. For the extent of applicability of the preparation for delivery requirements of referenced documents listed in section 2, see 6.4.)

5.1 Packaging. Packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A. Each pair of swim shoes shall be inserted in a snug-fitting clear polyethylene film bag of 0.0015-inch thickness (+ 20 percent tolerance). The polyethylene bag shall be formed with heat sealed seams that are straight, continuous, and parallel to each other and the formed edges of the bag. Closure of the polyethylene bag shall be accomplished by means of a mechanical tie (paper or plastic covered soft steel wire, aluminum band, etc.). Prior to or during the closure operation, excess air within the bag shall be expelled.

5.1.2 Level C. Each pair of swim shoes shall be protected against deterioration and physical damage during shipment from the supply source to the first receiving activity for immediate use. The supplier's normal packaging methods may be utilized when such meet the requirements of this level.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. Swim shoes of one size, packaged as specified in 5.1, shall be packed 24 pairs in a fiberboard box conforming to PPP-B-636, class weather-resistant, grade V, with variety and style at the supplier's option. Box reinforcement shall be by use of non-metallic or tape banding. All box seams, corners and the manufacturer's joint shall be waterproofed in accordance with the appendix to PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 202610-19T06:31Z
Check the source to verify that this is the current version before use.

5.2.2 Level B. Swim shoes of one size, packaged as specified in 5.1, shall be packed 24 pairs in a fiberboard box conforming to PPP-B-636, class-domestic and of minimum 250 grade, with variety and style at the supplier's option. Box closures shall be in accordance with the appendix to PPP-B-636.

5.2.3 Level C. Swim shoes, of one size packaged as specified in 5.1, shall be packed 24 pairs to the container, in containers in a manner to insure safe delivery and acceptance at destination. Containers shall comply with the Uniform Freight Classification Rules, National Motor Freight Classification Rules, or other carrier regulations applicable to the mode of transportation.

5.3 Marking. In addition to any special marking specified in the contract or order, each unit and intermediate package and shipping container shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The shoes covered in this specification are intended to be worn by swimmers for providing protection to the swimmer's feet.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Size and width required (see 1.2).
(c) Selection of applicable levels of packaging and packing required (see 5.1 and 5.2).

6.3 Eyelets. Eyelet materials are restrictive to those of 3.3.5 to meet certain magnetic characteristics not specified herein. Other metallic materials will be acceptable, provided the materials conform to MIL-M-19595.

6.4 Sub-contracted material and parts. The preparation for delivery requirements of referenced documents listed in Section 2 do not apply when material and parts are procured by the supplier for incorporation into the equipment and lose their separate identity when the equipment is shipped.

6.5 First article inspection.

6.5.1 Invitations for bids should provide that the Government reserves the right to waive the requirements for samples for first article inspection as to those bidders offering a product which has been previously procured or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending procurement.

6.6 THE MARGINS OF THIS SPECIFICATION ARE MARKED "#" TO INDICATE WHERE CHANGES (ADDITIONS, MODIFICATIONS, CORRECTIONS, DELETIONS) FROM THE PREVIOUS ISSUE HAVE BEEN MADE. THIS WAS DONE AS A CONVENIENCE ONLY AND THE GOVERNMENT ASSUMES NO LIABILITY WHATSOEVER FOR ANY INACCURACIES IN THESE NOTATIONS. BIDDERS AND CONTRACTORS ARE CAUTIONED TO EVALUATE THE REQUIREMENTS OF THIS DOCUMENT BASED ON THE ENTIRE CONTENT IRRESPECTIVE OF THE MARGINAL NOTATIONS AND RELATIONSHIP TO THE LAST PREVIOUS ISSUE.

Preparing activity:
Navy - SH
(Project 8430-N002)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:31Z
Check the source to verify that this is the current version before use.

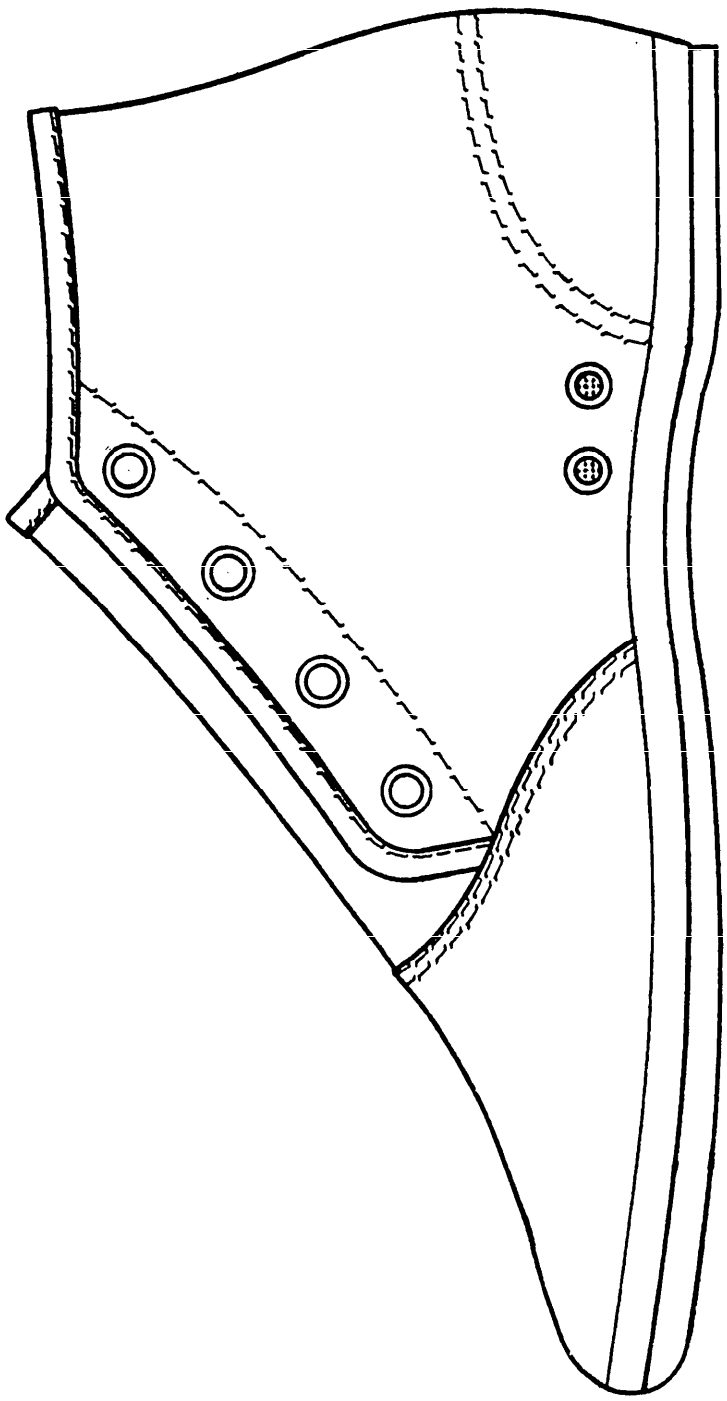


Figure 1 - Swim shoes.

Source: https://assist.dla.mil -- Downloaded: 20261O-19T06:31Z
Check the source to verify that this is the current version before use.

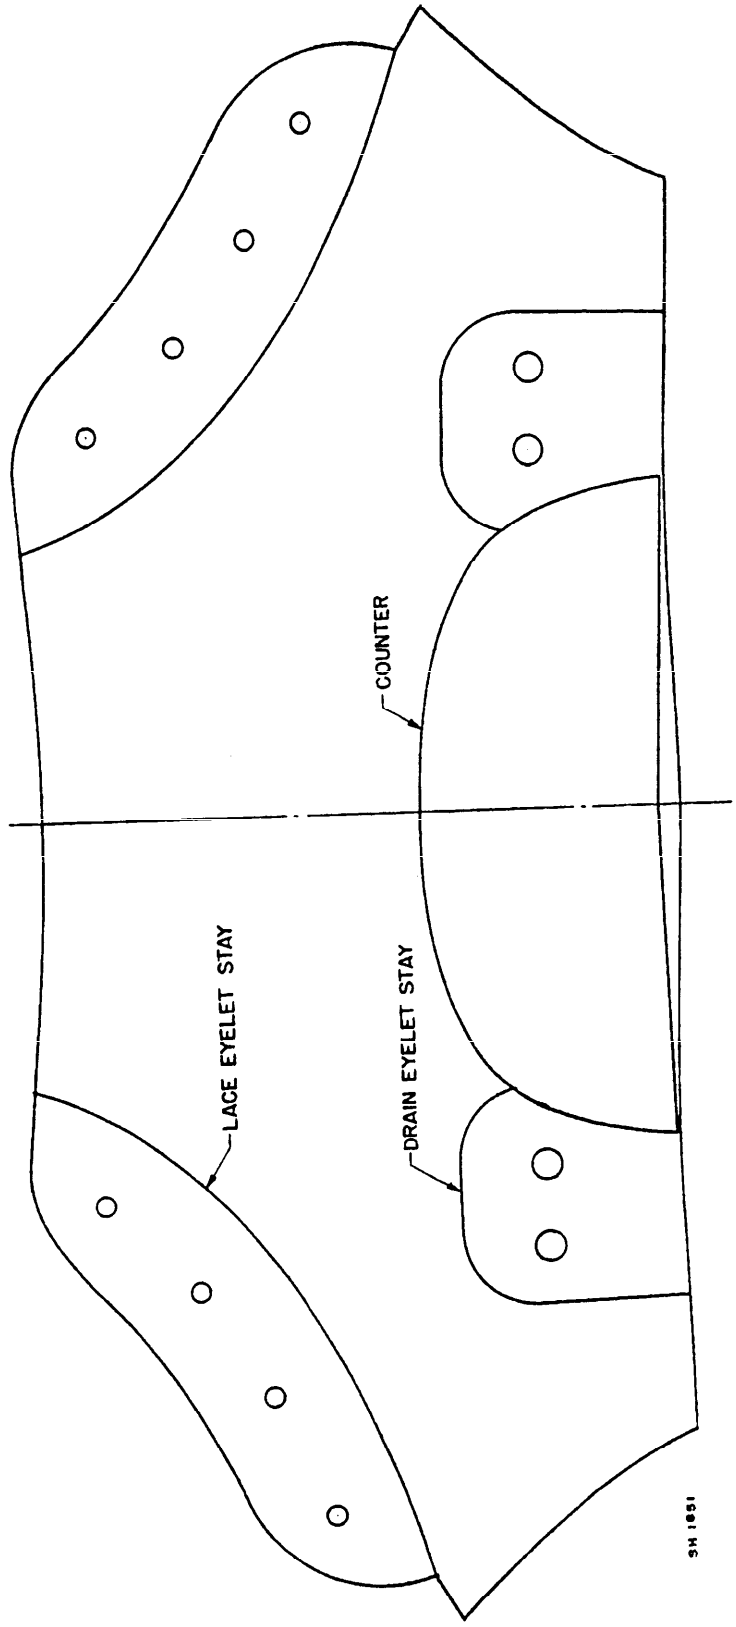


Figure 2 - Quarter.

Source: https://assist.dla.mil -- Downloaded: 20261O-19T06:31Z
Check the source to verify that this is the currentversion before use.

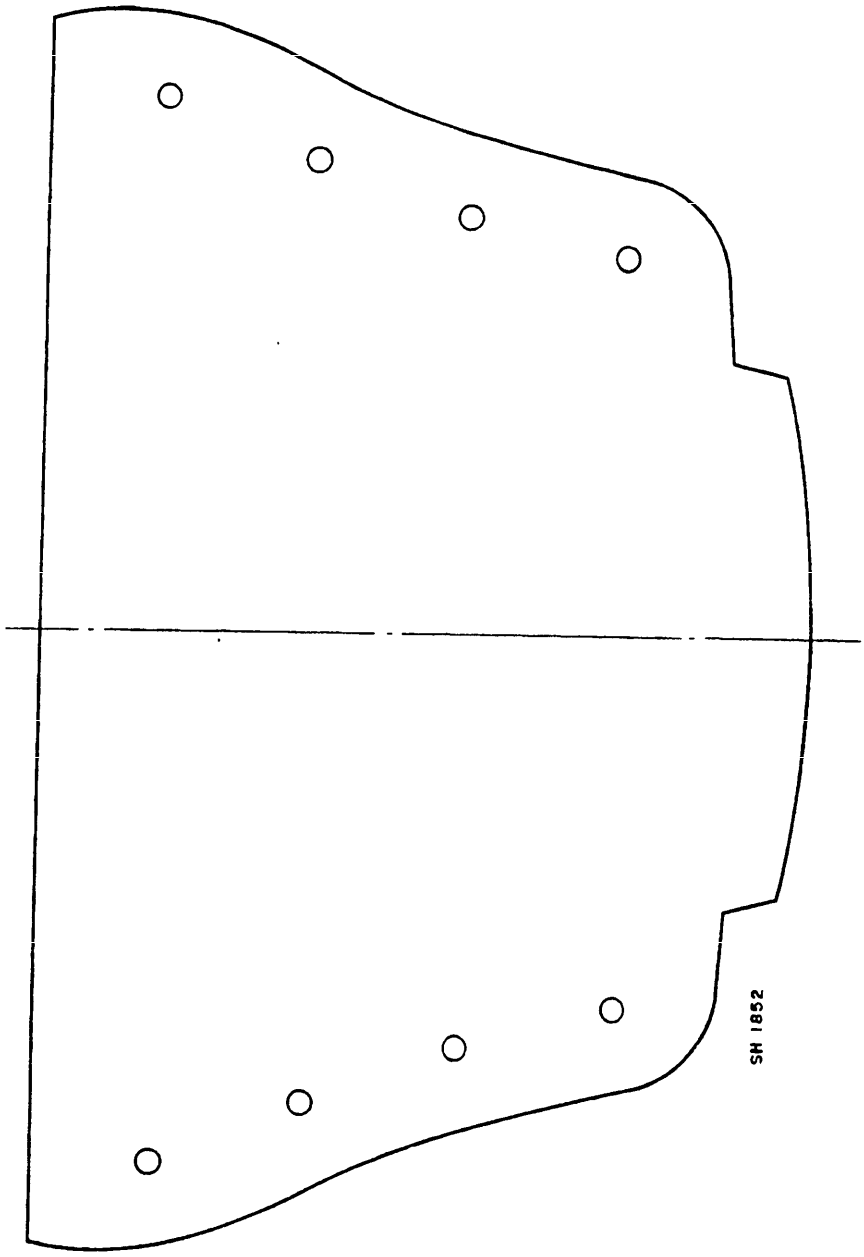


Figure 3 - Tongue.

Figure 3 - Tongue

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:31Z
Check the source to verify that this is the current version before use.

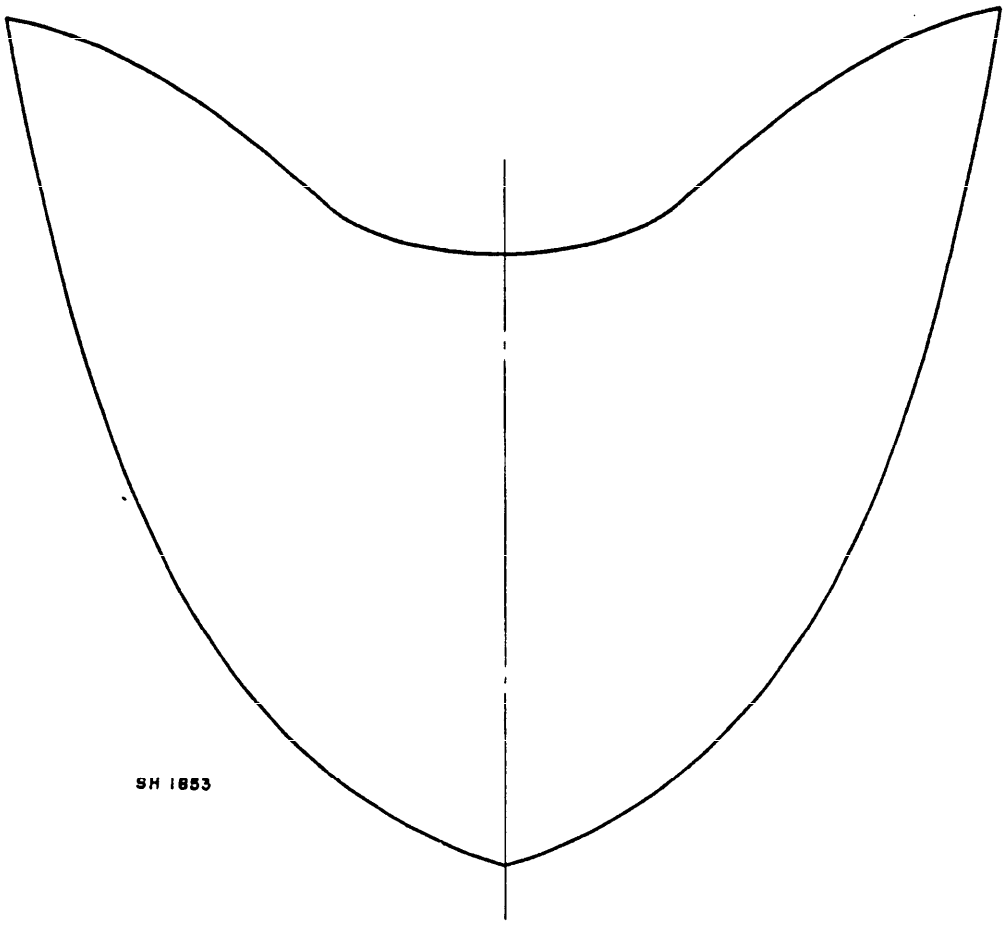


Figure 4 - Vamp.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:31Z
Check the source to verify that this is the current version before use.

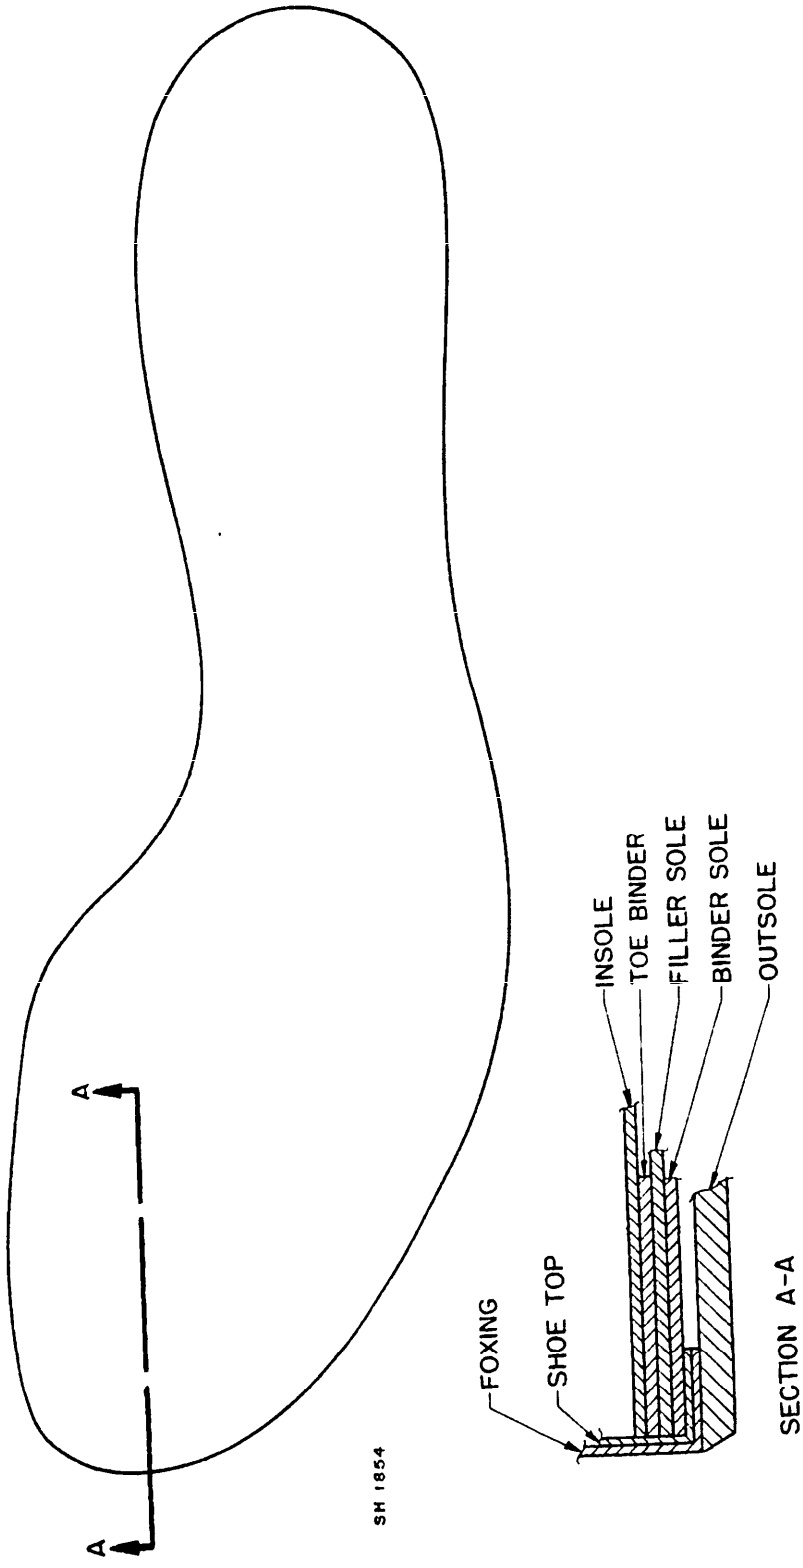


Figure 5 - Sole.

Source: https://assist.dla.mil -- Downloaded: 20261O-19T06:31Z
Check the source to verify that this is the currentversion before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 20261O-19T06:31Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander, Naval Ship Engineering Center
Code 6124, Center Building
Prince George's Center
Hyattsville, MD 20782

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:31Z
Check the source to verify that this is the current version before use.