FED. SUP. CLASS. 5306

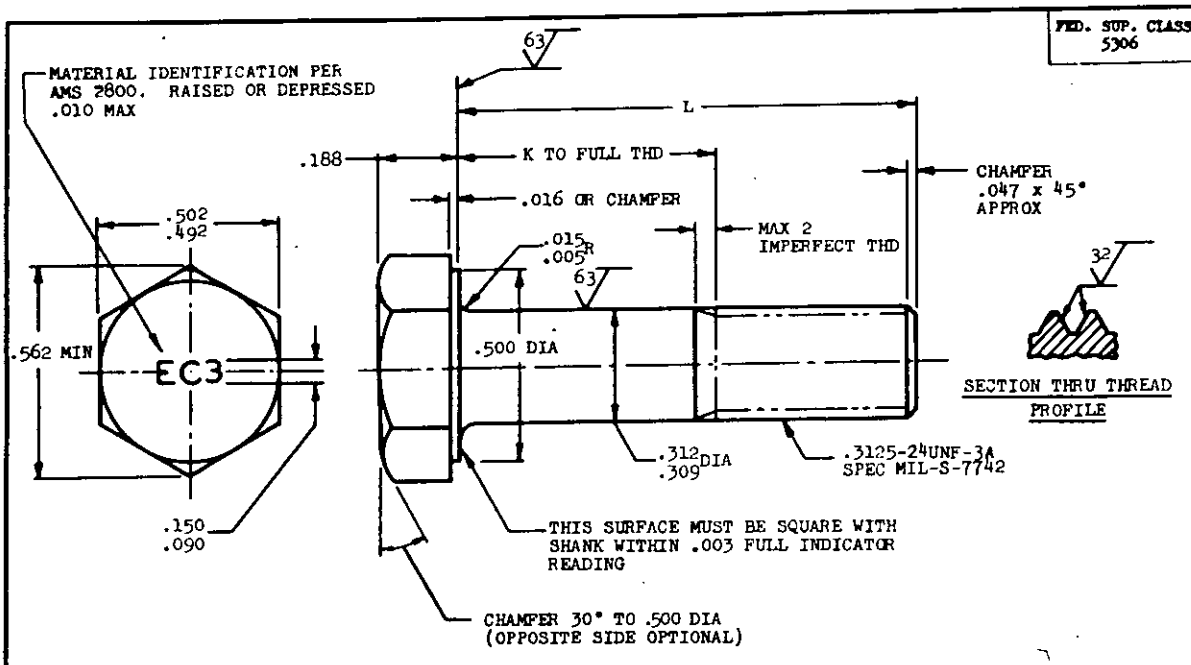

L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.
			1.375	.688	AN104818	2.750	2.062	AN104832	4.500	3.812	AN104846
			1.438	.750	AN104819	2.875	2.188	AN104833	4.625	3.938	AN104847
.625	(a)	AN104806	1.500	.812	AN104820	3.000	2.312	AN104834	4.750	4.062	AN104848
.688	(a)	AN104807	1.562	.875	AN104821	3.125	2.438	AN104835	4.875	4.188	AN104849
.750	(a)	AN104808	1.625	.938	AN104822	3.250	2.562	AN104836	5.000	4.312	AN104850
.812	.125	AN104809	1.688	1.000	AN104823	3.375	2.688	AN104837	5.125	4.438	AN104851
.875	.188	AN104810	1.750	1.062	AN104824	3.500	2.812	AN104838	5.250	4.562	AN104852
.938	.250	AN104811	1.875	1.188	AN104825	3.625	2.938	AN104839	5.375	4.688	AN104853
1.000	.312	AN104812	2.000	1.312	AN104826	3.750	3.062	AN104840	5.500	4.812	AN104854
1.062	.375	AN104813	2.125	1.438	AN104827	3.875	3.188	AN104841	5.625	4.938	AN104855
1.125	.438	AN104814	2.250	1.562	AN104828	4.000	3.312	AN104842	5.750	5.062	AN104856
1.188	.500	AN104815	2.375	1.688	AN104829	4.125	3.438	AN104843	5.875	5.188	AN104857
1.250	.562	AN104816	2.500	1.812	AN104830	4.250	3.562	AN104844	6.000	5.312	AN104858
1.312	.625	AN104817	2.625	1.938	AN104831	4.375	3.688	AN104845			

(a) THREAD TO HEAD. MAXIMUM TWO IMPERFECT THREADS.

NOTE: (1) SHANK SHALL BE STRAIGHT WITHIN .003 FIR. PER INCH OF BOLT LENGTH.
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .015 FIR.

MATERIAL: CORROSION RESISTANT STEEL - SEE MANUFACTURING SPECIFICATION

SURFACE ROUGHNESS: AS107

MANUFACTURING SPECIFICATION: AMS 7472

(3) **INSPECTION:** ALL PARTS SHALL UNDERGO FLUORESCENT INSPECTION IN ACCORDANCE WITH AMS2645

BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

DO NOT USE UNASSIGNED PART NUMBERS.

INACTIVE FOR NEW DESIGN AFTER 27 DEC 1966 NO SUPERSEDING STANDARD.

THIS STANDARD WAS DEVELOPED COOPERATIVELY BY THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 8 June 49 REVISED (1) 32 Aug 54 (2) 27 Dec 66 (3) 30 June 1986

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

NOTICE: When government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all applicable standard drawings for the same product and shall become effective for the procurement of aeronautical supplies or for use in new design not later than 6 months after the latest date of approval shown.

P.A. USAF - 11 Other Cust Navy-AS Army-AV	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN104801 THRU AN104900
	BOLT - CRES HEX HEAD .3125-24	

*U.S. GOVERNMENT PRINTING OFFICE 1967-251-515/3913

Project No. 5306-1032

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:25Z
Check the source to verify that this is the current version before use.