
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE.—This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or new design, not later than six months after the dated date of approval shown.

FED. SUP. CLASS. 5306

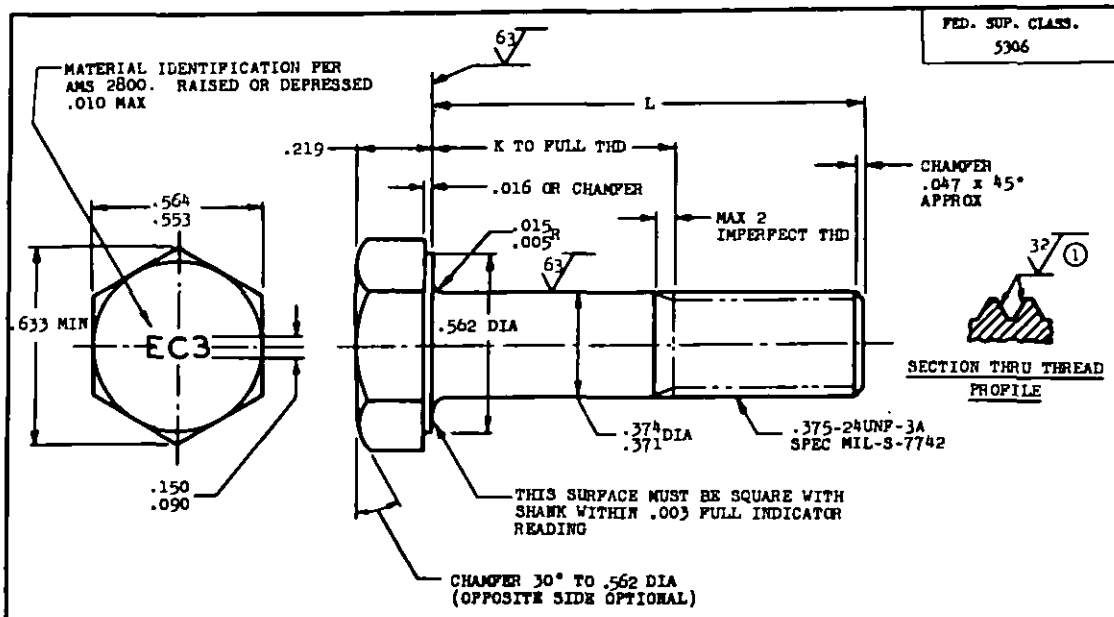

L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.
			1.500	.750	AN104918	3.000	2.250	AN104932	4.750	4.000	AN104946
			1.562	.812	AN104919	3.125	2.375	AN104933	4.875	4.125	AN104947
.750	(a)	AN104906	1.625	.875	AN104920	3.250	2.500	AN104934	5.000	4.250	AN104948
.812	(a)	AN104907	1.688	.938	AN104921	3.375	2.625	AN104935	5.125	4.375	AN104949
.875	.125	AN104908	1.750	1.000	AN104922	3.500	2.750	AN104936	5.250	4.500	AN104950
.938	.188	AN104909	1.875	1.125	AN104923	3.625	2.875	AN104937	5.375	4.625	AN104951
1.000	.250	AN104910	2.000	1.250	AN104924	3.750	3.000	AN104938	5.500	4.750	AN104952
1.062	.312	AN104911	2.125	1.375	AN104925	3.875	3.125	AN104939	5.625	4.875	AN104953
1.125	.375	AN104912	2.250	1.500	AN104926	4.000	3.250	AN104940	5.750	5.000	AN104954
1.188	.438	AN104913	2.375	1.625	AN104927	4.125	3.375	AN104941	5.875	5.125	AN104955
1.250	.500	AN104914	2.500	1.750	AN104928	4.250	3.500	AN104942	6.000	5.250	AN104956
1.312	.562	AN104915	2.625	1.875	AN104929	4.375	3.625	AN104943			
1.375	.625	AN104916	2.750	2.000	AN104930	4.500	3.750	AN104944			
1.438	.688	AN104917	2.875	2.125	AN104931	4.625	3.875	AN104945			

(a) THREAD TO HEAD. MAXIMUM TWO IMPERFECT THREADS.

NOTE: (1) SHANK SHALL BE STRAIGHT WITHIN .0025 FIR. PER INCH OF BOLT LENGTH.
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .017 FIR.

MATERIAL: CORROSION RESISTANT STEEL - SEE MANUFACTURING SPECIFICATION

SURFACE ROUGHNESS: AS107

MANUFACTURING SPECIFICATION: AMS 7472

③ INSPECTION: ALL PARTS SHALL UNDERGO FLUORESCENT PENETRANT INSPECTION IN ACCORDANCE WITH AMS2645.

BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

DO NOT USE UNASSIGNED PART NUMBERS.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

INACTIVE FOR DESIGN AFTER 27 DEC 1966 NO SUPERSEDING STANDARD.

APPROVED 19 Jul 49 REVISED ① 31 Aug 54 ② 27 Dec 66 ③ 10 June 1986

P.A. * USAF - 11 Other Cust Navy - AS Army - AV	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN104901 THRU AN105000
	BOLT - CRES HEX HEAD .375-24	

Project No. 5306-1033

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:25Z
Check the source to verify that this is the current version before use.