FED. SUP CLASS.
5306

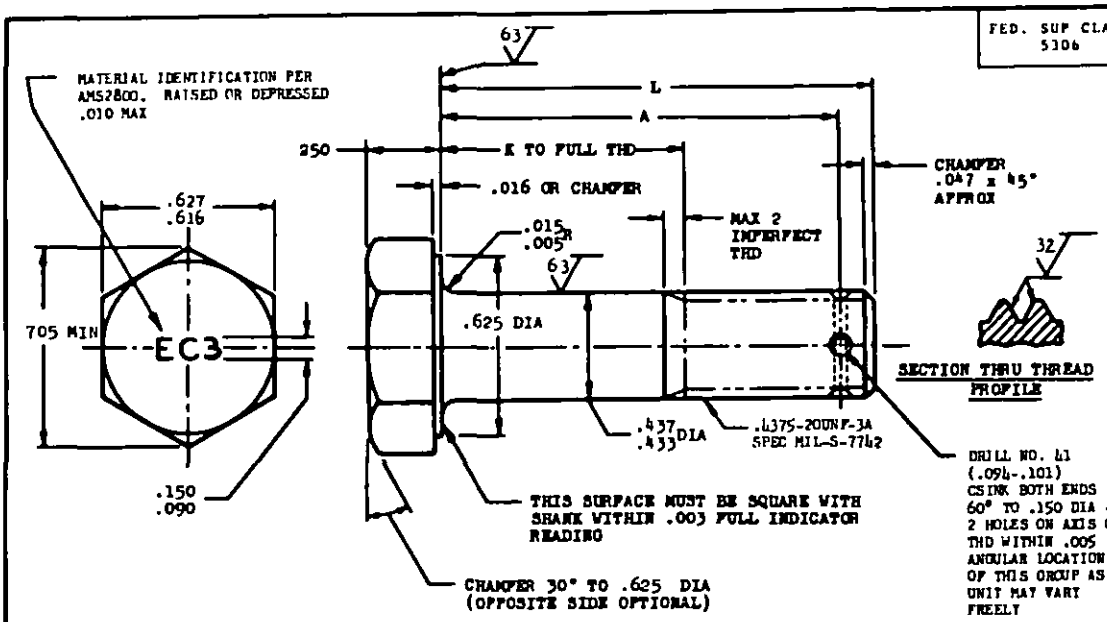

L	A	K +.000 -.060	PART NO.	L	A	K +.000 -.060	PART NO.	L	A	K +.000 -.060	PART NO.
				2.125	1.985	1.312	AN105924	4.750	4.610	3.938	AN105945
				2.250	2.110	1.438	AN105925	4.875	4.735	4.062	AN105946
				2.375	2.235	1.562	AN105926	5.000	4.860	4.188	AN105947
.812	.672	(a)	AN105906	2.500	2.360	1.688	AN105927	5.125	4.985	4.312	AN105948
.875	.735	(a)	AN105907	2.625	2.485	1.812	AN105928	5.250	5.110	4.438	AN105949
.938	.798	.125	AN105908	2.750	2.610	1.938	AN105929	5.375	5.235	4.562	AN105950
1.000	.860	.188	AN105909	2.875	2.735	2.062	AN105930	5.500	5.360	4.688	AN105951
1.062	.922	.250	AN105910	3.000	2.860	2.188	AN105931	5.625	5.485	4.812	AN105952
1.125	.985	.312	AN105911	3.125	2.985	2.312	AN105932	5.750	5.610	4.938	AN105953
1.188	1.048	.375	AN105912	3.250	3.110	2.438	AN105933	5.875	5.735	5.062	AN105954
1.250	1.110	.438	AN105913	3.375	3.235	2.562	AN105934	6.000	5.860	5.188	AN105955
1.312	1.172	.500	AN105914	3.500	3.360	2.688	AN105935				
1.375	1.235	.562	AN105915	3.625	3.485	2.812	AN105936				
1.438	1.298	.625	AN105916	3.750	3.610	2.938	AN105937				
1.500	1.360	.688	AN105917	3.875	3.735	3.062	AN105938				
1.562	1.422	.750	AN105918	4.000	3.860	3.188	AN105939				
1.625	1.485	.812	AN105919	4.125	3.965	3.312	AN105940				
1.688	1.548	.875	AN105920	4.250	4.110	3.438	AN105941				
1.750	1.610	.938	AN105921	4.375	4.235	3.562	AN105942				
1.875	1.735	1.062	AN105922	4.500	4.360	3.688	AN105943				
2.000	1.860	1.188	AN105923	4.625	4.485	3.812	AN105944				

(a) THREAD TO HEAD. MAXIMUM TWO IMPERFECT THREADS.

NOTE: (1) SHANK SHALL BE STRAIGHT WITHIN .0025 FIR. PER INCH OF BOLT LENGTH.
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .019 FIR.

INACTIVE FOR DESIGN AFTER 27 DEC 1966 NO SUPERSEDING STANDARD.

MATERIAL: CORROSION RESISTANT STEEL - SEE MANUFACTURING SPECIFICATION
SURFACE ROUGHNESS: AS107
MANUFACTURING SPECIFICATION: AMS 7472
(3) INSPECTION: ALL PARTS SHALL UNDERGO FLUORESCENT PENETRANT INSPECTION IN ACCORDANCE WITH AMS2645.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.
DO NOT USE UNASSIGNED PART NUMBERS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 18 Jul 49 REVISED (1) 31 Aug 54 (2) 27 Dec 66 (3) 30 June 1986

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

P.A.
USAF - 11
Other Cust
Navy - AS
Army - AV

AIR FORCE-NAVY AERONAUTICAL STANDARD

BOLT - CRES HEX HEAD, DRILLED SHANK, .4375-20

AN105901 THRU AN106000

Project No. 5306-1043

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:25Z
Check the source to verify that this is the current version before use.