DOD-STD-35-100(MI)

12 AUGUST 1978

SUPERSEDING
MIL-STD-35-100(MI)
6 FEBRUARY 1976

MILITARY STANDARD

REGULATORS AND NONPOWERED VALVES (HYDRAULIC, PNEUMATIC, AND VACUUM)

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

FSC EM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Regulators and Nonpowered Valves (Hydraulic, Pneumatic, and Vacuum)
Automated Engineering
Document Preparation System

DOD-STD-35-1OOA(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-100A(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for Regulators and Nonpowered Valves (Hydraulic, Pneumatic, and Vacuum).

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	13
	2.1	Issues of documents	13
	2.2	Other publications	14
	3.	DEFINITIONS	15
	4.	GENERAL REQUIREMENTS	17
	4.1	Introduction	17
	4.2	Specification Requirement Sheet (SRS)	17
	4.3	Configuration	17
	4.3.1	Dimensions	17
	4.3.2	Illustrations	17
	4.4	Units of measure	17
	5.	DETAILED REQUIREMENTS	19
	5.1	Introduction	19
	5.2	MSE Formats	19
	5.3	Referenced documents	19
	5.4	Test matrix	19
	5.5	Tabulation	22
	5.6	Keyword Code Index (KCI) and Standard Paragraphs	25
	5.6.1	Interrelationship of Codes	25
	5.6.2	Automatic MSE Data	25
	5.6.3	DOD-STD-35 Tables	25

TABLES

Table	I.	Title Index	2
	II.	Test matrix	20
	III.	Tabulation candidates	22

APPENDICES

Appendix	A.	Illustrations	301
	B.	Characteristic Code Index	345
		Index	357

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for Regulators and Nonpowered Valves (Hydraulic, Pneumatic, and Vacuum).

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. It is recommended that MIL-HDBK-227A, election and Use of Regulating and Control Valves be reviewed prior to using this dash-numbered part book.

The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE'S for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
REGULATOR, AIR PRESSURE? DEMAND	209009	MIL-R-19558	DIVERS
		MIL-R-24169	DIVERS
REGULATOR, OXYGEN, DEMAND	2090110	MIL–R–7605	PRESSURE BREATHING
REGULATOR, OXYGEN, DILUTER DEMAND	209011	MIL-R-6018	BREATHING
		MIL-R-6371	PRESSURE BREATHING
VALVE, AIR VENTING, STEAM	209012	MIL-V-18499	AUTOMATIC
		MS39122	FOR MAINS
		WW-V-151	THERMOSTATIC
VALVE, ANGLE	209013	WW-V-51	BRONZE
		MIL-V-1187	BRONZE, 300WSP
		MIL-V-1202	BRONZE, REGRINDABLE
		MIL-V-2187	MAGAZINE SPRINKLING
		MIL-V-17737	BOILER BLOW
		MIL-V–18434	STEEL
		MIL-V-18826	CAST IRON
		MIL–V–20064	NONFERROUS
		MIL-V–22052	OUTSIDE SCREW AND YOKE
		MIL–V-22094	FLANGED BONNET
		MIL–V-22682	ASTERN
		MIL-V-22854 MS17243	REFRIGERANT-12
		MIL–V-22862 MS17248	COMPRESSOR SERVICE
		MIL-V-24109	HIGH PRESSURE
		MIL-V-24439	HIGH PRESSURE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I, TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
VALVE ASSEMBLY, POPPET, HULL DRAIN	209014	MS51342	1-1/2 INCH
		MS51345	3 INCH
		MS51348	5 INCH
VALVE, BALL	209015	WW-V-35	PIPING SYSTEMS
		MIL-V-22687	NAVAL SHIPBOARD 2-l/2 INCH MAX
		MIL-V-24509	SEWAGE AND SEA WATER
VALVE, BUTTERFLY	209016	MIL-V-22133	RESILIENT AND METAL SEATED
		WW-V-1967	BRASS OR BRONZE
VALVE, CHECK	209002	WW-V-51	BRONZE
		MIL-V-5027	OXYGEN, HIGH PRESSURE
		AN6014	
		AN6015	
		AN6016	
		AN6017	
		AN6018	
		MS22035	
		MS90338	
		MIL-V-5524	HYDRAULIC
		AN6207	
		AN6249	
		AN6280	
		MS28890	
		MIL-V-5528	CONTROLLABLE
		AN6296	
		MIL-V-6129	VACUUM AND PRESSURE
		MS28050	
		MIL-V-6405	TWO-WAY
		MIL-V-7899	FUEL, LOW PRESSURE
		MS28882	
		MS28884	
		MIL-V-7908	LOW PRESSURE, OXYGEN
		MS21211	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	COVERAGE
VALVE, CHECK	209002 (CONT)	MIL-V-10386	SWING
		MIL-V-17547	BRONZE
		MIL-V-18436	STANDARD RATING
		MIL-V-19067	CONTROLLABLE, HYDRAULIC
		MS28764	
		MS28768	
		MIL-V-19069	HYDRAULIC, AIRCRAFT
		MS28765	
		MS28771	
		MS28892	
		MIL-V-23211	REFRIGERANT-12
		MS17810	
		MIL-V-23953	MBT BLOWLINES
		MIL-V-24258	SCUBA
		MIL-V-25513	LIQUID OXYGEN
		MIL-V-25514	OXYGEN
		MIL-V-25675	MINIATURE, HYDRAULIC
		MS24423	
		MS24593	
		MIL-V-27296	OXYGEN MASK
		MIL-V-62010	HYDRAULIC, LOCKING
		MS22066	OXYGEN CHARGING
		MS28052	BLEEDER AND FILLER
VALVE, CORE	209017	ZZ-V-25	PNEUMATIC TIRE
		MIL-V-8965	OXYGEN, HIGH PRESSURE
		MIL-V-27317	PNEUMATIC TIRE, AIRCRAFT
VALVE, CROSS	209018	MIL-V-1202	REGRINDABLE-RENEWABLE
		MS28056	INSTRUMENT VACUUM CONTROL
		MS35882	PACKLESS
		MS35883	PACKLESS
VALVE, CYLINDER, GAS	209019	MIL-V-2	COMPRESSED OR LIQUEFIED GASES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX, (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	COVERAGE
VALVE, CYLINDER, GAS	209019 (CONT)	MIL-V-8622	OXYGEN , AUTOMATIC OPENING
		MS22012	
		MIL-V-9439	OXYGEN, HIGH PRESSURE
VALVE, DRAIN	209020	MIL-V-25023	SELF-LOCKING FUEL
		MS29528	
		MS29529	
		MS29530	
		MS29571	
VALVE, EXPANSION	209021	MIL-V-23450	REFRIGERANT-12
		MS17982	
VALVE, FIRE EXTINGUISHER	209022	MIL-V-17360	CARBON DIOXIDE
VALVE, FLOAT	209023	MIL-V-16271	TANK, ANGLE AND GLOBE
		MIL-V-81356	PRESSURIZATION AND VENT
VALVE, FLOW REGULATOR	209024	MIL-V-8566	AIRCRAFT, HYDRAULIC
		MS28886	
VALVE, FOOT	209025	MIL-V-16720	BRASS AND POLYVINYL CHLORIDE
		MIL-V-16721	LOW PRESSURE
VALVE, GAS INLET	209026	MS16858	NONMAGNETIC
VALVE, GATE	209027	WW-V-54	BRONZE
		WW-V-58	CAST IRON
		MIL-V-1189	BRONZE W/P TO 400 PSI
		MIL-V-12125	QUICK OPENING W/POSITION LOCK
		MIL-V-12126	LEVER OPERATED, QUICK OPENING

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	COVERAGE
VALVE, GATE	209027 (CONT)	MIL-V-13803	DOUBLE DISC
		MIL-V-l8110	OUTSIDE SCREW AND YOKE
		MIL-V-18434	STEEL, COMMERCIAL
		MIL-V-58039	RISING STEM, DOUBLE ACTING
VALVE, GLOBE	209028	WW-V-511	BRONZE
		MIL-V-1187	BRONZE
		MIL-V-1202	REGRINDABLE-RENEWABLE
		MIL-V-2187	MAGAZINE SPRINKLING
		MIL-V-6674	DRAIN, OIL
		MIL-V-7529	OXYGEN LINE
		MIL-V-8612 AN6012	HIGH PRESSURE
		MIL-V-16468	HYDROCARBON FUEL SERVICE
		MIL-V-17737	BOILER BLOW
		MIL-V-18406	BLOWOFF, BOILER
		MIL-V-18434	STEEL
		MIL-V-18826	CAST IRON
		MIL-V-20064	NONFERROUS
		MIL-V-22052	OUTSIDE SCREW AND YOKE
		MIL-V-22094	FLANGED BONNET
		MIL-V-22682	ASTERN
		MIL-V-24109	HIGH PRESSURE
		MIL-V-24394	AUTOMATIC SHUTOFF
		MIL-V-24439	HIGH PRESSURE
		MS35880	PACKLESS
		MS35881	PACKLESS
VALVE, PLUG	209029	MIL-V-12003	MANUALLY OPERATED
		MIL-V-24509	SEWAGE AND SEAWATER
VALVE, PNEUMATIC INFLATOR	209030	MIL-V-8883 MS29599	LIFE RAFT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I, TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
VALVE, PNEUMATIC INFLATOR	209030 (CONT)	MS29600 MS22054	TOPPING OFF
VALVE, PNEUMATIC TANK	209031	MIL-V-6164 MS28889	AIRCRAFT, HIGH PRESSURE
VALVE, PNEUMATIC TIRE	209032	MS27436 ZZ-V-25	AIRCRAFT WHEEL VALVE SPUDS, CAPS AND CORES
VALVE, POWER BRAKE	209033	MIL-V-5525	AIRCRAFT
VALVE, PRESSURE EQUALIZING GASEOUS PRODUCTS	209034	MIL-V-27166 MS18014	LOW PRESSURE
VALVE, RADIATOR, HEATING	209035	MIL-V-18524	THERMOSTATIC CONTROLLED
VALVE, REGULATING, FEEDWATER	209036	MIL-R-18115	BOILER
VALVE, REGULATING, FLUID PRESSURE	209037	MIL-R-6125	OXYGEN
		MIL-R-8572	REDUCER, AIRCRAFT
		MIL-R-8636 AN6010	CONTINUOUS FLOW
		MIL-R-9198	HIGH PRESSURE
		MIL-R-11534	OXYGEN
		MIL-R-13877	COMPRESSED GAS
		MIL-R-17852	OXYGEN
		MIL-R-19180	COMPRESSED GAS
		MIL-R-23057	HIGH PRESSURE, COMPRESSED AIR
		MIL-R-25572	HIGH ALTITUDE, OXYGEN
		MIL-R-25575	OXYGEN
		MIL-R-51242	FLAMETHROWER
		MIL-R-81553	CHEST MOUNTED
		MIL-R-82441	CARBON DIOXIDE
		MIL-V-2042	WATER SERVICE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
VALVE, REGULATING, FLUID PRESSURE	209037 (CONT)	MIL-V-2961	GAS SERVICE
		MIL-V-5519	HYDRAULIC
		AN6295	UNLOADING
		MIL-V-15358	GASOLINE SYSTEMS
		MIL-V-16733	STEAM
		MIL-V-17848	STEAM
		MIL-V-18146	WATER
		MIL-V-18318	OXYGEN
		MIL-V-18500	COMPRESSED GAS
		MIL-V-23181	WATER
		MS17797	
		MIL-V-23300	REFRIGERANT-12, CRANKCASE
		MS17846	
		MIL-V-23318	REFRIGERANT-12, EVAPORATOR
		MS17854	
		MIL-V-24336	OXYGEN
		MIL-V-24544	LUBRICATING OIL QUIET DESIGN
		MIL-V-24545	STEAM PRESSURE, QUIET DESIGN
		MIL-V-24546	SEA WATER FEED, QUIET DESIGN
		MIL-V-24547	STEAM DRAIN, QUIET DESIGN
		MS53018	WINDSHIELD WIPER
VALVE, REGULATING, FUEL OIL	209038	MIL-V-2962	BOILER
VALVE, REGULATING, TEMPERATURE	209039	MIL-V-3155	STEAM CONTROL
		MIL-V-5636	LUBRICATING
		AN4103	OIL COOLER
		MS29593	
		MIL-V-18433	THERMOSTATIC
		MIL-V-19772	AUTOMATIC
VALVE, RELIEF, PRESSURE AND TEMPERATURE	209040	MIL-V-5523	HYDRAULIC

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
VALVE, RELIEF, PRESSURE AND TEMPERATURE	209040 (CONT)	MS28887	
		MIL-V-5527	THERMAL EXPANSION
		AN6245	
		MS28016	
		MIL-V-8712	LOW PRESSURE
		MIL-V-8813	AIRCRAFT, HYDRAULIC
		MS28893	
		MIL-V-9050	OXYGEN
		MIL-V-13612	HOT WATER SUPPLY SYSTEMS
		MIL-V-20065	STEAM SERVICE
		MIL-V-22549	GAS AND OXYGEN
		MIL-V-23255	
		MIL-V-52687	HYDRAULIC
		MIL-V-55341	
		MIL-V-81552	OXYGEN MASK
VALVE, RESTRICTOR, CHECK	209042	MIL-V-46726	HYDRAULIC
VALVE, SAFETY RELIEF	209043	MIL-V-5379	CABIN AIR
		MIL-V-8712	LOW PRESSURE
		MIL-V-11201	GAS SERVICE
		MIL-V-17462	BOILER
		MIL-V-18634	SPRING LOADED
		MIL-V-23135	REFRIGERANT-12
		MS17415	
		MIL-V-24332	LIQUID SERVICE
		MS35670	GASOLINE SERVICE
VALVE, SAMPLING AND BLEED	209044	MIL-V-81940	HYDRAULIC
VALVE, SEATLESS	209045	MIL-V-17737	BOILER BLOW
		MIL-V-18406	BLOWOFF BOILER
VALVE, SELECTOR	209007	MIL-V-5018	FUEL
		MIL-V-5529	HYDRAULIC
		AN6293	
		AN6294	
		MIL-V-6123	STATIC PRESSURE
		MS28051	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE NUMBER	DOCUMENT COVERAGE
VALVE, SELECTOR	209007 (CONT)	MIL-V-8057	PRESSURE BUILD-UP AND VENT
		MIL-V-24232	PNEUMATIC
		MIL-V–46725	HYDRAULIC
		MIL-V-46727	HYDRAULIC
		MIL-V-52688	HYDRAULIC, SPOOL
		MS28881	HYDRAULIC, SLIDE
VALVE, SHUTTLE	209046	MIL-V-5530	HYDRAULIC, AIRCRAFT, TYPE I SYSTEMS
		AN6277 AN6278	
		MIL-V-19068	HYDRAULIC? AIRCRAFT, TYPE II SYSTEMS
		MS28766	DIRECT MOUNTING
		MS28767	INTERNAL-THREAD
VALVE, STOP-CHECK	209047	MIL–V-6618	PURGE
		MIL-V-18447	NONRETURN, AUTOMATIC
VALVE, TOGGLE ACTUATED	209048	MIL-V-25962	LIQUID OXYGEN DRAIN
VALVE, VACUUM BREAKING	209049	MIL–V-5461 MS87005	AIR PUMPS
VALVE, Y	209050	MIL-V-47119	GAS SERVICING HOSE
		MIL-V-22052	OUTSIDE SCREW AND YOKE
		MIL–V–22094	FLANGED BONNET
		MIL-V-24394	AUTOMATIC SHUT-OFF
VALVE, RELIEF, PRESSURE	2090511	MIL-V-5379	CABIN AIR
		MIL-V-5523	HYDRAULIC
		MIL-V-8712	LOW PRESSURE
		MIL-V-88113 MS28893	AIRCRAFT HYDRAULIC

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
VALVE, RELEIF, PRESSURE	209051 (CONT)	MIL-V-9050	OXYGEN
		MIL-V-22549	GAS AND OXYGEN
		MIL-V-23255	
		MIL-V-52687	HYDRAULIC
		MIL-V-55341	
		MIL-V-81552	OXYGEN MASK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of Documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-S-901	Shock Tests, H.I. (High Impact); Shipboard Machinery, Equipment and Systems, Requirements For
MIL-V-5530	Valves, Aircraft Hydraulic Shuttle
MIL-V-5636	Valve, Lubricating Oil Cooler, Petroleum Base, Temperature Regulation With Surge Protection
MIL-R-8572	Reducers, Pneumatic Pressure Aircraft
MIL-V-9050	Valves, Oxygen, Pressure Relief, Aircraft
MIL-R-13877	Regulators, Pressure, Compressed Gas
MIL-V-19067	Valves, Check, Controllable, Hydraulic, Aircraft, Type II Systems
MIL-V-25675	Valves, Check, Miniature, Hydraulic, Aircraft and Missile

STANDARDS

FEDERAL

FED-STD-151	Metals, Test Methods

MILITARY

MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-167	Mechanical Vibrations of Shipboard Equipment
MIL-STD-740	Airborne and Structureborne Noise Measurements
MIL-STD-810	Environmental Test Methods
MIL-STD-1523	Age Controls of Age-Sensitive Elastomeric Material

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

MS33540	Safety Wiring and Cotter Pinning, General Practices For

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other Publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTME380	Metric Practice Guide

(Application for copies should be addressed to the American Society For Testing and Materials, 1916 Race St., Philadelphia, PA, 19103.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Regulators and Nonpowered Valves (Hydraulic, Pneumatic, and Vacuum).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Regulators and Nonpowered Valves (Hydraulic, Pneumatic, and Vacuum), it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Regulators and Nonpowered Valves (Hydraulic, Pneumatic, and Vacuum).

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Regulators and Nonpowered Valves (Hydraulic, Pneumatic, and Vacuum).

4.3.2 Illustrations. Illustrations applicable to Regulators and Nonpowered Valves Hydraulic, Pneumatic, and Vacuum) are contained in Appendix A to this document.

4.4 Units of Measure. The International System of Units (SI) or inch-pound units (U.S.) may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an “X” be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of-the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5,4 Test matrix. A test matrix is supplied as a guide for selecting documents to specify tests (see table II). The test matrix presents documents most applicable for use to satisfy the statement "TEST PER (DOC DES)". Any document listed in the Title Index may be used to satisfy the statement. However, the selected document from the Title Index must contain the desired test. Government test method documents and approved industry standards such as ASTM test methods may also be used to satisfy the statement "TEST PER (DOC DES)".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE II. Test matrix.

DOCUMENT	CODE	3724	3951	2784	2374	2234	2894	3184	3004	2124	2254	2184	2574	3104	1654	3961	1744	2024	1704	2074	1834	2664	2824	1974	1924	2854	2414
	TEST	Accelerated Aging	Accumulation	Bomb, Oxygen	Capacity (Flow Rate)	Checking Time	Corrosion, Accelerated	Creep, Pressure	Droop	Endurance	Endurance, Contaminated Media	Flow, Surge	Impulse	Inlet Filter	Leakage	Noise	Pressure, Burst	Pressure, Cracking or Set	Pressure, Proof	Pressure, Reseat	Pressure Drop	Regulation	Resistance, Ozone	Temperature, High	Temperature, Low	Torque, Manual	Warmup, Rapid
MIL-V-2042								X	X										X			X						
MIL-V-2961																			X			X						
MIL-V-5018							X			X	X				X		X				X					X		
MIL-V-5027				X						X					X			X			X		X	X	X			
MIL-V-5524						X				X		X			X			X	X		X			X	X			
MIL-V-5525										X					X				X			X		X	X			
MIL-V-5529										X					X				X		X			X	X	X	X	
MIL-V-5530										X			X		X				X		X			X	X		X	
MIL-V-5636										X		X			X						X			X	X			
MIL-R-6125					X					X				X	X				X					X	X			
MIL-V-7899							X			X	X				X		X	X			X							
MIL-V-8057					X														X					X	X			
MIL-V-8566					X					X			X		X		X		X		X			X	X		X	
MIL-R-8572					X					X					X			X	X	X		X		X	X			
MIL-V-8612				X						X					X				X		X		X	X	X	X		
MIL-V-8622				X						X					X				X		X		X	X	X	X		
MIL-V-8712	X				X										X			X		X								
MIL-V-8813					X					X					X		X		X	X				X	X		X	
MIL-V-8965				X	X					X					X								X					
MIL-V-9439				X	X					X					X				X					X	X	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Table II. Test matrix. (Cont)

DOCUMENT	CODE	3724	3951	2784	2374	2234	2894	3184	3004	2124	2254	2184	2574	3104	1654	3961	1744	2024	1704	2074	1834	2664	2824	1974	1924	2854	2414
	TEST	Accelerated Aging	Accumulation	Bomb, Oxygen	Capacity (Flow Rate)	Checking Time	Corrosion, Accelerated	Creep, Pressure	Droop	Endurance	Endurance, Contaminated Media	Flow, Surge	Impulse	Inlet Filter	Leakage	Noise	Pressure, Burst	Pressure, Cracking or Set	Pressure, Proof	Pressure, Reseat	Pressure Drop	Regulation	Resistance, Ozone	Temperature, High	Temperature, Low	Torque, Manual	Warmup, Rapid
MIL-R-13877				X				X														X					
MIL-V-17848								X	X	X					X				X								
MIL-V-18318				X	X					X					X			X				X		X	X		
MIL-R-19180										X				X	X			X				X					
MIL-V-24384					X			X	X						X				X		X	X					
MIL-V-24544			X							X					X	X											
MIL-V-24545										X					X	X											
MIL-V-24546										X					X	X											
MIL-V-24547			X							X					X	X											
MIL-V-25023							X			X	X				X		X										
MIL-V-25675						X				X		X			X		X	X	X		X			X	X		
MIL-V-46727					X					X					X		X		X		X			X	X	X	
MIL-V-52687					X					X					X			X	X	X					X		
MIL-R-81553										X					X							X	X	X	X		
ZZ-V-25					X								X		X								X	X	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.5 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table III provides codes for column headings which may be used for regulator and nonpowered valve characteristics, When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

TABLE III. TABULATION CANDIDATES

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
4350	PORT 1 DOCUMENT	4351	PORT 2 DOCUMENT	4352	PORT 3 DOCUMENT
4354	PORT 1 SIZE INCHES	4355	PORT 2 SIZE INCHES	4356	PORT 3 SIZE INCHES
4349	PORT 1 SIZE MILLIMETER	4348	PORT 2 SIZE MILLIMETER	4347	PORT 3 SIZE MILLIMETER
4358	PORT 1 STYLE	4359	PORT 2 STYLE	4360	PORT 3 STYLE
4366	PORT 1 DES	4367	PORT 2 DES	4368	PORT 3 DES
3902	PORT 1 THREAD	3903	PORT 2 THREAD	3904	PORT 3 THREAD
4353	PORT 4 DOCUMENT	4320	PORT 5 DOCUMENT	4326	PORT 6 DOCUMENT
4357	PORT 4 SIZE INCHES	4321	PORT 5 SIZE INCHES	4327	PORT 6 SIZE INCHES
4346	PORT 4 SIZE MILLIMETER	4322	PORT 5 SIZE MILLIMETER	4328	PORT 6 SIZE MILLIMETER
4361	PORT 4 STYLE	4323	PORT 5 STYLE	4329	PORT 6 STYLE
4369	PORT 4 DES	4325	PORT 5 DES	4331	PORT 6 DES
3905	PORT 4 THREAD	3906	PORT 5 THREAD	3907	PORT 6 THREAD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES (CONT)

CODE	COLUMN HEADING
7583	MAX PRESS RATING PSI
7584	MAX PRESS RATING KILOPASCAL
1568	MAX PRESS RATING INCHES OF MERCURY
1567	INLET PRESSURE MINIMUM PSI
1569	INLET PRESSURE MAXIMUM PSI
5069	MAX OPNL TEMP DEG C
5068	MIN OPNL TEMP DEG C
5046	NOM OPNL TEMP DEG C
6999	WEIGHT KG
6997	WEIGHT POUND
6996	WEIGHT OUNCES
1571	INLET PRESSURE MINIMUM KILOPASCAL
1573	INLET PRESSURE MAXIMUM KILOPASCAL
3552	REGULATOR SENSING INTERNAL
1631	REGULATOR SENSING EXTERNAL
1564	MIN RANGE ADJUSTMENT PSI
6998	WEIGHT GRAMS
3850	MIN RANGE ADJUSTMENT KILOPASCAL
1570	MIN RANGE ADJUSTMENT INCHES OF MERCURY
1566	MAX RANGE ADJUSTMENT PSI
3854	MAX RANGE ADJUSTMENT KILOPASCAL
1572	MAX RANGE ADJUSTMENT INCHES OF MERCURY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.6 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.6.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for “X” entries.

5.6.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.6.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
‘REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT.	0700
ONE SECTION DOCUMENT.	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 11006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT, IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35	
APERTURE CARDS REQUIRED	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6874 THE FOLLOWING SUGGESTED SOURCE(S) WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

0107

0108 0108.

SCOPE.

SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

6941 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES.

6942 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OPERATING PRESSURE RATING	
MINIMUM OPERATING PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	7581
(INCHES OF MERCURY)	3900
(KILOPASCALS)	7582
MAXIMUM OPERATING PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	7583
(INCHES OF MERCURY)	1568
(KILOPASCALS)	7584
NOMINAL OPERATING PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	7585
(INCHES OF MERCURY)	3901
(KILOPASCALS)	7586
PROOF PRESSURE RATING	
MINIMUM PROOF PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	7587
(KILOPASCALS)	7588

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7581	THE MINIMUM OPERATING PRESSURE RATING SHALL BE 7581 POUNDS PER SQUARE INCH.
3900	THE MINIMUM OPERATING PRESSURE RATING SHALL BE 3900 INCHES OF MERCURY.
7582	THE MINIMUM OPERATING PRESSURE RATING SHALL BE 7582 KILOPASCALS.
7583	THE MAXIMUM OPERATING PRESSURE RATING SHALL BE 7583 POUNDS PER SQUARE INCH.
1568	THE MAXIMUM OPERATING PRESSURE RATING SHALL BE 1568 INCHES OF MERCURY.
7584	THE MAXIMUM OPERATING PRESSURE RATING SHALL BE 7584 KILOPASCALS.
7585	THE NOMINAL OPERATING PRESSURE RATING SHALL BE 7585 POUNDS PER SQUARE INCH.
3901	THE NOMINAL OPERATING PRESSURE RATING SHALL BE 3901 INCHES OF MERCURY.
7586	THE NOMINAL OPERATING PRESSURE RATING SHALL BE 7586 KILOPASCALS.
	PROOF PRESSURE RATING.
7587	THE MINIMUM PROOF PRESSURE RATING SHALL BE 7587 POUNDS PER SQUARE INCH.
7588	THE MINIMUM PROOF PRESSURE RATING SHALL BE 7588 KILOPASCALS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
BURST PRESSURE RATING	
MINIMUM BURST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	7589
(KILOPASCALS)	7590
TEMPERATURE RATING	
MAXIMUM OPERATING (DEGREES CELSIUS)	5069
MAXIMUM STORAGE (DEGREES CELSIUS)	7302
MINIMUM OPERATING (DEGREES CELSIUS)	5068
MINIMUM STORAGE (DEGREES CELSIUS)	7301
NOMINAL OPERATING (DEGREES CELSIUS)	5046
NOMINAL STORAGE (DEGREES CELSIUS)	5048
RATED LIFE	
NOMINAL OPERATING (CYCLES)	1587
MINIMUM OPERATING (CYCLES)	1589

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	BURST PRESSURE RATING.
7589	THE MINIMUM BURST PRESSURE RATING SHALL BE 7589 POUNDS PER SQUARE INCH.
7590	THE MINIMUM BURST PRESSURE RATING SHALL BE 7590 KILOPASCALS.
	TEMPERATURE RATING.
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
7302	THE MAXIMUM STORAGE TEMPERATURE RATING SHALL BE 7302 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
7301	THE MINIMUM STORAGE TEMPERATURE RATING SHALL BE 7301 DEGREES CELSIUS.
5046	THE NOMINAL OPERATING TEMPERATURE RATING SHALL BE 5046 DEGREES CELSIUS.
5048	THE NOMINAL STORAGE TEMPERATURE RATING SHALL BE 5048 DEGREES CELSIUS.
1587	THE COMPONENT SHALL HAVE A NOMINAL OPERATING LIFE OF 1587 CYCLES,
1589	THE COMPONENT OPERATING LIFE SHALL BE NOT LESS THAN 1589.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PRESSURE RATING	
INLET PRESSURE (SELECT ONE)	
U.S.	
MINIMUM (POUNDS PER SQUARE INCH)	1567
MAXIMUM (POUNDS PER SQUARE INCH)	1569
SI	
MINIMUM (KILOPASCALS)	1571
MAXIMUM (KILOPASCALS)	1573
OUTLET PRESSURE (SELECT ONE)	
U.S.	
MINIMUM (SELECT ONE)	
(POUNDS PER SQUARE INCH)	1575
(INCHES OF MERCURY)	1583
MAXIMUM (SELECT ONE)	
(POUNDS PER SQUARE INCH)	1577
(INCHES OF MERCURY)	1585

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
	PRESSURE	RATING,
1567	THE INLET PRESSURE SHALL BE NOT LESS THAN 1567 POUNDS PER SQUARE INCH.	
1569	THE INLET PRESSURE SHALL BE NOT GREATER THAN 1569 POUNDS PER SQUARE INCH.	
1571	THE INLET PRESSURE SHALL BE NOT LESS THAN 1571 KILOPASCAL(S).	
1573	THE INLET PRESSURE SHALL BE NOT GREATER THAN 1573 KILOPASCAL(S).	
1575	THE OUTLET PRESSURE SHALL BE NOT LESS THAN 1575 POUNDS PER SQUARE INCH.	
1583	THE OUTLET PRESSURE SHALL BE NOT LESS THAN 1583 INCHES OF MERCURY.	
11577	THE OUTLET PRESSURE SHALL BE NOT GREATER THAN 11577 POUNDS PER SQUARE INCH.	
1585	THE OUTLET PRESSURE SHALL BE NOT GREATER THAN 1585 INCHES OF MERCURY,	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PRESSURE RATING (CONT)	
OUTLET PRESSURE (CONT)	
SI	
MINIMUM (KILOPASCALS)	1579
MAXIMUM (KILOPASCALS)	1581
OUTLET PRESSURE RANGE	
MINIMUM (INCHES OF WATER)	1578
*MAXIMUM (INCHES OF WATER)	1580
ADJUSTMENT PRESSURE	
MINIMUM (SELECT ONE)	
U.S. (SELECT ONE)	
(POUNDS PER SQUARE INCH)	1564
(INCHES OF MERCURY)	1570
SI	
(KILOPASCALS)	3850
MAXIMUM (SELECT ONE)	
U.S. (SELECT ONE)	
(POUNDS PER SQUARE INCH	1566
(INCHES OF MERCURY)	1572

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1579	THE OUTLET PRESSURE SHALL BE NOT LESS THAN 1579 KILOPASCAL(S).
1581	THE OUTLET PRESSURE SHALL BE NOT GREATER THAN 1581 KILOPASCAL(S).
1578 1580	THE OUTLET PRESSURE RANGE SHALL BE NOT LESS THAN 1578 INCHES OF WATER NOR GREATER THAN 1580 INCHES OF WATER.
1564	THE ADJUSTMENT PRESSURE SHALL BE NOT LESS THAN 1564 POUNDS PER SQUARE INCH.
1570	THE ADJUSTMENT PRESSURE SHALL BE NOT LESS THAN 1570 INCHES OF MERCURY.
3850	THE ADJUSTMENT PRESSURE SHALL BE NOT LESS THAN 3850 KILOPASCAL(S).
1566	THE ADJUSTMENT PRESSURE SHALL BE NOT GREATER THAN 1566 POUNDS PER SQUARE INCH.
1572	THE ADJUSTMENT PRESSURE SHALL BE NOT GREATER THAN 1572 INCHES OF MERCURY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PRESSURE RATING (CONT)	
ADJUSTMENT PRESSURE (CONT)	
MAXIMUM (CONT)	
SI	
(KILOPASCALS)	3854
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
DIMENSION TABLE, (SEE TABLE III, DOD-STD-35)	
*UNITS (SELECT ONE)	
U.S. (SELECT ONE)	
(INCHES)	7572
(FEET)	7573
(YARDS)	7574
SI (SELECT ONE)	
(CENTIMETERS)	7576
(MILLIMETERS)	7577
(METERS) 7578	7578

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

3854 THE ADJUSTMENT PRESSURE SHALL BE NOT GREATER THAN 3854 KILOPASCAL(S).

CONFIGURATION.

1009 CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.

7572 ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.

7573 ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN FEET OR DEGREES.

7574 ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN YARDS OR DEGREES.

7576 ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN CENTIMETERS OR DEGREES,

7577 ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.

7578 ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN METERS OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ILLUSTRATIONS, SEE APPENDIX A	
(NUMBER)	4950
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ISSUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.	
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	
METALS	
DISSIMILAR METALS.	7580

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE . (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLE FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION	
PORT CONFIGURATION	
PORT ONE	
DOCUMENT (DOC DES)	4350
SIZE (SELECT ONE)	
U.S.	
(INCHES)	4354
SI	
(MILLIMETERS)	4349
STYLE (LETTER.)	4358
DESIGNATION	4366
THREAD (DES)	3902
PORT TWO	
DOCUMENT (DOC DES)	4351

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	DESIGN AND CONSTRUCTION.
	PORT ONE.
4350	THE PORT ONE CONFIGURATION SHALL BE IN ACCORDANCE WITH 4350.
4354	THE PORT ONE SIZE SHALL BE 4354 INCH(S).
4349	THE PORT ONE SIZE SHALL BE 4349 MILLIMETER(S).
4358	THE PORT ONE STYLE SHALL BE 4358.
4366	THE PORT ONE DESIGNATION SHALL BE 4366.
3902	THE PORT ONE THREAD SHALL BE 3902.
	PORT TWO.
4351	THE PORT TWO CONFIGURATION SHALL BE IN ACCORDANCE WITH 4351.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
PORT TWO (CONT)	
SIZE (SELECT ONE)	
U.S.	
(INCHES)	4355
SI	
(MILLIMETERS)	4348
STYLE (LETTER)	4359
DESIGNATION	4367
THREAD (DES)	3903
PORT THREE	
DOCUMENT (DOC DES)	4352
SIZE (SELECT ONE)	
U.S.	
(INCHES)	4356
SI	
(MILLIMETERS)	4347
STYLE (LETTER)	4360
DESIGNATION	4368
THREAD (DES)	3904

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4355	THE PORT TWO SIZE SHALL BE 4355 INCH(S).
4348	THE PORT TWO SIZE SHALL BE 4348 MILLIMETER(S).
4359	THE PORT TWO STYLE SHALL BE 4359.
4367	THE PORT TWO DESIGNATION SHALL BE 4367.
3903	THE PORT TWO THREAD SHALL BE 3903.
	PORT THREE.
4352	THE PORT THREE CONFIGURATION SHALL BE IN ACCORDANCE WITH 4352.
4356	THE PORT THREE SIZE SHALL BE 4356 INCH(S).
4347	THE PORT THREE SIZE SHALL BE 4347 MILLIMETER(S).
4360	THE PORT THREE STYLE SHALL BE 4360.
4368	THE PORT THREE DESIGNATION SHALL BE 4368.
3904	THE PORT THREE THREAD SHALL BE 3904.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
PORT CONFIGURATION (CONT)	
PORT FOUR	
DOCUMENT (DOC DES)	4353
SIZE (SELECT ONE)	
U.S.	
(INCHES)	4357
SI	
(MILLIMETERS)	4346
STYLE (LETTER)	4361
DESIGNATION	4369
THREAD (DES)	3905
PORT FIVE	
DOCUMENT (DOC DES)	4320
SIZE (SELECT ONE)	
U.S.	
(INCHES)	4321
SI	
(MILLIMETERS)	4322
STYLE (LETTER)	4323

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH	
	PORT FOUR.	
4353	THE PORT FOUR CONFIGURATION SHALL BE IN ACCORDANCE WITH 4353.	
4357	THE PORT FOUR SIZE SHALL BE 4357 INCH(S).	
4346	THE PORT FOUR SIZE SHALL BE 4346 MILLIMETER(S).	
4361	THE PORT FOUR STYLE SHALL BE 4361.	
4369	THE PORT FOUR DESIGNATION SHALL BE 4369.	
3905	THE PORT FOUR THREAD SHALL BE 39050	
	PORT FIVE.	
4320	THE PORT FIVE CONFIGURATION SHALL BE IN ACCORDANCE WITH 4320.	
4321	THE PORT FIVE SIZE SHALL BE 4321 INCH(S).	
4322	THE PORT FIVE SIZE SHALL BE 4322 MILLIMETER(S).	
4323	THE PORT FIVE STYLE SHALL BE 4323.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
PORT FIVE (CONT)	
DESIGNATION	4325
THREAD (DES)	3906
PORT SIX	
DOCUMENT (DOC DES)	4326
SIZE (SELECT ONE)	
U.S.	
(INCHES)	4327
SI	
(MILLIMETERS)	4328
STYLE (LETTER)	4329
DESIGNATION	43311
THREAD (DES)	3907
MEDIA	
SERVICE MEDIA (NAME)	1574
SERVICE MEDIA DOCUMENT (DOC DES)	1576
DOME OR REGULATING MEDIA (NAME)	1588
DOME OR REGULATING MEDIA DOCUMENT (DOC DES)	1616

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4325	THE PORT FIVE DESIGNATION SHALL BE 4325.
3906	THE PORT FIVE THREAD SHALL BE 3906.
	PORT SIX.
4326	THE PORT SIX CONFIGURATION SHALL BE IN ACCORDANCE WITH 4326.
4327	THE PORT SIX SIZE SHALL BE 4327 INCH(S).
4328	THE PORT SIX SIZE SHALL BE 4328 MILLIMETER(S).
4329	THE PORT SIX STYLE SHALL BE 4329.
4331	THE PORT SIX DESIGNATION SHALL BE 4331.
3907	THE PORT SIX THREAD SHALL BE 3907.
1574	THE SERVICE MEDIA SHALL BE 1574.
1576	THE SERVICE MEDIA SHALL BE IN ACCORDANCE WITH 1576.
1588	THE DOME OR REGULATING MEDIA SHALL BE 1588.
1616	THE DOME OR REGULATING MEDIA SHALL BE IN ACCORDANCE WITH 1616.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
MEDIA TEMPERATURE	
MINIMUM (DEGREES CELISUS)	1618
MAXIMUM (DEGREES CELSIUS)	3550
REGULATOR SENSING (SELECT ONE)	
INTERNAL.	3552
EXTERNAL.	1631
FLOW DIRECTION CAPABILITY (SELECT ONE)	
SINGLE DIRECTION.	1584
EITHER DIRECTION.	1586
POSITION INDICATION REQUIRED (SELECT ONE)	
OPEN POSITION.	1590
CLOSED POSITION.	1592
CLOSING ROTATION DIRECTION OF HANDLE (SELECT ONE)	
CLOCKWISE.	1594
COUNTERCLOSKWISE.	1596

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
116118	THE MEDIA TEMPERATURE SHALL BE NOT LESS THAN 1618 DEGREES CELSIUS.
3550	THE MEDIA TEMPERATURE SHALL BE NOT GREATER THAN 3550 DEGREES CELSIUS.
3552	THE REGULATOR SHALL BE INTERNAL SENSING.
1631	THE REGULATOR SHALL BE EXTERNAL SENSING.
11584	THE COMPONENT SHALL BE CAPABLE OF FLOW IN A SINGLE DIRECTION.
1586	THE COMPONENT SHALL BE CAPABLE OF FLOW IN EITHER DIRECTION.
1590	THE COMPONENT SHALL BE SUPPLIED WITH OPEN POSITION INDICATION.
1592	THE COMPONENT SHALL BE SUPPLIED WITH CLOSED POSITION INDICATION.
1594	CLOSING ROTATION OF THE HANDLE SHALL BE CLOCKWISE.
1596	CLOSING ROTATION OF THE HANDLE SHALL BE COUNTERCLOCKWISE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
LOCKING DEVICE POSITION (SELECT ONE)	
OPEN POSITION.	1598
CLOSED POSITION.	1600
SAFETY WIRING	
PER MS33540.	1602
CLEANED FOR OXYGEN SERVICE.	1651
DRAIN PORT LOCATION	
FIGURE	1610
*LETTER	1611
BYPASS PORT LOCATION	
FIGURE	1612
*LETTER	1613
CHECK VALVE PATTERN	
FIGURE	1614
*PATTERN NUMBER	1615
HANDLE STYLE	
FIGURE	1619
*STYLE LETTER	1621

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1598	THE COMPONENT SHALL BE SUPPLIED WITH A LOCKING DEVICE IN THE OPEN POSITION.
1600	THE COMPONENT SHALL BE SUPPLIED WITH A LOCKING DEVICE IN THE CLOSED POSITION.
1602	ALL THREADED PARTS SHALL BE SAFETY WIRED IN ACCORDANCE WITH MS33540.
1651	THE COMPONENT SHALL BE CLEANED FOR OXYGEN SERVICE.
1610	THE COMPONENT DRAIN PORT LOCATION(S) SHALL BE AS SHOWN IN FIGURE 1610.
1611	LETTER(S) 1611 SHALL APPLY.
1612	THE COMPONENT BYPASS PORT LOCATION(S) SHALL BE AS SHOWN IN FIGURE 1612.
1613	LETTER(S) 1613 SHALL APPLY.
1614	THE CHECK VALVE SHALL BE AS SHOWN IN FIGURE 1614.
1615	PATTERN NUMBER 1615 SHALL APPLY.
1619	THE COMPONENT HANDLE SHALL BE AS SHOWN IN FIGURE 1619..
1621	STYLE LETTER 1621 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
GAGES	
INLET PRESSURE	
MAXIMUM PRESSURE INDICATION (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	1634
SI	
(KILOPASCALS)	1635
PART NUMBER	1636
*DOCUMENT (DOC DES)	1645
OUTLET PRESSURE	
MAXIMUM PRESSURE INDICATION (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	1637
SI	
(KILOPASCALS)	1638
PART NUMBER	1639
*DOCUMENT (DOC DES)	1646

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
1634	THE PRESSURE INDICATION OF THE INLET GAGE SHALL BE NOT GREATER THAN 1634 POUNDS PER SQUARE INCH.	
1635	THE PRESSURE INDICATION OF THE INLET GAGE SHALL BE NOT GREATER THAN 1635 KILOPASCAL(S).	
1636	THE INLET GAGE PART NUMBER SHALL BE 1636.	
1645	THE PART NUMBER SHALL BE IN ACCORDANCE EITH 1645.	
1637	THE PRESSURE INDICATION OF THE OUTLET GAGE SHALL BE NOT GREATER THAN 1637 POUNDS PER SQUARE INCH.	
1638	THE PRESSURE INDICATION OF THE OUTLET GAGE SHALL BE NOT GREATER THAN 1638 KILOPASCAL(S).	
1639	THE OUTLET GAGE PART NUMBER SHALL BE 1639.	
1646	THE PART NUMBER SHALL BE IN ACCORDANCE WITH 1646.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
INLET FILTER SIZE	
MESH (NUMBER)	1640
MICRONS (SELECT ONE)	
NOMINAL (MICRONS)	1641
ABSOLUTE (MICRONS)	1642
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024
NOMINAL WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	6996
(POUNDS)	6997

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD_ PARAGRAPH
1640	THE INLET FILTER SIZE SHALL BE 1640 MESH.
1641	THE INLET FILTER SIZE SHALL BE 1641 MICRONS, NOMINAL.
1642	THE INLET FILTER SIZE SHALL BE 1642 MICRONS, ABSOLUTE.
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).
7021	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).
6996	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6996 OUNCE(S).
6997	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6997 POUND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WEIGHT (CONT)	
NOMINAL WEIGHT PER UNIT (CONT)	
SI (SELECT ONE)	
(GRAMS)	6998
(KILOGRAMS)	6999
PERFORMANCE CHARACTERISTICS	
PERFORMANCE CHARACTERISTICS TABLE.	
ACCELERATED AGING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3700
AS FOLLOWS:	3702
LEAKAGE SHALL REMAIN WITHIN SPECIFIED TOLERANCES.	3704

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6998 NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6998 GRAM(S).

6999 NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6999 KILOGRAM(S).

PERFORMANCE CHARACTERISTICS TABLE. THE COMPONENT SHALL MEET THE REQUIREMENTS SPECIFIED IN THE PERFORMANCE CHARACTERISTICS TABLE.

PERFORMANCE CHARACTERISTICS TABLE

UNITS OF MEASURE	POINT 1	POINT 2	POINT 3	POINT 4	POINT 5	POINT 6	POINT 7	POINT 8
FLOW GPM	l865	1867	1869	1871	1873	1875	1877	1879
FLOW CU METERS/S	1881	1882	1883	1884	1885	1886	1887	1888
DIFF PRESS PSI	1866	l868	1870	1872	1874	1876	1878	1880
DIFF PRESS KPA	1889	1890	1891	1892	1893	1894	1895	1896

3700 ACCELERATED AGING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3700.

3702 ACCELERATED AGING, THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

3704 LEAKAGE SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATED AGING (CONT)	
AS FOLLOWS: (CONT)	
INITIAL DYNAMIC CRACKING PRESSURE (SELECT ONE)	
U.S.	
MINIMUM (POUNDS PER SQUARE INCH)	3706
MAXIMUM (POUNDS PER SQUARE INCH)	3710
SI	
MINIMUM (KILOPASCALS)	3706
MAXIMUM (KILOPASCALS)	3712
CRACKING PRESSURE AFTER INITIAL MEASUREMENT (SELECT ONE)	
U.S.	
MINIMUM (POUNDS PER SQUARE INCH)	3714
MAXIMUM (POUNDS PER SQUARE INCH)	3718

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3706	THE INITIAL DYNAMIC CRACKING PRESSURE SHALL BE NOT LESS THAN 3706 POUNDS PER SQUARE INCH.
3710	THE INITIAL DYNAMIC CRACKING PRESSURE SHALL BE NOT GREATER THAN 3710 POUNDS PER SQUARE INCH.
3708	THE INITIAL DYNAMIC CRACKING PRESSURE SHALL BE NOT LESS THAN 3708 KILOPASCAL(S).
3712	THE INITIAL DYNAMIC CRACKING PRESSURE SHALL BE NOT GREATER THAN 3712 KILOPASCAL(S).
3714	AFTER INITIAL CRACKING PRESSURE MEASUREMENT, THE CRACKING PRESSURE SHALL BE NOT LESS THAN 3714 POUNDS PER SQUARE INCH.
3718	AFTER INITIAL CRACKING PRESSURE MEASUREMENT, THE CRACKING PRESSURE SHALL BE NOT GREATER THAN 3718 POUNDS PER SQUARE INCH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATED AGING (CONT)	
CRACKING PRESSURE AFTER INITIAL MEASUREMENT (CONT)	
SI	
MINIMUM (KILOPASCALS)	3716
MAXIMUM (KILOPASCALS)	3720
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	3722
PER DOCUMENT (DOC DES)	3724
AGING DURATION (DAYS)	3726
AGING TEMPERATURE (DEGREES CELSIUS)	3727
COOL DOWN DURATION (HOURS)	3728
ACCUMULATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	3908
AS FOLLOWS:	3909
REMAIN WITHIN RATED FLOW TOLERANCES.	3910
NO CHATTER.	3912

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3716	AFTER INITIAL CRACKING PRESSURE MEASUREMENT, THE CRACKING PRESSURE SHALL BE NOT LESS THAN 3716 KILOPASCAL(S).
3720	AFTER INITIAL CRACKING PRESSURE MEASUREMENT, THE CRACKING PRESSURE SHALL BE NOT GREATER THAN 3720 KILOPASCAL(S).
3722	ACCELERATED AGING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3722.
3724	ACCELERATED AGING. TESTING SHALL BE IN ACCORDANCE WITH 3724.
3726	THE AGING DURATION SHALL BE 3726 DAY(S).
3727	THE AGING TEMPERATURE SHALL BE 3727 DEGREES CELSIUS.
3728	THE COOL DOWN DURATION SHALL BE 3728 HOUR(S).
3908	ACCUMULATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3908.
3909	ACCUMULATION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3910	THE VALVE SHALL REMAIN WITHIN RATED FLOW TOLERANCE(S).
3912	THE VALVE SHALL OPERATE SMOOTHLY AND WITHOUT CHATTER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCUMULATION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	3950
PER DOCUMENT (DOC DES)	3951
INLET PRESSURE INCREASE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	3952
SI	
(KILOPASCALS)	3953
BOMB, OXYGEN	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2814
NO EVIDENCE OF MATERIAL IGNITION, CHARRING OR DETERIORATION.	2816
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2782
PER DOCUMENT (DOC DES)	2784

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3950	ACCUMULATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3950.
3951	ACCUMULATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3951.
3952	THE INLET PRESSURE INCREASE SHALL BE 3952 POUNDS PER SQUARE INCH.
3953	THE INLET PRESSURE INCREASE SHALL BE 3953 KILOPASCAL(S).
2814	BOMB, OXYGEN. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2814.
2816	BOMB, OXYGEN. THERE SHALL BE NO EVIDENCE OF MATERIAL IGNITION, CHARRING OR DETERIORATION.
2782	BOMB, OXYGEN. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2782.
2784	BOMB, OXYGEN. TESTING SHALL BE IN ACCORDANCE WITH 2784.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
BOMB, OXYGEN (CONT)	
PER DOCUMENT (CONT)	
TEST PRESSURE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	2786
PLUS PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2788
MINUS PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2790
SI	
(KILOPASCALS)	2789
PLUS PRESSURE TOLERANCE (KILOPASCALS)	2791
MINUS PRESSURE TOLERANCE (KILOPASCALS)	2793
TEST TEMPERATURE	
(DEGREES CELSIUS)	2792
PLUS TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2794
MINUS TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2796

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
2786	THE TEST PRESSURE SHALL BE 2786 POUNDS PER SQUARE INCH.	
2788	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2788 POUNDS PER SQUARE INCH.	
2790	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2790 POUNDS PER SQUARE INCH.	
2789	THE TEST PRESSURE SHALL BE 2789 KILOPASCAL(S).	
2791	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2791 KILOPASCAL(S).	
2793	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2793 KILOPASCAL(S).	
2792	THE TEST TEMPERATURE SHALL BE 2792 DEGREES CELSIUS.	
2794	THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 2794 DEGREES CELSIUS.	
2796	THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 2796 DEGREES CELSIUS.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
BOMB, OXYGEN (CONT)	
PER DOCUMENT (CONT)	
PRESSURE HOLDING DURATION (MINUTES)	2800
TEST MEDIA DOCUMENT (DOC DES)	2798
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	2802
PLUS TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2804
MINUS TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2806
NUMBER OF TEST CYCLES (QUANTITY)	2808
TEST CYCLE RATE (CYCLES PER MINUTE)	2810
CAPACITY (FLOW RATE)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2396
AS FOLLOWS:	3913
FLOW RATE (SELECT ONE)	
U.S. (SELECT ONE)	
(GALLONS PER MINUTE)	2393
PLUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	2398

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2800	THE PRESSURE HOLDING DURATION SHALL BE 2800 MINUTE(S).
2798	THE TEST MEDIA SHALL CONFORM TO 2798.
2802	THE TEST MEDIA TEMPERATURE SHALL BE 2802 DEGREES CELSIUS.
2804	THE PLUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2804 DEGREES CELSIUS.
2806	THE MINUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2806 DEGREES CELSIUS.
2808	THERE SHALL BE 2808 TEST CYCLES.
2810	THE TEST CYCLE RATE SHALL BE 2810 CYCLES PER MINUTE.
2396	CAPACITY (FLOW RATE). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2396.
3913	CAPACITY (FLOW RATE). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2393	THE FLOW RATE SHALL BE 2393 GALLONS PER MINUTE.
2398	THE PLUS FLOW RATE TOLERANCE SHALL BE 2398 GALLONS PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CAPACITY (FLOW RATE) (CONT)	
(GALLONS PER MINUTE) (CONT)	
MINUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	2399
(STANDARD CUBIC FEET PER MINUTE)	2397
PLUS FLOW RATE TOLERANCE (STANDARD CUBIC FEET PER MINUTE)	2400
MINUS FLOW RATE TOLERANCE (STANDARD CUBIC FEET PER MINUTE)	2401
(POUNDS PER HOUR)	2383
PLUS FLOW RATE TOLERANCE (POUNDS PER HOUR)	2402
MINUS FLOW RATE TOLERANCE (POUNDS PER HOUR)	2403
SI (SELECT ONE)	
(CUBIC METERS PER SECOND)	2385
PLUS FLOW RATE TOLERANCE (CUBIC METERS PER SECOND)	2404
MINUS FLOW RATE TOLERANCE (CUBIC METERS PER SECOND)	2405

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
2399	THE MINUS FLOW RATE TOLERANCE SHALL BE 2399 GALLONS PER MINUTE.	
2397	THE FLOW RATE SHALL BE 2397 STANDARD CUBIC FEET PER MINUTE.	
2400	THE PLUS FLOW RATE TOLERANCE SHALL BE 2400 STANDARD CUBIC FEET PER MINUTE.	
2401	THE MINUS FLOW RATE TOLERANCE SHALL BE 2401 STANDARD CUBIC FEET PER MINUTE.	
2383	THE FLOW RATE SHALL BE 2383 POUNDS PER HOUR.	
2402	THE PLUS FLOW RATE TOLERANCE SHALL BE 2402 POUNDS PER HOUR.	
2403	THE MINUS FLOW RATE TOLERANCE SHALL BE 2403 POUNDS PER HOUR.	
2385	THE FLOW RATE SHALL BE 2385 CUBIC METERS PER SECOND.	
2404	THE PLUS FLOW RATE TOLERANCE SHALL BE 2404 CUBIC METERS PER SECOND.	
2405	THE MINUS FLOW RATE TOLERANCE SHALL BE 2405 CUBIC METERS PER SECOND.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CAPACITY (FLOW RATE) (CONT)	
SI (CONT)	
(KILOGRAMS PER SECOND)	2387
PLUS FLOW RATE TOLERANCE (KILOGRAMS PER SECOND)	2406
MINUS FLOW RATE TOLERANCE (KILOGRAMS PER SECOND)	2407
(LITERS PER HOUR)	2389
PLUS FLOW RATE TOLERANCE (LITERS PER HOUR)	2408
MINUS FLOW RATE TOLERANCE (LITERS PER HOUR)	2409
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2372
PER DOCUMENT (DOC DES)	2374
TEST PRESSURE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	2376
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2378

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2387	THE FLOW RATE SHALL BE 2387 KILOGRAMS PER SECOND.
2406	THE PLUS FLOW RATE TOLERANCE SHALL BE 2406 KILOGRAMS PER SECOND.
2407	THE MINUS FLOW RATE TOLERANCE SHALL BE 2407 KILOGRAMS PER SECOND.
2389	THE FLOW RATE SHALL BE 2389 LITERS PER HOUR.
2408	THE PLUS FLOW RATE TOLERANCE SHALL BE 2408 LITERS PER HOUR.
2409	THE MINUS FLOW RATE TOLERANCE SHALL BE 2409 LITERS PER HOUR.
2372	CAPACITY (FLOW RATE). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2372.
2374	CAPACITY (FLOW RATE). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2374.
2376	THE TEST PRESSURE SHALL BE 2376 POUNDS PER SQUARE INCH.
2378	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2378 POUNDS PER SQUARE INCH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CAPACITY (FLOW RATE) (CONT)	
(POUNDS PER SQUARE INCH) (CONT)	
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2380
SI	
(KILOPASCALS)	2377
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2379
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2381
TEST MEDIA (NAME)	2382
TEST MEDIA DOCUMENT (DOC DES)	2384
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	2386
PLUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2388
MINUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2390
TEST CYCLES (QUANTITY)	2391
TEST DURATION (MINUTES)	2392

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2380	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2380 POUNDS PER SQUARE INCH.
2377	THE TEST PRESSURE SHALL BE 2377 KILOPASCAL(S).
2379	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2379 KILOPASCAL(S).
2381	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2381 KILOPASCAL(S).
2382	THE TEST MEDIA SHALL BE 2382.
2384	THE TEST MEDIA SHALL CONFORM TO 2384.
2386	THE TEST MEDIA TEMPERATURE SHALL BE 2386 DEGREES CELSIUS.
2388	THE PLUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2388 DEGREES CELSIUS.
2390	THE MINUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2390 DEGREES CELSIUS.
2391	THERE SHALL BE 2391 TEST CYCLES.
2392	THE TEST DURATION SHALL BE 2392 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CAPACITY, RELIEF	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	3370
AS FOLLOWS:	3914
MINIMUM RELIEF FLOW RATE (SELECT ONE)	
U.S. (SELECT ONE)	
CUBIC FEET PER MINUTE	3372
STANDARD CUBIC FEET PER MINUTE	3374
GALLONS PER MINUTE	3376
SI	
CUBIC METERS PER SECOND	3378
PERCENTAGE OF RATED FLOW (PERCENT)	3380
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	3332
PER MIL-R-8572	3334

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3370	CAPACITY, RELIEF. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3370.
3914	CAPACITY, RELIEF. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3372	THE RELIEF FLOW RATE SHALL BE NOT LESS THAN 3372 CUBIC FEET PER MINUTE.
3374	THE RELIEF FLOW RATE SHALL BE NOT LESS THAN 3374 STANDARD CUBIC FEET PER MINUTE.
3376	THE RELIEF FLOW RATE SHALL BE NOT LESS THAN 3376 GALLONS PER MINUTE.
3378	THE RELIEF FLOW RATE SHALL BE NOT LESS THAN 3378 CUBIC METERS PER SECOND.
3380	THE RELIEF FLOW RATE SHALL BE NOT LESS THAN 3380 PERCENT OF THE RATED FLOW.
3332	CAPACITY, RELIEF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3332.
3334	CAPACITY, RELIEF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-8572.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CAPACITY, RELIEF (CONT)	
PER MIL-R-8572 (CONT)	
REGULATOR SET PRESSURE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	3336
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	3340
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	3342
SI	
(KILOPASCALS)	3338
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	3344
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	3346
TEST TEMPERATURE (DEGREES CELSIUS)	3348
PLUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	3350

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
3336	THE REGULATOR SET PRESSURE SHALL BE 3336 POUNDS PER SQUARE INCH.	
3340	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 3340 POUNDS PER SQUARE INCH.	
3342	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 3342 POUNDS PER SQUARE INCH.	
3338	THE REGULATOR SET PRESSURE SHALL BE 3338 KILOPASCAL(S).	
3344	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 3344 KILOPASCAL(S).	
3346	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 3346 KILOPASCAL(S).	
3348	THE TEST TEMPERATURE SHALL BE 3348 DEGREES CELSIUS.	
3350	THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 3350 DEGREES CELSIUS.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CAPACITY, RELIEF (CONT)	
TEST TEMPERATURE (CONT)	
MINUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	3352
TEST MEDIA (NAME)	3354
TEST MEDIA DOCUMENT (DOC DES)	3356
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	3358
PLUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	3360
MINUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	3362
TEST CYCLES (QUANTITY)	3364
RELIEF SET PRESSURE (PERCENT)	3366
CHECKING TIME	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2242
MAXIMUM CHECKING TIME (SECONDS)	2244

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3352	THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 3352 DEGREES CELSIUS.
3354	THE TEST MEDIA SHALL BE 3354.
3356	THE TEST MEDIA SHALL CONFORM TO 3356.
3358	THE TEST MEDIA TEMPERATURE SHALL BE 3358 DEGREES CELSIUS.
3360	THE PLUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 3360 DEGREES CELSIUS.
3362	THE MINUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 3362 DEGREES CELSIUS.
3364	THERE SHALL BE 3364 TEST CYCLES.
3366	THE RELIEF SET PRESSURE SHALL BE 3366 PERCENT OF THE REGULATOR SET PRESSURE.
2242	CHECKING TIME. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2242.
2244	CHECKING TIME. THE CHECKING TIME SHALL BE NOT GREATER THAN 2244 SECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CHECKING TIME (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2232
PER DOCUMENT (DOC DES)	2234
STATIC HEAD PRESSURE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	2236
SI	
(KILOPASCALS)	2237
MINIMUM PRESSURE BEFORE CHECKING ACTION OCCURS (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	2238
SI	
(KILOPASCALS)	2239
COMPOSITION, CHEMICAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1632

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2232	CHECKING TIME. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2232.
2234	CHECKING TIME. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2234.
2236	THE STATIC HEAD PRESSURE SHALL BE 2236 POUNDS PER SQUARE INCH.
2237	THE STATIC HEAD PRESSURE SHALL BE 2237 KILOPASCAL(S).
2238	CHECKING ACTION SHALL OCCUR BEFORE STATIC HEAD PRESSURE DECREASES TO 2238 POUNDS PER SQUARE INCH.
2239	CHECKING ACTION SHALL OCCUR BEFORE STATIC HEAD PRESSURE DECREASES TO 2239 KILOPASCAL(S).
1632	COMPOSITION, CHEMICAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1632.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COMPOSITION, CHEMICAL (CONT)	
PER CHEMICAL COMPOSITION TABLE.	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1622
PER FED-STD-151 (SELECT ONE)	
METHOD 111.2	1624
METHOD 11112.2	1626
SUPPLIERS CERTIFICATION.	1628

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

COMPOSITION, CHEMICAL. THE CHEMICAL COMPOSITION OF THE COMPONENT MATERIAL SHALL BE AS SPECIFIED IN THE CHEMICAL COMPOSITION TABLE.

CHEMICAL COMPOSITION TABLE

CHEMICAL ELEMENT	PCT MIN	PCT MAX
4420	4421	4422
4423	4424	4425
4426	4427	4428
4429	4430	4431
4432	4433	4434
4435	4436	4437
4438	4439	4440
4441	4442	4443
4444	4445	4446
4447	4448	4449

1622 COMPOSITION. CHEMICAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1622.

1624 COMPOSITION, CHEMICAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH FED-STD-151, METHOD 111.2.

1626 COMPOSITION, CHEMICAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH FED-STD-151, METHOD 112.2.

1628 COMPOSITION, CHEMICAL. Supplier's CERTIFICATION MAY BE ACCEPTED IN LIEU OF CHEMICAL ANALYSIS TESTS TO VERIFY CONFORMANCE WITH MATERIAL SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CORROSION, ACCELERATED	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2908
AS FOLLOWS:	3915
NO CORROSION OF ANY PART OF COMPONENT.	2910
NO DEGRADATION OF PERFORMANCE.	2912
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2892
PER DOCUMENT (DOC DES)	2894
SODIUM CHLORIDE QUANTITY IN IMMERSION SOLUTION (PERCENT BY WEIGHT)	2896
VALVE HEATED TEMPERATURE	
MINIMUM TEMPERATURE (DEGREES CELSIUS)	2898
MAXIMUM TEMPERATURE (DEGREES CELSIUS)	2900
MINIMUM HEATING DURATION	2902
HEATING AND IMMERSION CYCLES (QUANTITY)	2904

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2908	CORROSION, ACCELERATED. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2908.
3915	CORROSION, ACCELERATED. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2910	THERE SHALL BE NO CORROSION OF ANY PART OF THE COMPONENT.
2912	THERE SHALL BE NO DEGRADATION OF PERFORMANCE.
2892	CORROSION, ACCELERATED. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2892.
2894	CORROSION, ACCELERATED. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2894.
2896	THE COMPONENT SHALL BE IMMERSED IN A SOLUTION CONSISTING OF 2896 PERCENT BY WEIGHT OF SODIUM CHLORIDE IN DISTILLED WATER.
2898	THE COMPONENT SHALL BE HEATED TO A TEMPERATURE OF NOT LESS THAN 2898 DEGREES CELSIUS.
2900	THE COMPONENT SHALL BE HEATED TO A TEMPERATURE OF NOT GREATER THAN 2900 DEGREES CELSIUS.
2902	THE COMPONENT SHALL BE HEATED FOR A PERIOD OF NOT LESS THAN 2902 HOUR(S).
2904	THERE SHALL BE 2904 HEATING AND IMMERSION CYCLES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CREEP, PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	3234
AS FOLLOWS:	3916
MAXIMUM OUTLET PRESSURE INCREASE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	3236
SI	
(KILOPASCALS)	3238
OUTLET PRESSURE CHANGE (SELECT ONE)	
U.S.	
MINIMUM (POUNDS PER SQUARE INCH)	3240
MAXIMUM (POUNDS PER SQUARE INCH)	3242
SI	
MINIMUM (KILOPASCALS)	3244
MAXIMUM (KILOPASCALS)	3246
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	3182
PER DOCUMENT (DOC DES)	3184

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3234	CREEP, PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3234,
3916	CREEP, PRESSURE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3236	THE OUTLET PRESSURE INCREASE SHALL BE NOT GREATER THAN 3236 POUNDS PER SQUARE INCH,
3238	THE OUTLET PRESSURE INCREASE SHALL BE NOT GREATER THAN 3238 KILOPASCAL(S).
3240	THE OUTLET PRESSURE CHANGE SHALL BE NOT LESS THAN 3240 POUNDS PER SQUARE INCH.
3242	THE OUTLET PRESSURE CHANGE SHALL BE NOT GREATER THAN 3242 POUNDS PER SQUARE INCH.
3244	THE OUTLET PRESSURE CHANGE SHALL BE NOT LESS THAN 3244 KILOPASCAL(S).
3246	THE OUTLET PRESSURE CHANGE SHALL BE NOT GREATER THAN 3246 KILOPASCAL(S).
3182	CREEP, PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3182.
3184	CREEP, PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3184.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CREEP, PRESSURE (CONT)	
PER DOCUMENT (CONT)	
REGULATED DELIVERY PRESSURE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	3186
PLUS PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	3190
MINUS PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	3192
SI	
(KILOPASCALS)	3188
PLUS PRESSURE TOLERANCE (KILOPASCALS)	3194
MINUS PRESSURE TOLERANCE (KILOPASCALS)	3196
SUPPLY PRESSURE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	3198
PLUS PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	3202
MINUS PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	3204

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD_	PARAGRAPH

3186 THE REGULATED DELIVERY PRESSURE SHALL BE 3186 POUNDS PER SQUARE INCH.

3190 THE PLUS PRESSURE TOLERANCE SHALL BE 3190 POUNDS PER SQUARE INCH.

3192 THE MINUS PRESSURE TOLERANCE SHALL BE 3192 POUNDS PER SQUARE INCH.

3188 THE REGULATED DELIVERY PRESSURE SHALL BE 3188 KILOPASCAL(S).

3194 THE PLUS PRESSURE TOLERANCE SHALL BE 3194 KILOPASCAL(S).

3196 THE MINUS PRESSURE TOLERANCE SHALL BE 3196 KILOPASCAL(S).

3198 THE SUPPLY PRESSURE SHALL BE 3198 POUNDS PER SQUARE INCH.

3202 THE PLUS PRESSURE TOLERANCE SHALL BE 3202 POUNDS PER SQUARE INCH.

3204 THE MINUS PRESSURE TOLERANCE SHALL BE 3204 POUNDS PER SQUARE INCH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CREEP, PRESSURE (CONT)	
SUPPLY PRESSURE (CONT)	
SI	
(KILOPASCALS)	3200
PLUS PRESSURE TOLERANCE (KILOPASCALS)	3206
MINUS PRESSURE TOLERANCE (KILOPASCALS)	3208
TEST MEDIA (NAME)	3210
TEST MEDIA DOCUMENT (DOC DES)	3212
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	3214
PLUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	32116
MINUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	3218
TEST CYCLES (QUANTITY)	3220
NOMINAL TEST DURATION (SELECT ONE)	
(MINUTES)	3222
(HOURS)	3224
MAXIMUM OUTLET TEST VOLUME (SELECT ONE)	
(DIAMETERS OF DOWNSTREAM PIPE)	3226

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3200	THE SUPPLY PRESSURE SHALL BE 3200 KILOPASCAL(S).
3206	THE PLUS PRESSURE TOLERANCE SHALL BE 3206 KILOPASCAL(S).
3208	THE MINUS PRESSURE TOLERANCE SHALL BE 3208 KILOPASCAL(S).
3210	THE TEST MEDIA SHALL BE 3210.
3212	THE TEST MEDIA SHALL CONFORM TO 3212.
3214	THE TEST MEDIA TEMPERATURE SHALL BE 3214 DEGREES CELSIUS.
3216	THE PLUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 3216 DEGREES CELSIUS.
3218	THE MINUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 3218 DEGREES CELSIUS,
3220	THERE SHALL BE 3220 TEST CYCLES.
3222	THE NOMINAL TEST DURATION SHALL BE 3222 MINUTE(S).
3224	THE NOMINAL TEST DURATION SHALL B3 3224 HOUR(S).
3226	THE OUTLET TEST VOLUME SHALL BE NOT GREATER THAN 3226 DIAMETERS OF DOWNSTREAM PIPE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CREEP PRESSURE (CONT)	
MAXIMUM OUTLET TEST VOLUME (CONT)	
U.S.	
(CUBIC INCHES)	3228
SI	
(CUBIC CENTIMETERS)	3230
DROOP	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	3072
AS FOLLOWS:	3917
ALLOWABLE VARIANCE IN DELIVERED PRESSURE FROM SET PRESSURE (SELECT ONE)	
PERCENT TOLERANCE	
PLUS PRESSURE TOLERANCE (PERCENT)	3074
MINUS PRESSURE TOLERANCE (PERCENT)	3076
U.S.	
PLUS PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	3078
MINUS PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	3080

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3228	THE OUTLET TEST VOLUME SHALL BE NOT GREATER THAN 3228 CUBIC INCHES.
3230	THE OUTLET TEST VOLUME SHALL BE NOT GREATER THAN 3230 CUBIC CENTIMETER(S).
3072	DROOP. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3072.
3917	DROOP. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3074	THE ALLOWABLE VARIANCE IN DELIVERED PRESSURE SHALL BE PLUS 3074 PERCENT.
3076	THE ALLOWABLE VARIANCE IN DELIVERED PRESSURE SHALL BE MINUS 3076 PERCENT.
3078	THE ALLOWABLE VARIANCE IN DELIVERED PRESSURE SHALL BE PLUS 3078 POUNDS PER SQUARE INCH.
3080	THE ALLOWABLE VARIANCE IN DELIVERED PRESSURE SHALL BE MINUS 3080 POUNDS PER SQUARE INCH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DROOP (CONT)	
ALLOWABLE VARIANCE IN DELIVERED PRESSURE FROM SET PRESSURE (CONT)	
SI	
PLUS PRESSURE TOLERANCE (KILOPASCALS)	3082
MINUS PRESSURE TOLERANCE (KILOPASCALS)	3084
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	3002
PER DOCUMENT (DOC DES)	3004
TEST PRESSURE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	3006
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	3010
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	3012
SI	
(KILOPASCALS)	3008

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3082	THE ALLOWABLE VARIANCE IN DELIVERED PRESSURE SHALL BE PLUS 3082 KILOPASCAL(S).
3084	THE ALLOWABLE VARIANCE IN DELIVERED PRESSURE SHALL BE MINUS 3084 KILOPASCAL(S).
3002	DROOP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3002.
3004	DROOP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3004.
3006	THE TEST PRESSURE SHALL BE 3006 POUNDS PER SQUARE INCH.
3010	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 3010 POUNDS PER SQUARE INCH.
3012	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 3012 POUNDS PER SQUARE INCH.
3008	THE TEST PRESSURE SHALL BE 3008 KILOPASCAL(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DROOP (CONT)	
(KILOPASCALS) (CONT)	
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	3014
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	3016
TEST TEMPERATURE (DEGREES CELSIUS)	3018
PLUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	3020
MINUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	3022
TEST MEDIA (NAME)	3024
TEST MEDIA DOCUMENT (DOC DES)	3026
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	3028
PLUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	3030
MINUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	3032
TEST CYCLES (QUANTITY)	3034

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
3014	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 3014 KILOPASCAL(S).	
3016	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 3016 KILOPASCAL(S).	
3018	THE TEST TEMPERATURE SHALL BE 3018 DEGREES CELSIUS.	
3020	THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 3020 DEGREES CELSIUS.	
3022	THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 3022 DEGREES CELSIUS.	
3024	THE TEST MEDIA SHALL BE 3024.	
3026	THE TEST MEDIA SHALL CONFORM TO 3026.	
3028	THE TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 3030 DEGREES CELSIUS.	
3030	THE PLUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 3030 DEGREES CELSIUS.	
3032	THE MINUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 3032 DEGREES CELSIUS.	
3034	THERE SHALL BE 3034 TEST CYCLES.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DROOP (CONT)	
PER DOCUMENT (CONT)	
FLOW RATE (SELECT ONE)	
U.S. (SELECT ONE)	
(GALLONS PER MINUTE)	3040
PLUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	3050
MINUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	3052
(STANDARD CUBIC FEET PER MINUTE)	3042
PLUS FLOW RATE TOLERANCE (STANDARD CUBIC FEET PER MINUTE)	3054
MINUS FLOW RATE TOLERANCE (STANDARD CUBIC FEET PER MINUTE)	3056
(POUNDS PER HOUR)	3044
PLUS FLOW RATE TOLERANCE (POUNDS PER HOUR)	3058
MINUS FLOW RATE TOLERANCE (POUNDS PER HOUR)	3060

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3040	THE FLOW RATE SHALL BE 3040 GALLONS PER MINUTE.
3050	THE PLUS FLOW RATE TOLERANCE SHALL BE 3050 GALLONS PER MINUTE.
3052	THE MINUS FLOW RATE TOLERANCE SHALL BE 3052 GALLONS PER MINUTE.
3042	THE FLOW RATE SHALL BE 3042 STANDARD CUBIC FEET PER MINUTE.
3054	THE PLUS FLOW RATE TOLERANCE SHALL BE 3054 STANDARD CUBIC FEET PER MINUTE.
3056	THE MINUS FLOW RATE TOLERANCE SHALL BE 3056 STANDARD CUBIC FEET PER MINUTE.
3044	THE FLOW RATE SHALL BE 3044 POUNDS PER HOUR.
3058	THE PLUS FLOW RATE TOLERANCE SHALL BE 3058 POUNDS PER HOUR.
3060	THE MINUS FLOW RATE TOLERANCE SHALL BE 3060 POUNDS PER HOUR.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DROOP (CONT)	
FLOW RATE (CONT)	
SI (SELECT ONE)	
(CUBIC METERS PER SECOND)	3046
PLUS FLOW RATE TOLERANCE (CUBIC METERS PER SECOND)	3062
MINUS FLOW RATE TOLERANCE (CUBIC METERS PER SECOND)	3064
(KILOGRAMS PER SECOND)	3048
PLUS FLOW RATE TOLERANCE (KILOGRAMS PER SECOND)	3066
MINUS FLOW RATE TOLERANCE (KILOGRAMS PER SECOND)	3068
NOMINAL TEST DURATION (SELECT ONE)	
(SECONDS)	3036
(MINUTES)	3038
DUST	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4724
NO EVIDENCE OF PHYSICAL DAMAGE.	1510
NO EVIDENCE OF DUST PENETRATION.	4801

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3046	THE FLOW RATE SHALL BE 3046 CUBIC METERS PER SECOND.
3062	THE PLUS FLOW RATE TOLERANCE SHALL BE 3062 CUBIC METERS PER SECOND.
3064	THE MINUS FLOW RATE TOLERANCE SHALL BE 3064 CUBIC METERS PER SECOND.
3048	THE FLOW RATE SHALL BE 3048 KILOGRAMS PER SECOND.
3066	THE PLUS FLOW RATE TOLERANCE SHALL BE 3066 KILOGRAMS PER SECOND.
3068	THE MINUS FLOW RATE TOLERANCE SHALL BE 3068 KILOGRAMS PER SECOND.
3036	THE NOMINAL TEST DURATION SHALL BE 3036 SECOND(S).
3038	THE NOMINAL TEST DURATION SHALL BE 3038 MINUTE(S).
4724	DUST. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4724.
1510	DUST. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4801	THERE SHALL BE NO EVIDENCE OF DUST PENETRATION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDES (KCI)

CHARACTERISTIC NAME	CHAR CODE
DUST (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4895
PER MIL-STD-81O, METHOD 510.	4953
TEST SPECIMEN(S) SHALL BE OPERATED DURING TEST STEP(S) (NUMBERS)	4872
*DURATION OF OPERATION (HOURS)	6299
SPECIMEN ORIENTATION SHALL BE CHANGED DURING TEST.	1539
SECOND 6-HOUR TEST IMMEDIATELY FOLLOWING TEMPERATURE STABILIZATION IN STEP 2.	4956
STEP 2 AND STEP 3 TEMPERATURE (DEGREES CELSIUS)	4840
ENDURANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2166
AS FOLLOWS:	3918
MAXIMUM ALLOWABLE INTERNAL LEAKAGE (CUBIC CENTIMETERS PER MINUTE)	2168
MAXIMUM ALLOWABLE EXTERNAL LEAKAGE (CUBIC CENTIMETERS PER MINUTE)	2170

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4895	DUST, TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4895.
4953	DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 510 OF MIL-STD-810.
4872	ITEMS SHALL BE OPERATED DURING STEP(S) 4872.
6299	DURATION OF OPERATION SHALL BE 6299 HOUR(S).
1539	ORIENTATION SHALL BE CHANGED DURING THE TEST.
4956	THE SECOND 6-HOUR TEST SHALL BE PERFORMED IMMEDIATELY AFTER REACHING STABILIZATION IN STEP 2.
4840	THE TEMPERATURE SHALL BE 4840 DEGREES CELSIUS FOR STEPS 2 AND 3.
2166	ENDURANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2166.
3918	ENDURANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2168	THE ALLOWABLE INTERNAL LEAKAGE SHALL BE NOT GREATER THAN 2168 CUBIC CENTIMETER(S) PER MINUTE.
2170	THE ALLOWABLE EXTERNAL LEAKAGE SHALL BE NOT GREATER THAN 2170 CUBIC CENTIMETER(S) PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE (CONT)	
AS FOLLOWS: (CONT)	
NO EVIDENCE OF EXCESSIVE WEAR.	2172
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2122
PER DOCUMENT (DOC DES)	2124
TEST PRESSURE (SELECT ONE)	
U s .	
(POUNDS PER SQUARE INCH)	2126
PLUS PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2128
MINUS PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2130
SI	
(KILOPASCALS)	2125
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2127
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2129
TEST TEMPERATURE (DEGREES CELSIUS)	2132
PLUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2134

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2172	THERE SHALL BE NO EVIDENCE OF EXCESSIVE WEAR.
2122	ENDURANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2122.
2124	ENDURANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2124.
2126	THE TEST PRESSURE SHALL BE 2126 POUNDS PER SQUARE INCH.
2128	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2128 POUNDS PER SQUARE INCH.
2130	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2130 POUNDS PER SQUARE INCH.
2125	THE TEST PRESSURE SHALL BE 2125 KILOPASCAL(S).
2127	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2127 KILOPASCAL(S).
2129	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2129 KILOPASCAL(S).
2132	THE TEST TEMPERATURE SHALL BE 2132 DEGREES CELSIUS.
2134	THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 2134 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE (CONT)	
TEST TEMPERATURE (CONT)	
MINUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2136
TEST MEDIA (NAME)	2138
TEST MEDIA DOCUMENT (DOC DES)	2140
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	2146
PLUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2148
MINUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2150
TEST CYCLES (QUANTITY)	2152
TEST CYCLE RATE (CYCLES PER MINUTE)	2154
INITIAL PRESSURE OF EACH CYCLE (SELECT ONE)	
U.S.	
MINIMUM (POUNDS PER SQUARE INCH)	2142
MAXIMUM (POUNDS PER SQUARE INCH)	2144
SI	
MINIMUM (KILOPASCALS)	2131

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2136	THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 21136 DEGREES CELSIUS.
2138	THE TEST MEDIA SHALL BE 2138.
2140	THE TEST MEDIA SHALL CONFORM TO 2140.
2146	THE TEST MEDIA TEMPERATURE SHALL BE 2146 DEGREES CELSIUS.
2148	THE PLUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2148 DEGREES CELSIUS.
2150	THE MINUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2150 DEGREES CELSIUS.
2152	THERE SHALL BE 2152 TEST CYCLES.
2154	THE TEST CYCLE RATE SHALL BE 2154 CYCLES PER MINUTE.
2142	THE INITIAL PRESSURE OF EACH CYCLE SHALL BE NOT LESS THAN 2142 POUNDS PER SQUARE INCH.
2144	THE INITIAL PRESSURE OF EACH CYCLE SHALL BE NOT GREATER THAN 2144 POUNDS PER SQUARE INCH.
2131	THE INITIAL PRESSURE OF EACH CYCLE SHALL BE NOT LESS THAN 2131 KILOPASCAL(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE (CONT)	
SI (CONT)	
MAXIMUM (KILOPASCALS)	2133
FLOW RATE (SELECT ONE)	
U.S. (SELECT ONE)	
(GALLONS PER MINUTE)	2143
PLUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	2153
MINUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	2155
(STANDARD CUBIC FEET PER MINUTE)	2145
PLUS FLOW RATE TOLERANCE (STANDARD CUBIC FEET PER MINUTE)	2156
MINUS FLOW RATE TOLERANCE (STANDARD CUBIC FEET PER MINUTE)	2157
(POUNDS PER HOUR)	2147
PLUS FLOW RATE TOLERANCE (POUNDS PER HOUR)	2158
MINUS FLOW RATE TOLERANCE (POUNDS PER HOUR)	21159

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2133	THE INITIAL PRESSURE OF EACH CYCLE SHALL BE NOT GREATER THAN 2133 KILOPASCAL(S).
2143	THE FLOW RATE SHALL BE 2143 GALLONS PER MINUTE.
2153	THE PLUS FLOW RATE TOLERANCE SHALL BE 2153 GALLONS PER MINUTE.
2155	THE MINUS FLOW RATE TOLERANCE SHALL BE 2155 GALLONS PER MINUTE .
2145	THE FLOW RATE SHALL BE 2145 STANDARD CUBIC FEET PER MINUTE.
2156	THE PLUS FLOW RATE TOLERANCE SHALL BE 21156 STANDARD CUBIC FEET PER MINUTE.
2157	THE MINUS FLOW RATE TOLERANCE SHALL BE 2157 STANDARD CUBIC FEET PER MINUTE.
2147	THE FLOW RATE SHALL BE 2147 POUNDS PER HOUR.
2158	THE PLUS FLOW RATE TOLERANCE SHALL BE 2158 POUNDS PER HOUR.
2159	THE MINUS FLOW RATE TOLERANCE SHALL BE 2159 POUNDS PER HOUR.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE (CONT)	
FLOW RATE (CONT)	
SI (SELECT ONE)	
(CUBIC METERS PER SECOND)	2149
PLUS FLOW RATE TOLERANCE (CUBIC METERS PER SECOND)	2160
MINUS FLOW RATE TOLERANCE (CUBIC METERS PER SECOND)	2161
(KILOGRAMS PER SECOND)	2151
PLUS FLOW RATE TOLERANCE (KILOGRAMS PER SECOND)	2162
MINUS FLOW RATE TOLERANCE (KILOGRAMS PER SECOND)	2163
ENDURANCE, CONTAMINATED MEDIA	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2292
AS FOLLOWS:	3919
MAXIMUM ALLOWABLE LEAKAGE (CUBIC CENTIMETERS PER MINUTE)	2294
NO DETERIORATION OF PERFORMANCE.	2296

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2149	THE FLOW RATE SHALL BE 2149 CUBIC METERS PER SECOND.
2160	THE PLUS FLOW RATE TOLERANCE SHALL BE 2160 CUBIC METERS PER SECOND.
2161	THE MINUS FLOW RATE TOLERANCE SHALL BE 2161 CUBIC METERS PER SECOND.
2151	THE FLOW RATE SHALL BE 2151 KILOGRAMS PER SECOND.
2162	THE PLUS FLOW RATE TOLERANCE SHALL BE 2162 KILOGRAMS PER SECOND.
2163	THE MINUS FLOW RATE TOLERANCE SHALL BE 2163 KILOGRAMS PER SECOND.
2292	ENDURANCE, CONTAMINATED MEDIA. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2292.
3919	ENDURANCE, CONTAMINATED MEDIA. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2294	THE ALLOWABLE LEAKAGE SHALL BE NOT GREATER THAN 2294 CUBIC CENTIMETER(S) PER MINUTE.
2296	THERE SHALL BE NO DETERIORATION OF PERFORMANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE, CONTAMINATED MEDIA (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2252
PER DOCUMENT (DOC DES)	2254
TEST PRESSURE (SELECT ONE)	
U s .	
(POUNDS PER SQUARE INCH)	2256
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2258
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2260
SI	
(KILOPASCALS)	2251
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2253
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2255
TEST TEMPERATURE (DEGREES CELSIUS)	2262
PLUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2264
MINUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2266

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2252	ENDURANCE, CONTAMINATED MEDIA. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2252.
2254	ENDUARNCE, CONTAMINATED MEDIA. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2254.
2256	THE TEST PRESSURE SHALL BE 2256 POUNDS PER SQUARE INCH.
2258	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2258 POUNDS PER SQUARE INCH.
2260	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2260 POUNDS PER SQUARE INCH.
2251	THE TEST PRESSURE SHALL BE 2251 KILOPASCAL(S).
2253	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2253 KILOPASCAL(S).
2255	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2255 KILOPASCAL(S).
2262	THE TEST TEMPERATURE SHALL BE 2262 DEGREES CELSIUS.
2264	THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 2264 DEGREES CELISUS.
2266	THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 2266 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE, CONTAMINATED MEDIA (CONT)	
PER DOCUMENT (CONT)	
TEST MEDIA (NAME)	2268
TEST MEDIA DOCUMENT (DOC DES)	2270
TEST MEDIA TEMPERATURE (DEGREES CELSIUS	2272
PLUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2274
MINUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2276
TEST CYCLES (QUANTITY)	2278
TEST CYCLE RATE (CYCLES PER MINUTE)	2280
FLOW RATE (SELECT ONE)	
U.S. (SELECT ONE)	
(GALLONS PER MINUTE)	2257
PLUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	2267
MINUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	2269
(STANDARD CUBIC FEET PER MINUTE)	2259
PLUS FLOW RATE TOLERANCE (STANDARD CUBIC FEET PER MINUTE)	2271

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2268	THE TEST MEDIA SHALL BE 2268.
2270	THE TEST MEDIA SHALL CONFORM TO 2270,
2272	THE TEST MEDIA TEMPERATURE SHALL BE 2272 DEGREES CELSIUS.
2274	THE PLUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2274 DEGREES CELSIUS.
2276	THE MINUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2276 DEGREES CELSIUS.
2278	THERE SHALL BE 2278 TEST CYCLES.
2280	THE TEST CYCLE RATE SHALL BE 2280 CYCLES PER MINUTE.
2257	THE FLOW RATE SHALL BE 2257 GALLONS PER MINUTE.
2267	THE PLUS FLOW RATE TOLERANCE SHALL BE 2267 GALLONS PER MINUTE.
2269	THE MINUS FLOW RATE TOLERANCE SHALL BE 2269 GALLONS PER MINUTE.
2259	THE FLOW RATE SHALL BE 2259 STANDARD CUBIC FEET PER MINUTE.
2271	THE PLUS FLOW RATE TOLERANCE SHALL BE 2271 STANDARD CUBIC FEET PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE, CONTAMINATED MEDIA (CONT)	
(STANDARD CUBIC FEET PER MINUTE) (CONT)	
MINUS FLOW RATE TOLERANCE (STANDARD CUBIC FEET PER MINUTE)	2273
(POUNDS PER HOUR)	2261
PLUS FLOW RATE TOLERANCE (POUNDS PER HOUR)	2275
MINUS FLOW RATE TOLERANCE (POUNDS PER HOUR)	2277
SI (SELECT ONE)	
(CUBIC METERS PER SECOND)	2263
PLUS FLOW RATE TOLERANCE (CUBIC METERS PER SECOND)	2279
MINUS FLOW RATE TOLERANCE (CUBIC METERS PER SECOND)	2281
(KILOGRAMS PER SECOND)	2265
PLUS FLOW RATE TOLERANCE (KILOGRAMS PER SECOND)	2283
MINUS FLOW RATE TOLERANCE (KILOGRAMS PER SECOND)	2285

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
2273	THE MINUS FLOW RATE TOLERANCE SHALL BE 2273 STANDARD CUBIC FEET PER MINUTE.	
2261	THE FLOW RATE SHALL BE 2261 POUNDS PER HOUR.	
2275	THE PLUS FLOW RATE TOLERANCE SHALL BE 2275 POUNDS PER HOUR.	
2277	THE MINUS FLOW RATE TOLERANCE SHALL BE 2277 POUNDS PER HOUR.	
2263	THE FLOW RATE SHALL BE 2263 CUBIC METERS PER SECOND.	
2279	THE PLUS FLOW RATE TOLERANCE SHALL BE 2279 CUBIC METERS PER SECOND.	
2281	THE MINUS FLOW RATE TOLERANCE SHALL BE 2281 CUBIC METERS PER SECOND.	
2265	THE FLOW RATE SHALL BE 2265 KILOGRAMS PER SECOND.	
2283	THE PLUS FLOW RATE TOLERANCE SHALL BE 2283 KILOGRAMS PER SECOND.	
2285	THE MINUS FLOW RATE TOLERANCE SHALL BE 2285 KILOGRAMS PER SECOND.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE, CONTAMINATED MEDIA (CONT)	
PER DOCUMENT (CONT)	
TEST CONTAMINANTS	
NOTE: SEE CONTAMINATED MEDIA ENDURANCE TEST CONTAMINANTS TABLE.	
ENDURANCE, RELIEF	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	3472
AS FOLLOWS:	3920
MAXIMUM ALLOWABLE INTERNAL LEAKAGE (CUBIC CENTIMETERS PER MINUTE)	3474
MAXIMUM ALLOWABLE EXTERNAL LEAKAGE (CUBIC CENTIMETERS PER MINUTE)	3476
MAXIMUM CHANGE IN SET PRESSURE (PERCENT)	3478

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

THE TEST CONTAMINANTS SHALL BE AS SPECIFIED IN THE CONTAMINATED MEDIA ENDURANCE TEST CONTAMINANTS TABLE.

CONTAMINATED MEDIA ENDURANCE TEST CONTAMINANTS TABLE

CONTAMINANT	DESCRIPTION	PARTICLE SIZE (MICRONS)	PERCENTAGE	QUANTITY (GRAMS)
4460		4461	4462	4463
4464		4465	4466	4467
4468		4469	4470	44711
4472		4473	4474	4475
4476		4477	4478	4479
4480		4481	4482	4483
4484		4485	4486	4487
4488		4489	4490	4491
4492		4493	4494	4495
4496		4497	4498	4499

3472 ENDURANCE, RELIEF. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3472.

3920 ENDURANCE, RELIEF. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

3474 THE ALLOWABLE INTERNAL LEAKAGE SHALL BE NOT GREATER THAN 3474 CUBIC CENTIMETER(S) PER MINUTE.

3476 THE ALLOWABLE EXTERNAL LEAKAGE SHALL BE NOT GREATER THAN 3476 CUBIC CENTIMETER(S) PER MINUTE.

3478 THE CHANGE IN SET PRESSURE SHALL BE NOT GREATER THAN 3478 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE, RELIEF (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM INCREASE IN RESEAT PRESSURE (PERCENT)	3480
MAXIMUM CHANGE IN RELIEF CRACKING PRESSURE (PERCENT)	3482
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3392
TEST PER MIL-R-8572.	3394
REGULATOR SET PRESSURE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	3396
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	3400
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	3402
SI	
(KILOPASCALS)	3398
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	3404

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD_ PARAGRAPH
3480	THE INCREASE IN RESEAT PRESSURE SHALL BE NOT GREATER THAN 3480 PERCENT.
3482	THE CHANGE IN RELIEF CRACKING PRESSURE SHALL BE NOT GREATER THAN 3482 PERCENT.
3392	ENDURANCE, RELIEF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3392.
3394	ENDURANCE, RELIEF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-8572.
3396	THE REGULATOR SET PRESSURE SHALL BE 3396 POUNDS PER SQUARE INCH.
3400	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 3400 POUNDS PER SQUARE INCH.
3402	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 3402 POUNDS PER SQUARE INCH.
3398	THE REGULATOR SET PRESSURE SHALL BE 3398 KILOPASCAL(S).
3404	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 3404 KILOPASCAL(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE, RELIEF (CONT)	
(KILOPASCALS) (CONT)	
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	3406
TEST TEMPERATURE (DEGREES CELSIUS)	3408
PLUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	3410
MINUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	3412
TEST MEDIA (NAME)	3414
TEST MEDIA DOCUMENT (DOC DES)	3416
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	3418
PLUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	3420
MINUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	3422
TEST CYCLES (QUANTITY)	3424
TEST CYCLE RATE (CYCLES PER MINUTE)	3426

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3406	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 3406 KILOPASCAL(S).
3408	THE TEST TEMPERATURE SHALL BE 3408 DEGREES CELSIUS.
3410	THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 3410 DEGREES CELSIUS.
	THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 3412 DEGREES CELSIUS.
3414	THE TEST MEDIA SHALL BE 3414.
3416	THE TEST MEDIA SHALL CONFORM TO 3416.
3418	THE TEST MEDIA TEMPERATURE SHALL BE 3418 DEGREES CELSIUS.
3420	THE PLUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 3420 DEGREES CELSIUS.
3422	THE MINUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 3422 DEGREES CELSIUS.
3424	THERE SHALL BE 3424 TEST CYCLES.
3426	THE TEST CYCLE RATE SHALL BE 3426 CYCLES PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE, RELIEF (CONT)	
TEST PER MIL-R-8572 (CONT)	
FLOW RATE (SELECT ONE)	
U.S. (SELECT ONE)	
(GALLONS PER MINUTE)	3440
PLUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	3450
MINUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	3452
(STANDARD CUBIC FEET PER MINUTE)	3442
PLUS FLOW RATE TOLERANCE (STANDARD CUBIC FEET PER MINUTE)	3454
MINUS FLOW RATE TOLERANCE (STANDARD CUBIC FEET PER MINUTE)	3456
(POUNDS PER HOUR)	3444
PLUS FLOW RATE TOLERANCE (POUNDS PER HOUR)	3458
MINUS FLOW RATE TOLERANCE (POUNDS PER HOUR)	3460

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
3440	THE FLOW RATE SHALL BE 3440 GALLONS PER MINUTE.	
3450	THE PLUS FLOW RATE TOLERANCE SHALL BE 3450 GALLONS PER MINUTE.	
3452	THE MINUS FLOW RATE TOLERANCE SHALL BE 3452 GALLONS PER MINUTE.	
3442	THE FLOW RATE SHALL BE 3442 STANDARD CUBIC FEET PER MINUTE.	
3454	THE PLUS FLOW RATE TOLERANCE SHALL BE 3454 STANDARD CUBIC FEET PER MINUTE.	
3456	THE MINUS FLOW RATE TOLERANCE SHALL BE 3456 STANDARD CUBIC FEET PER MINUTE.	
3444	THE FLOW RATE SHALL BE 3444 POUNDS PER HOUR.	
3458	THE PLUS FLOW RATE TOLERANCE SHALL BE 3458 POUNDS PER HOUR.	
3460	THE MINUS FLOW RATE TOLERANCE SHALL BE 3460 POUNDS PER HOUR.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE, RELIEF (CONT)	
FLOW RATE (CONT)	
SI (SELECT ONE)	
(CUBIC METERS PER SECOND)	3446
PLUS FLOW RATE TOLERANCE (CUBIC METERS PER SECOND)	3462
MINUS FLOW RATE TOLERANCE (CUBIC METERS PER SECOND)	3464
(KILOGRAMS PER SECOND)	3448
PLUS FLOW RATE TOLERANCE (KILOGRAMS PER SECOND)	3466
MINUS FLOW RATE TOLERANCE (KILOGRAMS PER SECOND)	3468
RELIEF PRESSURE SETTING (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	3428
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	3432
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	3434

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3446	THE FLOW RATE SHALL BE 3446 CUBIC METERS PER SECOND.
3462	THE PLUS FLOW RATE TOLERANCE SHALL BE 3462 CUBIC METERS PER SECOND.
3464	THE MINUS FLOW RATE TOLERANCE SHALL BE 3464 CUBIC METERS PER SECOND.
3448	THE FLOW RATE SHALL BE 3448 KILOGRAMS PER SECOND.
3466	THE PLUS FLOW RATE TOLERANCE SHALL BE 3466 KILOGRAMS PER SECOND.
3468	THE MINUS FLOW RATE TOLERANCE SHALL BE 3468 KILOGRAMS PER SECOND.
3428	THE RELIEF PRESSURE SETTING SHALL BE 3428 POUNDS PER SQUARE INCH.
3432	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 3432 POUNDS PER SQUARE INCH.
3434	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 3434 POUNDS PER SQUARE INCH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE, RELIEF (CONT)	
RELIEF PRESSURE SETTING (CONT)	
SI	
(KILOPASCALS)	3430
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	3436
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	3438
FLOW, SURGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2222
AS FOLLOWS:	3921
MAXIMUM ALLOWABLE LEAKAGE (CUBIC CENTIMETERS PER MINUTE)	2224
NO DAMAGE TO COMPONENT PARTS.	2226
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2182
PER DOCUMENT (DOC DES)	2184

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
3430	THE RELIEF PRESSURE SETTING SHALL BE 3430 KILOPASCAL(S).	
3436	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 3436 KILOPASCAL(S).	
3438	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 3438 KILOPASCAL(S).	
2222	FLOW, SURGE.	THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2222.
3921	FLOW, SURGE.	THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2224	THE ALLOWABLE LEAKAGE SHALL BE NOT GREATER THAN 2224 CUBIC CENTIMETER(S) PER MINUTE.	
2226	THERE SHALL BE NO DAMAGE TO COMPONENT PARTS.	
2182	FLOW, SURGE.	TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2182.
2184	FLOW_, SURGE.	TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2184.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLOW, SURGE (CONT)	
PER DOCUMENT (CONT)	
TEST PRESSURE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	2186
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2188
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2190
SI	
(KILOPASCALS)	2187
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2189
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2191
TEST TEMPERATURE (DEGREES CELSIUS)	2192
PLUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2194
MINUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2196
TEST MEDIA (NAME)	2198

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2186	THE TEST PRESSURE SHALL BE 2186 POUNDS PER SQUARE INCH.
2%88	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2188 POUNDS PER SQUARE INCH.
2190	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2190 POUNDS PER SQUARE INCH.
21187	THE TEST PRESSURE SHALL BE 2187 KILOPASCAL(S).
2189	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2189 KILOPASCAL(S).
2119	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2191 KILOPASCAL(S).
2192	THE TEST TEMPERATURE SHALL BE 2192 DEGREES CELSIUS.
2194	THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 2194 DEGREES CELSIUS.
2196	THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 2196 DEGREES CELSIUS.
21198	THE TEST MEDIA SHALL BE 2198.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLOW, SURGE (CONT)	
PER DOCUMENT (CONT)	
TEST MEDIA DOCUMENT (DOC DES)	2200
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	2204
PLUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2206
MINUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2208
TEST CYCLES (QUANTITY)	2210
FLOW RATE (SELECT ONE)	
U.S. (SELECT ONE)	
(GALLONS PER MINUTE)	2197
PLUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	2209
MINUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	2211
(STANDARD CUBIC FEET PER MINUTE)	2199
PLUS FLOW RATE TOLERANCE (STANDARD CUBIC FEET PER MINUTE)	2212
MINUS FLOW RATE TOLERANCE (STANDARD CUBIC FEET PER MINUTE)	2213

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2200	THE TEST MEDIA SHALL CONFORM TO 2200.
2204	THE TEST MEDIA TEMPERATURE SHALL BE 2204 DEGREES CELSIUS.
2206	THE PLUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2206 DEGREES CELSIUS.
2208	THE MINUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2208 DEGREES CELSIUS.
2210	THERE SHALL BE 2210 TEST CYCLES.
2197	THE FLOW RATE SHALL BE 2197 GALLONS PER MINUTE.
2209	THE PLUS FLOW RATE TOLERANCE SHALL BE 2209 GALLONS PER MINUTE.
2211	THE MINUS FLOW RATE TOLERANCE SHALL BE 2211 GALLONS PER MINUTE.
2199	THE FLOW RATE SHALL BE 2199 STANDARD CUBIC FEET PER MINUTE.
2212	THE PLUS FLOW RATE TOLERANCE SHALL BE 2212 STANDARD CUBIC FEET PER MINUTE.
2213	THE MINUS FLOW RATE TOLERANCE SHALL BE 2213 STANDARD CUBIC FEET PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLOW, SURGE (CONT)	
U.S. (CONT)	
(POUNDS PER HOUR)	2201
PLUS FLOW RATE TOLERANCE (POUNDS PER HOUR)	2214
MINUS FLOW RATE TOLERANCE (POUNDS PER HOUR)	2215
SI (SELECT ONE)	
(CUBIC METERS PER SECOND)	2205
PLUS FLOW RATE TOLERANCE (CUBIC METERS PER SECOND)	2216
MINUS FLOW RATE TOLERANCE (CUBIC METERS PER SECOND)	2217
(KILOGRAMS PER SECOND)	2207
PLUS FLOW RATE TOLERANCE (KILOGRAMS PER SECOND)	2218
MINUS FLOW RATE TOLERANCE (KILOGRAMS PER SECOND)	2219

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
2201	THE FLOW RATE SHALL BE 2201 POUNDS PER HOUR.	
2214	THE PLUS FLOW RATE TOLERANCE SHALL BE 2214 POUNDS PER HOUR.	
2215	THE MINUS FLOW RATE TOLERANCE SHALL BE 2215 POUNDS PER HOUR.	
2205	THE FLOW RATE SHALL BE 2205 CUBIC METERS PER SECOND.	
2216	THE PLUS FLOW RATE TOLERANCE SHALL BE 2216 CUBIC METERS PER SECOND.	
2217	THE MINUS FLOW RATE TOLERANCE SHALL BE 2217 CUBIC METERS PER SECOND.	
2207	THE FLOW RATE SHALL BE 2207 KILOGRAMS PER SECOND.	
22118	THE PLUS FLOW RATE TOLERANCE SHALL BE 2218 KILOGRAMS PER SECOND.	
2219	THE MINUS FLOW RATE TOLERANCE SHALL BE 2219 KILOGRAMS PER SECOND.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLOW, SURGE (CONT)	
PER DOCUMENT (CONT)	
ACCUMULATOR CHARGE PRESSURE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	2202
SI	
(KILOPASCALS)	2203
FLOW, SUSTAINED	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1822
AS FOLLOWS:	3922
THE COMPONENT SHALL NOT CHATTER OR MAKE EXCESSIVE NOISE DURING FLOW.	1824
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1782
TEST PER MIL-V-9050,	1784
TEST PRESSURE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	1786

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH	
2202	THE ACCUMULATOR CHARGE PRESSURE SHALL BE 2202 POUNDS PER SQUARE INCH.	
2203	THE ACCUMULATOR CHARGE PRESSURE SHALL BE 2203 KILOPASCAL(S).	
1822	FLOW, SUSTAINED.	THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT l822.
3922	FLOW, SUSTAINED.	THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1824	THE COMPONENT SHALL NOT CHATTER OR MAKE EXCESSIVE NOISE DURING FLOW.	
1782	FLOW, SUSTAINED*	TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1782.
1784	FLOW, SUSTAINED.	TESTING SHALL BE IN ACCORDANCE WITH MIL-V-9050.
1786	THE TEST PRESSURE SHALL BE 1786 POUNDS PER SQUARE INCH.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLOW, SUSTAINED (CONT)	
(POUNDS PER SQUARE INCH) (CONT)	
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	1788
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	1790
SI	
(KILOPASCALS)	1787
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	1789
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	1791
TEST TEMPERATURE (DEGREES CELSIUS)	1792
PLUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1794
MINUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1796
TEST MEDIA (NAME)	1798
TEST MEDIA DOCUMENT (DOC DES)	1800

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1788	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 1788 POUNDS PER SQUARE INCH.
1790	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 1790 POUNDS PER SQUARE INCH.
1787	THE TEST PRESSURE SHALL BE 1787 KILOPASCAL(S).
1789	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 1789 KILOPASCAL(S).
1791	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 1791 KILOPASCAL(S).
1792	THE TEST TEMPERATURE SHALL BE 1792 DEGREES CELSIUS.
1794	THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 1794 DEGREES CELSIUS.
1796	THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 1796 DEGREES CELSIUS.
1798	THE TEST MEDIA SHALL BE 1798.
1800	THE TEST MEDIA SHALL CONFORM TO 1800.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLOW, SUSTAINED (CONT)	
TEST PER MIL-V-9050 (CONT)	
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	1802
PLUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1804
MINUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1806
TEST CYCLES (QUANTITY)	1808
FLOW RATE (SELECT ONE)	
U.S. (SELECT ONE)	
(GALLONS PER MINUTE)	1793
PLUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	1805
MINUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	1807
(STANDARD CUBIC FEET PER MINUTE)	1795
PLUS FLOW RATE TOLERANCE (STANDARD CUBIC FEET PER MINUTE)	l809
MINUS FLOW RATE TOLERANCE (STANDARD CUBIC FEET PER MINUTE)	1810

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1802	THE TEST MEDIA TEMPERATURE SHALL BE 1802 DEGREES CELSIUS.
1804	THE PLUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 1804 DEGREES CELSIUS.
1806	THE MINUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 1806 DEGREES CELSIUS.
1808	THERE SHALL BE 1808 TEST CYCLES.
1793	THE FLOW RATE SHALL BE 1793 GALLONS PER MINUTE.
1805	THE PLUS FLOW RATE TOLERANCE SHALL BE 1805 GALLONS PER MINUTE.
1807	THE MINUS FLOW RATE TOLERANCE SHALL BE 1807 GALLONS PER MINUTE.
1795	THE FLOW RATE SHALL BE 1795 STANDARD CUBIC FEET PER MINUTE.
1809	THE PLUS FLOW RATE TOLERANCE SHALL BE 1809 STANDARD CUBIC FEET PER MINUTE.
1810	THE MINUS FLOW RATE TOLERANCE SHALL BE 1810 STANDARD CUBIC FEET PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLOW, SUSTAINED (CONT)	
U.S. (CONT)	
(POUNDS PER HOUR)	1797
PLUS FLOW RATE TOLERANCE (POUNDS PER HOUR)	1811
MINUS FLOW RATE TOLERANCE (POUNDS PER HOUR)	1812
SI (SELECT ONE)	
(CUBIC METERS PER SECOND)	1799
PLUS FLOW RATE TOLERANCE (CUBIC METERS PER SECOND)	1813
MINUS FLOW RATE TOLERANCE (CUBIC METERS PER SECOND)	1814
(KILOGRAMS PER SECOND)	1801
PLUS FLOW RATE TOLERANCE (KILOGRAMS PER SECOND)	1815
MINUS FLOW RATE TOLERANCE (KILOGRAMS PER SECOND)	1816
(LITERS PER MINUTE)	1803
PLUS FLOW RATE TOLERANCE (LITERS PER MINUTE)	1817

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
1797	THE FLOW RATE SHALL BE 1797 POUNDS PER HOUR.	
1811	THE PLUS FLOW RATE TOLERANCE SHALL BE 1811 POUNDS PER HOUR.	
1812	THE MINUS FLOW RATE TOLERANCE SHALL BE 1812 POUNDS PER HOUR.	
1799	THE FLOW RATE SHALL BE 1799 CUBIC METERS PER SECOND.	
1813	THE PLUS FLOW RATE TOLERANCE SHALL BE 1813 CUBIC METERS PER SECOND.	
1814	THE MINUS FLOW RATE TOLERANCE SHALL BE 1814 CUBIC METERS PER SECOND.	
1801	THE FLOW RATE SHALL BE 1801 KILOGRAMS PER SECOND.	
1815	THE PLUS FLOW RATE TOLERANCE SHALL BE 1815 KILOGRAMS PER SECOND.	
1816	THE MINUS FLOW RATE TOLERANCE SHALL BE 1816 KILOGRAMS PER SECOND,	
1803	THE FLOW RATE SHALL BE 1803 LITERS PER MINUTE.	
1817	THE PLUS FLOW RATE TOLERANCE SHALL BE 1817 LITERS PER PER MINUTE.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLOW, SUSTAINED (CONT)	
(LITERS PER MINUTE) (CONT)	
MINUS FLOW RATE TOLERANCE (LITERS PER MINUTE)	1819
TEST DURATION (HOURS)	1818
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4798
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	4799
NO DEGRADATION OF PERFORMANCE.	4815
REMAIN WITHIN SPECIFIED TOLERANCE.	4791
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4788
PER MIL-STD-810, METHOD 507.	4781
*PROCEDURE NUMBER (SELECT ONE)	
TEST PROCEDURE I.	4767
EXTREME TEMPERATURE BEFORE TESTING (DEGREES CELSIUS)	4777
*DURATION OF TEMPERATURE EXPOSURE (HOURS)	4778
TEST PROCEDURE II.	6334
CYCLE LIMITED TO 24 HOURS DURATION.	4716

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1819	THE MINUS FLOW RATE TOLERANCE SHALL BE 1819 LITERS PER MINUTE.
1818	THE TEST DURATION SHALL BE 1818 HOUR(S).
4798	HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.
4799	HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE,
4815	THERE SHALL BE NO DEGRADATION OF PERFORMANCE.
4791	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4788	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.
4781	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 507 OF MIL-STD-810.
4767	PROCEDURE NUMBER 1 SHALL APPLY.
4777	SPECIMEN(S) SHALL BE EXPOSED TO 4777 DEGREES CELSIUS BEFORE TESTING.
4778	DURATION OF EXPOSURE TO EXTREME TEMPERATURE SHALL BE 4778 HOUR(S).
6334	PROCEDURE NUMBER II SHALL APPLY,
4716	CYCLES SHALL BE LIMITED TO 24 HOURS DURATION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
*PROCEDURE NUMBER (CONT)	
TEST PROCEDURE III.	6335
TEST PROCEDURE IV.	6336
TEST PROCEDURE V.	6337
NUMBER OF CYCLES (NUMBER)	4800
WATER PURITY BY CONDUCTIVITY METHOD.	4764
OPERATION AND MEASUREMENT AT HIGH TEMPERATURE PORTION OF CYCLE(S) (NUMBER)	4916
OPERATION AND MEASUREMENT AT LOW TEMPERATURE PORTION OF CYCLE(S) (NUMBER)	1554
IMPULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2606
AS FOLLOWS:	3926
MAXIMUM ALLOWABLE INTERNAL LEAKAGE (SELECT ONE)	
(CUBIC CENTIMETERS PER MINUTE)	2607
(CUBIC CENTIMETERS PER 100 CYCLES)	2608

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6335	PROCEDURE NUMBER III SHALL APPLY.
6336	PROCEDURE NUMBER IV SHALL APPLY.
6337	PROCEDURE NUMBER V SHALL APPLY.
4800	THERE SHALL BE 4800 CYCLE(S).
4764	WATER PURITY SHALL BE DETERMINED BY THE CONDUCTIVITY METHOD.
4916	OPERATION AND MEASUREMENTS SHALL BE PERFORMED AT HIGH TEMPERATURE DURING CYCLE(S) 4916.
1554	OPERATION AND MEASUREMENTS SHALL BE PERFORMED AT LOW TEMPERATURE DURING CYCLE(S) 1554.
2606	IMPULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2606.
3926	IMPULSE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2607	THE ALLOWABLE INTERNAL LEAKAGE SHALL BE NOT GREATER THAN 2607 CUBIC CENTIMETER(S) PER MINUTE.
2608	THE ALLOWABLE INTERNAL LEAKAGE SHALL BE NOT GREATER THAN 2608 CUBIC CENTIMETER(S) PER 100 CYCLES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMPULSE (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM ALLOWABLE EXTERNAL LEAKAGE	
(CUBIC CENTIMETERS PER MINUTE)	2610
NO EVIDENCE OF EXCESSIVE WEAR.	2612
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2572
PER DOCUMENT (DOC DES)	2574
TEST PRESSURE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	2576
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2578
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2580
SI	
(KILOPASCALS)	2577
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2579
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2581

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2610	THE ALLOWABLE EXTERNAL LEAKAGE SHALL BE NOT GREATER THAN 2610 CUBIC CENTIMETER(S) PER MINUTE.
2612	THERE SHALL BE NO EVIDENCE OF EXCESSIVE WEAR.
2572	IMPULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2572.
2574	IMPULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2574.
2576	THE TEST PRESSURE SHALL BE 2576 POUNDS PER SQUARE INCH.
2578	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2578 POUNDS PER SQUARE INCH.
2580	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2580 POUNDS PER SQUARE INCH.
2577	THE TEST PRESSURE SHALL BE 2577 KILOPASCAL(S).
2579	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2579 KILOPASCAL(S).
2581	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2581 KILOPASCAL(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMPULSE (CONT)	
PER DOCUMENT (CONT)	
TEST TEMPERATURE (DEGREES CELSIUS)	2582
PLUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2584
MINUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2586
TEST MEDIA (NAME)	2588
TEST MEDIA DOCUMENT (DOC DES)	2590
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	2592
PLUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2594
MINUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2596
TEST CYCLES (QUANTITY)	2598
TEST CYCLE RATE (CYCLES PER MINUTE)	2600
MAXIMUM BACK PRESSURE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	2602
SI	
(KILOPASCALS)	2603

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2582	THE TEST TEMPERATURE SHALL BE 2582 DEGREES CELSIUS.
2584	THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 2584 DEGREES CELSIUS.
2586	THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 2586 DEGREES CELSIUS.
2588	THE TEST MEDIA SHALL BE 2588.
2590	THE TEST MEDIA SHALL CONFORM TO 2590.
2592	THE TEST MEDIA TEMPERATURE SHALL BE 2592 DEGREES CELSIUS.
2594	THE PLUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2594 DEGREES CELSIUS.
2596	THE MINUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2596 DEGREES CELSIUS.
2598	THERE SHALL BE 2598 TEST CYCLES.
2600	THE TEST CYCLE RATE SHALL BE 2600 CYCLES PER MINUTE.
2602	THE BACK PRESSURE SHALL BE NOT GREATER THAN 2602 POUNDS PER SQUARE INCH.
2603	THE BACK PRESSURE SHALL BE NOT GREATER THAN 2603 KILOPASCAL(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INLET FILTER	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	3172
AS FOLLOWS:	3927
MAXIMUM ALLOWABLE PARTICLE SIZE PASSED BY FILTER (SELECT ONE)	
(MESH)	3174
(MICRON)	3176
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	3102
PER DOCUMENT (DOC DES)	3104
TEST PRESSURE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	3106
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	3110
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	3112

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3172	INLET FILTER. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3172.
3927	INLET FILTER. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3174	THE ALLOWABLE PARTICLE SIZE PASSED BY THE FILTER SHALL BE NOT GREATER THAN 3174 MESH.
3176	THE ALLOWABLE PARTICLE SIZE PASSED BY THE FILTER SHALL BE NOT GREATER THAN 3176 MICRONS.
3102	INLET FILTER. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3102.
3104	INLET FILTER. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3104.
3106	THE TEST PRESSURE SHALL BE 3106 POUNDS PER SQUARE INCH.
3110	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 3110 POUNDS PER SQUARE INCH.
3112	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 3112 POUNDS PER SQUARE INCH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INLET FILTER (CONT)	
TEST PRESSURE (CONT)	
SI	
(KILOPASCALS)	3108
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	3114
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	3116
TEST TEMPERATURE (DEGREES CELSIUS)	3118
PLUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	3120
MINUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	3122
TEST MEDIA (NAME)	3124
TEST MEDIA DOCUMENT (DOC DES)	3126
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	3128
PLUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	3130
MINUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	3132
TEST CYCLES (QUANTITY)	3134

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3108	THE TEST PRESSURE SHALL BE 3108 KILOPASCAL(S).
3114	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 3114 KILOPASCAL(S).
3116	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 3116 KILOPASCAL(S).
3118	THE TEST TEMPERATURE SHALL BE 3118 DEGREES CELSIUS.
3120	THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 3120 DEGREES CELSIUS.
3122	THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 3122 DEGREES CELSIUS.
3124	THE TEST MEDIA SHALL BE 3124.
3126	THE TEST MEDIA SHALL CONFORM TO 3126.
3128	THE TEST MEDIA TEMPERATURE SHALL BE 3128 DEGREES CELSIUS.
3130	THE PLUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 3130 DEGREES CELSIUS.
3132	THE MINUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 3132 DEGREES CELSIUS.
3134	THERE SHALL BE 3134 TEST CYCLES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INLET FILTER (CONT)	
PER DOCUMENT (CONT)	
FLOW RATE (SELECT ONE)	
U.S. (SELECT ONE)	
(GALLONS PER MINUTE)	3138
PLUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	3148
MINUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	3150
(STANDARD CUBIC FEET PER MINUTE)	3140
PLUS FLOW RATE TOLERANCE (STANDARD CUBIC FEET PER MINUTE)	3152
MINUS FLOW RATE TOLERANCE (STANDARD CUBIC FEET PER MINUTE)	3154
(POUNDS PER HOUR)	3142
PLUS FLOW RATE TOLERANCE (POUNDS PER HOUR)	3156
MINUS FLOW RATE TOLERANCE (POUNDS PER HOUR)	3158

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
3138	THE FLOW RATE SHALL BE 3138 GALLONS PER MINUTE.	
3148	THE PLUS FLOW RATE TOLERANCE SHALL BE 3148 GALLONS PER MINUTE.	
3150	THE MINUS FLOW RATE TOLERANCE SHALL BE 3150 GALLONS PER MINUTE.	
3140	THE FLOW RATE SHALL BE 3140 STANDARD CUBIC FEET PER MINUTE.	
3152	THE PLUS FLOW RATE TOLERANCE SHALL BE 3152 STANDARD CUBIC FEET PER MINUTE.	
3154	THE MINUS FLOW RATE TOLERANCE SHALL BE 3154 STANDARD CUBIC FEET PER MINUTE.	
3142	THE FLOW RATE SHALL BE 3142 POUNDS PER HOUR.	
3156	THE PLUS FLOW RATE TOLERANCE SHALL BE 3156 POUNDS PER HOUR.	
3158	THE MINUS FLOW RATE TOLERANCE SHALL BE 3158 POUNDS PER HOUR,	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INLET FILTER (CONT)	
FLOW RATE (CONT)	
SI (SELECT ONE)	
(CUBIC METERS PER SECOND)	3144
PLUS FLOW RATE TOLERANCE (CUBIC METERS PER SECOND)	3160
MINUS FLOW RATE TOLERANCE (CUBIC METERS PER SECOND)	3162
(KILOGRAMS PER SECOND)	3146
PLUS FLOW RATE TOLERANCE (KILOGRAMS PER SECOND)	3164
MINUS FLOW RATE TOLERANCE (KILOGRAMS PER SECOND)	3166
TEST DURATION (MINUTES)	3136

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3144	THE FLOW RATE SHALL BE 3144 CUBIC METERS PER SECOND.
3160	THE PLUS FLOW RATE TOLERANCE SHALL BE 3160 CUBIC METERS PER SECOND.
3162	THE MINUS FLOW RATE TOLERANCE SHALL BE 3162 CUBIC METERS PER SECOND.
3146	THE FLOW RATE SHALL BE 3146 KILOGRAMS PER SECOND.
31164	THE PLUS FLOW RATE TOLERANCE SHALL BE 3164 KILOGRAMS PER SECOND.
3166	THE MINUS FLOW RATE TOLERANCE SHALL BE 3166 KILOGRAMS PER SECOND.
3136	THE TEST DURATION SHALL BE 3136 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INLET FILTER (CONT)	
PER DOCUMENT (CONT)	
TEST CONTAMINANTS	
NOTE: SEE INLET FILTER TEST CONTAMINANTS TABLE.	
LEAKAGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1688
AS FOLLOWS:	3928
MAXIMUM ALLOWABLE INTERNAL LEAKAGE (CUBIC CENTIMETERS PER MINUTE)	3820
MAXIMUM ALLOWABLE EXTERNAL LEAKAGE (CUBIC CENTIMETERS PER MINUTE)	3824
MAXIMUM CHANGE IN MANOMETER LEVEL IN 10 SECONDS (INCHES OF MERCURY)	1694

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

THE TEST CONTAMINANTS SHALL BE AS SPECIFIED IN THE INLET FILTER CONTAMINANTS TABLE.

INLET FILTER TEST CONTAMINANTS TABLE

CONTAMINANT	DESCRIPTION	PARTICLE SIZE (MICRONS)	PERCENTAGE	QUANTITY (GRAMS)
4000		4001	4002	4003
4004		4005	4006	4007
4008		4009	4010	4011
4012		4013	4014	4015
4016		4017	4018	4019
4020		4021	4022	4023
4024		4025	4026	4027
4028		4029	4030	4031
4032		4033	4034	4035
4036		4037	4038	4039

1688 LEAKAGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1688.

3928 LEAKAGE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

3820 THE ALLOWABLE INTERNAL LEAKAGE SHALL BE NOT GREATER THAN 3820 CUBIC CENTIMETER(S) PER MINUTE.

3824 THE ALLOWABLE EXTERNAL LEAKAGE SHALL BE NOT GREATER THAN 3824 CUBIC CENTIMETER(S) PER MINUTE.

1694 THE CHANGE IN MANOMETER LEVEL SHALL BE NOT GREATER THAN 1694 INCHES OF MERCURY IN 10 SECONDS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LEAKAGE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1652
PER DOCUMENT (DOC DES)	1654
TEST PRESSURE (SELECT ONE)	
U.S. (SELECT ONE)	
(POUNDS PER SQUARE INCH)	1656
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	1658
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	1660
(INCHES OF MERCURY)	1662
PLUS TEST PRESSURE TOLERANCE (INCHES OF MERCURY)	1664
MINUS TEST PRESSURE TOLERANCE (INCHES OF MERCURY)	1666
SI	
(KILOPASCALS)	1657
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	1659
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	1661

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1652	LEAKAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1652.
1654	LEAKAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1654.
1656	THE TEST PRESSURE SHALL BE 1656 POUNDS PER SQUARE INCH,
1658	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 1658 POUNDS PER SQUARE INCH.
1660	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 1660 POUNDS PER SQUARE INCH.
1662	THE TEST PRESSURE SHALL BE 1662 INCHES OF MERCURY.
1664	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 1664 INCHES OF MERCURY.
1666	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 1666 INCHES OF MERCURY.
1657	THE TEST PRESSURE SHALL BE 1657 KILOPASCAL(S).
1659	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 1659 KILOPASCAL(S).
1661	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 1661 KILOPASCAL(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LEAKAGE (CONT)	
PER DOCUMENT (CONT)	
TEST TEMPERATURE (DEGREES CELSIUS)	1668
PLUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1670
MINUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1672
TEST MEDIA (NAME)	1674
TEST MEDIA DOCUMENT (DOC DES)	1676
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	1680
PLUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1682
MINUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1684
PRESSURE HOLDING DURATION (MINUTES)	1678
NOISE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	3923
AS FOLLOWS:	3924
MEET ACCEPTANCE CRITERIA OF MIL-STD-740.	3925

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1668	THE TEST TEMPERATURE SHALL BE 1668 DEGREES CELSIUS.
1670	THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 1670 DEGREES CELSIUS.
1672	THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 1672 DEGREES CELSIUS.
1674	THE TEST MEDIA SHALL BE 1674.
1676	THE TEST MEDIA SHALL CONFORM TO 1676.
1680	THE TEST MEDIA TEMPERATURE SHALL BE 1680 DEGREES CELSIUS.
1682	THE PLUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 1682 DEGREES CELSIUS.
1684	THE MINUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 1684 DEGREES CELSIUS,
1678	THE PRESSURE HOLDING DURATION SHALL BE 1678 MINUTE(S).
3923	NOISE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3923.
3924	NOISE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3925	THE ITEM(S) SHALL MEET THE ACCEPTANCE CRITERIA OF MIL-STD-740.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NOISE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	3960
PER DOCUMENT (DOC DES)	3961
PER MIL–STD-740.	3962
TESTING BY SOUND PRESSURE PROCEDURE.	3963
GRADE AND TYPE EQUIPMENT	
AIRBORNE (GRADE)	3964
STRUCTUREBORNE (TYPE)	3965
EQUIPMENT MOUNTING.	3966
OPERATING CONDITIONS DURING NOISE TESTS	
NORMAL OPERATING CONDITIONS,	3967
NO FLOW.	3968

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3960	NOISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3960.
3961	NOISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3961.
3962	NOISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-740.
3963	THE AIRBORNE NOISE TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE SOUND PRESSURE PROCEDURE,
3964	THE ITEM(S) SHALL BE NOISE TESTED PER AIRBORNE GRADE 3964 EQUIPMENT.
3965	THE ITEM(S) SHALL BE NOISE TESTED PER STRUCTUREBORNE TYPE 3965 EQUIPMENT.
3966	THE ITEM(S) SHALL BE TEST FIXTURE MOUNTED TO DUPLICATE SHIPBOARD INSTALLATION.
3967	THE ITEM(S) SHALL BE NOISE TESTED UNDER NORMAL OPERATING CONDITIONS.
3968	THE ITEM(S) SHALL BE NOISE TESTED UNDER NO FLOW CONDITION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PRESSURE, BURST	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1772
AS FOLLOWS:	3929
MAXIMUM ALLOWABLE LEAKAGE (CUBIC CENTIMETERS PER MINUTE)	1774
NO PERMANENT DEFORMATION OR RUPTURE.	1776
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1742
PER DOCUMENT (DOC DES)	1744
TEST PRESSURE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	1746
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	1748
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	1750

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1772	PRESSURE, BURST. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1172.
3929	PRESSURE, BURST. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1774	THE ALLOWABLE LEAKAGE SHALL BE NOT GREATER THAN 1774 CUBIC CENTIMETER(S) PER MINUTE.
1776	THERE SHALL BE NO PERMANENT DEFORMATION OR RUPTURE.
1742	PRESSURE, BURST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1742.
1744	PRESSURE, BURST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1744.
1746	THE TEST PRESSURE SHALL BE 1746 POUNDS PER SQUARE INCH.
1748	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 1748 POUNDS PER SQUARE INCH.
1750	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 1750 POUNDS PER SQUARE INCH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PRESSURE, BURST (CONT)	
TEST PRESSURE (CONT)	
SI	
(KILOPASCALS)	1747
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	1749
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	1751
TEST TEMPERATURE (DEGREES CELSIUS)	1752
PLUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1754
MINUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1756
TEST MEDIA (NAME)	1758
TEST MEDIA DOCUMENT (DOC DES)	1760
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	1764
PLUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1766
MINUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1768
TEST CYCLES (QUANTITY)	1753

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1747	THE TEST PRESSURE SHALL BE 1747 KILOPASCAL(S).
1749	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 1749 KILOPASCAL(S).
1751	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 1751 KILOPASCAL(S).
1752	THE TEST TEMPERATURE SHALL BE 1752 DEGREES CELSIUS.
1754	THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 1754 DEGREES CELSIUS.
1756	THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 1756 DEGREES CELSIUS.
1758	THE TEST MEDIA SHALL BE 1758.
1760	THE TEST MEDIA SHALL CONFORM TO 1760.
1764	THE TEST MEDIA TEMPERATURE SHALL BE 1764 DEGREES CELSIUS.
1766	THE PLUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 1766 DEGREES CELSIUS.
1768	THE MINUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 1768 DEGREES CELSIUS.
1753	THERE SHALL BE 1753 TEST CYCLES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PRESSURE, BURST (CONT)	
PER DOCUMENT (CONT)	
MAXIMUM TEST PRESSURE APPLICATION RATE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH PER MINUTE)	1755
SI	
(KILOPASCALS PER MINUTE)	1757
PRESSURE HOLDING DURATION (MINUTES)	1762
PRESSURE, CRACKING OR SET	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2060
AS FOLLOWS:	3930
CRACKING OR SET PRESSURE (SELECT ONE)	
U.S.	
MINIMUM (POUNDS PER SQUARE INCH)	2062
MAXIMUM (POUNDS PER SQUARE INCH)	2063

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
1755	THE TEST PRESSURE APPLICATION RATE SHALL BE NOT GREATER THAN 1755 POUNDS PER SQUARE INCH PER MINUTE.	
1757	THE TEST PRESSURE APPLICATION RATE SHALL BE NOT GREATER THAN 1757 KILOPASCAL(S) PER MINUTE.	
1762	THE PRESSURE HOLDING DURATION SHALL BE 1762 MINUTE(S).	
2060	PRESSURE, CRACKING OR SET. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2060.	
3930	PRESSURE, CRACKING OR SET. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:	
2062	THE CRACKING OR SET PRESSURE SHALL BE NOT LESS THAN 2062 POUNDS PER SQUARE INCH.	
2063	THE CRACKING OR SET PRESSURE SHALL BE NOT GREATER THAN 2063 POUNDS PER SQUARE INCH.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PRESSURE, CRACKING OR SET (CONT)	
CRACKING OR SET PRESSURE (CONT)	
SI	
MINIMUM (KILOPASCALS)	2064
MAXIMUM (KILOPASCALS)	2065
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2022
PER DOCUMENT (DOC DES)	2024
TEST PRESSURE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	2026
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2028
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2030
SI	
(KILOPASCALS)	2025
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2027

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2064	THE CRACKING OR SET PRESSURE SHALL BE NOT LESS THAN 2064 KILOPASCAL(S).
2065	THE CRACKING OR SET PRESSURE SHALL BE NOT GREATER THAN 2065 KILOPASCAL(S).
2022	PRESSURE, CRACKING OR SET. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2022.
2024	PRESSURE, CRACKING OR SET. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2024.
2026	THE TEST PRESSURE SHALL BE 2026 POUNDS PER SQUARE INCH.
2028	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2028 POUNDS PER SQUARE INCH.
2030	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2030 POUNDS PER SQUARE INCH.
2025	THE TEST PRESSURE SHALL BE 2025 KILOPASCAL(S).
2027	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2027 KILOPASCAL(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PRESSURE, CRACKING OR SET (CONT)	
(KILOPASCALS) (CONT)	
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2029
TEST TEMPERATURE (DEGREES CELSIUS)	2032
PLUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2034
MINUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2036
TEST MEDIA (NAME)	2038
TEST MEDIA DOCUMENT (DOC DES)	2040
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	2042
PLUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2044
MINUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2046
TEST CYCLES (QUANTITY)	2048
FLOW RATE (SELECT ONE)	
U.S. (SELECT ONE)	
(GALLONS PER MINUTE)	2037

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2029	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2029 KILOPASCAL(S).
2032	THE TEST TEMPERATURE SHALL BE 2032 DEGREES CELSIUS.
2034	THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 2034 DEGREES CELSIUS.
2036	THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 2036 DEGREES CELSIUS.
2038	THE TEST MEDIA SHALL BE 2038.
2040	THE TEST MEDIA SHALL CONFORM TO 2040.
2042	THE TEST MEDIA TEMPERATURE SHALL BE 2042 DEGREES CELSIUS.
2044	THE PLUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2044 DEGREES CELSIUS.
2046	THE MINUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2046 DEGREES CELSIUS,
2048	THERE SHALL BE 2048 TEST CYCLES.
2037	THE FLOW RATE SHALL BE 2037 GALLONS PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PRESSURE, CRACKING OR SET (CONT)	
(GALLONS PER MINUTE) (CONT)	
PLUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	2047
MINUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	2049
(STANDARD CUBIC FEET PER MINUTE)	2039
PLUS FLOW RATE TOLERANCE (STANDARD CUBIC FEET PER MINUTE)	2050
MINUS FLOW RATE TOLERANCE (STANDARD CUBIC FEET PER MINUTE)	2051
(POUNDS PER HOUR)	2041
PLUS FLOW RATE TOLERANCE (POUNDS PER HOUR)	2052
MINUS FLOW RATE TOLERANCE (POUNDS PER HOUR)	2053
SI (SELECT ONE)	
(CUBIC METERS PER SECOND)	2043
PLUS FLOW RATE TOLERANCE (CUBIC METERS PER SECOND)	2054
MINUS FLOW RATE TOLERANCE (CUBIC METERS PER SECOND)	2055

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
2047	THE PLUS FLOW RATE TOLERANCE SHALL BE 2047 GALLONS PER MINUTE.	
2049	THE MINUS FLOW RATE TOLERANCE SHALL BE 2049 GALLONS PER MINUTE.	
2039	THE FLOW RATE SHALL BE 2039 STANDARD CUBIC FEET PER MINUTE.	
2050	THE PLUS FLOW RATE TOLERANCE SHALL BE 2050 STANDARD CUBIC FEET PER MINUTE.	
2051	THE MINUS FLOW RATE TOLERANCE SHALL BE 2051 STANDARD CUBIC FEET PER MINUTE.	
2041	THE FLOW RATE SHALL BE 2041 POUNDS PER HOUR.	
2052	THE PLUS FLOW RATE TOLERANCE SHALL BE 2052 POUNDS PER HOUR.	
2053	THE MINUS FLOW RATE TOLERANCE SHALL BE 2053 POUNDS PER HOUR.	
2043	THE FLOW RATE SHALL BE 2043 CUBIC METERS PER SECOND.	
2054	THE PLUS FLOW RATE TOLERANCE SHALL BE 2054 CUBIC METERS PER SECOND.	
2055	THE MINUS FLOW RATE TOLERANCE SHALL BE 2055 CUBIC METERS PER SECOND.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PRESSURE, CRACKING OR SET (CONT)	
SI (CONT)	
(KILOGRAMS PER SECOND)	2045
PLUS FLOW RATE TOLERANCE (KILOGRAMS PER SECOND)	2056
MINUS FLOW RATE TOLERANCE (KILOGRAMS PER SECOND)	2057
PRESSURE, PROOF	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1732
AS FOLLOWS:	3931
MAXIMUM ALLOWABLE LEAKAGE (CUBIC CENTIMETERS PER MINUTE)	1734
NO PERMANENT DEFORMATION OF ANY PART.	1736
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1702
PER DOCUMENT (DOC DES)	1704

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2045	THE FLOW RATE SHALL BE 2045 KILOGRAMS PER SECOND.
2056	THE PLUS FLOW RATE TOLERANCE SHALL BE 2056 KILOGRAMS PER SECOND.
2057	THE MINUS FLOW RATE TOLERANCE SHALL BE 2057 KILOGRAMS PER SECOND.
1732	PRESSURE, PROOF. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1732.
3931	PRESSURE, PROOF, THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1734	THE ALLOWABLE LEAKAGE SHALL BE NOT GREATER THAN 1734 CUBIC CENTIMETER(S) PER MINUTE.
1736	THERE SHALL BE NO PERMANENT DEFORMATION OF ANY PART.
1702	PRESSURE, PROOF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1702.
1704	PRESSURE, PROOF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1704.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PRESSURE, PROOF (CONT)	
PER DOCUMENT (CONT)	
TEST PRESSURE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	1706
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	1708
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	1710
SI	
(KILOPASCALS)	1707
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	1709
MINuS TEST PRESSURE TOLERANCE (KILOPASCALS)	1711
TEST TEMPERATURE (DEGREES CELSIUS)	1712
PLUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1714
MINUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1716
TEST MEDIA (NAME)	1718
TEST MEDIA DOCUMENT (DOC DES)	1720

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1706	THE TEST PRESSURE SHALL BE 1706 POUNDS PER SQUARE INCH.
1708	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 1708 POUNDS PER SQUARE INCH.
1710	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 1710 POUNDS PER SQUARE INCH.
1707	THE TEST PRESSURE SHALL BE 1707 KILOPASCAL(S).
1709	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 1709 KILOPASCAL(S).
1711	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 1711 KILOPASCAL(S).
1712	THE TEST TEMPERATURE SHALL BE 1712 DEGREES CELSIUS.
1714	THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 1714 DEGREES CELSIUS.
1716	THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 1716 DEGREES CELSIUS.
1718	THE TEST MEDIA SHALL BE 1718.
1720	THE TEST MEDIA SHALL CONFORM TO 1720.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PRESSURE, PROOF (CONT)	
PER DOCUMENT (CONT)	
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	1724
PLUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1726
MINUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1728
PRESSURE HOLDING DURATION (MINUTES)	1722
MAXIMUM TEST PRESSURE APPLICATION RATE	
U.S.	
(POUNDS PER SQUARE INCH PER MINUTE)	1727
SI	
(KILOPASCALS PER MINUTE)	1729
PRESSURE, RESEAT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2110
AS FOLLOWS:	3932

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1724 THE TEST MEDIA TEMPERATURE SHALL BE 1724 DEGREES CELSIUS.

1726 THE PLUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 1726 DEGREES CELSIUS.

1728 THE MINUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 1728 DEGREES CELSIUS.

1722 THE PRESSURE HOLDING DURATION SHALL BE 1722 MINUTE(S).

1727 THE TEST PRESSURE APPLICATION RATE SHALL BE NOT GREATER THAN 1727 POUNDS PER SQUARE INCH PER MINUTE.

1729 THE TEST PRESSURE APPLICATION RATE SHALL BE NOT GREATER THAN 1729 KILOPASCAL(S) PER MINUTE.

2110 PRESSURE, RESEAT. THE REQUIREMENT'(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2110.

3932 PRESSURE, RESEAT. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PRESSURE, RESEAT (CONT)	
AS FOLLOWS: (CONT)	
RESEAT PRESSURE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	2109
MINUS RESEAT PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2112
PLUS RESEAT PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2113
SI	
(KILOPASCALS)	2111
MINUS RESEAT PRESSURE TOLERANCE (KILOPASCALS)	2114
PLUS RESEAT PRESSURE TOLERANCE (KILOPASCALS)	2115
MAXIMUM ALLOWABLE LEAKAGE AT RESEAT PRESSURE (CUBIC CENTIMETERS PER MINUTE)	2116
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2072
PER DOCUMENT (DOC DES)	2074

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
2109	THE RESEAT PRESSURE SHALL BE 2109 POUNDS PER SQUARE INCH.	
2112	THE MINUS RESEAT PRESSURE TOLERANCE SHALL BE 2112 POUNDS PER SQUARE INCH.	
2113	THE PLUS RESEAT PRESSURE TOLERANCE SHALL BE 2113 POUNDS PER SQUARE INCH.	
2111	THE RESEAT PRESSURE SHALL BE 2111 KILOPASCAL(S).	
2114	THE MINUS RESEAT PRESSURE TOLERANCE SHALL BE 2114 KILOPASCAL(S).	
2115	THE PLUS RESEAT PRESSURE TOLERANCE SHALL BE 2115 KILOPASCAL(S).	
2116	THE ALLOWABLE LEAKAGE AT RESEAT PRESSURE SHALL BE NOT GREATER THAN 2116 CUBIC CENTIMETER(S) PER MINUTE.	
2072	PRESSURE, RESEAT.	TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2072.
2074	PRESSURE, RESEAT.	TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2074.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PRESSURE, RESEAT (CONT)	
PER DOCUMENT (CONT)	
TEST PRESSURE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	2076
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2078
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2080
SI	
(KILOPASCALS)	2077
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2079
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2081
TEST TEMPERATURE (DEGREES CELSIUS)	2082
PLUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2084
MINUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2086
TEST MEDIA (NAME)	2088

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2076	THE TEST PRESSURE SHALL BE 2076 POUNDS PER SQUARE INCH.
2078	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2078 POUNDS PER SQUARE INCH.
2080	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2080 POUNDS PER SQUARE INCH.
2077	THE TEST PRESSURE SHALL BE 2077 KILOPASCAL(S).
2079	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2079 KILOPASCAL(S).
2081	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2081 KILOPASCAL(S).
2082	THE TEST TEMPERATURE SHALL BE 2082 DEGREES CELSIUS.
2084	THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 2084 DEGREES CELSIUS.
2086	THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 2086 DEGREES CELSIUS.
2088	THE TEST MEDIA SHALL BE 2088.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PRESSURE, RESEAT (CONT)	
PER DOCUMENT (CONT)	
TEST MEDIA DOCUMENT (DOC DES)	2090
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	2092
PLUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2094
MINUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2096
TEST CYCLES (QUANTITY)	2098
FLOW RATE (SELECT ONE)	
U.S. (SELECT ONE)	
(GALLONS PER MINUTE)	2087
PLUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	2097
MINUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	2099
(STANDARD CUBIC FEET PER MINUTE)	2089
PLUS FLOW RATE TOLERANCE (STANDARD CUBIC FEET PER MINUTE)	2100
MINUS FLOW RATE TOLERANCE (STANDARD CUBIC FEET PER MINUTE)	2101

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2090	THE TEST MEDIA SHALL CONFORM TO 2090.
2092	THE TEST MEDIA TEMPERATURE SHALL BE 2092 DEGREES CELSIUS.
2094	THE PLUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2094 DEGREES CELSIUS.
2096	THE MINUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2096 DEGREES CELSIUS.
2098	THERE SHALL BE 2098 TEST CYCLES.
2087	THE FLOW RATE SHALL BE 2087 GALLONS PER MINUTE.
2097	THE PLUS FLOW RATE TOLERANCE SHALL BE 2097 GALLONS PER MINUTE.
2099	THE MINUS FLOW RATE TOLERANCE SHALL BE 2099 GALLONS PER MINUTE.
2089	THE FLOW RATE SHALL BE 2089 STANDARD CUBIC FEET PER MINUTE.
2100	THE PLUS FLOW RATE TOLERANCE SHALL BE 2100 STANDARD CUBIC FEET PER MINUTE.
2101	THE MINUS FLOW RATE TOLERANCE SHALL BE 2101 STANDARD CUBIC FEET PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PRESSURE, RESEAT (CONT)	
U.S. (CONT)	
(POUNDS PER HOUR)	2091
PLUS FLOW RATE TOLERANCE (POUNDS PER HOUR)	2102
MINUS FLOW RATE TOLERANCE (POUNDS PER HOUR)	2103
SI (SELECT ONE)	
(CUBIC METERS PER SECOND)	2093
PLUS FLOW RATE TOLERANCE (CUBIC METERS PER SECOND)	2104
MINUS FLOW RATE TOLERANCE (CUBIC METERS PER SECOND)	2105
(KILOGRAMS PER SECOND)	2095
PLUS FLOW RATE TOLERANCE (KILOGRAMS PER SECOND)	2106
MINUS FLOW RATE TOLERANCE (KILOGRAMS PER SECOND)	2107
PRESSURE DROP	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1862

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2091	THE FLOW RATE SHALL BE 2091 POUNDS PER HOUR.
2102	THE PLUS FLOW RATE TOLERANCE SHALL BE 2102 POUNDS PER HOUR.
2103	THE MINUS FLOW RATE TOLERANCE SHALL BE 2103 POUNDS PER HOUR.
2093	THE FLOW RATE SHALL BE 2093 CUBIC METERS PER SECOND.
2104	THE PLUS FLOW RATE TOLERANCE SHALL BE 2104 CUBIC METERS PER SECOND,
2105	THE MINUS FLOW RATE TOLERANCE SHALL BE 2105 CUBIC METERS PER SECOND.
2095	THE FLOW RATE SHALL BE 2095 KILOGRAMS PER SECOND.
2106	THE PLUS FLOW RATE TOLERANCE SHALL BE 2106 KILOGRAMS PER SECOND.
2107	THE MINUS FLOW RATE TOLERANCE SHALL BE 2107 KILOGRAMS PER SECOND.
1862	PRESSURE DROP. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1862.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PRESSURE DROP (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	3933
MAXIMUM PRESSURE DROP (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	1565
SI	
(KILOPASCALS)	1582
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1832
PER DOCUMENT (DOC DES)	1834
TEST PRESSURE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	1836
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	1838
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	1840

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
3933	PRESSURE DROP.	THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1565	THE PRESSURE DROP SHALL BE NOT GREATER THAN 1565 POUNDS PER SQUARE INCH.	
1582	THE PRESSURE DROP SHALL BE NOT GREATER THAN 1582 KILOPASCAL(S).	
1832	PRESSURE DROP.	TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1832.
1834	PRESSURE DROP.	TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1834.
1836	THE TEST PRESSURE SHALL BE 1836 POUNDS PER SQUARE INCH.	
1838	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 1838 POUNDS PER SQUARE INCH.	
1840	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 1840 POUNDS PER SQUARE INCH.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PRESSURE DROP (CONT)	
TEST PRESSURE (CONT)	
SI	
(KILOPASCALS)	1837
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	1839
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	1841
TEST TEMPERATURE (DEGREES CELSIUS)	1842
PLUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1844
MINUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1846
TEST MEDIA (NAME)	1848
TEST MEDIA DOCUMENT (DOC DES)	1850
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	1825
PLUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1826
MINUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1827

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1837	THE TEST PRESSURE SHALL BE 1837 KILOPASCAL(S).
1839	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 1839 KILOPASCAL(S).
1841	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 1841 KILOPASCAL(S).
1842	THE TEST TEMPERATURE SHALL BE 1842 DEGREES CELSIUS.
1844	THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 1844 DEGREES CELSIUS.
1846	THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 1846 DEGREES CELSIUS.
1848	THE TEST MEDIA SHALL BE 1848.
1850	THE TEST MEDIA SHALL CONFORM TO 1850.
1825	THE TEST MEDIA TEMPERATURE SHALL BE 1825 DEGREES CELSIUS.
1826	THE PLUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 1826 DEGREES CELSIUS.
1827	THE MINUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 1827 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PRESSURE DROP (CONT)	
PER DOCUMENT (CONT)	
FLOW RATE (SELECT ONE)	
U.S. (SELECT ONE)	
(GALLONS PER MINUTE)	1828
PLUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	1845
MINUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	1847
(STANDARD CUBIC FEET PER MINUTE)	1829
PLUS FLOW RATE TOLERANCE (STANDARD CUBIC FEET PER MINUTE)	1849
MINUS FLOW RATE TOLERANCE (STANDARD CUBIC FEET PER MINUTE)	1851
(POUNDS PER HOUR)	1831
PLUS FLOW RATE TOLERANCE (POUNDS PER HOUR)	1852
MINUS FLOW RATE TOLERANCE (POUNDS PER HOUR)	1853

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1828	THE FLOW RATE SHALL BE 1828 GALLONS PER MINUTE.
1845	THE PLUS FLOW RATE TOLERANCE SHALL BE 1845 GALLONS PER MINUTE.
1847	THE MINUS FLOW RATE TOLERANCE SHALL BE 1847 GALLONS PER MINUTE.
1829	THE FLOW RATE SHALL BE 1829 STANDARD CUBIC FEET PER MINUTE.
1849	THE PLUS FLOW RATE TOLERANCE SHALL BE 1849 STANDARD CUBIC FEET PER MINUTE.
1851	THE MINUS FLOW RATE TOLERANCE SHALL BE 1851 STANDARD CUBIC FEET PER MINUTE.
1831	THE FLOW RATE SHALL BE 1831 POUNDS PER HOUR.
1852	THE PLUS FLOW RATE TOLERANCE SHALL BE 1852 POUNDS PER HOUR.
1853	THE MINUS FLOW RATE TOLERANCE SHALL BE 1853 POUNDS PER HOUR.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PRESSURE DROP (CONT)	
FLOW RATE (CONT)	
SI (SELECT ONE)	
(CUBIC METERS PER SECOND)	1833
PLUS FLOW RATE TOLERANCE (CUBIC METERS PER SECOND)	1854
MINUS FLOW RATE TOLERANCE (CUBIC METERS PER SECOND)	1855
(KILOGRAMS PER SECOND)	1835
PLUS FLOW RATE TOLERANCE (KILOGRAMS PER SECOND)	1856
MINUS FLOW RATE TOLERANCE (KILOGRAMS PER SECOND)	1857
(LITERS PER MINUTE)	1843
PLUS FLOW RATE TOLERANCE (LITERS PER MINUTE)	1858
MINUS FLOW RATE TOLERANCE (LITERS PER MINUTE)	1859
PRESSURE JUMP	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	3318

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD, PARAGRAPH
1833	THE FLOW RATE SHALL BE 1833 CUBIC METERS PER SECOND.
1854	THE PLUS FLOW RATE TOLERANCE SHALL BE 1854 CUBIC METERS PER SECOND.
1855	THE MINUS FLOW RATE TOLERANCE SHALL BE 1855 CUBIC METERS PER SECOND.
1835	THE FLOW RATE SHALL BE 1835 KILOGRAMS PER SECOND.
1856	THE PLUS FLOW RATE TOLERANCE SHALL BE 1856 KILOGRAMS PER SECOND.
1857	THE MINUS FLOW RATE TOLERANCE SHALL BE 1857 KILOGRAMS PER SECOND.
1843	THE FLOW RATE SHALL BE 1843 LITERS PER MINUTE.
1858	THE PLUS FLOW RATE TOLERANCE SHALL BE 1858 LITERS PER MINUTE.
1859	THE MINUS FLOW RATE TOLERANCE SHALL BE 1859 LITERS PER MINUTE.
3318	PRESSURE JUMP. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3318.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PRESSURE JUMP (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	3934
MAXIMUM PRESSURE JUMP (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	3322
SI	
(KILOPASCALS)	3324
PERCENTAGE OF REGULATED PRESSURE (PERCENT)	3320
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	3252
PER MIL-R-13877	3254
SET PRESSURE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	3256
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	3260

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH	
3934	PRESSURE JUMP.	THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3322		THE PRESSURE JUMP SHALL BE NOT GREATER THAN 3322 POUNDS PER SQUARE INCH.
3324		THE PRESSURE JUMP SHALL BE NOT GREATER THAN 3324 KILOPASCAL(S).
3320		THE PRESSURE JUMP SHALL BE NOT GREATER THAN 3320 PERCENT OF THE REGULATED PRESSURE.
3252		PRESSURE JUMP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3252.
3254		PRESSURE JUMP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-R-13877.
3256		THE SET PRESSURE SHALL BE 3256 POUNDS PER SQUARE INCH.
3260		THE PLUS SET PRESSURE TOLERANCE SHALL BE 3260 POUNDS PER SQUARE INCH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PRESSURE JUMP (CONT)	
(POUNDS PER SQUARE INCH) (CONT)	
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	3262
SI	
(KILOPASCALS)	3258
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	3264
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	3266
TEST TEMPERATURE (DEGREES CELSIUS)	3268
PLUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	3270
MINUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	3272
TEST MEDIA (NAME)	3274
TEST MEDIA DOCUMENT (DOC DES)	3276
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	3278
PLUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	3280
MINUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	3282

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3262	THE MINUS SET PRESSURE TOLERANCE SHALL BE 3262 POUNDS PER SQUARE INCH,
3258	THE SET PRESSURE SHALL BE 3258 KILOPASCAL(S),
3264	THE PLUS SET PRESSURE TOLERANCE SHALL BE 3264 KILOPASCAL(S).
3266	THE MINUS SET PRESSURE TOLERANCE SHALL BE 3266 KILOPASCAL(S).
3268	THE TEST TEMPERATURE SHALL BE 3268 DEGREES CELSIUS.
3270	THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 3270 DEGREES CELSIUS,
3272	THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 3272 DEGREES CELSIUS.
3274	THE TEST MEDIA SHALL BE 3274.
3276	THE TEST MEDIA SHALL CONFORM TO 3276.
3278	THE TEST MEDIA TEMPERATURE SHALL BE 3278 DEGREES CELSIUS.
3280	THE PLUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 3280 DEGREES CELSIUS.
3282	THE MINUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 3282 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PRESSURE JUMP (CONT)	
PER MIL-R-13877 (CONT)	
TEST CYCLES (QUANTITY)	3284
INLET PRESSURE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	3286
PLUS INLET PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	3290
MINUS INLET PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	3292
SI	
(KILOPASCALS)	3288
PLUS INLET PRESSURE TOLERANCE (KILOPASCALS)	3294
MINUS INLET PRESSURE TOLERANCE (KILOPASCALS)	3296
FLOW RATE (SELECT ONE)	
U.S. (SELECT ONE)	
(CUBIC FEET PER HOUR)	3298
PLUS FLOW RATE TOLERANCE (CUBIC FEET PER HOUR)	3304

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3284	THERE SHALL BE 3284 TEST CYCLES.
3286	THE INLET PRESSURE SHALL BE 3286 POUNDS PER SQUARE INCH.
3290	THE PLUS INLET PRESSURE TOLERANCE SHALL BE 3290 POUNDS PER SQUARE INCH.
3292	THE MINUS INLET PRESSURE TOLERANCE SHALL BE 3292 POUNDS PER SQUARE INCH.
3288	THE INLET PRESSURE SHALL BE 3288 KILOPASCAL(S).
3294	THE PLUS INLET PRESSURE TOLERANCE SHALL BE 3294 KILOPASCAL(S).
3296	THE MINUS INLET PRESSURE TOLERANCE SHALL BE 3296 KILOPASCAL(S).
3298	THE FLOW RATE SHALL BE 3298 CUBIC FEET PER HOUR.
3304	THE PLUS FLOW RATE TOLERANCE SHALL BE 3304 CUBIC FEET PER HOUR.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PRESSURE JUMP (CONT)	
(CUBIC FEET PER HOUR) (CONT)	
MINUS FLOW RATE TOLERANCE (CUBIC FEET PER HOUR)	3306
(STANDARD CUBIC FEET PER MINUTE)	3300
PLUS FLOW RATE TOLERANCE (STANDARD CUBIC FEET PER MINUTE)	3308
MINUS FLOW RATE TOLERANCE (STANDARD CUBIC FEET PER MINUTE)	3310
SI	
(CUBIC METERS PER SECOND)	3302
PLUS FLOW RATE TOLERANCE (CUBIC METERS PER SECOND)	3312
MINUS FLOW RATE TOLERANCE (CUBIC METERS PER SECOND)	3314
REGULATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2702
AS FOLLOWS:	3935

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3306	THE MINUS FLOW RATE TOLERANCE SHALL BE 3306 CUBIC FEET PER HOUR.
3300	THE FLOW RATE SHALL BE 3300 STANDARD CUBIC FEET PER MINUTE.
3308	THE PLUS FLOW RATE TOLERANCE SHALL BE 3308 STANDARD CUBIC FEET PER MINUTE.
3310	THE MINUS FLOW RATE TOLERANCE SHALL BE 3310 STANDARD CUBIC FEET PER MINUTE.
3302	THE FLOW RATE SHALL BE 3302 CUBIC METERS PER SECOND.
3312	THE PLUS FLOW RATE TOLERANCE SHALL BE 3312 CUBIC METERS PER SECOND.
3334	THE MINUS FLOW RATE TOLERANCE SHALL BE 3314 CUBIC METERS PER SECOND.
2702	REGULATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2702.
3935	REGULATION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
REGULATION (CONT)	
AS FOLLOWS: (CONT)	
OUTLET PRESSURE CHANGE (SELECT ONE)	
U.S.	
PLUS OUTLET PRESSURE CHANGE (POUNDS PER SQUARE INCH)	2704
MINUS OUTLET PRESSURE CHANGE (POUNDS PER SQUARE INCH)	2708
SI	
PLUS OUTLET PRESSURE CHANGE (KILOPASCALS)	2714
MINUS OUTLET PRESSURE CHANGE (KILOPASCALS)	2716
PERCENTAGE	
PLUS OUTLET PRESSURE CHANGE (PERCENT)	2710
MINUS OUTLET PRESSURE CHANGE (PERCENT)	2712
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2662

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2704	THE PLUS OUTLET PRESSURE CHANGE SHALL BE 2704 POUNDS PER SQUARE INCH.
2708	THE MINUS OUTLET PRESSURE CHANGE SHALL BE 2708 POUNDS PER SQUARE INCH.
2714	THE PLUS OUTLET PRESSURE CHANGE SHALL BE 2714 KILOPASCAL(S).
2716	THE MINUS OUTLET PRESSURE CHANGE SHALL BE 2716 KILOPASCAL(S).
2710	THE PLUS OUTLET PRESSURE CHANGE SHALL BE 2710 PERCENT.
2712	THE MINUS OUTLET PRESSURE CHANGE SHALL BE 2712 PERCENT.
2662	REGULATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2662.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
REGULATION (CONT)	
TEST METHODS (CONT)	
PER DOCUMENT (DOC DES)	2664
TEST PRESSURE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	2666
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2668
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2670
SI	
(KILOPASCALS)	2667
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2669
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2671
TEST TEMPERATURE (DEGREES CELSIUS)	2672
PLUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2674
MINUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2676

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2664	REGULATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2664.
2666	THE TEST PRESSURE SHALL BE 2666 POUNDS PER SQUARE INCH.
2668	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2668 POUNDS PER SQUARE INCH.
2670	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2670 POUNDS PER SQUARE INCH.
2667	THE TEST PRESSURE SHALL BE 2667 KILOPASCAL(S).
2669	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2669 KILOPASCAL(S),
2671	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2671 KILOPASCAL(S).
2672	THE TEST TEMPERATURE SHALL BE 2672 DEGREES CELSIUS.
2674	THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 2674 DEGREES CELSIUS.
2676	THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 2676 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
REGULATION (CONT)	
PER DOCUMENT (CONT)	
TEST MEDIA (NAME)	2678
TEST MEDIA DOCUMENT (DOC DES)	2680
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	2682
PLUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2684
MINUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2686
TEST CYCLES (QUANTITY)	2688
FLOW RATE (SELECT ONE)	
U.S. (SELECT ONE)	
(GALLONS PER MINUTE)	2675
PLUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	2687
MINUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	2689
(STANDARD CUBIC FEET PER MINUTE)	2677
PLUS FLOW RATE TOLERANCE (STANDARD CUBIC FEET PER MINUTE)	2690

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2678	THE TEST MEDIA SHALL BE 2678.
2680	THE TEST MEDIA SHALL CONFORM TO 2680.
2682	THE TEST MEDIA TEMPERATURE SHALL BE 2682 DEGREES CELSIUS.
2684	THE PLUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2684 DEGREES CELSIUS.
2686	THE MINUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2686 DEGREES CELSIUS.
2688	THERE SHALL BE 2688 TEST CYCLES.
2675	THE FLOW RATE SHALL BE 2675 GALLONS PER MINUTE.
2687	THE PLUS FLOW RATE TOLERANCE SHALL BE 2687 GALLONS PER MINUTE.
2689	THE MINUS FLOW RATE TOLERANCE SHALL BE 2689 GALLONS PER MINUTE.
2677	THE FLOW RATE SHALL BE 2677 STANDARD CUBIC FEET PER MINUTE.
2690	THE PLUS FLOW RATE TOLERANCE SHALL BE 2690 STANDARD CUBIC FEET PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
REGULATION (CONT)	
(STANDARD CUBIC FEET PER MINUTE) (CONT)	
MINUS FLOW RATE TOLERANCE (STANDARD CUBIC FEET PER MINUTE)	2691
(POUNDS PER HOUR)	2679
PLUS FLOW RATE TOLERANCE (POUNDS PER HOUR)	2692
MINUS FLOW RATE TOLERANCE (POUNDS PER HOUR)	2693
SI (SELECT ONE)	
(CUBIC METERS PER SECOND)	2681
PLUS FLOW RATE TOLERANCE (CUBIC METERS PER SECOND)	2694
MINUS FLOW RATE TOLERANCE (CUBIC METERS PER SECOND)	2695
(KILOGRAMS PER SECOND)	2683
PLUS FLOW RATE TOLERANCE (KILOGRAMS PER SECOND)	2696
MINUS FLOW RATE TOLERANCE (KILOGRAMS PER SECOND)	2697
(LITERS PER MINUTE)	2685
PLUS FLOW RATE TOLERANCE (LITERS PER MINUTE)	2698

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
2691	THE MINUS FLOW RATE TOLERANCE SHALL BE 2691 STANDARD CUBIC FEET PER MINUTE.	
2679	THE FLOW RATE SHALL BE 2679 POUNDS PER HOUR.	
2692	THE PLUS FLOW RATE TOLERANCE SHALL BE 2692 POUNDS PER HOUR.	
2693	THE MINUS FLOW RATE TOLERANCE SHALL BE 2693 POUNDS PER HOUR.	
2681	THE FLOW RATE SHALL BE 2681 CUBIC METERS PER SECOND.	
2694	THE PLUS FLOW RATE TOLERANCE SHALL BE 2694 CUBIC METERS PER SECOND.	
2695	THE MINUS FLOW RATE TOLERANCE SHALL BE 2695 CUBIC METERS PER SECOND.	
2683	THE FLOW RATE SHALL BE 2683 KILOGRAMS PER SECOND.	
2696	THE PLUS FLOW RATE TOLERANCE SHALL BE 2696 KILOGRAMS PER SECOND.	
2697	THE MINUS FLOW RATE TOLERANCE SHALL BE 2697 KILOGRAMS PER SECOND,	
2685	THE FLOW RATE SHALL BE 2685 LITERS PER MINUTE.	
2698	THE PLUS FLOW RATE TOLERANCE SHALL BE 2698 LITERS PER MINUTE.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
REGULATION (CONT)	
(LITERS PER MINUTE) (CONT)	
MINUS FLOW RATE TOLERANCE (LITERS PER MINUTE)	2699
REGULATION, TEMPERATURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2770
AS FOLLOWS:	3936
REGULATED FLUID TEMPERATURE (DEGREES CELSIUS)	2772
PLUS TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2774
MINUS TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2776
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2722
PER MIL-V-5636.	2724
TEST PRESSURE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	2726
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2728

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2699	THE MINUS FLOW RATE TOLERANCE SHALL BE 2699 LITERS PER MINUTE.
2770	REGULATION, TEMPERATURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2770,
3936	REGULATION, TEMPERATURE. THE REQUIREMENT(S) SHALL BE FOLLOWS:
2772	THE REGULATED FLUID TEMPERATURE SHALL BE 2772 DEGREES CELSIUS.
2774	THE PLUS TEMPERATURE TOLERANCE SHALL BE 2774 DEGREES CELSIUS.
2776	THE MINUS TEMPERATURE TOLERANCE SHALL BE 2776 DEGREES CELSIUS.
2722	REGULATION, TEMPERATURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2722.
2724	REGULATION, TEMPERATURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-V-5636.
2726	THE TEST PRESSURE SHALL BE 2726 POUNDS PER SQUARE INCH
2728	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2728 POUNDS PER SQUARE INCH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
REGULATION, TEMPERATURE (CONT)	
(POUNDS PER SQUARE INCH) (CONT)	
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2730
SI	
(KILOPASCALS)	2727
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2729
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2731
TEST TEMPERATURE (DEGREES CELSIUS)	2732
PLUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2734
MINUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2736
TEST MEDIA (NAME)	2738
TEST MEDIA DOCUMENT (DOC DES)	2740
SUPPLY TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	2744
PLUS SUPPLY TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2746

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2730	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2730 POUNDS PER SQUARE INCH.
2727	THE TEST PRESSURE SHALL BE 2727 KILOPASCAL(S).
2729	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2729 KILOPASCAL(S).
2731	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2731 KILOPASCAL(S).
2732	THE TEST TEMPERATURE SHALL BE 2732 DEGREES CELSIUS.
2734	THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 2734 DEGREES CELSIUS.
2736	THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 2736 DEGREES CELSIUS.
2738	THE TEST MEDIA SHALL BE 2738.
2740	THE TEST MEDIA SHALL CONFORM TO 2740.
2744	THE SUPPLY TEST MEDIA TEMPERATURE SHALL BE 2744 DEGREES CELSIUS.
2746	THE PLUS SUPPLY TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2746 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
REGULATION, TEMPERATURE (CONT)	
SUPPLY TEST MEDIA TEMPERATURE (CONT)	
MINUS SUPPLY TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2748
TEST CYCLES (QUANTITY)	2762
RETURN TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	2750
PLUS RETURN MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2752
MINUS RETURN MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2754
TEMPERATURE STABILIZATION DURATION (MINUTES)	2742
FLOW RATE (SELECT ONE)	
U.S.	
(GALLONS PER MINUTE)	2764
PLUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	2766
MINUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	2767

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2748	THE MINUS SUPPLY TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2748 DEGREES CELSIUS.
2762	THERE SHALL BE 2762 TEST CYCLES.
2750	THE RETURN TEST MEDIA TEMPERATURE SHALL BE 2750 DEGREES CELSIUS.
2752	THE PLUS RETURN TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2752 DEGREES CELSIUS.
2754	THE MINUS RETURN TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2754 DEGREES CELSIUS.
2742	THE TEMPERATURE STABILIZATION DURATION SHALL BE 2742 MINUTE(S).
2764	THE FLOW RATE SHALL BE 2764 GALLONS PER MINUTE.
2766	THE PLUS FLOW RATE TOLERANCE SHALL BE 2766 GALLONS PER MINUTE.
2767	THE MINUS FLOW RATE TOLERANCE SHALL BE 2767 GALLONS PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
REGULATION, TEMPERATURE (CONT)	
FLOW RATE (CONT)	
SI	
(CUBIC METERS PER SECOND)	2765
PLUS FLOW RATE TOLERANCE (CUBIC METERS PER SECOND)	2761
MINUS FLOW RATE TOLERANCE (CUBIC METERS PER SECOND)	2763
RESISTANCE, OZONE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2846
AS FOLLOWS:	3937
NO EVIDENCE OF CHECKING, CRACKING OR DAMAGE.	2848
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2822
PER DOCUMENT (DOC DES)	2824
TEST SLAB ELONGATION (PERCENT)	2826
DURATION IN OZONE FREE ATMOSPHERE BEFORE PLACEMENT IN OZONE CHAMBER (HOURS)	2828

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2765	THE FLOW RATE SHALL BE 2765 CUBIC METERS PER SECOND,
2761	THE PLUS FLOW RATE TOLERANCE SHALL BE 2761 CUBIC METERS PER SECOND.
2763	THE MINUS FLOW RATE TOLERANCE SHALL BE 2763 CUBIC METERS PER SECOND.
2846	RESISTANCE, OZONE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2846.
3937	RESISTANCE, OZONE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2848	THERE SHALL BE NO EVIDENCE OF CHECKING, CRACKING OR DAMAGE.
2822	RESISTANCE, OZONE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2822.
2824	RESISTANCE, OZONE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2824.
2826	THE TEST SLABS SHALL BE ELONGATED 2826 PERCENT.
2828	THE ELONGATED TEST SLABS SHALL BE PLACED IN AN OZONE-FREE ATMOSPHERE FOR 2828 HOURS BEFORE PLACEMENT IN THE OZONE CHAMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE, OZONE (CONT)	
PER DOCUMENT (CONT)	
OZONE CHAMBER TEMPERATURE (DEGREES CELSIUS)	2830
PLUS CHAMBER TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2832
MINUS CHAMBER TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2834
MINIMUM CHAMBER VELOCITY (SELECT ONE)	
U.S.	
(FEET PER SECOND)	2840
SI	
(METERS PER SECOND)	2841
EXPOSURE DURATION (MINUTES)	2842
OZONE CONCENTRATION	
MINIMUM (PARTS BY VOLUME OF OZONE PER MILLION PARTS BY VOLUME OF AIR)	2836
MAXIMUM (PARTS BY VOLUME OF OZONE PER MILLION PARTS BY VOLUME OF AIR)	2838

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2830	THE OZONE CHAMBER TEMPERATURE SHALL BE 2830 DEGREES CELSIUS.
2832	THE PLUS CHAMBER TEMPERATURE TOLERANCE SHALL BE 2832 DEGREES CELSIUS.
2834	THE MINUS CHAMBER TEMPERATURE TOLERANCE SHALL BE 2834 DEGREES CELSIUS.
2840	THE AIR-OZONE VELOCITY SHALL BE NOT LESS THAN 2840 FEET PER SECOND.
2841	THE AIR-OZONE VELOCITY SHALL BE NOT LESS THAN 28411 METERS PER SECOND.
2842	THE EXPOSURE DURATION SHALL BE 2842 MINUTE(S).
2836	THE OZONE CONCENTRATION SHALL BE NOT LESS THAN 2836 PARTS BY VOLUME OF OZONE PER MILLION PARTS BY VOLUME OF AIR.
2838	THE OZONE CONCENTRATION SHALL BE NOT GREATER THAN 2838 PARTS BY VOLUME OF OZONE PER MILLION' PARTS BY VOLUME OF AIR.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RUGGEDNESS, HANDLE STOPS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2652
AS FOLLOWS:	3938
NO FAILURE (BRINELLING OR NORMAL WEAR SHALL NOT CONSTITUTE FAILURE).	2654
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2642
PER MIL-V-19067.	2644
APPLIED TORQUE (SELECT ONE)	
U.S.	
(POUND-INCHES)	2646
SI	
(NEWTON METERS)	2647
TORQUE APPLICATIONS (QUANTITY)	2648
SALT FOG	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4998

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2652	RUGGEDNESS, HANDLE STOPS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2652.
3938	RUGGEDNESS, HANDLE STOPS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2654	THERE SHALL BE NO FAILURE (BRINELLING OR NORMAL WEAR SHALL NOT CONSTITUTE FAILURE).
2642	RUGGEDNESS, HANDLE STOPS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2642.
2644	RUGGEDNESS, HANDLE STOPS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-V-19067.
2646	THE APPLIED TORQUE SHALL BE 2646 POUND-INCH(S).
2647	THE APPLIED TORQUE SHALL BE 2647 NEWTON METER(S).
2648	THERE SHALL BE 2648 TORQUE APPLICATIONS TO THE HANDLE STOPS.
4998	SALT FOG. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT? EXCEPT 4998.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT FOG (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.	4999
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4779
PER MIL-STD-8L0, METHOD 509.	4780
SALT SOLUTION (PERCENT)	4786
EXPOSURE PERIOD (HOURS)	4783
DRYING PERIOD (HOURS)	4775
OPERATE (SELECT ONE)	
OPERATE ONLY AFTER DRYING.	6245
OPERATE ONLY AFTER EXPOSURE.	6246
OPERATE AFTER EXPOSURE AND AFTER DRYING.	6247
OPERATE AFTER 24 HOURS OF EXPOSURE.	6248
SHOCK	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	7315
NO EVIDENCE OF PHYSICAL DAMAGE.	7316

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4999	SALT FOG. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
4779	SALT FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 47790
4780	SALT FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 509 OF MIL-STD-810.
4786	SOLUTION SHALL BE 4786 PERCENT SALT.
4783	DURATION OF THE TEST SHALL BE 4783 HOUR(S).
4775	DRYING PERIOD SHALL BE 4775 HOUR(S).
6245	ITEM(S) SHALL BE OPERATED ONLY AFTER DRYING.
6246	ITEM(S) SHALL BE OPERATED ONLY AFTER EXPOSURE.
6247	ITEM(S) SHALL BE OPERATED AFTER EXPOSURE AND AFTER DRYING.
6248	ITEM(S) SHALL BE OPERATED AFTER 24 HOURS OF EXPOSURE.
7315	SHOCK. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 7315.
7316	SHOCK. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	7311
PER MIL-STD-810, METHOD 516.	7312
*PROCEDURE	
PROCEDURE I.	7313
*FIGURE (SELECT ONE)	
FIGURE 516-1 APPLIES.	7317
FIGURE 516-2 APPLIES.	7318
*AMPLITUDE, A OR B (LETTER)	7305
*DURATION, C OR D (LETTER)	7306
PROCEDURE II.	6327
PROCEDURE III.	6338
*FIGURE (SELECT ONE)	
FIGURE 516-1 APPLIES.	6339
FIGURE 516-2 APPLIES.	6340
*AMPLITUDE A OR B (LETTER)	6341
*DURATION C OR D (LETTER)	6342

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7311	SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 7311.
7312	SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 516 OF MIL-STD-810.
7313	PROCEDURE NUMBER 1 SHALL APPLY;
7317	THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH FIGURE 516-1 OF METHOD 516 OF MIL-STD-810.
7318	THE SHOCK PULSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516-2 OF METHOD 516 OF MIL-STD-810.
7305	AMPLITUDE LETTER 7305 SHALL APPLY.
7306	DURATION LETTER 7306 SHALL APPLY.
6327	PROCEDURE NUMBER II SHALL APPLY.
6338	PROCEDURE NUMBER III SHALL APPLY.
6339	THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH THE FIGURE 516-1 OF METHOD 516 OF MIL-STD-810.
6340	THE SHOCK PULSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH THE FIGURE 516-2 OF METHOD 516 OF MIL-STD-810.
6341	AMPLITUDE LETTER 6341 SHALL APPLY.
6342	DURATION LETTER 6342 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDES (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK (CONT)	
PROCEDURE (CONT)	
PROCEDURE IV.	6343
*FIGURE (SELECT ONE)	
FIGURE 516-1 APPLIES.	6344
FIGURE 5116-2 APPLIES.	6345
*AMPLITUDE, A OR B (LETTER)	6346
*DURATION, C OR D (LETTER)	6347
PROCEDURE V.	6348
PROCEDURE VI.	6349
TEST TEMPERATURE (DEGREES CELSIUS)	7307
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	7308
OPERATION DURING TEST REQUIRED.	7309
PER MIL-S-901.	4132
EQUIPMENT GRADE (LETTER)	4133
EQUIPMENT CLASSIFICATION (SELECT ONE)	
HULL MOUNTED.	4134
DECK MOUNTED.	4135

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6343	PROCEDURE NUMBER IV SHALL APPLY.
6344	THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH FIGURE 516-1 OF METHOD 516 OF MIL-STD-810.
6345	THE SHOCK PULSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516-2 OF METHOD 516 OF MIL–STD-810.
6346	AMPLITUDE LETTER 6346 SHALL APPLY.
6347	DURATION LETTER 6347 SHALL APPLY.
6348	PROCEDURE NUMBER V SHALL APPLY.
6349	PROCEDURE NUMBER VI SHALL APPLY.
7307	THE TEST TEMPERATURE SHALL BE 7307 DEGREES CELSIUS.
7308	THE TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 7308 DEGREES CELSIUS.
7309	OPERATION DURING THE TEST IS REQUIRED.
4132	SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-901.
4133	THE EQUIPMENT GRADE SHALL BE 4133.
4134	THE EQUIPMENT CLASSIFICATION SHALL BE HULL MOUNTED.
4135	THE EQUIPMENT CLASSIFICATION SHALL BE DECK MOUNTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX

CHARACTERISTIC NAME	CHAR CODE
SHOCK (CONT)	
EQUIPMENT CLASSIFICATION (CONT)	
SHELL MOUNTED.	4136
PRINCIPAL UNIT.	4137
SUBSIDIARY COMPONENT.	4138
SUBASSEMBLIES.	4139
EQUIPMENT CLASS (NUMERAL)	4142
TEST CLASSIFICATION (SELECT ONE)	
LIGHTWEIGHT.	4143
MEDIUMWEIGHT.	4144
HEAVYWEIGHT.	4145
TEST TYPE (LETTER)	4146
METHOD OF MOUNTING (FIXTURE)	4147
MODE OF COMPONENT OPERATION DURING TEST (SELECT ONE)	
PRESSURIZED.	4148
UNPRESSURIZED.	4149
SHUTTLING WITH GAS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2510

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4136	THE EQUIPMENT CLASSIFICATION SHALL BE SHELL MOUNTED.
4137	THE EQUIPMENT CLASSIFICATION SHALL BE PRINCIPAL UNIT.
4138	THE EQUIPMENT CLASSIFICATION SHALL BE SUBSIDIARY COMPONENT.
4139	THE EQUIPMENT CLASSIFICATION SHALL BE SUBASSEMBLIES.
4142	THE EQUIPMENT CLASS SHALL BE 4142.
4143	THE TEST CLASSIFICATION SHALL BE LIGHTWEIGHT.
4144	THE TEST CLASSIFICATION SHALL BE MEDIUMWEIGHT.
4145	THE TEST CLASSIFICATION SHALL BE HEAVYWEIGHT.
4146	THE TEST TYPE SHALL BE 4146.
4147	THE METHOD OF MOUNTING SHALL BE IN ACCORDANCE WITH FIXTURE 4147.
4148	THE COMPONENT SHALL BE PRESSURIZED DURING TEST.
4149	THE COMPONENT SHALL BE UNPRESSURIZED DURING TEST.
2510	SHUTTLING WITH GAS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2510.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHUTTLING WITH GAS (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	3939
MAXIMUM ALLOWABLE LEAKAGE (SELECT ONE)	
(CUBIC CENTIMETERS PER MINUTE)	2512
(CUBIC CENTIMETERS PER CYCLE)	2514
MAXIMUM SHUTTLING PRESSURE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	2516
SI	
(KILOPASCALS)	2518
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2482
PER MIL-V-5530.	2484

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3939	SHUTTLING WITH GAS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2512	THE ALLOWABLE LEAKAGE SHALL BE NOT GREATER THAN 2512 CUBIC CENTIMETER(S) PER MINUTE.
2514	THE ALLOWABLE LEAKAGE SHALL BE NOT GREATER THAN 2514 CUBIC CENTIMETER(S) PER CYCLE.
2516	THE SHUTTLING PRESSURE SHALL BE NOT GREATER THAN 2516 POUNDS PER SQUARE INCH.
2518	THE SHUTTLING PRESSURE SHALL BE NOT GREATER THAN 2518 KILOPASCAL(S).
2482	SHUTTLING WITH GAS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2482.
2484	SHUTTLING WITH GAS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-V-5530.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHUTTLING WITH GAS (CONT)	
PER MIL-V-5530. (CONT)	
INITIAL TEST PRESSURE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	2486
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2488
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2490
SI	
(KILOPASCALS)	2487
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2489
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2491
TEST TEMPERATURE (DEGREES CELSIUS)	2492
PLUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2494
MINUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2496
TEST MEDIA (NAME)	2498

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2486	THE INITIAL TEST PRESSURE SHALL BE 2486 PER SQUARE INCH.
2488	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2488 POUNDS PER SQUARE INCH.
2490	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2490 POUNDS PER SQUARE INCH.
2487	THE INITIAL TEST PRESSURE SHALL BE 2487 KILOPASCAL(S).
2489	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2489 KILOPASCAL(S).
2491	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2491 KILOPASCAL(S).
2492	THE TEST TEMPERATURE SHALL BE 2492 DEGREES CELSIUS.
2494	THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 2494 DEGREES CELSIUS.
2496	THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 2496 DEGREES CELSIUS.
2498	THE TEST MEDIA SHALL BE 2498.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHUTTLING WITH GAS (CONT)	
PER MIL-V-5530. (CONT)	
TEST MEDIA DOCUMENT (DOC DES)	2500
SECOND TEST PRESSURE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	2502
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2504
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2506
SI	
(KILOPASCALS)	2503
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2505
MINUS TEST PRESSURE TOLERANCE (KILOPASCAL(S)	2507
SHUTTLING WITH LIQUID	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2550

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2500	THE TEST MEDIA SHALL CONFORM TO 2500.
2502	THE SECOND TEST PRESSURE SHALL BE 2502 POUNDS PER SQUARE INCH.
2504	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2504 POUNDS PER SQUARE INCH.
2506	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2506 POUNDS PER SQUARE INCH.
2503	THE SECOND TEST PRESSURE SHALL BE 2503 KILOPASCAL(S).
2505	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2505 KILOPASCAL(S).
2507	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2507 KILOPASCAL(S).
2550	SHUTTLING WITH LIQUID. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2550.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHUTTLING WITH LIQUID (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	3940
MAXIMUM ALLOWABLE LEAKAGE	
(CUBIC CENTIMETERS PER MINUTE)	2552
(CUBIC CENTIMETERS PER CYCLE)	2554
MAXIMUM ALLOWABLE FLOW RATE NECESSARY FOR VALVE TO SHUTTLE (CUBIC CENTIMETERS PER MINUTE)	2556
SHUTTLING PRESSURE RANGE (SELECT ONE)	
U.S.	
MINIMUM (POUNDS PER SQUARE INCH)	2558
MAXIMUM (POUNDS PER SQUARE INCH)	2560
SI	
MINIMUM (KILOPASCALS)	2557
MAXIMUM (KILOPASCALS)	2559
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2522

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3940	SHUTTLING WITH LIQUID. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2552	THE ALLOWABLE LEAKAGE SHALL BE NOT GREATER THAN 2552 CUBIC CENTIMETER(S) PER MINUTE.
2554	THE ALLOWABLE LEAKAGE SHALL BE NOT GREATER THAN 2554 CUBIC CENTIMETER(S) PER CYCLE.
2556	THE ALLOWABLE FLOW RATE NECESSARY FOR VALVE TO SHUTTLE SHALL BE NOT GREATER THAN 2556 CUBIC CENTIMETER(S) PER MINUTE,
2558	THE SHUTTLING PRESSURE SHALL BE NOT LESS THAN 2558 POUNDS PER SQUARE INCH.
2560	THE SHUTTLING PRESSURE SHALL BE NOT GREATER THAN 2560 POUNDS PER SQUARE INCH.
2557	THE SHUTTLING PRESSURE SHALL BE NOT LESS THAN 2557 KILOPASCAL(S).
559	THE SHUTTLING PRESSURE SHALL BE NOT GREATER THAN 2559 KILOPASCAL(S).
2522	SHUTTLING WITH LIQUID. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2522.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHUTTLING WITH LIQUID (CONT)	
TEST METHODS (CONT)	
PER MIL-V-5530.	2524
INITIAL TEST PRESSURE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	2526
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2528
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2530
SI	
(KILOPASCALS)	2527
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2529
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2531
TEST MEDIA (NAME)	2532
TEST MEDIA DOCUMENT (DOC DES)	2534

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2524	SHUTTLING WITH LIQUID. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-V-5530.
2526	THE INITIAL TEST PRESSURE SHALL BE 2526 POUNDS PER SQUARE INCH.
2528	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2528 POUNDS PER SQUARE INCH.
2530	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2530 POUNDS PER SQUARE INCH.
2527	THE INITIAL TEST PRESSURE SHALL BE 2527 KILOPASCAL(S).
2529	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2529 KILOPASCAL(S).
2531	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2531 KILOPASCAL(S).
2532	THE TEST MEDIA SHALL BE 2532.
2534	THE TEST MEDIA SHALL CONFORM TO 2534.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHUTTLING WITH LIQUID (CONT)	
PER MIL-V-5530. (CONT)	
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	2536
PLUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2538
MINUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2540
SECOND TEST PRESSURE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	2542
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2544
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2546
SI	
(KILOPASCALS)	2543
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2545
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2547

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2536	THE TEST MEDIA TEMPERATURE SHALL BE 2536 DEGREES CELSIUS.
2538	THE PLUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2538 DEGREES CELSIUS.
2540	THE MINUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2540 DEGREES CELSIUS.
2542	THE SECOND TEST PRESSURE SHALL BE 2542 POUNDS PER SQUARE INCH.
2544	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2544 POUNDS PER SQUARE INCH.
2546	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2546 POUNDS PER SQUARE INCH.
2543	THE SECOND TEST PRESSURE SHALL BE 2543 KILOPASCAL(S).
2545	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2545 KILOPASCAL(S).
2547	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2547 KILOPASCAL(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STRENGTH, FLEXURAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2338
AS FOLLOWS:	3941
NO MECHANICAL FAILURE.	2342
MAXIMUM ALLOWABLE LEAKAGE (CUBIC CENTIMETERS PER MINUTE)	2340
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2302
PER MIL-V-25675.	2304
TEST PRESSURE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	2306
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2308
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2310

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2338	STRENGTH, FLEXURAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2338.
3941	STRENGTH, FLEXURAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2342	THERE SHALL BE NO MECHANICAL FAILURE.
2340	THE ALLOWABLE LEAKAGE SHALL BE NOT GREATER THAN 2340 CUBIC CENTIMETER(S) PER MINUTE.
2302	STRENGTH, FLEXURAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2302.
2304	STRENGTH, FLEXURAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-V-25675.
2306	THE TEST PRESSURE SHALL BE 2306 POUNDS PER SQUARE INCH.
2308	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2308 POUNDS PER SQUARE INCH.
2310	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2310 POUNDS PER SQUARE INCH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STRENGTH, FLEXURAL (CONT)	
TEST PRESSURE (CONT)	
SI	
(KILOPASCALS)	2307
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2309
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2311
TEST TEMPERATURE (DEGREES CELSIUS)	2312
PLUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2314
MINUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2316
TEST MEDIA (NAME)	2318
TEST MEDIA DOCUMENT (DOC DES)	2320
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	2324
PLUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2326
MINUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2328
TEST CYCLES (QUANTITY)	2330

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2307	THE TEST PRESSURE SHALL BE 2307 KILOPASCAL(S).
2309	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2309 KILOPASCAL(S).
2311	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2311 KILOPASCAL(S).
2312	THE TEST TEMPERATURE SHALL BE 2312 DEGREES CELSIUS.
2314	THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 2314 DEGREES CELSIUS.
2316	THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 2316 DEGREES CELSIUS.
2318	THE TEST MEDIA SHALL BE 2318.
2320	THE TEST MEDIA SHALL CONFORM TO 2320.
2324	THE TEST MEDIA TEMPERATURE SHALL BE 2324 DEGREES CELSIUS.
2326	THE PLUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2326 DEGREES CELSIUS.
2328	THE MINUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2328 DEGREES CELSIUS.
2330	THERE SHALL BE 2330 TEST CYCLES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STRENGTH, FLEXURAL (CONT)	
PER MIL-V-25675, (CONT)	
PRESSURE HOLDING DURATION (MINUTES)	2322
FLEXING RATE	
MINIMUM FREQUENCY (HERTZ)	2332
MAXIMUM FREQUENCY (HERTZ)	2334
TEMPERATURE, HIGH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2010
AS FOLLOWS:	3942
MAXIMUM ALLOWABLE LEAKAGE (CUBIC CENTIMETERS PER MINUTE)	2012
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1972
PER DOCUMENT (DOC DES)	1974
TEST PRESSURE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	1976
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	1978

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2322	THE PRESSURE HOLDING DURATION SHALL BE 2322 MINUTE(S).
2332	THE FREQUENCY OF FLEXING SHALL BE NOT LESS THAN 2332 HERTZ.
2334	THE FREQUENCY OF FLEXING SHALL BE NOT GREATER THAN 2334 HERTZ.
2010	TEMPERATURE, HIGH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2010.
3942	TEMPERATURE, HIGH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2012	THE ALLOWABLE LEAKAGE SHALL BE NOT GREATER THAN 2012 CUBIC CENTIMETER(S) PER MINUTE.
1972	TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1972.
1974	TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1974.
1976	THE TEST PRESSURE SHALL BE 1976 POUNDS PER SQUARE INCH.
1978	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 1978 POUNDS PER SQUARE INCH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, HIGH (CONT)	
(POUNDS PER SQUARE INCH) (CONT)	
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	1980
SI	
(KILOPASCALS)	1977
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	1979
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	1981
TEST TEMPERATURE. (DEGREES CELSIUS)	1982
PLUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1984
MINUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1986
TEST MEDIA (NAME)	1988
TEST MEDIA DOCUMENT (DOC DES)	1990
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	1992
PLUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1994
MINUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1996

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
1980	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 1980 POUNDS PER SQUARE INCH.	
1977	THE TEST PRESSURE SHALL BE 1977 KILOPASCAL(S).	
1979	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 1979 KILOPASCAL(S).	
1981	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 1981 KILOPASCAL(S).	
1982	THE TEST TEMPERATURE SHALL BE 1982 DEGREES CELSIUS.	
1984	THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 1984 DEGREES CELSIUS.	
1986	THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 1986 DEGREES CELSIUS.	
1988	THE TEST MEDIA SHALL BE 1988.	
1990	THE TEST MEDIA SHALL CONFORM TO 1990.	
1992	THE TEST MEDIA TEMPERATURE SHALL BE 1992 DEGREES CELSIUS.	
1994	THE PLUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 1994 DEGREES CELSIUS.	
1996	THE MINUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 1996 DEGREES CELSIUS.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, HIGH (CONT)	
PER DOCUMENT (CONT)	
TEST CYCLES (QUANTITY)	1998
FLOW RATE (SELECT ONE)	
U.S. (SELECT ONE)	
(GALLONS PER MINUTE)	1985
PLUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	1995
MINUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	1997
(STANDARD CUBIC FEET PER MINUTE)	1987
PLUS FLOW RATE TOLERANCE (STANDARD CUBIC FEET PER MINUTE)	1999
MINUS FLOW RATE TOLERANCE (STANDARD CUBIC FEET PER MINUTE)	2000
(POUNDS PER HOUR)	1989
PLUS FLOW RATE TOLERANCE (POUNDS PER HOUR)	2001
MINUS FLOW RATE TOLERANCE (POUNDS PER HOUR)	2002

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1998	THERE SHALL BE 1998 TEST CYCLE(S).
1985	THE FLOW RATE SHALL BE 1985 GALLONS PER MINUTE,
1995	THE PLUS FLOW RATE TOLERANCE SHALL BE 1995 GALLONS PER MINUTE.
1997	THE MINUS FLOW RATE TOLERANCE SHALL BE 1997 GALLONS PER MINUTE.
1987	THE FLOW RATE SHALL BE 1987 STANDARD CUBIC FEET PER MINUTE.
1999	THE PLUS FLOW RATE TOLERANCE SHALL BE 1999 STANDARD CUBIC FEET PER MINUTE.
2000	THE MINUS FLOW RATE TOLERANCE SHALL BE 2000 STANDARD CUBIC FEET PER MINUTE.
1989	THE FLOW RATE SHALL BE 1989 POUNDS PER HOUR.
2001	THE PLUS FLOW RATE TOLERANCE SHALL BE 2001 POUNDS PER HOUR.
2002	THE MINUS FLOW RATE TOLERANCE SHALL BE 2002 POUNDS PER HOUR.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, HIGH (CONT)	
FLOW RATE (CONT)	
SI (SELECT ONE)	
(CUBIC METERS PER SECOND)	1991
PLUS FLOW RATE TOLERANCE (CUBIC METERS PER SECOND)	2003
MINUS FLOW RATE TOLERANCE (CUBIC METERS PER SECOND)	2004
(KILOGRAMS PER SECOND)	1993
PLUS FLOW RATE TOLERANCE (KILOGRAMS PER SECOND)	2005
MINUS FLOW RATE TOLERANCE (KILOGRAMS PER SECOND)	2006
TEMPERATURE, LOW	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1960
AS FOLLOWS:	3943
MAXIMUM ALLOWABLE LEAKAGE (CUBIC CENTIMETERS PER MINUTE)	1962
MAXIMUM CHANGE IN PRESSURE VALUE FROM VALUE OBTAINED AT AMBIENT TEMPERATURE (PERCENT)	1963

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1991	THE FLOW RATE SHALL BE 1991 CUBIC METERS PER SECOND.
2003	THE PLUS FLOW RATE TOLERANCE SHALL BE 2003 CUIBIC METERS PER SECOND.
2004	THE MINUS FLOW RATE TOLERANCE SHALL BE 2004 CUBIC METERS PER SECOND.
1993	THE FLOW RATE SHALL BE 1993 KILOGRAMS PER SECOND.
2005	THE PLUS FLOW RATE TOLERANCE SHALL BE 2005 KILOGRAMS PER SECOND.
2006	THE MINUS FLOW RATE TOLERANCE SHALL BE 2006 KILOGRAMS PER SECOND.
1960	TEMPERATURE, LOW. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 11960.
3943	TEMPERATURE, LOW. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1962	THE ALLOWABLE LEAKAGE SHALL BE NOT GREATER THAN 1962 CUBIC CENTIMETER(S) PER MINUTE.
1963	THE CHANGE IN THE PRESSURE VALUE FROM THE VALUE OBTAINED AT AMBIENT TEMPERATURE SHALL BE NOT GREATER THAN 1963 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, LOW (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM CHANGE IN FLOW VALUE FROM VALUE OBTAINED AT AMBIENT TEMPERATURE (PERCENT)	1964
MAXIMUM CHANGE IN PRESSURE DROP VALUE FROM VALUE OBTAINED AT AMBIENT TEMPERATURE (PERCENT)	1966
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1922
PER DOCUMENT (DOC DES)	1924
TEST PRESSURE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	1926
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	1928
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	1930
SI	
(KILOPASCALS)	1927
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	1929

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1964	THE CHANGE IN THE FLOW VALUE FROM THAT VALUE OBTAINED AT AMBIENT TEMPERATURE SHALL BE NOT GREATER THAN 1964 PERCENT.
1966	THE CHANGE IN THE PRESSURE DROP VALUE FROM THE VALUE OBTAINED AT AMBIENT TEMPERATURE SHALL BE NOT GREATER THAN 1966 PERCENT.
1922	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1922.
1924	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1924.
1926	THE TEST PRESSURE SHALL BE 1926 POUNDS PER SQUARE INCH.
1928	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 1928 POUNDS PER SQUARE INCH.
1930	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 1930 POUNDS PER SQUARE INCH.
1927	THE TEST PRESSURE SHALL BE 1927 KILOPASCAL(S).
1929	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 1929 KILOPASCAL(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, LOW (CONT)	
(KILOPASCALS) (CONT)	
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	1931
TEST TEMPERATURE (DEGREES CELSIUS)	1932
PLUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1934
MINUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1936
TEST MEDIA (NAME)	1938
TEST MEDIA DOCUMENT (DOC DES)	1940
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	1942
PLUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1944
MINUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1946
TEST CYCLES (QUANTITY)	1948
FLOW RATE (SELECT ONE)	
U.S. (SELECT ONE)	
(GALLONS PER MINUTE)	1937

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1931	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 1931 KILOPASCAL(S).
1932	THE TEST TEMPERATURE SHALL BE 1932 DEGREES CELSIUS.
1934	THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 1934 DEGREES CELSIUS.
1936	THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 1936 DEGREES CELSIUS.
1938	THE TEST MEDIA SHALL BE 1938.
1940	THE TEST MEDIA SHALL CONFORM TO 1940.
1942	THE TEST MEDIA TEMPERATURE SHALL BE 1942 DEGREES CELSIUS.
1944	THE PLUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 1944 DEGREES CELSIUS.
11946	THE MINUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 1946 DEGREES CELSIUS.
1948	THERE SHALL BE 1948 TEST CYCLES.
1937	THE FLOW RATE SHALL BE 1937 GALLONS PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, LOW (CONT)	
(GALLONS PER MINUTE) (CONT)	
PLUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	1947
MINUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	1949
(STANDARD CUBIC FEET PER MINUTE)	1939
PLUS FLOW RATE TOLERANCE (STANDARD CUBIC FEET PER MINUTE)	1950
MINUS FLOW RATE TOLERANCE (STANDARD CUBIC FEET PER MINUTE)	1951
(POUNDS PER HOUR)	1941
PLUS FLOW RATE TOLERANCE (POUNDS PER HOUR)	1952
MINUS FLOW RATE TOLERANCE (POUNDS PER HOUR)	1953
SI	
(CUBIC METERS PER SECOND)	1943
PLUS FLOW RATE TOLERANCE (CUBIC METERS PER SECOND)	1954
MINUS FLOW RATE TOLERANCE (CUBIC METERS PER SECOND)	1955

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1947	THE PLUS FLOW RATE TOLERANCE SHALL BE 1947 GALLONS PER MINUTE.
1949	THE MINUS FLOW RATE TOLERANCE SHALL BE 1949 GALLONS PER MINUTE.
11939	THE FLOW RATE SHALL BE 1939 STANDARD CUBIC FEET PER MINUTE.
1950	THE PLUS FLOW RATE TOLERANCE SHALL BE 1950 STANDARD CUBIC FEET PER MINUTE.
1951	THE MINUS FLOW RATE TOLERANCE SHALL BE 1951 STANDARD CUBIC FEET PER MINUTE.
1941	THE FLOW RATE SHALL BE 1941 POUNDS PER HOUR.
1952	THE PLUS FLOW RATE TOLERANCE SHALL BE 1952 POUNDS PER HOUR.
1953	THE MINUS FLOW RATE TOLERANCE SHALL BE 1953 POUNDS PER HOUR.
1943	THE FLOW RATE SHALL BE 1943 CUBIC METERS PER SECOND.
1954	THE PLUS FLOW RATE TOLERANCE SHALL BE 1954 CUBIC METERS PER SECOND.
1955	THE MINUS FLOW RATE TOLERANCE SHALL BE 1955 CUBIC METERS PER SECOND.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, LOW (CONT)	
SI (CONT)	
(KILOGRAMS PER SECOND)	11945
PLUS FLOW RATE TOLERANCE (KILOGRAMS PER SECOND)	1956
MINUS FLOW RATE TOLERANCE (KILOGRAMS PER SECOND)	1957
TORQUE, MANUAL	
REQUIREMENTS	
PER BASE DOCUMENT EXCEPT _____	2876
AS FOLLOWS:	3944
MAXIMUM TORQUE REQUIRED TO FULLY OPEN VALVE (SELECT ONE)	
U.S. (SELECT ONE)	
(POUND-INCHES)	2878
(POUND-FEET)	2880
SI	
(NEWTON METERS)	2879

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1945	THE FLOW RATE SHALL BE 1945 KILOGRAMS PER SECOND.
1956	THE PLUS FLOW RATE TOLERANCE SHALL BE 1956 KILOGRAMS PER SECOND.
11957	THE MINUS FLOW RATE TOLERANCE SHALL BE 1957 KILOGRAMS PER SECOND.
2876	TORQUE, MANUAL, THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2876.
3944	TORQUE, MANUAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2878	THE TORQUE REQUIRED TO FULLY OPEN THE VALVE SHALL BE NOT GREATER THAN 2878 POUND-INCHES.
2880	THE TORQUE REQUIRED TO FULLY OPEN THE VALVE SHALL BE NOT GREATER THAN 2880 POUND-FEET.
2879	THE TORQUE REQUIRED TO FULLY OPEN THE VALVE SHALL BE NOT GREATER THAN 2879 NEWTON METER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TORQUE, MANUAL (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM TORQUE REQUIRED TO CLOSE OR SEAL VALVE (SELECT ONE)	
U.S. (SELECT ONE)	
(POUND-INCHES)	2882
(POUND-FEET)	2884
SI	
(NEWTON METERS)	2883
MAXIMUM ALLOWABLE LEAKAGE (CUBIC CENTIMETERS PER MINUTE)	2886
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2852
PER DOCUMENT (DOC DES)	2854
TEST PRESSURE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	2856
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2858

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2882	THE TORQUE REQUIRED TO CLOSE OR SEAL THE VALVE SHALL BE NOT GREATER THAN 2882 POUND-INCHES.
2884	THE TORQUE REQUIRED TO CLOSE OR SEAL THE VALVE SHALL BE NOT GREATER THAN 2884 POUND-FEET.
2883	THE TORQUE REQUIRED TO CLOSE OR SEAL THE VALVE SHALL BE NOT GREATER THAN 2883 NEWTON METER(S).
2886	THE ALLOWABLE LEAKAGE SHALL BE NOT GREATER THAN 2886 CUBIC CENTIMETER(S) PER MINUTE.
2852	TORQUE, MANUAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2852.
2854	TORQUE, MANUAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2854.
2856	THE TEST PRESSURE SHALL BE 2856 POUNDS PER SQUARE INCH,
2858	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2858 POUNDS PER SQUARE INCH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TORQUE, MANUAL (CONT)	
(POUNDS PER SQUARE INCH) (CONT)	
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2860
SI	
(KILOPASCALS)	2875
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2877
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2881
TEST TEMPERATURE (DEGREES CELSIUS	2862
PLUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2864
MINUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2866
TEST MEDIA (NAME)	2868
TEST MEDIA DOCUMENT (DOC DES)	2870
TEST CYCLES (QUANTITY)	2872
FLOW RATE (SELECT ONE)	
U.S. (SELECT ONE)	
(GALLONS PER MINUTE)	2845

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2860	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2860 POUNDS PER SQUARE INCH.
2875	THE TEST PRESSURE SHALL BE 2875 KILOPASCAL(S).
2877	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2877 KILOPASCAL(S).
2881	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2881 KILOPASCAL(S).
2862	THE TEST TEMPERATURE SHALL BE 2862 DEGREES CELSIUS.
2864	THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 2864 DEGREES CELSIUS.
2866	THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 2866 DEGREES CELSIUS.
2868	THE TEST MEDIA SHALL BE 2868.
2870	THE TEST MEDIA SHALL CONFORM TO 2870.
2872	THERE SHALL BE 2872 TEST CYCLES.
2845	THE FLOW RATE SHALL BE 2845 GALLONS PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TORQUE, MANUAL (CONT)	
GALLONS PER MINUTE (CONT)	
PLUS FLOW RATE TOLARANCE (GALLONS PER MINUTE)	2855
MINUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	2857
(STANDARD CUBIC FEET PER MINUTE)	2847
PLUS FLOW RATE TOLERANCE (STANDARD CUBIC FEET PER MINUTE)	2859
MINUS FLOW RATE TOLERANCE (STANDARD CUBIC FEET PER MINUTE)	2861
(POUNDS PER HOUR)	2849
PLUS FLOW RATE TOLERANCE (POUNDS PER HOUR)	2863
MINUS FLOW RATE TOLERANCE (POUNDS PER HOUR)	2865
SI (SELECT ONE)	
(CUBIC METERS PER SECOND)	2851
PLUS FLOW RATE TOLERANCE (CUBIC METERS PER SECOND)	2867
MINUS FLOW RATE TOLERANCE (CUBIC METERS PER SECOND)	2869

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2855	THE PLUS FLOW RATE TOLERANCE SHALL BE 2855 GALLONS PER MINUTE.
2857	THE MINUS FLOW RATE TOLERANCE SHALL BE 2857 STANDARD CUBIC FEET PER MINUTE.
2847	THE FLOW RATE SHALL BE 2847 STANDARD CUBIC FEET PER MINUTE.
2859	THE PLUS FLOW RATE TOLERANCE SHALL BE 2859 STANDARD CUBIC FEET PER MINUTE.
2861	THE MINUS FLOW RATE TOLERANCE SHALL BE 2861 STANDARD CUBIC FEET MER MINUTE.
2849	THE FLOW RATE SHALL BE 2849 POUNDS PER HOUR.
2863	THE PLUS FLOW RATE TOLERANCE SHALL BE 2863 POUNDS PER HOUR.
2865	THE MINUS FLOW RATE TOLERANCE SHALL BE 2865 POUNDS PER HOUR.
2851	THE FLOW RATE SHALL BE 2851 CUBIC METERS PER SECOND.
2867	THE PLUS FLOW RATE TOLERANCE SHALL BE 2867 CUBIC METERS PER SECOND.
2869	THE MINUS FLOW RATE TOLERANCE SHALL BE 2869 CUBIC METERS PER SECOND.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TORQUE, MANUAL (CONT)	
SI (CONT)	
(KILOGRAMS PER SECOND)	2853
PLUS FLOW RATE TOLERANCE (KILOGRAMS PER SECOND)	2871
MINUS FLOW RATE TOLERANCE (KILOGRAMS PER SECOND)	2873
UNSEATING, REVERSE FLOW	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2632
AS FOLLOWS:	3945
MAXIMUM ALLOWABLE LEAKAGE (CUBIC CENTIMETERS PER MINUTE)	2634
THE VALVE SHALL NOT UNSEAT,	2636
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2622
PER MIL-V-5530.	2624

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2853	THE FLOW RATE SHALL BE 2853 KILOGRAMS PER SECOND.
2871	THE PLUS FLOW RATE TOLERANCE SHALL BE 2871 KILOGRAMS PER SECOND.
2873	THE MINUS FLOW RATE TOLERANCE SHALL BE 2873 KILOGRAMS PER SECOND.
2632	UNSEATING, REVERSE FLOW. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2632.
3945	UNSEATING, REVERSE FLOW. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2634	THE ALLOWABLE LEAKAGE SHALL BE NOT GREATER THAN 2634 CUBIC CENTIMETER(S) PER MINUTE.
2636	THE VALVE SHALL NOT UNSEAT.
2622	UNSEATING, REVERSE FLOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2622.
2624	UNSEATING, REVERSE FLOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-V-5530.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
UNSEATING, REVERSE FLOW (CONT)	
PER MIL-V-5530. (CONT)	
FLOW RATE (SELECT ONE)	
U.S. (SELECT ONE)	
(GALLONS PER MINUTE)	2621
PLUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	2629
MINUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	2631
(STANDARD CUBIC FEET PER MINUTE)	2623
PLUS FLOW RATE TOLERANCE (STANDARD CUBIC FEET PER MINUTE)	2633
MINUS FLOW RATE TOLERANCE (STANDARD CUBIC FEET PER MINUTE)	2635
(POUNDS PER HOUR)	2626
PLUS FLOW RATE TOLERANCE (POUNDS PER HOUR)	2637
MINUS FLOW RATE TOLERANCE (POUNDS PER HOUR)	2638
SI (SELECT ONE)	
(CUBIC METERS PER SECOND)	2627

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE.	STANDARD PARAGRAPH
2621	THE FLOW RATE SHALL BE 2621 GALLONS PER MINUTE.
2629	THE PLUS FLOW RATE TOLERANCE SHALL BE 2629 GALLONS PER MINUTE,
2631	THE MINUS FLOW RATE TOLERANCE SHALL BE 2632 GALLONS PER MINUTE.
2623	THE FLOW RATE SHALL BE 2623 STANDARD CUBIC FEET PER NINUTE.
2633	THE PLUS FLOW RATE TOLERANCE SHALL BE 2633 STANDARD CUBIC FEET PER MINUTE.
2635	THE MINUS FLOW RATE TOLERANCE SHALL BE 2635 STANDARD CUBIC FEET PER MINUTE.
2626	THE FLOW RATE SHALL BE 2626 POUNDS PER HOUR.
2637	THE PLUS FLOW RATE TOLERANCE SHALL BE 2637 POUNDS PER HOUR.
2638	THE MINUS FLOW RATE TOLERANCE SHALL BE 2638 POUNDS PER HOUR.
2627	THE FLOW RATE SHALL BE 2627 CUBIC METERS PER SECONDS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
UNSEATING, REVERSE FLOW (CONT)	
(CUBIC METERS PER SECOND) (CONT)	
PLUS FLOW RATE TOLERANCE (CUBIC METERS PER SECOND)	2639
MINUS FLOW RATE TOLERANCE (CUBIC METERS PER SECOND)	2619
(KILOGRAMS PER SECOND)	2628
PLUS FLOW RATE TOLERANCE (KILOGRAMS PER SECOND)	2618
MINUS FLOW RATE TOLERANCE (KILOGRAMS PER SECOND)	2617
VIBRATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	4681
NO EVIDENCE OF PHYSICAL DAMAGE.	4682
REMAIN WITH SPECIFIED TOLERANCE.	1538
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	1505
PER MIL-STD-810, METHOD 514.	1514
*PROCEDURE NUMBER (ROMAN NUMERAL)	1518

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2639	THE PLUS FLOW RATE TOLERANCE SHALL BE 2639 CUBIC METERS PER SECOND.
2619	THE MINUS FLOW RATE TOLERANCE SHALL BE 2619 CUBIC METERS PER SECOND.
2628	THE FLOW RATE SHALL BE 2628 KILOGRAMS PER SECOND.
2618	THE PLUS FLOW RATE TOLERANCE SHALL BE 2618 KILOGRAMS PER SECOND.
2617	THE MINUS FLOW RATE TOLERANCE SHALL BE 2617 KILOGRAMS PER SECOND.
4681	VIBRATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4681.
4682	VIBRATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1538	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1505	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1505.
1514	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 514 OF MIL-STD-810.
1518	PROCEDURE NUMBER 1518 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION (CONT)	
PER MIL-STD-810, METHOD 514. (CONT)	
EQUIPMENT (CATEGORY)	1540
CURVE (LETTERS)	1525
APPLICABLE TABLE (NUMBER)	1532
APPLICABLE FIGURE (NUMBER)	1559
OPERATION NOT REQUIRED.	1424
TEMPERATURE (DEGREES CELSIUS)	1542
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1543
DURATION AT TEMPERATURE (HOURS)	1544
PER MIL-STD-167-1	3970
TYPE(S) OF VIBRATION REQUIRED (ROMAN NUMERAL)	3972
WARMUP, RAPID	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT	2424
AS FOLLOWS:	3946

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1540	THE EQUIPMENT CATEGORY SHALL BE 1540 IN ACCORDANCE WITH METHOD 514 OF MIL-STD-810.
1525	CURVE 1525 SHALL APPLY.
1532	PROCEDURE AND TIME SCHEDULE SHALL BE AS SHOWN ON TABLE 1532 OF METHOD 514 OF MIL-STD-810.
1559	TEST CURVES ARE AS SHOWN IN FIGURE 11559 OF METHOD 514 OF MIL-STD-810.
1424	OPERATION DURING THE TEST IS NOT REQUIRED.
1542	VIBRATION TEST SHALL BE PERFORMED AT A TEMPERATURE OF 1542 DEGREES CELSIUS.
1543	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1543 DEGREES CELSIUS.
1544	THE TEMPERATURE TIME DURATION SHALL BE 1544 HOUR(S).
3970	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-167-1
3972	TESTING SHALL BE PERFORMED PER TYPE 3972 CLASSIFICATION.
2424	WARMUP, RAPID. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2424.
3946	WARMUP, RAPID. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WARMUP, RAPID (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM ALLOWABLE CHANGE IN PRESSURE VALUES FROM VALUES OBTAINED AT AMBIENT TEMPERATURE	
PLUS PERCENTAGE CHANGE (PERCENT)	2426
MINUS PERCENTAGE CHANGE (PERCENT)	2428
MAXIMUM ALLOWABLE CHANGE IN FLOW VALUES FROM VALUES OBTAINED AT AMBIENT TEMPERATURE	
PLUS PERCENTAGE CHANGE (PERCENT)	2427
MINUS PERCENTAGE CHANGE (PERCENT)	2429
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2412
PER DOCUMENT (DOC DES)	2414
TEST PRESSURE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	2411
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2415

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2426	THE PRESSURE VALUES SHALL NOT CHANGE MORE THAN PLUS 2426 PERCENT OF THE VALUES OBTAINED AT AMBIENT TEMPERATURE.
2428	THF PRESSURE VALUES SHALL NOT CHANGE MORE THAN MINUS 2428 PERCENT OF THE VALUES OBTAINED AT AMBIENT TEMPERATURE.
2427	THE FLOW VALUES SHALL NOT CHANGE MORE THAN PLUS 2427 PERCENT OF THE VALUES OBTAINED AT AMBIENT TEMPERATURE.
2429	THE FLOW VALUES SHALL NOT CHANGE MORE THAN MINUS 2429 PERCENT OF THE VALUES OBTAINED AT AMBIENT TEMPERATURE.
2412	WARMUP, RAPID. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 241120
2414	WARMUP, RAPID. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2414.
2411	THE TEST PRESSURE SHALL BE 2411 POUNDS PER SQUARE INCH.
2415	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2415 POUNDS PER PER SQUARE INCH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WARMUP, RAPID (CONT)	
(POUNDS PER SQUARE INCH) (CONT)	
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2417
SI	
(KILOPASCALS)	2413
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2419
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2421
TEST TEMPERATURE (DEGREES CELSIUS)	2416
PLUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2418
MINUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2420
WASHOUT (LUBRICANT)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2466
AS FOLLOWS:	3947

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH

2417 THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2417 POUNDS PER SQUARE INCH.

2413 THE TEST PRESSURE SHALL BE 2413 KILOPASCAL(S).

2419 THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2419 KILOPASCAL(S).

2421 THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2421 KILOPASCAL(S).

2416 THE TEST TEMPERATURE SHALL BE 2416 DEGREES CELSIUS.

2418 THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 2418 DEGREES DEGREES CELSIUS.

2420 THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 2420 DEGREES CELSIUS.

2466 WASHOUT (LUBRICANT). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2466.

3947 WASHOUT (LUBRICANT). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WASHOUT (LUBRICANT) (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM ALLOWABLE LEAKAGE (SELECT ONE)	
(CUBIC CENTIMETERS PER MINUTE)	2468
(CUBIC CENTIMETERS PER CYCLE)	2470
NO WASHING OUT OF LUBRICANT OR PACKING.	2472
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2432
PER MIL-V-5530.	2434
TEST PRESSURE (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	2436
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2438
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2440

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
2468	THE ALLOWABLE LEAKAGE SHALL BE NOT GREATER THAN 2468 CUBIC CENTIMETER(S) PER MINUTE.	
2470	THE ALLOWABLE LEAKAGE SHALL BE NOT GREATER THAN 2470 CUBIC CENTIMETER(S) PER CYCLE.	
2472	THERE SHALL BE NO WASHING OUT OF LUBRICANT OR PACKING.	
2432	WASHOUT (LUBRICANT). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 24320	
2434	WASHOUT (LUBRICANT). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-V-5530.	
2436	THE TEST PRESSURE SHALL BE 2436 POUNDS PER SQUARE INCH.	
2438	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2438 POUNDS PER SQUARE INCH.	
2440	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2440 POUNDS PER SQUARE INCH.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WASHOUT (LUBRICANT) (CONT)	
TEST PRESSURE (CONT)	
SI	
(KILOPASCALS)	2437
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2439
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2441
TEST TEMPERATURE (DEGREES CELSIUS)	2442
PLUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2444
MINUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2446
TEST MEDIA (NAME)	2448
TEST MEDIA DOCUMENT (DOC DES)	2450
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	2452
PLUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2454
MINUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2456
TEST CYCLES (QUANTITY)	2458

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
2437	THE TEST PRESSURE SHALL BE 2437 KILOPASCAL(S).	
2439	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2439 KILOPASCAL(S),	
2441	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2441 KILOPASCAL(S),	
2442	THE TEST TEMPERATURE SHALL BE 2442 DEGREES CELSIUS.	
2444	THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 2444 DEGREES CELSIUS.	
2446	THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 2446 DEGREES CELSIUS.	
2448	THE TEST MEDIA SHALL BE 2448.	
2450	THE TEST MEDIA SHALL CONFORM TO 2450.	
2452	THE TEST MEDIA TEMPERATURE SHALL BE 2452 DEGREES CELSIUS.	
2454	THE PLUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2454 DEGREES CELSIUS,	
2456	THE MINUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2456 DEGREES CELSIUS.	
2458	THERE SHALL BE 2458 TEST CYCLES,	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WASHOUT (LUBRICANT) (CONT)	
PER MIL-V-5530. (CONT)	
FLOW RATE (SELECT ONE)	
U.S.	
(GALLONS PER MINUTE)	2457
PLUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	2460
MINUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	2461
SI	
(CUBIC METERS PER SECOND)	2459
PLUS FLOW RATE TOLERANCE (CUBIC METERS PER SECOND)	2462
MINUS FLOW RATE TOLERANCE (CUBIC METERS PER SECOND)	2463
STORAGE CONDITIONS	
(YEARS)	1529
CERTIFY MAXIMUM CURE DATE TO DELIVERY (QUARTERS)	4942
CERTIFY MINIMUM SHELF LIFE AFTER DELIVERY (QUARTERS)	4943

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2457	THE FLOW RATE SHALL BE 2457 GALLONS PER MINUTE.
2460	THE PLUS FLOW RATE TOLERANCE SHALL BE 2460 GALLONS PER MINUTE.
2461	THE MINUS FLOW RATE TOLERANCE SHALL BE 2461 GALLONS PER MINUTE.
2459	THE FLOW RATE SHALL BE 2459 CUBIC METERS PER SECOND.
2462	THE PLUS FLOW RATE TOLERANCE SHALL BE 2462 CUBIC METERS PER SECOND.
2463	THE MINUS FLOW RATE TOLERANCE SHALL BE 2463 CUBIC METERS PER SECOND.
	STORAGE CONDITIONS.
1529	ITEMS SHALL WITHSTAND 1529 YEARS OF STORAGE WHEN PROPERLY PRESERVED, PACKAGED AND MECHANICALLY PROTECTED WITHOUT REQUIRING MAJOR REPAIR.
4942	MANUFACTURER SHALL CERTIFY THAT THE CURE DATE SHALL BE NOT GREATER THAN 4942 QUARTERS PRIOR TO DELIVERY DATE.
4943	MANUFACTURER SHALL CERTIFY THAT THERE SHALL BE NOT LESS THAN 4943 QUARTERS OF SHELF LIFE AFTER DELIVERY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STORAGE CONDITIONS (CONT)	
CERTIFY MAXIMUM MANUFACTURE DATE TO DELIVERY (QUARTERS)	4944
AGE LIMITATION PER MIL-STD-1523.	5209
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A _____	7001
B _____	7002
C _____	7003
D _____	7004
E _____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-130.	7629

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4944	MANUFACTURER SHALL CERTIFY THAT THE DATE OF MANUFACTURE SHALL BE NOT GREATER THAN 4944 QUARTERS PRIOR TO DATE OF DELIVERY.
5209	AGE LIMITATIONS OF THE FINISHED PRODUCT SHALL BE IN ACCORDANCE WITH MIL-STD-1523.
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(c) 7003.
7004	(D) 7004.
7005	(E) 7005.
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADDITIONAL PART MARKING	
A _____	6991
B _____	6992
C _____	6993
D _____	6994
E _____	6995
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI

(Project EDS-A260)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX A


ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

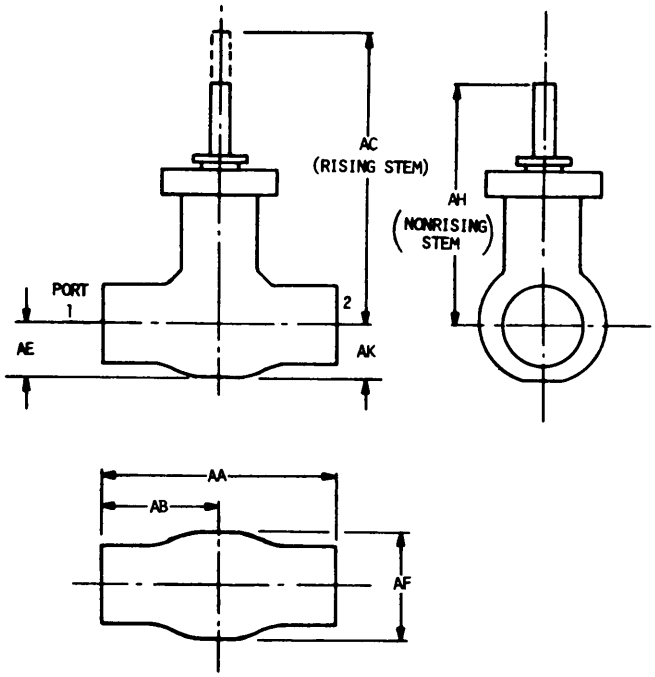


209-01-1

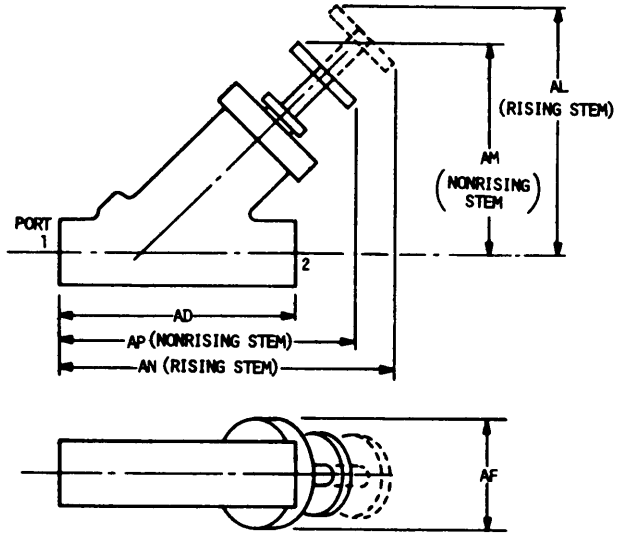


209-01-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

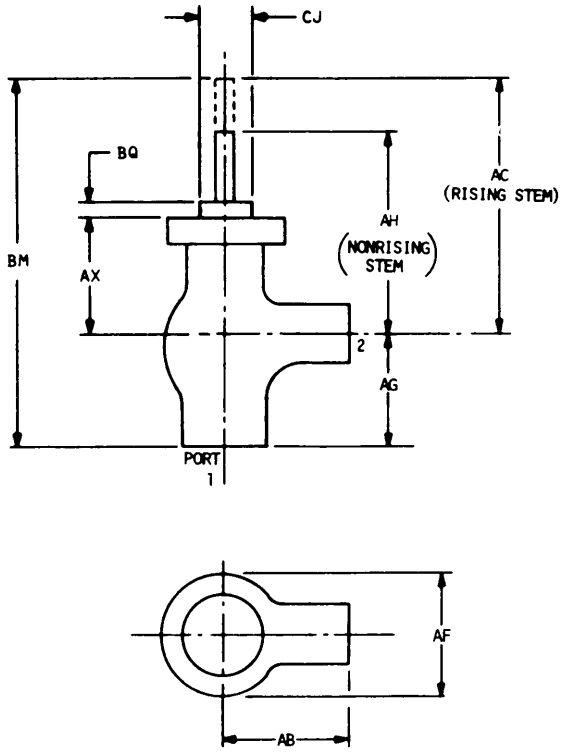


209-01-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

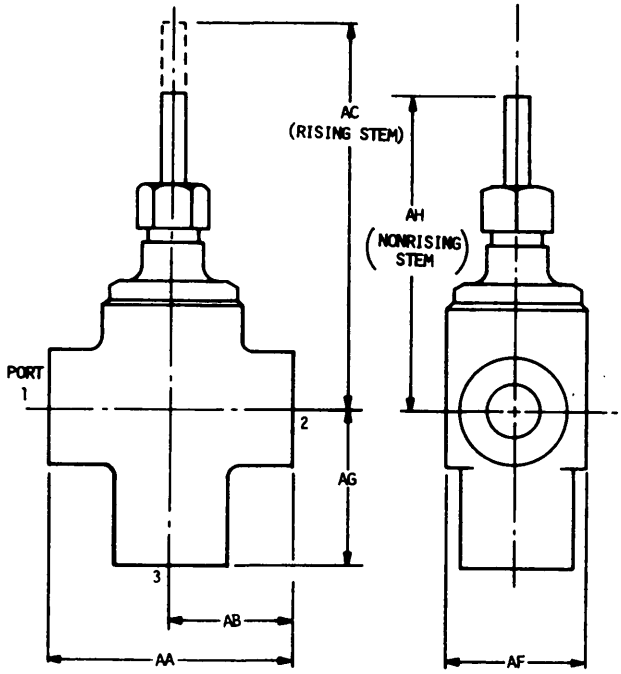


209-01-4

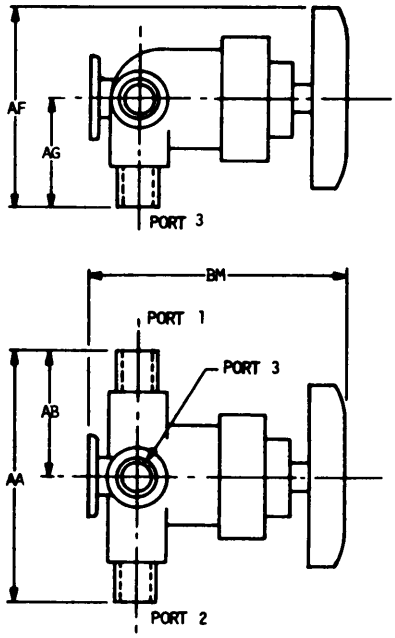


209-01-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

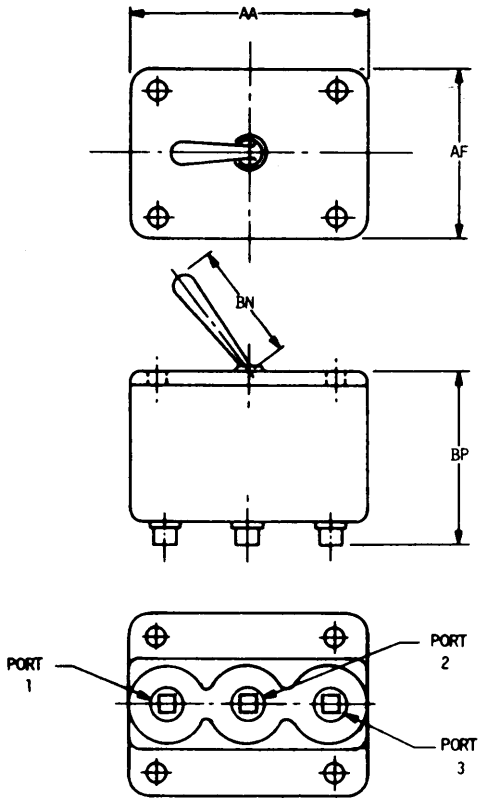


209-01-6

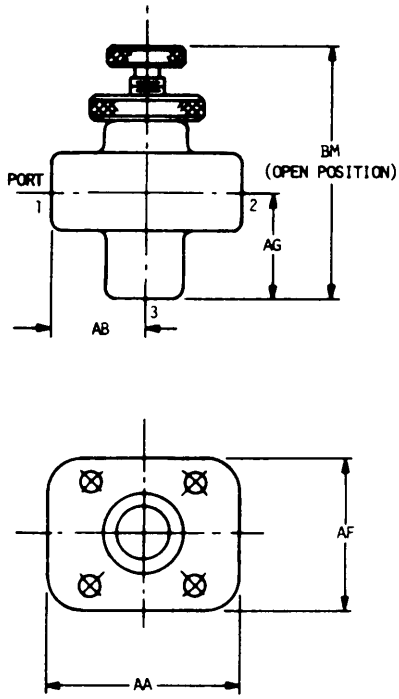


209-01-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

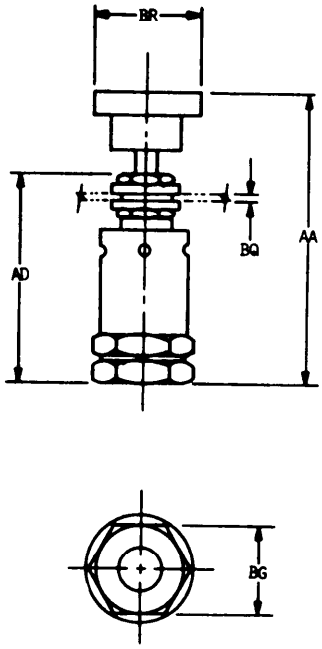


209-01-8

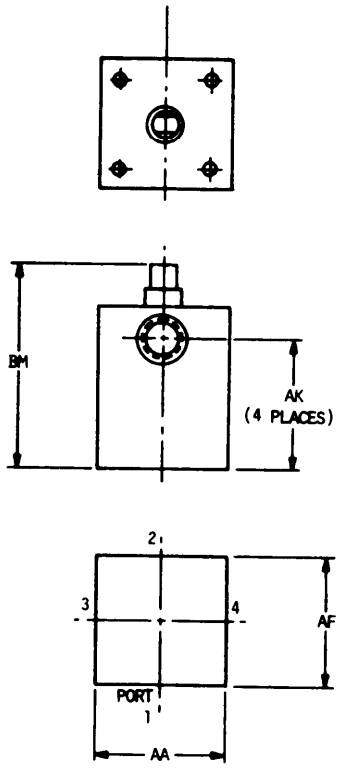

209-01-9


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

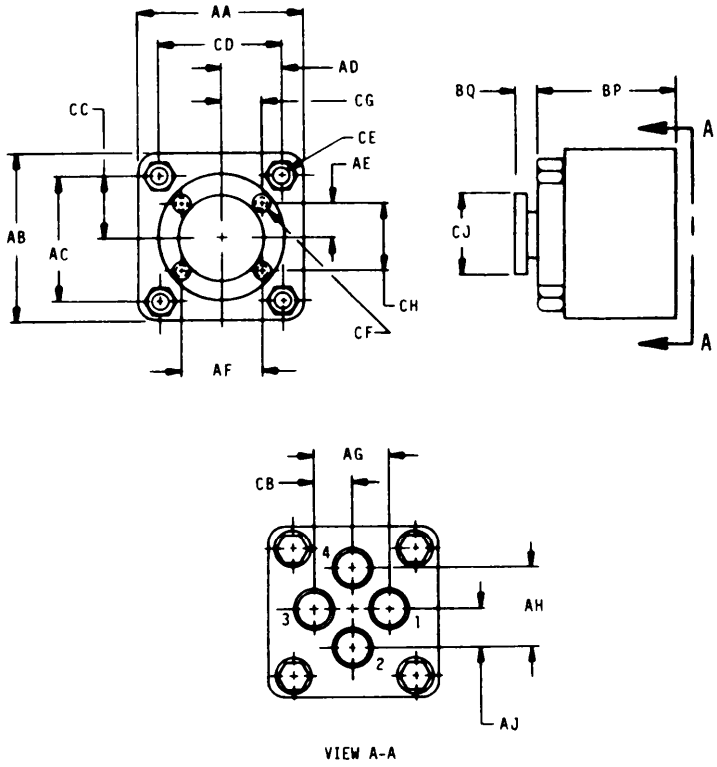


VIEW A-A

209-01-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

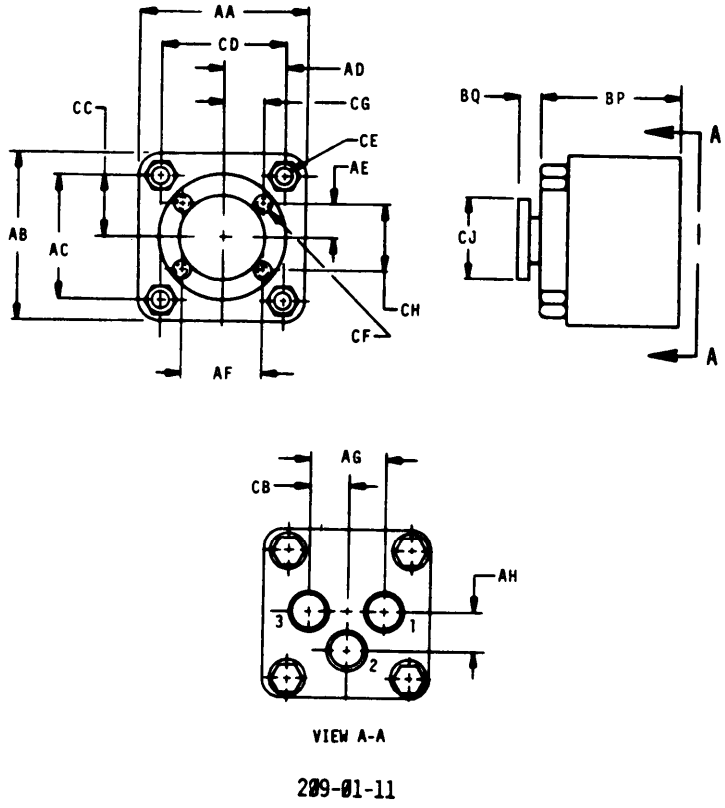


209-01-11

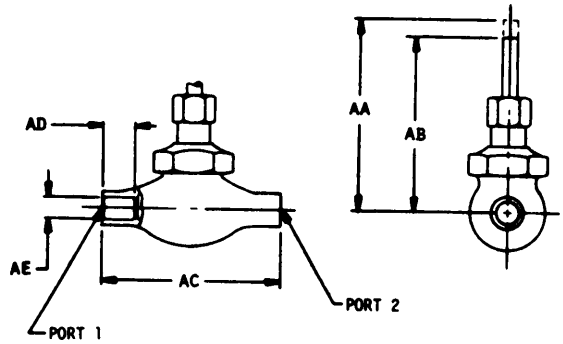


209-01-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

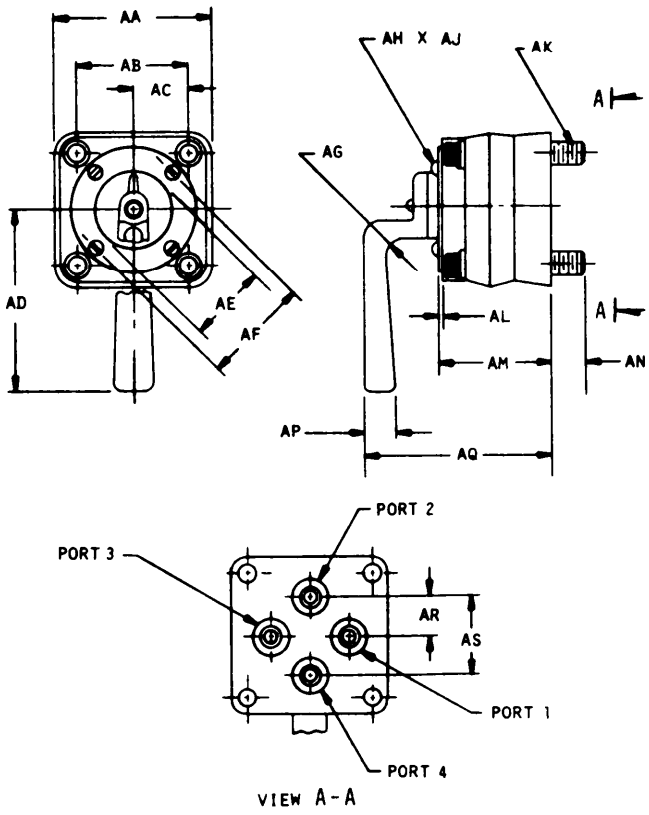


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

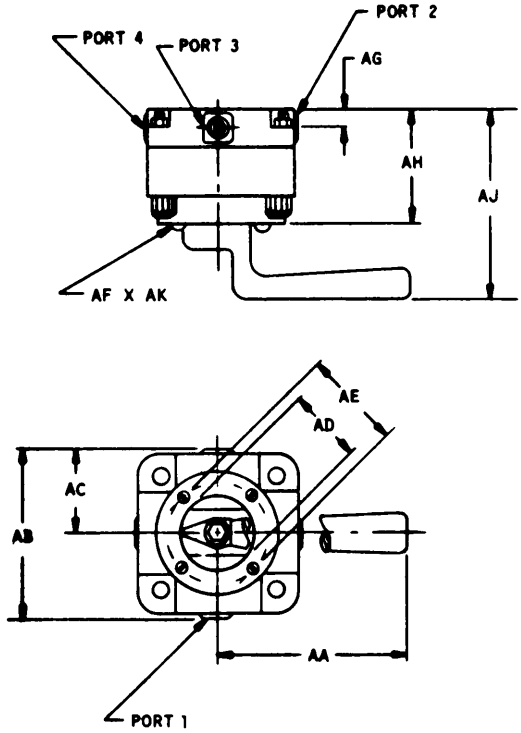



209-01-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

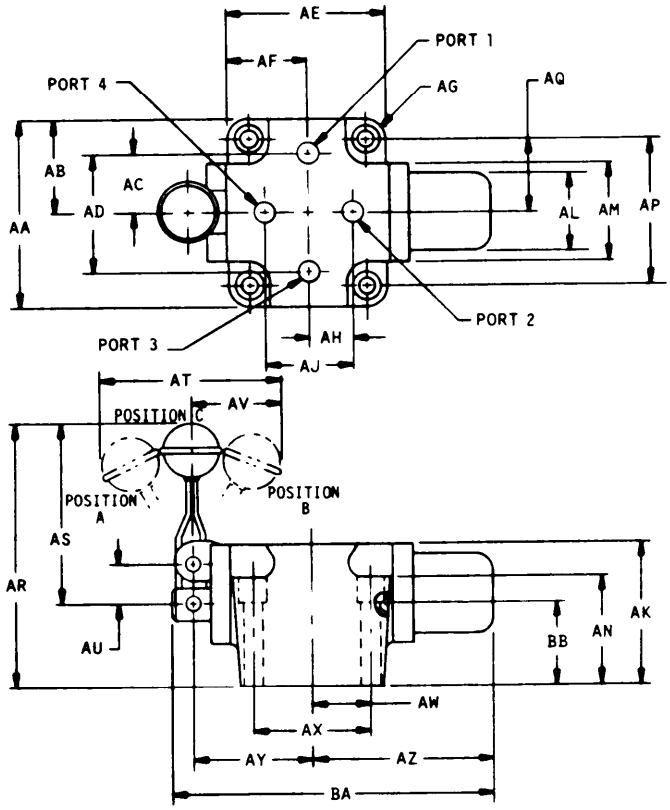


209-01-15

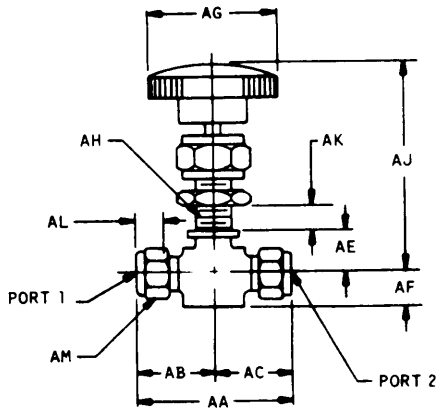


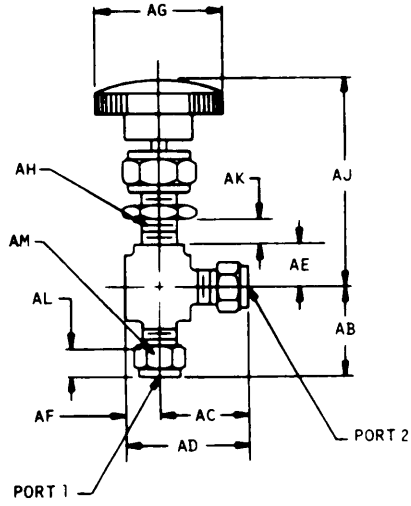

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

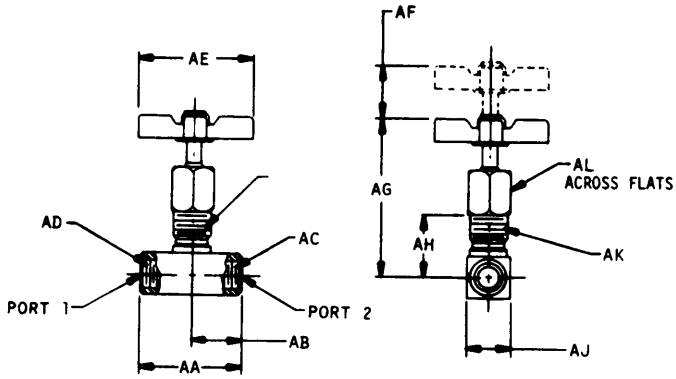


209-01-18

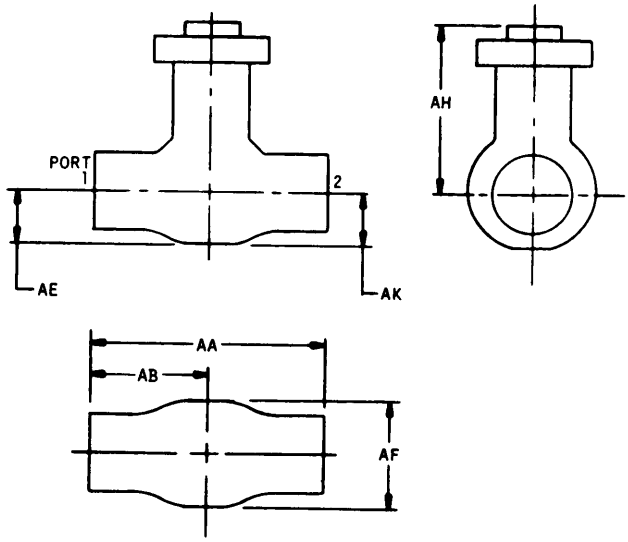


209-01-19

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

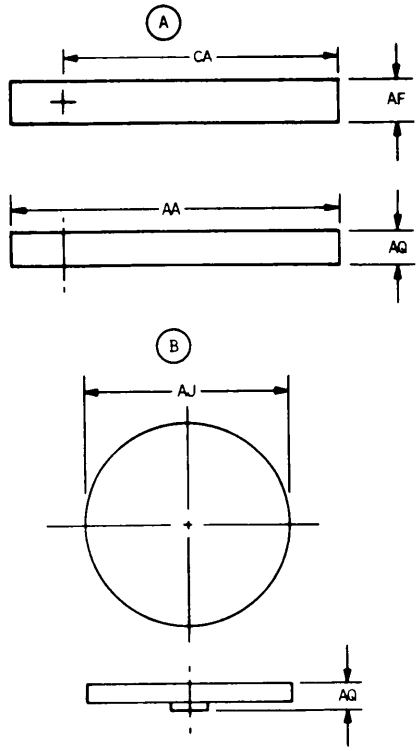


209-02-1

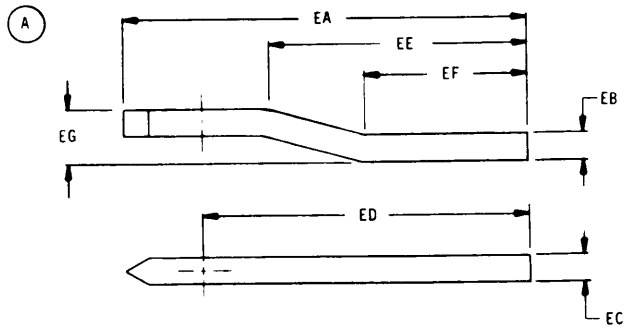


209-02-2


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

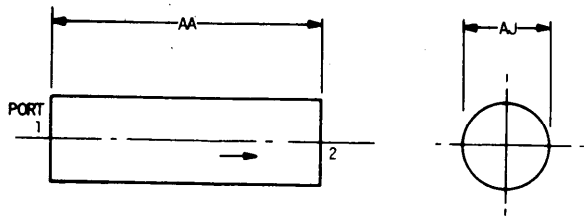

209-03-1

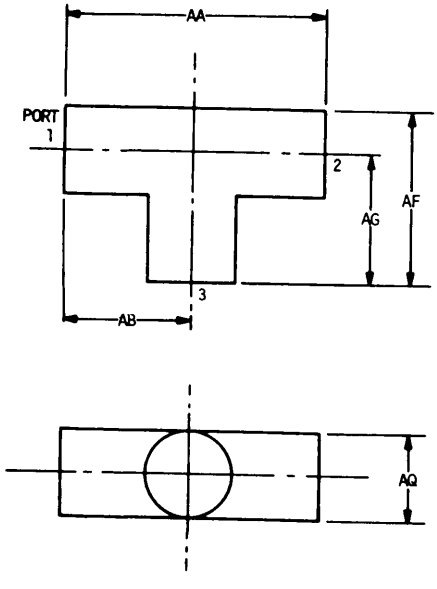


209-03-2

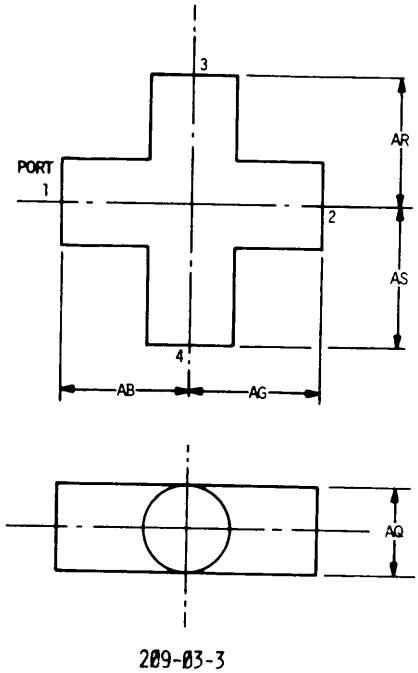


209-03-3


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

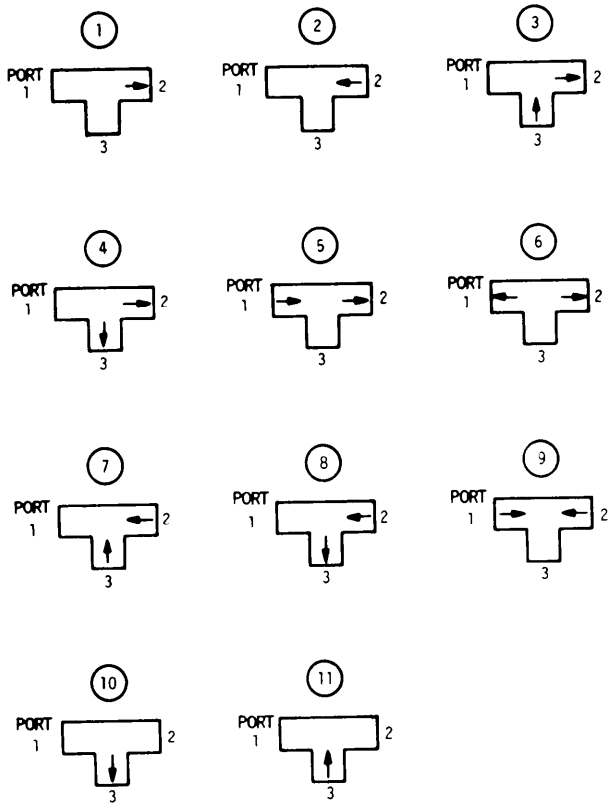


209-03-4

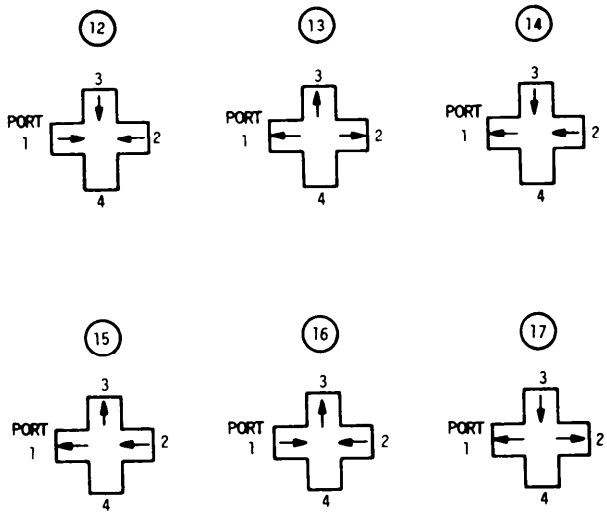


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

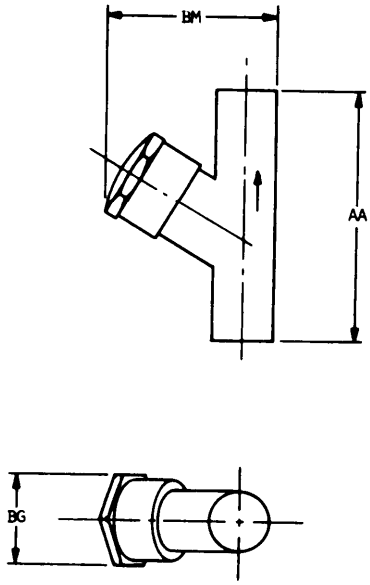

209-03-6

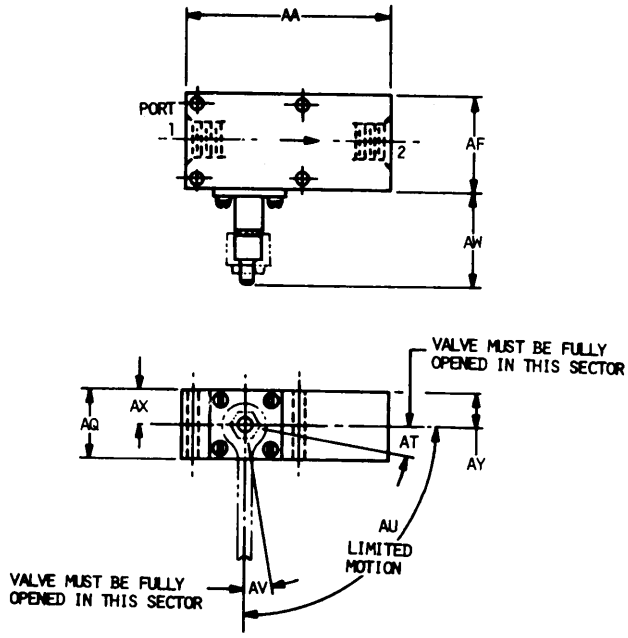


209-03-7

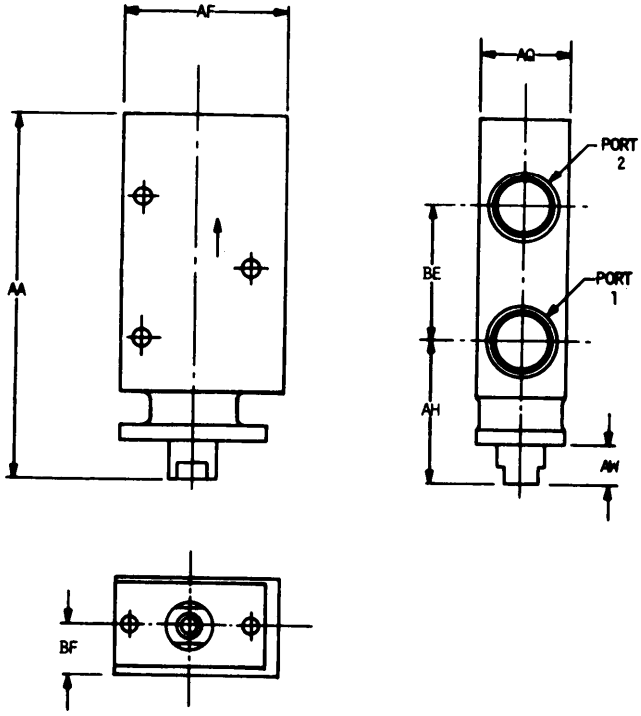


209-03-8


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

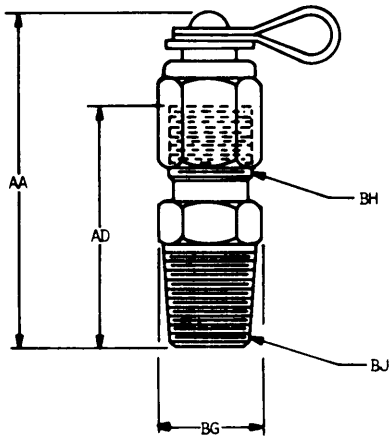


209-03-9

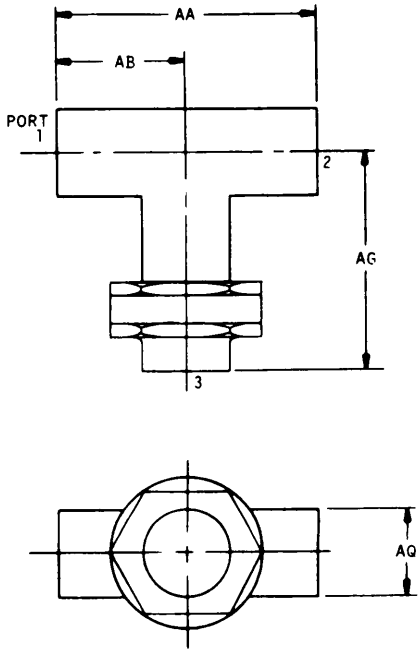


209-03-10

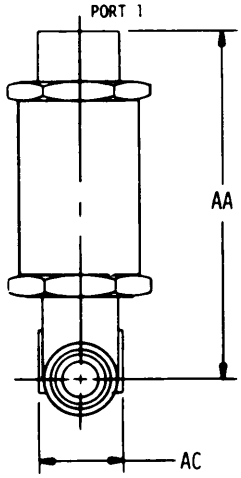


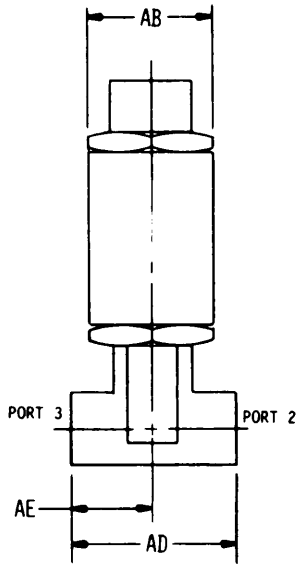


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

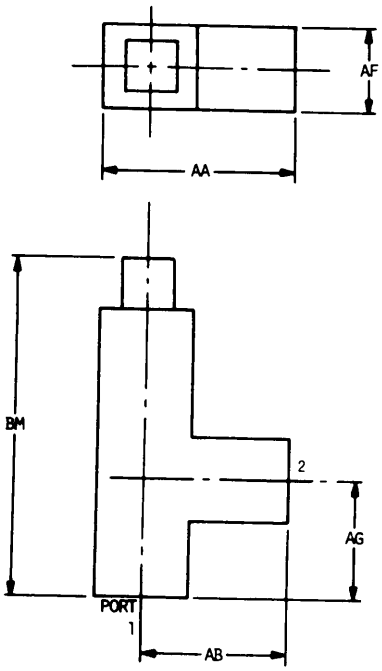

209-04-1

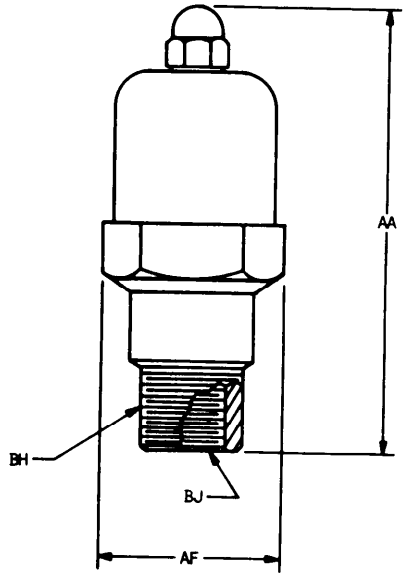


209-04-2

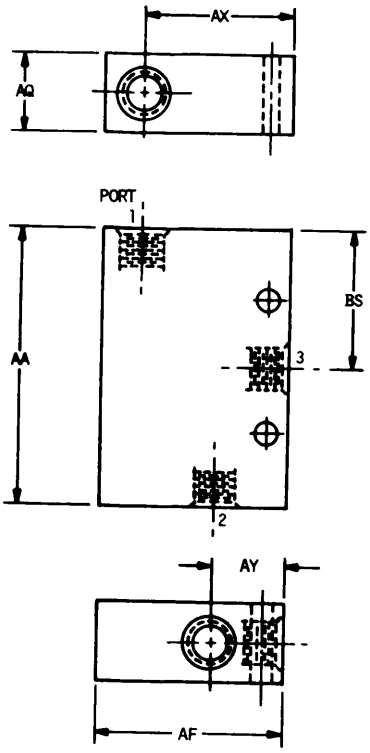


209-04-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

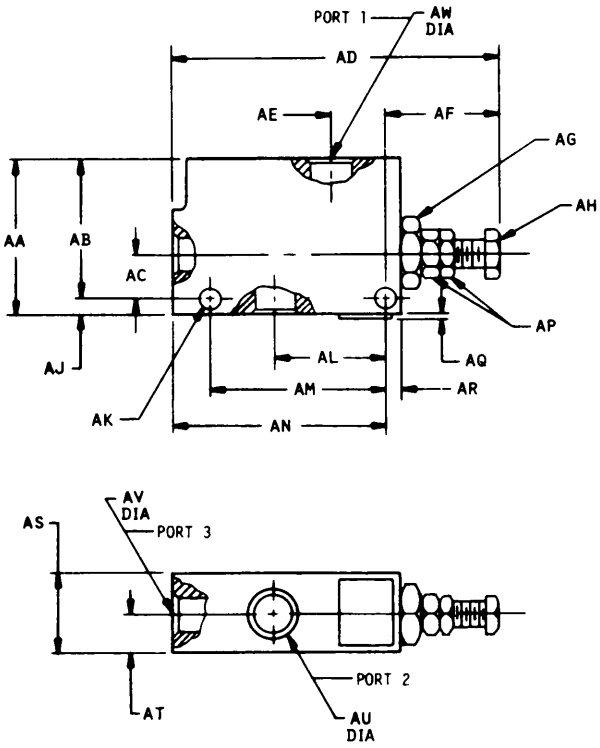


209-04-4

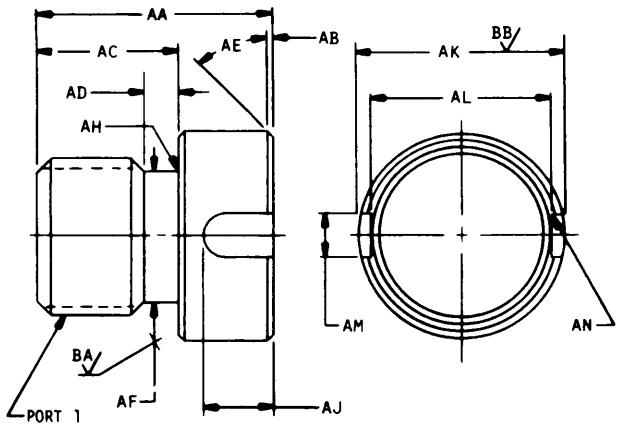


209-04-5


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

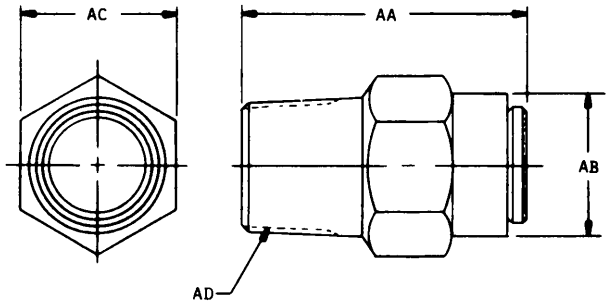

209-04-6

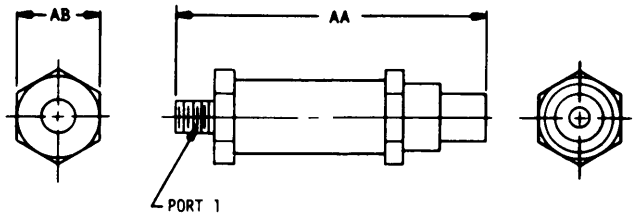


209-04-7

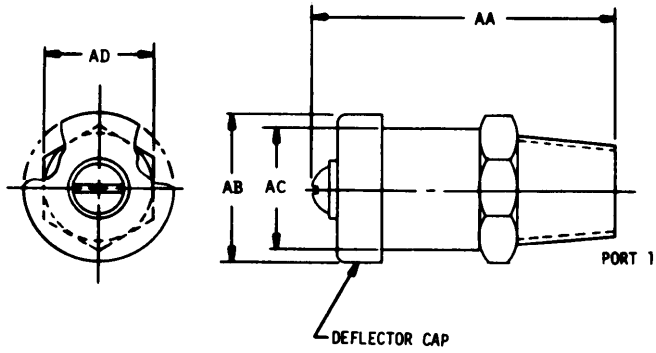


209-04-8


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

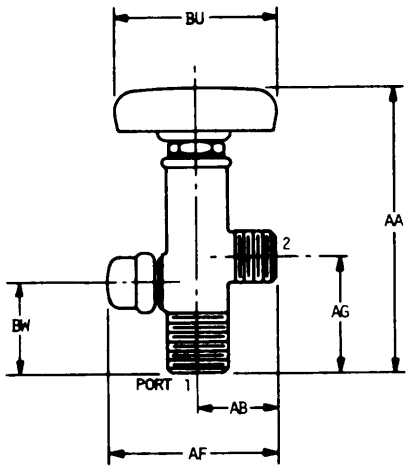


209-05-1

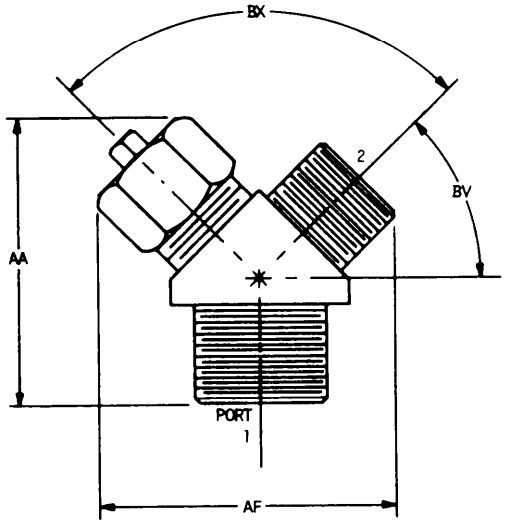

209-05-2

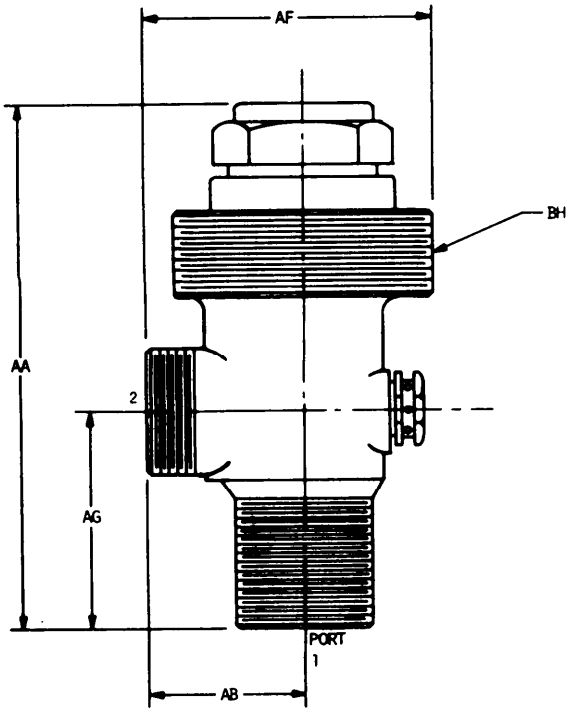


209-05-3

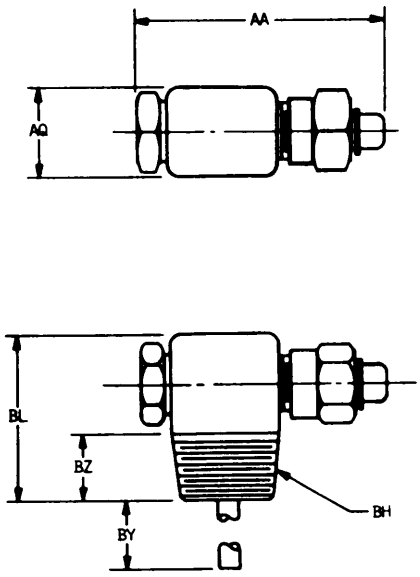


209-05-4


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

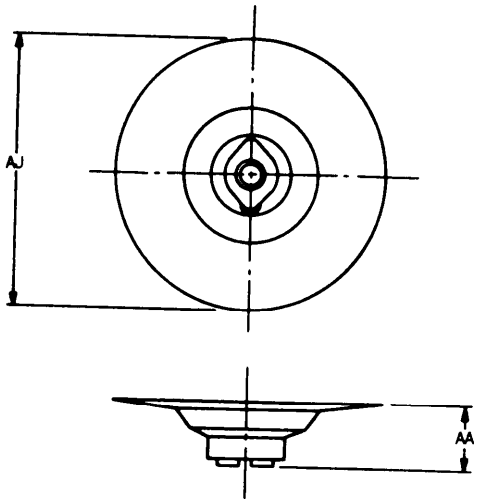

209-06-1

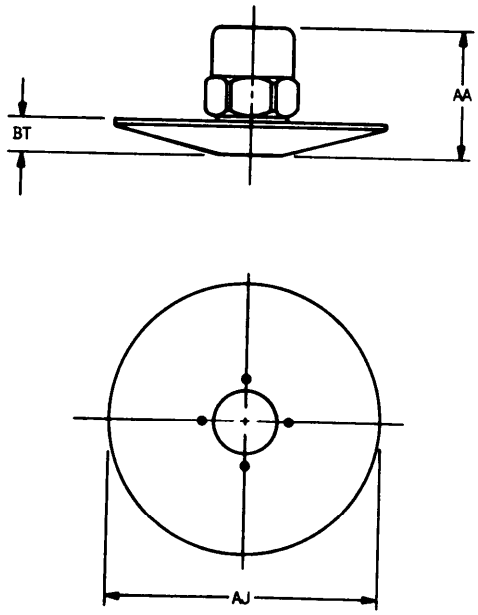


209-06-2

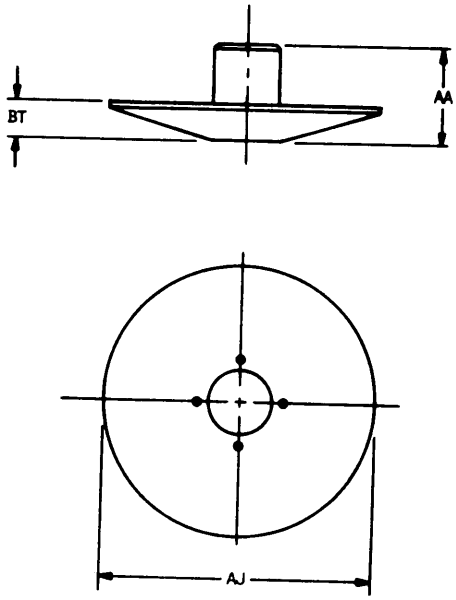


209-06-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

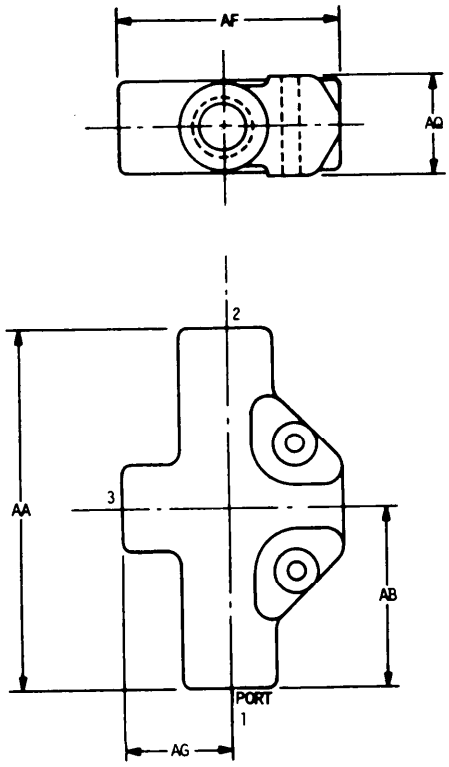



209-07-1

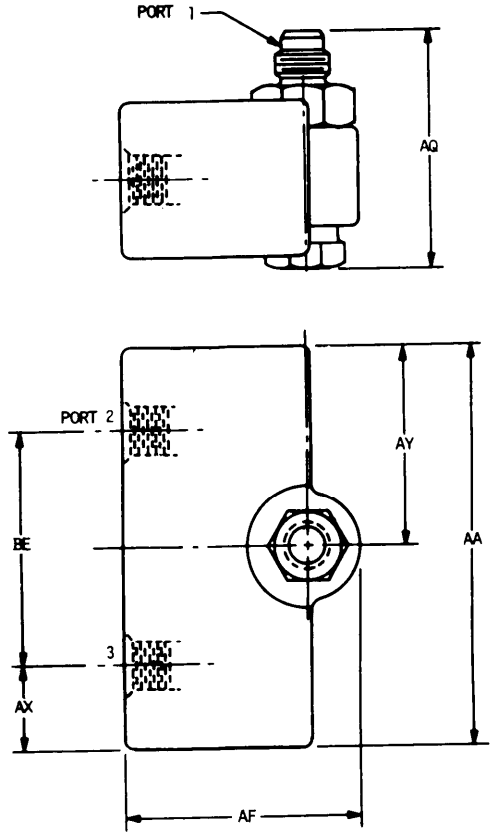


209-07-2


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.



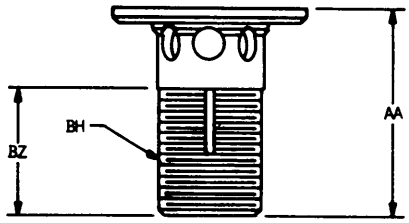


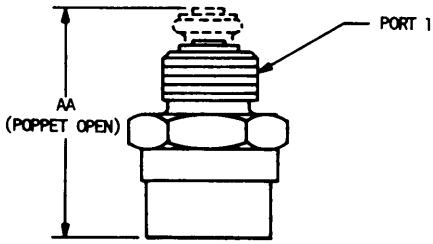



209-88-1




209-88-2

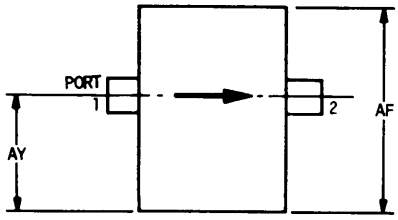



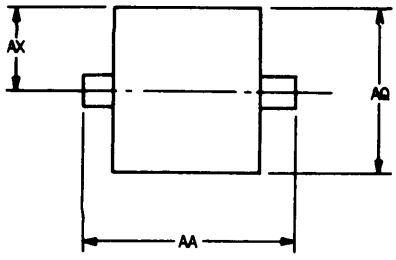


209-88-3

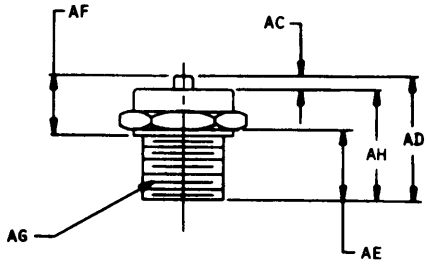


209-88-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

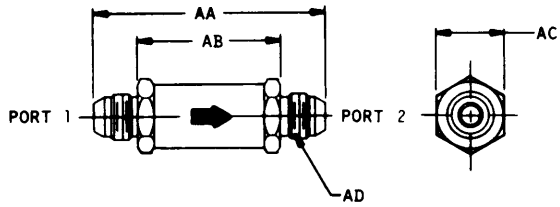


209-08-5

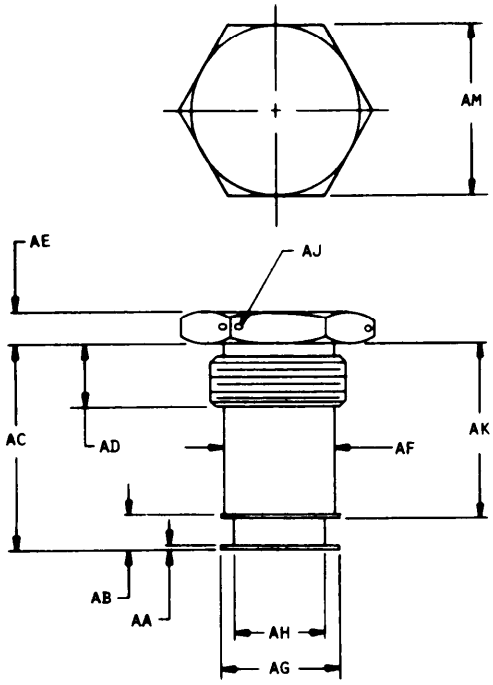


209-08-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

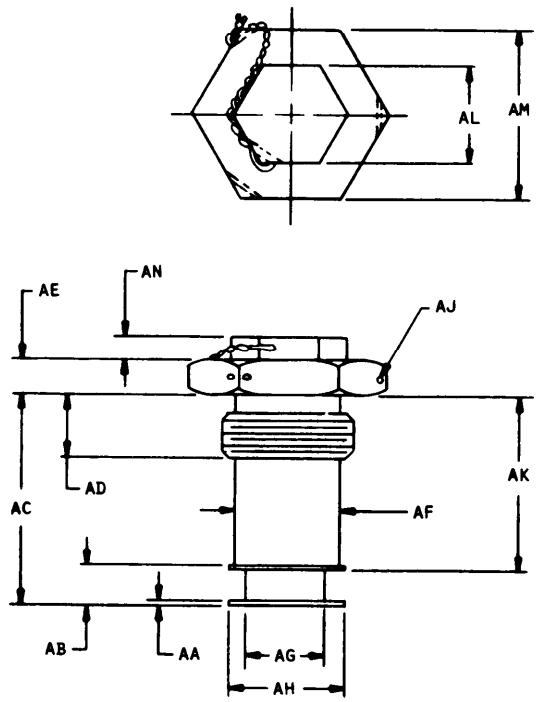


209-08-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

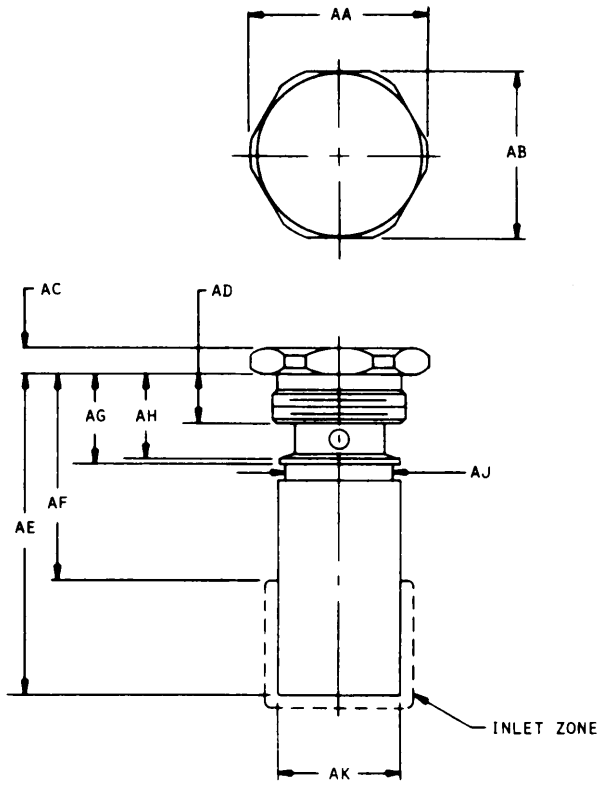


209-08-8


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

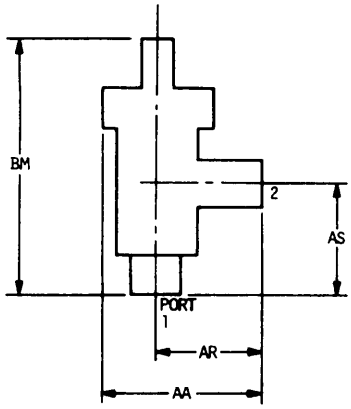


209-09-1

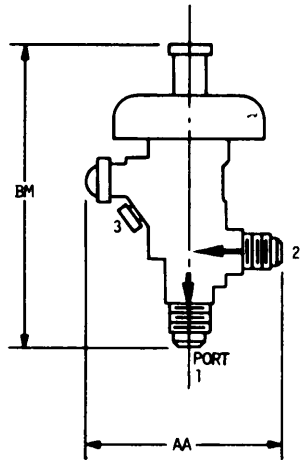

209-09-2

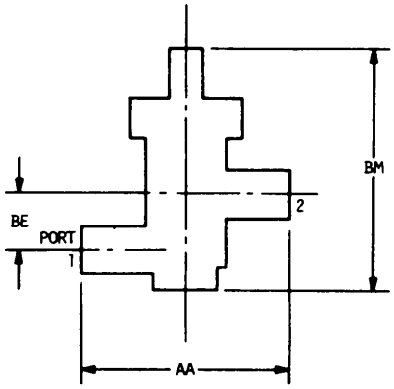



209-09-3

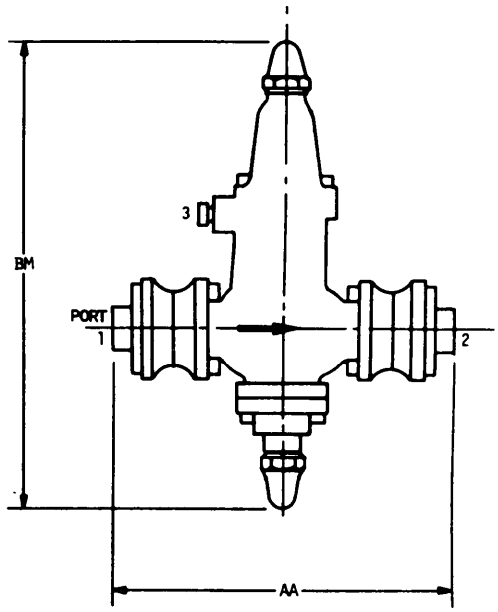


209-09-4


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.






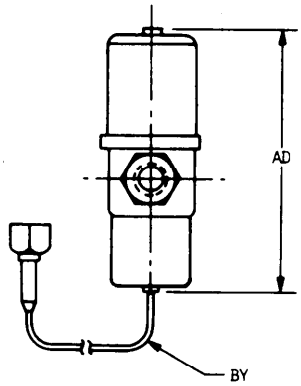



209-09-5

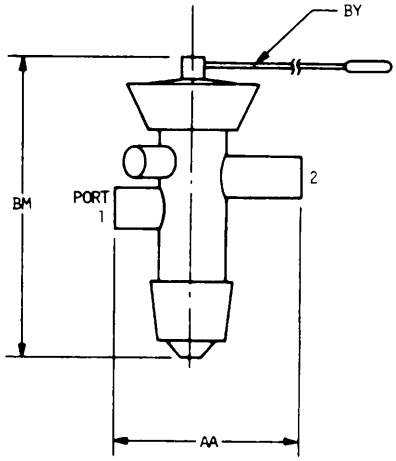


209-09-7

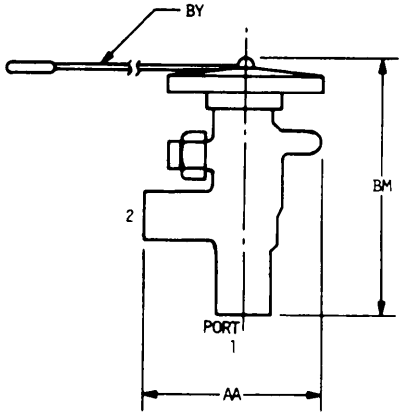




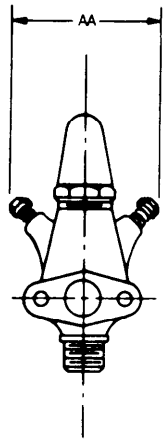


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

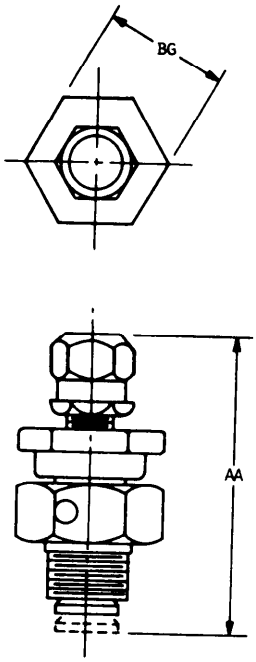

209-10-1

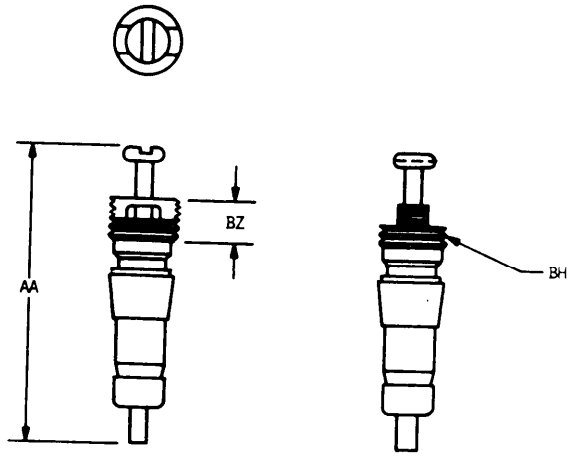


209-11-1

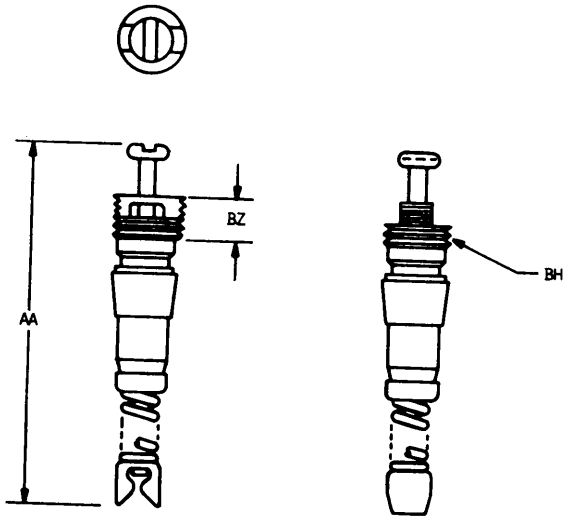


209-11-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

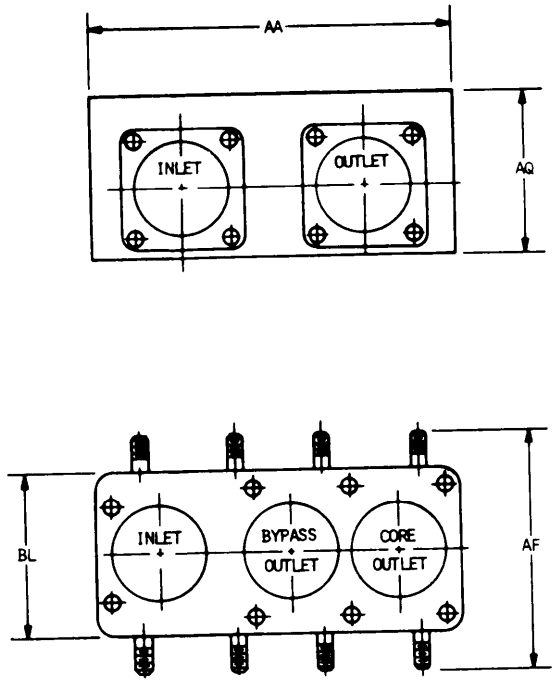


209-12-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

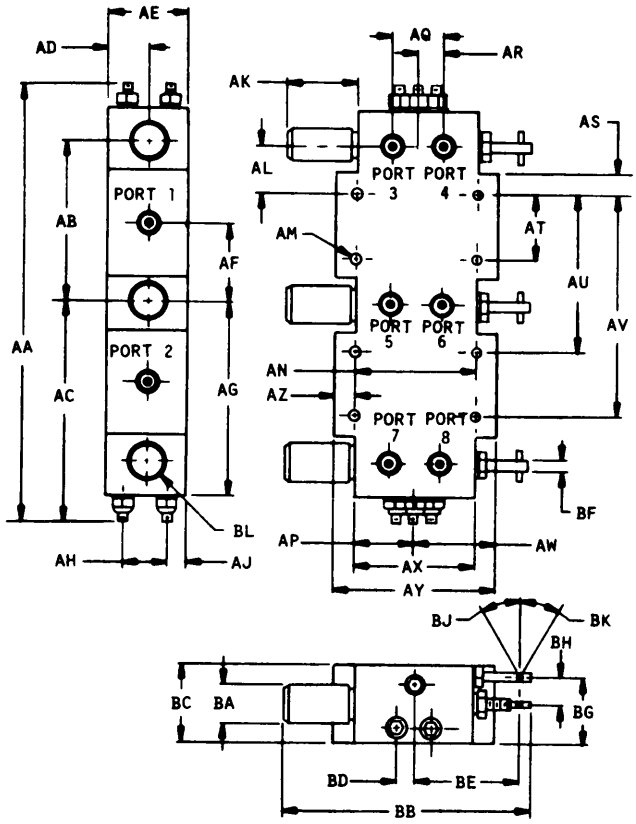


209-12-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

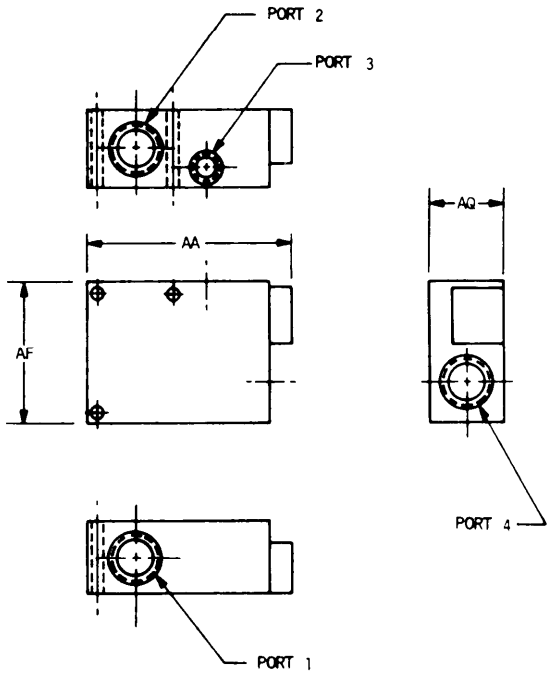


209-13-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

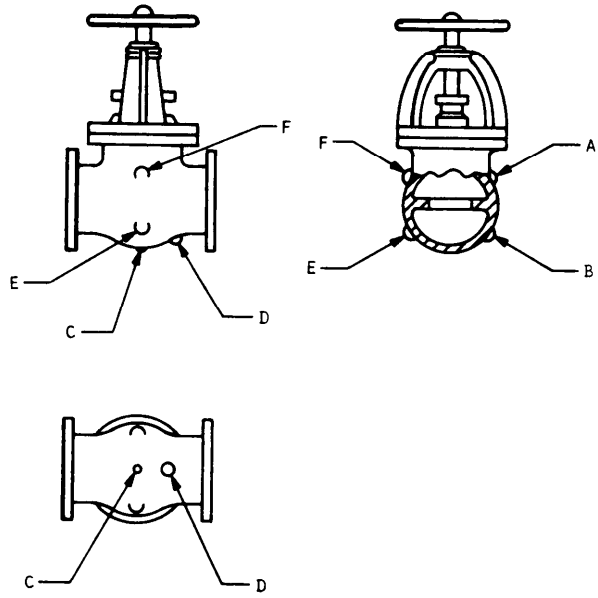


209-14-1

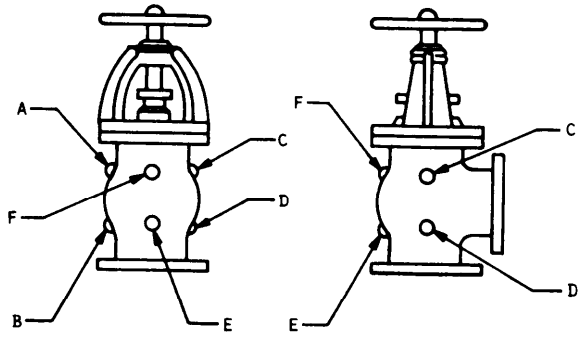


209-14-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

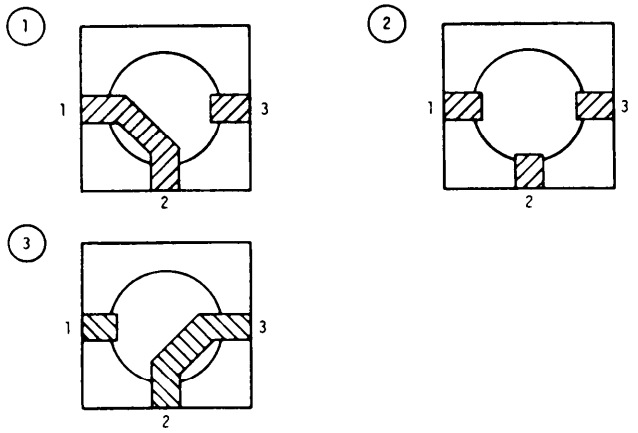


209-15-1

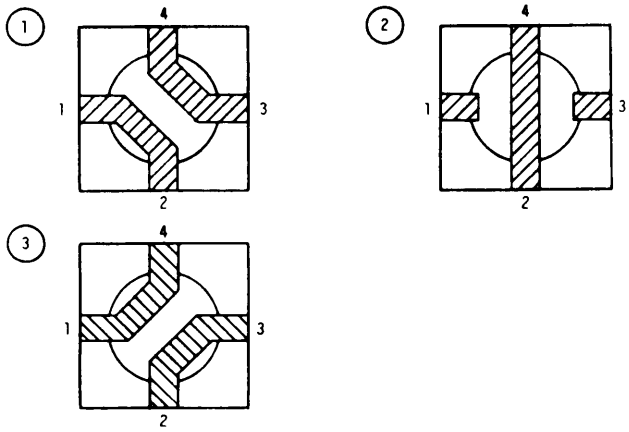


209-16-1


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

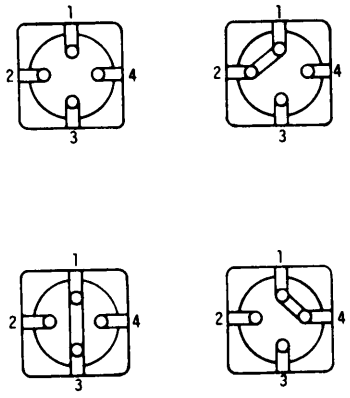

209-16-2

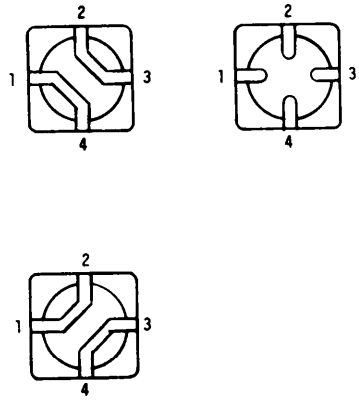


209-16-3

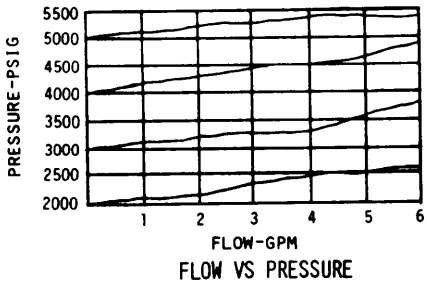


FLOW VS PRESSURE

209-17-1


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.



209-18-1

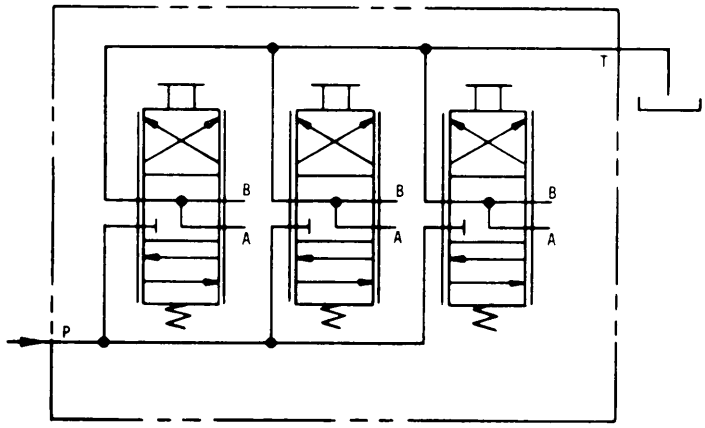


209-18-2




209-18-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

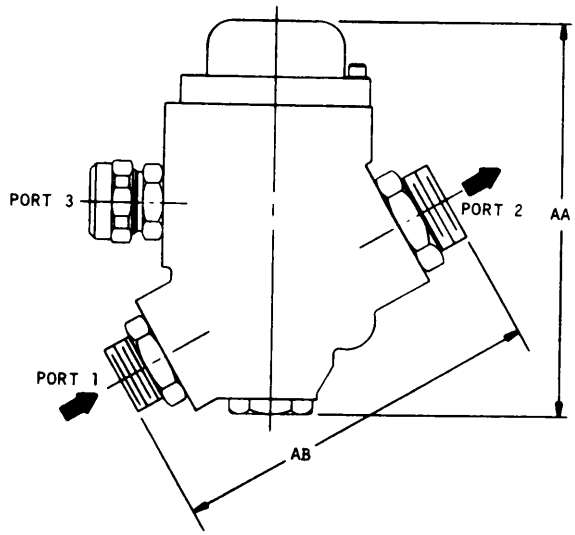


209-19-1

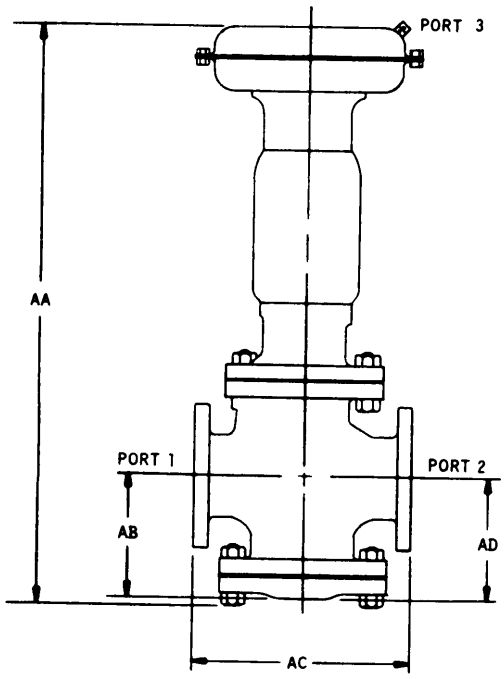


209-19-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

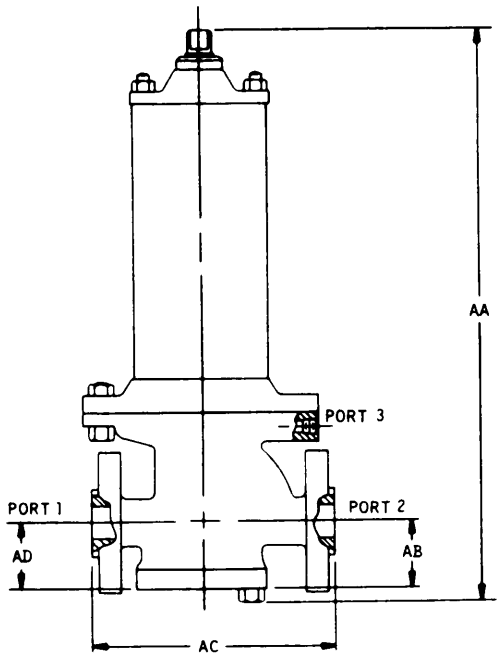


209-19-3

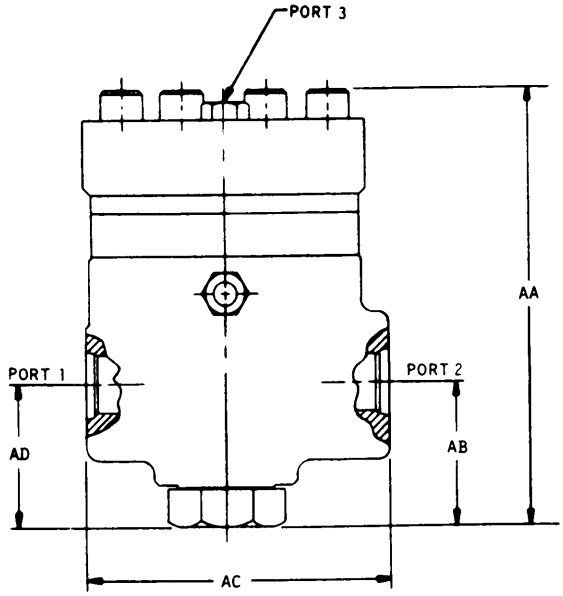


209-19-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

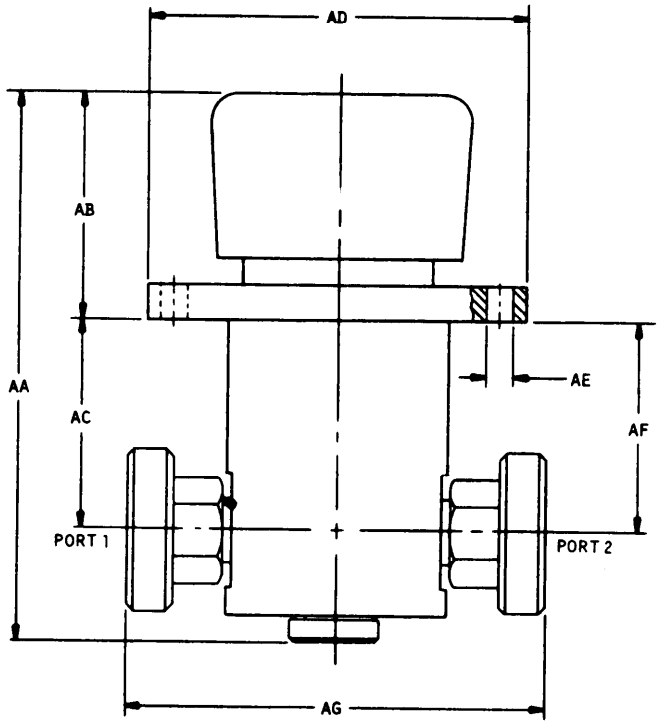


209-19-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

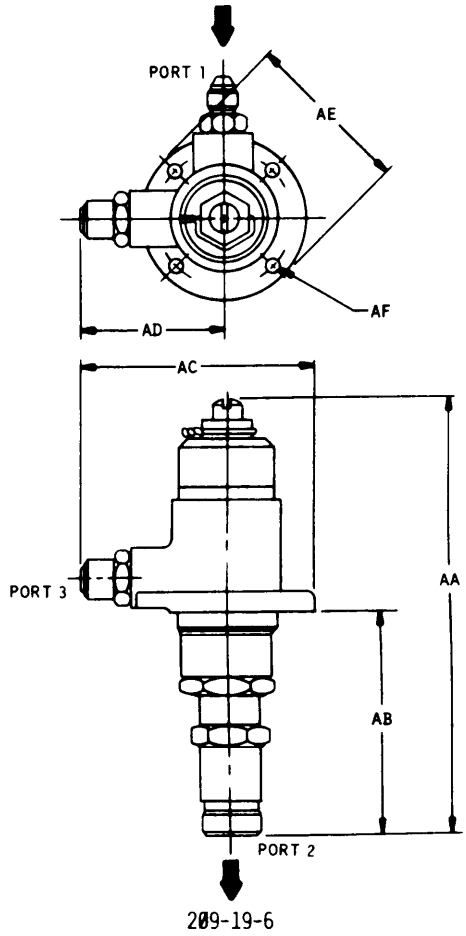


209-19-6


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

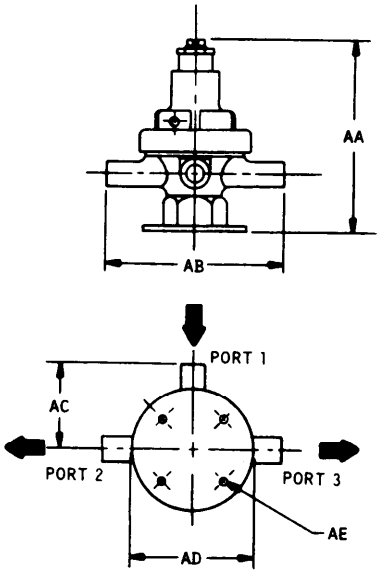


209-19-7

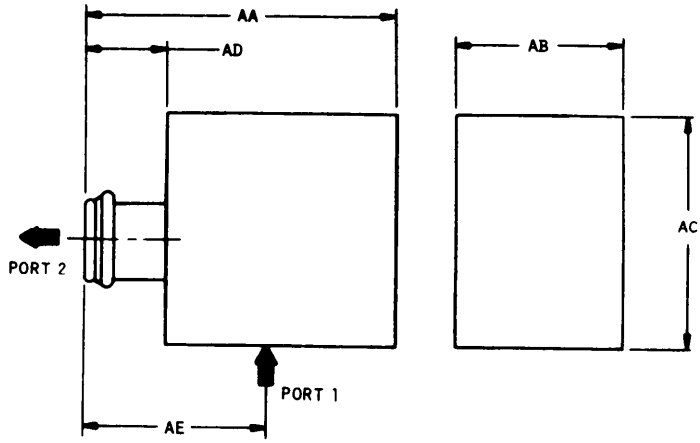

209-19-8



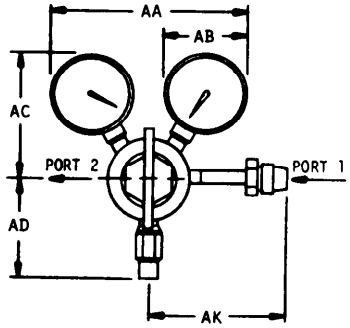

209-20-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	26	1573	34	1634	54	1710	184
0102	26	1574	48	1635	54	1711	184
0103	26	1575	34	1636	54	1712	184
0104	26	1576	48	1637	54	1714	184
0105	26	1577	34	1638	54	1716	184
0107	28	1578	36	1639	54	1718	184
0108	28	1579	36	1640	56	1720	184
0700	26	i580	36	1641	56	1722	186
0800	26	1581	36	1642	56	1724	186
1003	26	1582	196	1645	54	1726	186
1004	26	1583	34	1646	54	1727	186
1005	26	1584	59	1651	52	1728	186
1006	26	1585	34	1652	164	1729	186
1008	26	1586	50	1654	164	1732	182
1009	30	1587	32	1656	164	1734	182
1424	284	1588	48	1657	164	1736	182
1505	262	1589	32	1658	164	1742	170
1510	102	1590	50	1659	164	1744	170
1514	282	1592	58	1660	164	1746	170
1518	282	1594	50	1661	164	1747	172
1525	284	1596	50	1662	164	1748	170
1529	294	1598	52	1664	164	1749	172
1532	284	1600	52	1666	164	1750	170
1538	282	1602	52	1668	166	1751	172
1539	104	1610	52	1670	166	1752	172
1540	284	1611	52	1672	166	1753	172
1542	284	1612	52	1674	166	1754	172
1543	284	1613	52	1676	166	1755	174
1544	284	1614	52	1678	166	1756	172
1554	148	1615	52	1680	166	1757	174
1559	284	1616	48	1682	166	1758	172
1564	36	1618	50	1684	166	1760	172
1565	196	1619	52	1688	162	1762	174
1566	36	1621	52	1694	162	1764	172
1567	34	1622	84	1702	182	1766	172
1568	30	1624	84	1704	182	1767	146
1569	34	1626	04	1706	184	1768	172
1570	36	1628	04	1707	184	1772	170
1571	34	1631	50	1708	194	1774	170
1572	36	1632	82	1709	184	1776	170

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1782	138	1828	200	1873	59	1943	268
1784	138	1829	200	1874	59	1944	266
1786	138	1831	200	1875	59	1945	270
1788	140	1832	196	1676	59	1946	266
1789	140	1833	202	1877	59	1947	268
1790	140	1834	196	1878	59	1948	266
1791	140	1835	202	1879	59	1949	268
1792	140	1836	196	1880	59	1950	268
1793	142	1837	198	1881	59	1951	268
1794	140	1838	196	1882	59	1952	268
1795	142	1839	198	1883	59	1953	268
1796	140	1840	196	1884	59	1954	268
1797	144	1841	198	1885	59	1955	268
1798	140	1842	198	1886	59	1956	270
1799	144	1843	202	1887	59	1957	270
1800	140	1844	198	1888	59	1960	262
1801	144	1845	200	1889	59	1962	262
1802	142	1846	198	1890	59	1963	262
1803	144	1847	200	1891	59	1964	264
1804	142	1848	198	1692	59	1966	264
1805	142	1849	200	1893	59	1972	256
1806	142	1850	198	1894	59	1974	256
1807	142	1851	200	1895	59	1976	256
1808	142	1852	200	1922	264	1977	258
1809	142	1853	200	1924	264	1978	256
1810	142	1854	202	1926	264	1979	258
1811	144	1855	202	1927	264	1980	258
1812	144	1856	202	1928	264	1981	258
1813	144	1857	202	1929	264	1982	258
1814	144	1858	202	1930	264	1984	258
1815	144	1859	202	1931	266	1985	260
1816	144	1862	194	1932	266	1986	59
1817	144	1865	59	1934	266	1987	140
1818	146	1866	59	1936	266	1988	258
1819	146	1867	59	1937	266	1989	260
1822	138	1868	59	1938	266	1990	258
1824	138	1869	59	1939	268	1991	262
1825	198	1870	59	1940	266	1992	258
1826	198	1871	59	1941	268	1993	262
1827	198	1872	59	1942	266	1994	258

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1995	260	2052	180	2105	194	2156	110
1996	258	2053	180	2106	194	2157	110
1997	260	2054	180	2107	194	2158	110
1998	260	2955	180	2109	188	2159	110
1999	260	2056	182	2110	186	2160	112
2000	260	2057	182	2111	188	2161	112
2001	260	2060	176	2112	188	2162	112
2002	260	2062	174	2113	188	2163	112
2003	262	2063	174	2114	188	2166	104
2004	262	2064	176	2115	188	2168	104
2005	262	2065	176	2116	188	2170	104
2006	262	2072	188	2122	106	2172	106
2010	256	2074	188	2124	106	2182	130
2012	256	2076	190	2125	106	2184	130
2022	176	2077	190	2126	106	2186	132
2024	176	2078	190	2127	106	2187	132
2025	176	2079	190	2128	106	2180	132
2026	176	2080	190	2129	106	2189	132
2027	176	2081	190	2130	106	2190	132
2028	176	2082	190	2131	108	2191	132
2029	178	2084	190	2132	106	2192	132
2930	176	2046	190	2133	110	2194	132
2032	178	2087	192	2134	106	2196	132
2034	178	2088	190	2136	108	2197	134
2036	178	2089	192	2138	108	2198	132
2037	178	2090	192	2140	108	2199	134
2038	178	2091	194	2142	108	2200	134
2039	180	2092	192	2143	110	2201	136
2040	178	2093	194	2144	108	2202	138
2041	180	2094	192	2145	110	2203	138
2942	178	2095	194	2146	108	2204	136
2043	180	2096	192	2147	110	2205	136
2044	178	2097	192	2148	108	2206	134
2045	182	2090	192	2149	112	2207	136
2046	178	2099	192	2150	108	2208	134
2947	180	2100	192	2151	112	2209	134
2048	178	2101	192	2152	108	2210	134
2049	180	2102	194	2153	110	2211	136
2050	180	2103	194	2154	108	2212	134
2051	180	2104	194	2155	110	2213	134

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2214	136	2274	116	2378	72	2421	208
2215	136	2275	118	2379	74	2424	284
2216	136	2276	116	2380	74	2426	286
2217	136	2277	118	2381	74	2427	286
2218	136	2278	116	2382	74	2428	286
2219	136	2279	118	2383	70	2429	286
2222	130	2280	116	2384	74	2432	290
2224	130	2281	118	2385	70	2434	290
2226	130	2283	118	2396	74	2436	290
2232	82	2285	118	2387	72	2437	292
2234	82	2292	112	2388	74	2438	290
2236	82	2294	112	2389	72	2439	292
2237	82	2296	112	2390	74	2440	290
2238	82	2302	252	2391	74	2441	292
2239	82	2304	252	2392	74	2442	292
2242	80	2306	252	2393	68	2444	292
2244	80	2307	254	2396	68	2446	292
2251	114	2308	252	2397	70	2448	292
2252	114	2309	254	2398	68	2450	292
2253	114	2310	252	2399	70	2452	292
2254	114	2311	254	2400	70	2454	292
2255	114	2312	254	2401	70	2456	292
2256	114	2314	254	2402	70	2457	294
2257	116	2316	254	2403	70	2458	292
2258	114	2318	254	2404	70	2459	294
2259	116	2320	254	2405	70	2460	294
2260	114	2322	256	2406	72	2461	294
2261	118	2324	254	2407	72	2462	296
2262	114	2326	254	2408	72	2463	294
2263	118	2328	254	2409	72	2466	288
2264	114	2330	254	2411	286	2468	290
2265	118	2332	256	2412	286	2470	290
2266	114	2334	256	2413	288	2472	290
2267	116	2338	252	2414	286	2482	240
2268	116	2340	252	2415	266	2484	240
2269	116	2342	252	2416	289	2486	242
2270	116	2372	72	2417	288	2487	242
2271	116	2374	72	2418	288	2488	242
2272	116	2376	72	2419	288	2489	242
2273	118	2377	74	2420	288	2490	242

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2491	242	2557	246	2631	280	2689	216
2492	242	2558	246	2632	278	2690	216
2494	242	2559	246	2633	280	2691	218
2496	242	2560	246	2634	278	2692	218
2498	242	2572	150	2635	280	2693	218
2500	244	2574	150	2636	278	2694	218
2502	244	2576	150	2637	280	2695	218
2503	244	2577	150	2638	280	2696	216
2504	244	2578	150	2639	282	2697	218
2505	244	2579	150	2642	230	2698	218
2506	244	2580	150	2644	230	2699	220
2507	244	2581	150	2646	230	2702	210
2510	238	2582	152	2647	230	2704	212
2512	240	2584	152	2648	230	2708	212
2514	248	2586	152	2652	230	2710	212
2516	240	2586	152	2654	230	2712	212
2518	240	2590	152	2662	212	2714	212
2522	246	2592	152	2664	214	2716	212
2524	248	2594	152	2666	214	2722	220
2526	248	2596	152	2667	214	2724	220
2527	248	2598	152	2668	214	2726	220
2528	248	2600	152	2669	214	2727	222
2529	248	2602	152	2670	214	2728	220
2530	248	2603	152	2671	214	2729	222
2531	268	2606	148	2672	214	2730	222
2532	248	2607	148	2674	214	2731	222
2534	248	2608	148	2675	216	2732	222
2536	250	2610	150	2676	214	2734	222
2538	250	2612	150	2677	216	2736	222
2540	250	2617	282	2678	216	2738	222
2542	250	2618	282	2679	218	2740	222
2543	250	2619	282	2680	216	2742	224
2544	250	2621	280	2681	218	2744	222
2545	250	2622	278	2682	216	2746	222
2546	250	2623	280	2683	218	2748	224
2547	250	2624	278	2684	216	2750	224
2550	244	2626	280	2685	218	2752	224
2552	246	2627	280	2686	216	2754	224
2554	246	2628	282	2687	216	2761	226
2556	246	2629	280	2688	216	2762	224

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2763	226	2842	228	2892	86	3062	102
2764	224	2845	274	2894	86	3064	102
2765	226	2846	226	2896	86	3066	102
2766	224	2847	276	2898	86	3068	102
2767	224	2848	226	2900	86	3072	94
2770	220	2849	276	2902	86	3074	94
2772	220	2851	276	2904	86	3076	94
27?4	220	2852	272	2908	86	3078	94
2776	220	2853	278	2910	86	3080	94
2782	64	2854	272	2912	86	3082	96
2784	64	2855	276	3002	96	3084	96
2786	66	2856	272	3004	96	3102	154
2788	66	2857	276	3006	96	3104	154
2789	66	2858	272	3008	96	3106	154
2790	66	2859	276	3010	96	3108	156
2791	66	2860	274	3012	96	3110	154
2792	66	2861	276	3014	98	3112	154
2793	66	2862	274	3016	98	3114	156
2794	66	2863	276	3018	98	3116	156
2796	66	2864	274	3020	98	3118	156
2798	68	2865	276	3022	98	3120	156
2800	68	2866	274	3024	98	3122	156
2802	68	2867	276	3026	98	3124	156
2804	68	2868	274	3028	98	3126	156
2806	68	2869	276	3030	98	3128	156
2806	68	2870	274	3032	98	3130	156
2810	68	2871	278	3034	98	3132	156
2814	64	2872	274	3036	102	3134	156
2816	64	2873	278	3038	102	3136	160
2822	226	2875	274	3040	100	3138	158
2824	226	2876	270	3042	100	3140	158
2826	226	2877	274	3044	100	3142	158
2828	226	2878	270	3046	102	3144	160
2830	228	2879	270	3048	102	3148	158
2832	228	2880	270	3050	100	3150	158
2834	228	2881	274	3052	100	3152	158
2836	228	2882	272	3054	180	3154	158
2838	228	2883	272	3056	100	3156	158
2840	228	2884	272	3058	100	3158	158
2841	228	2886	272	3060	100	3160	160

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3162	160	3256	204	3344	78	3436	130
3164	160	3258	206	3346	78	3438	130
3166	160	3260	204	3348	78	3440	126
3172	154	3263	206	3350	78	3442	126
3174	154	3264	206	3352	80	3444	126
3176	154	3266	206	3354	80	3446	128
3182	88	3268	206	3356	80	3448	128
3184	88	3270	206	3358	80	3450	126
3186	90	3272	206	3360	80	3452	126
3188	99	3274	206	3362	80	3454	126
3190	99	3276	206	3364	80	3456	126
3192	90	3276	206	3366	80	3458	126
3194	90	3280	206	3370	76	3460	126
3196	90	3282	206	3372	76	3462	128
3190	90	3284	208	3374	76	3464	128
3200	92	3286	208	3376	76	3466	128
3202	90	3288	208	3370	76	3468	128
3204	90	3290	208	3380	76	3472	120
3206	92	3292	208	3392	122	3474	120
3208	92	3294	208	3394	122	3476	120
3210	92	3296	208	3396	122	3478	120
3212	92	3298	208	3398	122	3480	122
3214	92	3300	210	3400	122	3482	122
3216	92	3302	210	3492	122	3550	50
3218	92	3304	208	3404	122	3552	50
3229	92	3306	210	3406	124	3700	58
3222	92	3308	210	3408	124	3702	58
3224	92	3310	210	3410	124	3704	58
3226	92	3312	210	3412	124	3706	60
3228	94	3314	210	3414	124	3708	60
3230	94	3316	202	3416	124	3710	60
3234	88	3320	204	3418	124	3712	60
3236	88	3322	204	3420	124	3713	234
3238	88	3324	204	3422	124	3714	60
3240	88	3332	76	3424	124	3716	62
3242	88	3334	76	3426	124	3718	60
3244	88	3336	78	3428	128	3720	62
3246	88	3338	78	3430	130	3722	62
3252	204	3340	78	3432	128	3724	62
3254	204	3342	78	3434	128	3726	62

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3727	62	3935	210	4012	163	4146	238
3728	62	3936	220	4013	163	4147	238
3820	162	3937	226	4014	163	4148	238
3824	162	3938	230	4015	163	4149	238
3850	36	3939	240	4016	163	4320	46
3854	38	3940	246	4017	163	4321	46
3900	30	3941	252	4018	163	4322	46
3901	30	3942	256	4019	163	4323	46
3902	42	3943	262	4020	163	4325	48
3903	44	3944	270	4021	163	4326	48
3904	44	3945	278	4022	163	4327	48
3905	46	3946	284	4023	163	4328	48
3906	48	3947	288	4024	163	4329	48
3907	48	3950	64	4025	163	4331	48
3908	62	3951	64	4026	163	4346	46
3909	62	3952	64	4027	163	4347	44
3910	62	3953	64	4028	163	4348	44
3912	62	3960	168	4029	163	4349	42
3913	68	3961	168	4030	163	4350	42
3914	76	3962	168	4031	163	4351	42
3915	86	3963	168	4032	163	4352	44
3916	88	3964	168	4033	163	4353	46
3917	94	3965	168	4034	163	4354	42
3918	104	3966	168	4035	163	4355	44
3919	112	3967	168	4036	163	4356	44
3920	120	3968	168	4037	163	4357	46
3921	130	3970	284	4038	163	4358	42
3922	138	3972	284	4039	163	4359	44
3923	166	4000	163	4132	236	4360	44
3924	166	4001	163	4133	236	4361	46
3925	166	4002	163	4134	236	4366	42
3926	148	4003	163	4135	236	4367	44
3927	154	4004	163	4136	238	4368	44
3928	162	4005	163	4137	238	4369	46
3929	170	4006	163	4138	238	4420	85
3930	174	4007	163	4139	238	4421	85
3931	182	4008	163	4142	238	4422	85
3932	186	4009	163	4143	238	4423	85
3933	196	4010	163	4144	238	4424	85
3934	204	4011	163	4145	238	4425	85

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4426	85	4476	121	4799	146	6346	236
4427	85	4477	121	4800	148	6347	236
4428	85	4478	121	4801	102	6348	236
4429	85	4479	121	4815	146	6349	236
4430	85	4480	121	4840	104	6369	26
4431	85	4481	121	4872	104	6372	296
4432	85	4482	121	4895	104	6870	296
4433	85	4483	121	4916	148	6873	26
4434	85	4484	121	4942	294	6874	28
4435	85	4485	121	4943	294	6941	28
4436	85	4486	121	4944	296	6942	28
4437	85	4487	121	4950	40	6991	298
4438	85	4488	121	4953	104	6992	298
4439	85	4489	121	4956	104	6993	298
4440	85	4490	121	4998	230	6994	298
4441	85	4491	121	4999	232	6995	298
4442	85	4492	121	5046	32	6996	56
4443	85	4493	121	5048	32	6997	56
4444	85	4494	121	5068	32	6998	58
4445	85	4495	121	5069	32	6999	58
4446	85	4496	121	5209	296	7001	296
4447	85	4497	121	6146	160	7002	296
4448	85	4498	121	6245	232	7003	296
4449	85	4499	121	6246	232	7004	296
4460	121	4681	282	6247	232	7005	296
4461	121	4682	282	6248	232	7021	56
4462	121	4716	146	6299	104	7022	56
4463	121	4724	102	6327	234	7023	56
4464	121	4764	148	6334	146	7024	56
4465	121	4775	232	6335	148	7301	32
4466	121	4777	146	6336	148	7302	32
4467	121	4778	146	6337	148	7305	234
4468	121	4779	232	6338	234	7306	234
4469	121	4780	232	6339	234	7307	236
4470	121	4781	146	6340	234	7308	236
4471	121	4783	232	6341	234	7309	236
4472	121	4786	232	6342	234	7311	234
4473	121	4788	146	6343	236	7312	234
4474	121	4791	146	6344	236	7315	232
4475	121	4798	146	6345	236	7316	232

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
7317	234						
7318	234						
7572	38						
7573	38						
7574	38						
7576	38						
757?	38						
7578	38						
7580	40						
7581	30						
7582	30						
7583	30						
7584	30						
7585	30						
7586	30						
758?	30						
7588	30						
7589	32						
7590	32						
7629	296						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Accelerated Aging	58
Accumulation	62
Additional Part Marking	298
Additional Requirements	296
Aperture Cards Required	28
Applicable Documents	298
Base Document	26
Bomb, Oxygen	64
Burst Pressure Rating	32
Capacity (Flow Rate)	68
Capacity, Relief	76
Checking Time	80
City, State, Zip	26
Company Name/Command	26
Composition, Chemical	82
Configuration	38
Contract Number/Office Symbol	26
Control	26
Corrosion, Accelerated	86
Creep, Pressure	88
Date	26
Design and Construction	42
Droop	94
Dust	102
Endurance	104
Endurance, Contaminated Media	112
Endurance, Relief	120
Finishes	40
Flow, Surge	130
Flow, Sustained	138
Format	26
Government Design Activity FSCM	26
Humidity	146
Illustrations	40
Impulse	148
Inlet Filter	154

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Leakage	162
Materials	40
Media	48
Metals	40
Mounting Hardware	296
Noise	166
Nomenclature	298
Notes	298
Operating Pressure Rating	30
Packaging	298
Part Marking	296
Part Number	28
Part Number Cross-Reference	298
Performance Characteristics	58
Phone Number	26
Port One	42
Port Two	42
Port Three	44
Port Four	46
Port Five	46
Port Six	48
Port Configuration	42
Pressure, Burst	170
Pressure, Cracking or Set	174
Pressure Drop	194
Pressure Jump	202
Pressure, Proof	182
Pressure Rating	34
Pressure, Reseat	186
Proof Pressure Rating	30
Quality Assurance Provisions	298
Rated Life	32
Regulation	210
Regulation, Temperature	220
Requester FSCM	26
Requester's Name	26
Resistance, Ozone	226
Revision of AEDPS Document (Number)	28
Ruggedness, Handle Stops	230

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Salt Fog	230
Scope	28
Shock	232
Shuttling With Gas	238
Shuttling With Liquid	244
Source Table	28
Storage Conditions	294
Street/Building	26
Strength, Flexural	252
Superseded Document	298
System Application	26
Tabulated Characteristics	40
Temperature, High	256
Temperature, Low	262
Temperature Rating	32
Torque, Manual	270
Units of Measure	28, 38
Unseating, Reverse Flow	278
Vibration	282
Warmup, Rapid	284
Washout (Lubricant)	288
Weight	56
Workmanship	296

*U.S. GOVERNMENT PRINGING OFFICE: 1984-705-040/A3861

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET___OF___

*TITLE CODE 1 2 3 4 5 6	*REQUESTER NO. 7 8 9 10 11 12	CHAR CODE 13	14	15	16
*REQUESTER'S NAME		Ø	1	Ø	1
*COMPANY NAME/COMMAND		Ø	1	Ø	2
*STREET/BUILDING		Ø	1	Ø	3
*CITY, STATE, ZIP		Ø	1	Ø	4
*PHONE NO. INCLUDE A/C AUTOVON IF APPLICABLE		Ø	1	Ø	5
*DATE		1	Ø	Ø	3
*REQUESTER FSCM		1	Ø	Ø	4
*CONTRACT NO./OFFICE SYMBOL		1	Ø	Ø	5
*BASE DOCUMENT		1	Ø	Ø	6
*SYSTEM APPLICATION		1	Ø	Ø	8
*GOVERNMENT DESIGN ACTIVITY FSCM		6	3	6	9
*FORMAT SIX SECTION DOCUMENT.		Ø	7	Ø	Ø
ONE SECTION DOCUMENT.		Ø	8	Ø	Ø
APERTURE CARDS REQUIRED.		Ø	1	Ø	7
REVISION OF AEDPS DOCUMENT NO.		Ø	1	Ø	8
*CONTROL SOURCE.		6	8	7	3
SPECIFICATION.		6	8	7	4
*SOURCE TABLE		9	1	5	1
UNIT OF MEASURE U.S.		6	9	4	1
SI.		6	9	4	2

CHARACTERISTIC VALUE 20 25 30 35 40 45 50 55 60 65 70 75 79 | LINE NO. 80

PLEASE SUPPLY THE FOLLOWING:

DASH-NUMBERED PART _____ REV _____ NOTICE # _____

AS A FINAL CHECK, SCAN THE SRS FOR THE FOLLOWING COMMON ERRORS:

- ☐ MANDATORY CHARACTERISTIC CODES AND VALUES NOT SUPPLIED
- ☐ ZERO (Ø) WRITTEN WITHOUT VIRGULE (0)
- ☐ USE OF POUND SIGN (#) WITHOUT ACCOMPANYING CHARACTERISTIC VALUE
- ☐ POUND SIGN (#) OMITTED FROM END OF STATEMENT (CHARACTERISTIC VALUE)
- ☐ CHARACTERISTIC CODE USED MORE THAN ONCE (OTHER THAN MULTILINE STATEMENT)
- ☐ MULTILINE STATEMENT NOT NUMBERED IN COLUMN 80

*MANDATORY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET___OF___

TITLE CODE 1 2 3 4 5 6	REQUESTER NO. 7 8 9 10 11 12	CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE 20 25 30 35 40 45 50 55 60 65 70 75 79	LINE NO. 80

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Missile Command
ATTN: DRSMI-RSDS
Redstone Arsenal, AL 35898

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.