DOD-STD-35-lllB(MI)
1 JUNE 1983

SUPERSEDING
DOD-STD-35-llla(MI)
9 FEBRUARY 1979

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

INSULATION, ELECTRICAL

NO DELIVERABLE DATA
REQUIRED BY THIS DOCUMENT

AREA - EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Insulation, Electrical
Automated Engineering
Document Preparation System

DOD-STD-35-lllB(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRSMI-RSDC, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-lllB(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for Insulation, Electrical.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	7
	2.1	Issues of documents	7
	2.2	Other publications	8
	3.	DEFINITIONS	9
	4.	GENERAL REQUIREMENTS	10
	4.1	Introduction	10
	4.2	Specification Requirement Sheet (SRS)	10
	4.3	Configuration	10
	4.3.1	Dimensions	10
	4.3.2	Illustrations	10
	4.4	Units of measure	10
	5.	DETAILED REQUIREMENTS	11
	5.1	Introduction	11
	5.2	MSE Formats	11
	5.3	Referenced documents	11
	5.4	Test matrix	11
	5.5	Tabulation	16
	5.6	Keyword Code Index (KCI) and Standard Paragraphs	17
	5.6.1	Interrelationship of Codes	17
	5.6.2	Automatic MSE Data	17
	5.6.3	DOD-STD-35 Tables	17

TABLES

Table	I.	Title Index	
	II.	Test matrix	
	III.	Tabulation candidates	

APPENDICES

Appendix	A.	Illustrations	
	B.	Characteristic Code Index	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for insulation, electrical.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as a base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
INSULATION CLOTH, ELECTRICAL	810001	MIL-P-997	PLASTIC, THERMOSETTING
		MIL-I-3053	ASBESTOS-FIBER
		MIL-I-3374	VARNISHED CAMBIC
		MIL-P-15037	PLASTIC SHEET, MELAMINE-RESIN
		MIL-I-17205	GLASS FIBER, VARNISHED
INSULATION COMPOUND, ELECTRICAL	810002	MIL-I-10	CERAMIC
		MIL-I-3064	PLASTIC-SEALER
		MIL-I-3930	FOR CABLES
		MIL-I-14169	POTTING
		MIL-I-15265	SUBMARINE BUS BAR COVERING
		MIL-I-16923	EMBEDDING
		MIL-I-17384	QUICK-DRYING
		MIL-I-22266	FIELD SPLICING
		MIL-I-46058	PRINTED CIRCUIT COATING
		MIL-I-46838	SILICONE RUBBER
		MIL-I-46865	EPOXY, POTTING
		MIL-I-46877	SILICONE RESIN
		MIL-I-46879	EPOXY BASE
		MIL-I-46880	SYNTHETIC RESIN
		MIL-I-46881	EPOXY RESIN, TRANSPARENT
		MIL-I-47001	EPOXY METAL
		MIL-C-47002	POLYURETHANE
		MIL-R-47004	RESIN, EPOXY, THIXOTROPIC
		MIL-C-47097	COATING, CLEAR
		MIL-C-47102	COATING, POLYURETHANE
		MIL-P-47104	POTTING, EPOXY
		MIL-C-47150	COATING, PORCELAIN
		MIL-I-47151	EMBEDDING
		MIL-C-47153	EPOXY RESIN
		MIL-P-47199	SILICONE RUBBER
		MIL-C-47200	POLYURETHANE
		MIL-C-47233	EMBEDDING
		MIL-C-47272	EPOXY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
INSULATION COMPOUND, ELECTRICAL (CONT)	810002 (CONT)	MIL-I-81550	EMBEDDING, SILICONE
INSULATION FLUID, ELECTRICAL	810003	VV-I-1219	NONCOMBUSTIBLE
INSULATION OIL, ELECTRICAL	810004	VV-I-530	TRANSFORMERS, SWITCHES
INSULATION SHEET, ELECTRICAL	810005	HH-I-536	MUSCOVITE MICA
		MIL-I-545	PRESSBOARD
		MIL-I-631	SYNTHETIC
		MIL-I-695	SLOT CELL
		MIL-I-3505	COIL AND SLOT
		MIL-I-19254	BLANKETS
		MIL-I-19632	PLASTIC FILM, RAG PAPER
		MIL-I-19917	MICA PAPER
		MIL-I-21070	REINFORCED MICA
		MIL-I-22834	SYNTHETIC FIBER
		MIL-I-24204	HI TEMPERATURE
		MIL-I-24330	LIGNO-CELLULOSE
		MIL-I-47152	PAPER CREPED
		MIL-P-47202	PAPER TISSUE
		MIL-P-47271	PAPER
INSULATION SLEEVING, ELECTRICAL	810006	AMS3632	POLYVINYLIDENE FLUORIDE
		MIL-I-631	SYNTHETIC-RESIN
		MIL-I-3053	ASBESTOS-FIBER
		MIL-I-3190	FLEXIBLE-COATED
		MIL-I-7444	FLEXIBLE
		MIL-I-13548	CABLE SPLICING
		MIL-I-18057	GLASS FIBER
		MIL-I-21557	GLASS FIBER
		MIL-I-22076	NONRIGID, VINYL
		MIL-I-22129	POLYTETRA-FLUOROETHYLENE
		MIL-I-23053	HEAT SHRINK
		MIL-I-23578	HOSES, HOODS
		MIL-I-47048	POLYOLEFIN, DUAL WALL
		MIL-I-47049	SILICONE RUBBER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
INSULATION SLEEVING, ELECTRICAL (CONT)	810006 (CONT)	MIL-T-47050	POLYVINYLIDENE FLUORIDE
		MIL-S-47053	POLYAMIDE
		MIL-I-47203	BRAIDED
INSULATION SLEEVING, ELECTRICAL, SPECIAL PURPOSE	810007	MIL-I-15265	SUBMARINE BUS BAR COVERING
		MIL-I-81765	MOLDED, HEAT SHRINKABLE
INSULATION MATERIAL, ELECTRICAL	810008	MIL-I-3053	ASBESTOS-FIBER
INSULATION TAPE, ELECTRICAL	810009	HH-I-510	FRICTION
		HH-I-553	RUBBER
		HH-I-595	PRESSURE SENSITIVE
		MIL-I-631	SYNTHETIC-RESIN
		MIL-I-3053	ASBESTOS-FIBER
		MIL-I-3158	GLASS-FIBER
		MIL-I-3374	VARNISH CAMBRIC
		MIL-I-3505	COIL AND SLOT
		MIL-I-3825	SELF-FUSING
		MIL-T-13020	UNVULCANIZED RUBBER
		MIL-I-15126	PRESSURE SENSITIVE
		MIL-I-17205	GLASS FIBER
		MIL-I-17695	FLAMEPROOF
		MIL-I-18746	NONADHERING, GLASS FABRIC
		MIL-I-19166	GLASS FIBER
		MIL-I-21070	REINFORCED MICA
		MIL-I-22444	SELF BONDING
		MIL-I-23594	POLYTETRA-FLUOROETHYLENE
		MIL-I-24178	RESIN TREATED GLASS
		MIL-I-24391	PLASTIC
		MIL-I-46852	SILICONE RUBBER
		MIL-T-47052	EPOXY-GLASS CLOTH
		MIL-T-47103	POLYESTER, REINFORCED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
INSULATION TAPE, ELECTRICAL (CONT)	810009 (CONT)	MIL-P-47271	PAPER
INSULATION VARNISH, ELECTRICAL	810010	MIL-V-13497	ELECTRICAL INSULATING
		MIL-I-24092	IMPREGNATING
		MIL-V-47006	EPOXY BASE
		MIL-V-47242	ELECTRICAL INSULATING
		MIL-V-83148	MOISTURE RESISTANT
INSULATION WAX, ELECTRICAL	810011	MIL-W-12465	MICROCRYSTALINE
		MIL-W-13262	POTTING

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-I-631	Insulation, Electrical, Synthetic-Resin Compound, Nonrigid
MIL-I-3064	Insulation, Electrical, Plastic Sealed
MIL-I-22266	Insulating Compound, Electrical (for Field Splicing Applications)

STANDARDS

FEDERAL

FED-STD-141	Paint, Varnish, Lacquer and Related Materials; Methods of Inspection, Sampling and Testing
FED-STD-228	Cables and Wire, Insulated; Method of Testing

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-202	Test Methods for Electronic and Electrical Parts
MIL-STD-1285	Marking of Electrical and Electronic Parts
MIL-STD-1523	Age Controls of Age-Sensitive Elastomeric Material

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTMD97	Pour Point of Petroleum Oils, Test For
ASTMD412	Tension Testing of Vulcanized Rubber
ASTMD1149	Accelerated Ozone Cracking of Vulcanized Rubber
ASTMD1275	Corrosive Sulfur in Electrical Insulating Oils, Test For
ASTME380	Metric Practice Guide
ASTMG21	Resistance of Synthetic Polymeric Materials to Fungi Rec. Practice for Determining

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, Pa. 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Insulation, Electrical.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for electrical insulation, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to electrical insulation.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to electrical insulation.

4.3.2 Illustrations. Illustrations applicable to electrical insulation are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Test matrix. A test matrix is supplied as a guide for selecting documents to specify tests (see table II). The test matrix presents documents most applicable for use to satisfy the statement "TEST PER (DOC DES)". Any document listed in the Title Index may be used to satisfy the statement. However, the selected document from the Title Index must contain the desired test. Government test method documents and approved industry standards such as ASTM test methods may also be used to satisfy the statement "TEST PER (DOC DES)".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE II. TEST MATRIX.

DOCUMENT	CODE	1744	1836	1804	1906	2004	2046,	2104	2166	2216	2304	2364	2412	2436	2478	2526	2576	2604	2682	2852	2904	2938	2976	1704	3046	3134
	TEST	Adhesion	Bonding Strength	Breaking Strength	Chemical Composition	Corrosion	Dielectric Constant	Dielectric Strength	Dissipation Factor	Drying (Cure, Gel)	Flammability	Flexibility	Fungus	Hardness	Heat Aging	Hydrolytic Stability	Insulation Resistance	Longitudinal Shrinkage	Oil and Solvent Resistance	Specific Gravity	Tear Resistance	Temperature, Low	Tensile Strength	Test Specimen Preparation	Viscosity	Volume Resistivity
MIL-V-83148								X					X				X									
MIL-I-81765						X												X	X			X	X			
MIL-I-81550	X					X	X	X	X	X	X		X		X	X		X		X					X	X	X
MIL-C-47272							X	X										X		X			X		X	X
MIL-P-47271			X					X									X						X			
MIL-V-47242								X						X					X	X				X	X	
MIL-C-47233							X	X	X		X				X					X			X		X	X
MIL-C-47200	X									X							X									
MIL-P-47199							X	X						X						X	X	X	X		X	X
MIL-C-47153							X			X	X	X	X	X				X					X		X	X
MIL-I-47152																	X						X	X		
MIL-I-47151																	X			X						
MIL-P-47104	X							X		X				X												
MIL-T-47103						X																	X			
MIL-T-47050								X					X		X			X	X	X			X			X
MIL-I-47048								X					X		X			X								
MIL-V-47006								X		X										X					X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE II. TEST MATRIX. (CONT)

DOCUMENT	CODE	1744	1836	1804	1906	2004	2046	2104	2166	2216	2304	2364	2412	2436	2478	2526	2576	2604	2682	2852	2904	2938	2976	1704	3046	3134
	TEST	Adhesion	Bonding Strength	Breaking Strength	Chemical Composition	Corrosion	Dielectric Constant	Dielectric Strength	Dissipation Factor	Drying (Cure, Gel)	Flammability	Flexibility	Fungus	Hardness	Heat Aging	Hydrolytic Stability	Insulation Resistance	Longitudinal Shrinkage	Oil and Solvent Resistance	Specific Gravity	Tear Resistance	Temperature, Low	Tensile Strength	Test Specimen Preparation	Viscosity	Volume Resistivity
MIL-C-46880		X				X		X																	X	
MIL-I-46879							X	X	X			X		X						X				X	X	X
MIL-I-46877							X	X	X					X			X	X					X		X	
MIL-I-46865												X		X			X							X	X	
MIL-I-46852			X					X															X	X		X
MIL-I-46838																								X		
MIL-I-46058								X		X	X	X	X			X	X									
MIL-I-24391		X		X		X		X			X	X														
MIL-I-24330			X																		X					
MIL-I-24204							X	X	X						X						X		X			X
MIL-I-24178				X																			X			
MIL-I-24092							X	X	X	X					X		X			X					X	
MIL-I-23594		X						X															X			X
MIL-I-23053						X					X	X			X			X	X				X			
MIL-I-22834								X													X		X			X
MIL-I-22444		X						X															X			
MIL-I-22266						X				X				X				X	X	X			X	X	X	X
MIL-I-22129								X										X								

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE II. TEST MATRIX. (CONT)

DOCUMENT	CODE	1744	1836	1804	1906	2004	2046	2104	2166	2216	2304	2364	2412	2436	2478	2526	2576	2604	2682	2852	2904	2938	2976	1704	3046	3134
	TEST	Adhesion	Bonding Strength	Breaking Strength	Chemical Composition	Corrosion	Dielectric Constant	Dielectric Strength	Dissipation Factor	Drying (Cure, Gel)	Flammability	Flexibility	Fungus	Hardness	Heat Aging	Hydrolytic Stability	Insulation Resistance	Longitudinal Shrinkage	Oil and Solvent Resistance	Specific Gravity	Tear Resistance	Temperature, Low	Tensile Strength	Test Specimen Preparation	Viscosity	Volume Resistivity
MIL-I-22076						X	X	X	X		X		X					X	X				X			X
MIL-I-21557								X			X				X				X							
MIL-I-21070								X													X		X			X
MIL-I-19917								X				X			X											X
MIL-I-19166		X				X		X							X								X			
MIL-I-18746				X				X																		
MIL-I-18057								X			X				X											
MIL-I-17695											X												X			
MIL-I-17384		X						X		X					X		X		X							
MIL-I-17205							X	X							X								X	X		
MIL-I-16923							X	X	X		X					X				X						
MIL-I-15265								X			X				X		X		X							
MIL-I-15126		X	X			X		X															X	X		
MIL-P-15037			X	X			X	X	X		X	X														X
MIL-I-14169											X			X						X						
MIL-I-13548								X																		
MIL-V-13497						X																				
MIL-W-13262							X		X													X			X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE II. TEST MATRIX. (CONT)

DOCUMENT	CODE	1744	1836	1804	1906	2004	2046	2104	2166	2216	2304	2364	2412	2436	2478	2526	2576	2604	2682	2852	2904	2938	2976	1704	3046	3134
	TEST	Adhesion	Bonding Strength	Breaking Strength	Chemical Composition	Corrosion	Dielectric Constant	Dielectric Strength	Dissipation Factor	Drying (Cure, Gel)	Flammability	Flexibility	Fungus	Hardness	Heat Aging	Hydrolytic Stability	Insulation Resistance	Longitudinal Shrinkage	Oil and Solvent Resistance	Specific Gravity	Tear Resistance	Temperature, Low	Tensile Strength	Test Specimen Preparation	Viscosity	Volume Resistivity
MIL-T-13020		X						X															X	X		
MIL-I-7444						X		X			X		X						X	X			X			
MIL-I-3930														X	X	X			X		X	X	X			
MIL-I-3825							X	X	X			X			X											X
MIL-I-3505								X				X											X	X		
MIL-I-3374				X								X			X						X			X		
MIL-I-3190								X			X		X		X	X			X							
MIL-I-3158				X							X	X							X							
MIL-I-3064		X						X			X						X									
MIL-I-3053				X								X														
MIL-P-997			X	X				X																		
MIL-I-695								X				X			X						X		X	X		
MIL-I-631				X		X	X	X	X		X	X						X	X				X			X
MIL-I-545								X				X														
HH-I-536								X																		
MIL-I-10							X	X	X			X														

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.5 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table III provides codes for column headings which may be used for electrical insulation characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

TABLE III. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
2086	MINIMUM DIELECTRIC CONSTANT AT 60 HZ	2088	MINIMUM DIELECTRIC CONSTANT AT 1 KHZ	2090	MINIMUM DIELECTRIC CONSTANT AT 1 MHZ
2156	MINIMUM DIELECTRIC STRENGTH VOLTS PER MIL	2160	MINIMUM BREAKDOWN VOLTAGE VOLTS		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.6 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.6.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.6.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.6.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT	0700
ONE SECTION DOCUMENT	0800
*CONTROL (SELECT ONE)	
SOURCES	6873

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:24Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1O06	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN,
1O08	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	S o u r c e
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-350	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6874	THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).
0107	
0108	0108. SCOPE. SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE. PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER. PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.
6941	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POIJND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.
6942	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION	
TYPE (DESIGNATE)	1562
CLASS (DESIGNATE)	1564
FORM (DESIGNATE)	1566
GRADE (DESIGNATE)	1568
CATEGORY (DESIGNATE)	1570
TEMPERATURE RATING	
MAXIMUM STORAGE (DEGREES CELSIUS)	7302
MAXIMUM SERVICE (DEGREES CELSIUS)	4905
MINIMUM STORAGE (DEGREES CELSIUS)	7303
MINIMUM SERVICE (DEGREES CELSIUS)	4904
ALTITUDE RATING	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5060
SEA LEVEL TO (METERS)	5061

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:24Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
	Classification
1562	TYPE. TYPE DESIGNATION SHALL BE 1562 IN ACCORDANCE WITH THE BASE DOCUMENT.
1564	CLASS. CLASS DESIGNATION SHALL BE 1564 IN ACCORDANCE WITH THE BASE DOCUMENT.
1566	FORM. FORM SHALL BE 1566 IN ACCORDANCE WITH THE BASE DOCUMENT.
1568	GRADE. GRADE DESIGNATION SHALL BE 1568 IN ACCORDANCE WITH THE BASE DOCUMENT.
1570	CATECORY. CATEGORY DESIGNATION SHALL BE 1570 IN ACCORDANCE WITH THE BASE DOCUMENT*
	TEMPERATURE RATING.
7302	THE MAXIMUM STORAGE TEMPERATURE RATING SHALL BE 7302 DEGREES CELSIUS.
4905	THE MAXIMUM SERVICE TEMPERATURE RATING SHALL BE 4905 DEGREES CELSIUS.
73011	THE MINIMUM STORAGE TEMPERATURE RATING SHALL BE 7301 DEGREES CELSIUS.
4904	THE MINIMUM SERVICE TEMPERATURE RATING SHALL BE 4904 DEGREES CELSIUS.
	ALTITUDE RATING.
5060	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5060 FEET.
5061	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5061 METERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VOLTAGE RATING	
MINIMUM VOLTAGE	
VOLTS	
(VOLTS AC)	7600
(VOLTS DC)	7601
(VOLTS RMS)	7602
MAXIMUM VOLTAGE	
VOLTS	
(VOLTS AC)	7609
(VOLTS DC)	7610
(VOLTS RMS)	7611
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
*UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(INCHES)	7572
(FEET)	7573
(YARDS)	7574

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	VOLTAGE RATING.
7600	THE MINIMUM VOLTAGE RATING SHALL BE 7600 VOLT(S) AC.
7601	THE MINIMUM VOLTAGE RATING SHALL BE 7601 VOLT(S) DC.
7602	THE MINIMUM VOLTAGE RATING SHALL BE 7602 VOLT(S) RMS.
7609	THE MAXIMUM VOLTAGE RATING SHALL BE 7609 VOLT(S) AC.
7610	THE MAXIMUM VOLTAGE RATING SHALL BE 7610 VOLT(S) DC.
7611	THE MAXIMUM VOLTAGE RATING SHALL BE 7611 VOLT(S) RMS.
	Configuration
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7573	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN FEET OR DEGREES.
7574	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN YARDS OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONFIGURATION (CONT)	
UNITS (CONT)	
SI (SELECT ONE)	
(CENTIMETERS)	7576
(MILLIMETERS)	7577
(METERS)	7578
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950

NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.

TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)

MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)

NOTE: AUTOMATIC WHEN TABLE VII IS USED.

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:24Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH	
7576	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN CENTIMETERS OR DEGREES.	
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.	
7578	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN METERS OR DEGREES.	
4950	ILLUSTRATION(S).	ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.
	MATERIAL(S).	MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COMPOSITION	
COMPOSITION, FORMULATION OR MIXTURE.	6375
*INGREDIENT TABLE, (SEE TABLE XI, DOD-STD-35)	
DESIGN AND CONSTRUCTION	
APPLICATION METHOD (SELECT ONE)	
BRUSHING.	1596
CASTING.	1598
COVERING.	1600
DIPPING.	1602
EMBEDDING.	1604
ENCAPSULATING.	1606
EXTRUDING.	1608
IMPREGNATING.	1610
POTTING.	1612
SPRAYING.	1614
VACUUM DEPOSITION.	1616
WRAPPING.	1618

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6375	COMPOSITION. THE COMPOSITION, FORMULATION OR MIXTURE (AS APPLICABLE) SHALL BE AS SPECIFIED HEREIN. THE INGREDIENT QUANTITIES SHALL BE SHOWN IN INTERNATION (SI) SYSTEM OR UNITS SUCH AS GRAMS, LITERS, ETC., OR U.S. STANDARDS SUCH AS PINTS, QUARTS OR GALLONS, AS SPECIFIED IN THE TABLE.
	DESIGN AND CONSTRUCTION.
	APPLICATION METHOD. THE ITEM SHALL BE APPLIED BY THE FOLLOWING METHOD(S).
1596	BRUSHING.
1598	CASTING.
1600	COVERING.
1602	DIPPING.
1604	EMBEDDING.
1606	ENCAPSULATING.
1608	EXTRUDING.
1610	IMPREGNATING.
1612	POTTING.
1614	SPRAYING.
1616	VACUUM DEPOSITION.
1618	WRAPPING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
CLOTH CONSTRUCTION	
MINIMUM ALLOWABLE STRANDS IN WRAP (SELECT ONE)	
(PER LINEAR INCH)	1928
(PER LINEAR MILLIMETER)	1932
MINIMUM ALLOWABLE STRANDS IN FILLING (SELECT ONE)	
(PER LINEAR INCH)	1930
(PER LINEAR MILLIMETER)	1934
PICKS (SELECT ONE)	
(QUANTITY PER INCH)	1936
(QUANTITY PER MILLIMETER)	1938
CUT (SELECT ONE)	
BIAS.	1940
STRAIGHT.	1942
TREATMENT (SELECT ONE)	
IMPREGNATED.	1944
COATED.	1946

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CLOTH CONSTRUCTION.
1928	THE NUMBER OF STRANDS PER LINEAR INCH IN THE WRAP SHALL BE NOT LESS THAN 1928.
1932	THE NUMBER OF STRANDS PER LINEAR MILLIMETER IN THE WRAP SHALL BE NOT LESS THAN 1932.
1930	THE NUMBER OF STRANDS PER LINEAR INCH IN THE FILLING SHALL BE NOT LESS THAN 1930.
1934	THE NUMBER OF STRANDS PER LINEAR MILLIMETER IN THE FILLING SHALL BE NOT LESS THAN 1934.
1936	THE CLOTH SHALL HAVE 1936 PICKS PER INCH.
1938	THE CLOTH SHALL HAVE 1938 PICKS PER MILLIMETER,
1940	THE CLOTH CUT SHALL BE BIAS.
1942	THE CLOTH CUT SHALL BE STRAIGHT.
1944	THE ITEM SHALL BE IMPREGNATED.
1946	THE ITEM SHALL BE COATED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
CONTAINER	
SIZES (SELECT ONE)	
U.S.	
1 PINT.	1630
1 QUART.	1632
1 GALLON.	1634
5 GALLON LUG COVER STEEL PAIL.	1636
55 GALLON STEEL DRUM.	1640
SI.	
1 LITER.	1642
1 CUBIC METER.	1644
PACKAGE MAXIMUM WEIGHT (SELECT ONE)	
U.S.	
(POUNDS)	1646
SI	
(KILOGRAMS)	1648
ROLL MINIMUM LENGTH TOTAL (SELECT ONE)	
U.S. (SELECT ONE)	
(FEET)	1650
(YARDS)	1652

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
	CONTAINER.	
	THE CONTAINER SIZE(S) SHALL BE AS FOLLOWS:	
1630	1-PINT.	
1632	1-QUART.	
1634	1-GALLON.	
1636	5-GALLON LUG COVER STEEL PAIL.	
1640	55-GALLON STEEL DRUM.	
1642	1-LITER.	
1644	1-CUBIC METER.	
1646	THE PACKAGE WEIGHT SHALL NOT EXCEED 1646 POUNDS.	
1648	THE PACKAGE WEIGHT SHALL NOT EXCEED 1648 KILOGRAMS.	
1650	THE ROLL TOTAL LENGTH SHALL BE NOT LESS THAN 1650 FEET.	
1652	THE ROLL TOTAL LENGTH SHALL BE NOT LESS THAN 1652 YARDS.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
ROLL MINIMUM LENGTH TOTAL (CONT)	
SI	
(METERS)	1654
MINIMUM PERCENT OF ROLL (PERCENT)	1664
*MINIMUM LENGTH (SELECT ONE)	
U.S. (SELECT ONE)	
(FEET)	1666
(YARDS)	1668
SI	
(METERS)	1670
ROLL CORE ID (SELECT ONE)	
U.S.	
(INCHES)	1680
SI	
(MILLIMETERS)	1682

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1654	THE ROLL TOTAL LENGTH SHALL BE NOT LESS THAN 1654 METERS.
1664 1666	AT LEAST 1664 PERCENT OF A ROLL SHALL HAVE A LENGTH OF NOT LESS THAN 1666 FEET.
1664 1668	AT LEAST 1664 PERCENT OF A ROLL SHALL HAVE A LENGTH OF NOT LESS THAN 1668 YARDS.
1664 1670	AT LEAST 1664 PERCENT OF A ROLL SHALL HAVE A LENGTH OF NOT LESS THAN 1670 METERS.
1680	THE ROLL CORE INSIDE DIAMETER SHALL BE 1680 INCHES.
1682	THE ROLL CORE INSIDE DIAMETER SHALL BE 1682 MILLIMETERS.

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
CONTAINER (CONT)	
ROLL CORE OD (SELECT ONE)	
U.S.	
(INCHES)	
SI	
(MILLIMETERS)	1686
SLEEVING MINIMUM LENGTH (SELECT ONE)	
U.S.	
(INCHES)	1688
SI	
(MILLIMETERS)	1690
POT LIFE	
MINIMUM DURATION (SELECT ONE)	
(MINUTES)	1620
(HOURS)	1622
TEMPERATURE (DEGREES CELSIUS)	1624
TEMPERATURE TOLERANCE (PLUS OR MINUS DEGREES CELSIUS)	1626

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1684	THE ROLL CORE OUTSIDE DIAMETER SHALL BE 1684 INCHES.
1686	THE ROLL CORE OUTSIDE DIAMETER SHALL BE 1686 MILLIMETERS.
1688	THE SLEEVING LENGTH SHALL BE NOT LESS THAN 1688 INCH(S).
1690	THE SLEEVING LENGTH SHALL BE NOT LESS THAN 1690 MILLIMETER(S).
	POT LIFE.
1620	THE POT LIFE SHALL BE NOT LESS THAN 1620 MINUTES.
1622	THE POT LIFE SHALL BE NOT LESS THAN 1622 HOURS.
1624	THE POT LIFE TEMPERATURE SHALL BE 1624 DEGREES CELSIUS.
1626	THE POT LIFE TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1626 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
SHELF LIFE	
MINIMUM SHELF LIFE (MONTHS)	2804
MAXIMUM SHELF LIFE (MONTHS)	2806
SHELF LIFE TEMPERATURE (DEGREES CELSIUS)	3700
MANUFACTURER CERTIFIES THAT MATERIAL MEETS PHYSICAL AND ELECTRICAL REQUIREMENTS AT THE END OF SHELF LIFE.	2808
MATERIAL CONFORMS TO INSULATION RESISTANCE AND DIELECTRIC STRENGTH REQUIREMENTS AT THE END OF SHELF LIFE.	2810
MATERIAL CONFORMS TO VISCOSITY AND HARDNESS REQUIREMENTS AT THE END OF SHELF LIFE.	2812
NO EXCESSIVE ADHESION FLOW ON TAPE SIDES.	2814
TAPE CONFORMS TO ADHESION AND BREAKING STRENGTH AT THE END OF SHELF LIFE.	2820
MAXIMUM TAPE TELESCOPING (SELECT ONE)	
U.S.	
(INCHES)	2816
SI	
(MILLIMETERS)	2817

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	SHELF LIFE.
2804	THE SHELF LIFE SHALL BE NOT LESS THAN 2804 MONTH(S).
2806	THE SHELF LIFE SHALL BE NOT GREATER THAN 2806 MONTH(S).
1700	THE SHELF LIFE TEMPERATURE SHALL BE 1700 DEGREES CELSIUS.
2808	THE MANUFACTURER SHALL CERTIFY THE MATERIAL MEETS ALL PHYSICAL AND ELECTRICAL REQUIREMENTS AT THE END OF THE SHELF LIFE.
2810	THE MATERIAL SHALL CONFORM TO THE INSULATION RESISTANCE AND DIELECTRIC STRENGTH REQUIREMENTS AT THE END OF THE SHELF LIFE.
2812	THE MATERIAL SHALL CONFORM TO THE VISCOSITY AND HARDNESS REQUIREMENTS AT THE END OF THE SHELF LIFE.
2814	THERE SHALL BE NO EXCESSIVE ADHESIVE FLOW ON TAPE SIDES.
2820	TAPE SHALL CONFORM TO ADHESION AND BREAKING STRENGTH REQUIREMENTS AT THE END OF SHELF LIFE.
2816	THE TAPE TELESCOPING AT THE END OF SHELF LIFE SHALL BE NOT GREATER THAN 2816 INCH(S).
2817	THE TAPE TELESCOPING AT THE END OF SHELF LIFE SHALL BE NOT GREATER THAN 2817 Millimeter

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
SHELF LIFE (CONT)	
MAXIMUM TAPE GAPPING (SELECT ONE)	
U.S.	
(INCHES)	2818
SI	
(MILLIMETERS)	2819
SLEEVE CONSTRUCTION	
MINIMUM CARRIERS (QUANTITY)	1572
ENDS PER CARRIER (QUANTITY)	1574
PICKS (SELECT ONE)	
PICKS PER INCH (QUANTITY)	1576
PICKS PER MILLIMETER (QUANTITY)	1578
YARN PLIES (QUANTITY)	1580
THREADS PER PLY (QUANTITY)	1582
TREATMENT (SELECT ONE)	
IMPREGNATED.	1584
COATED.	1586

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2818	THE TAPE ROLL GAPPING AT THE END OF SHELF LIFE SHALL BE NOT GREATER THAN 2818 INCH(S).
2819	THE TAPE ROLL GAPPING AT THE END OF SHELF LIFE SHALL BE NOT GREATER THAN 2819 MILLIMETER(S).
	SLEEVE CONSTRUCTION.
1572	THE NUMBER OF CARRIERS SHALL BE NOT LESS THAN 1572.
1574	THE NUMBER OF ENDS PER CARRIER SHALL BE NOT LESS THAN 1574.
1576	THE NUMBER OF PICKS PER INCH SHALL BE 1576.
1578	THE NUMBER OF PICKS PER MILLIMETER SHALL BE 1578.
1580	THE NUMBER OF PLIES IN THE YARN SHALL BE 1580.
1582	THE NUMBER OF THREADS IN EACH PLY SHALL BE 1582.
1584	THE ITEM SHALL BE IMPREGNATED.
1586	THE ITEM SHALL BE COATED.

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
TAPE CONSTRUCTION	
TREATMENT (SELECT ONE)	
IMPREGNATED.	1588
LAMINATED.	1590
ADHESIVE BACKED.	1592
COATED.	1594
TEMPERATURE	
MAXIMUM STORAGE (DEGREES CELSIUS)	6796
MAXIMUM SERVICE (DEGREES CELSIUS)	6797
MINIMUM STORAGE (DEGREES CELSIUS)	6801
MINIMUM SERVICE (DEGREES CELSIUS)	6802
TOXICITY	
THE TOXICITY OF THE MATERIAL SHALL BE SUCH THAT IT WILL NOT PRESENT A HEALTH HAZARD TO INDIVIDUALS FROM INHALATION, SKIN CONTACT, OR INGESTION, WHEN USED IN THE MANNER INTENDED OR AS A RESULT OF EXPOSURE AFTER ITS APPLICATION.	1628

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	TAPE CONSTRUCTION.
1588	THE ITEM SHALL BE IMPREGNATED.
1590	THE ITEM SHALL BE LAMINATED.
1592	THE ITEM SHALL BE ADHESIVE BACKED.
1594	THE ITEM SHALL BE COATED.
6796	MAXIMUM STORAGE TEMPERATURE. THE STORAGE TEMPERATURE SHALL BE NOT GREATER THAN 6796 DEGREES CELSIUS.
6797	MAXIMUM SERVICE TEMPERATURE. THE SERVICE TEMPERATURE SHALL BE NOT GREATER THAN 6797 DEGREES CELSIUS.
6801	MINIMUM STORAGE TEMPERATURE. THE STORAGE TEMPERATURE SHALL BE NOT LESS THAN 6801 DEGREES CELSIUS.
6802	MINIMUM SERVICE TEMPERATURE. THE SERVICE TEMPERATURE SHALL BE NOT LESS THAN 6802 DEGREES CELSIUS.
1628	TOXICITY. THE TOXICITY OF THE MATERIAL SHALL BE SUCH THAT IT WILL NOT PRESENT A HEALTH HAZARD TO INDIVIDUALS FROM INHALATION, SKIN CONTACT, OR INGESTION, WHEN USED IN THE MANNER INTENDED OR AS A RESULT OF EXPOSURE AFTER ITS Application

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024
MAXIMUM WEIGHT PER UNIT LENGTH (SELECT ONE)	
U.S. (SELECT ONE)	
PER FOOT (SELECT ONE)	
(OUNCES)	7050
(POUNDS)	7051
PER 1OO FEET (POUNDS)	7056
PER 1OOO FEET (POUNDS)	7347

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:24Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).
7021	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).
7050	MAXIMUM WEIGHT PER FOOT. THE WEIGHT PER FOOT SHALL BE NOT GREATER THAN 7050 OUNCE(S).
70511	MAXIMUM WEIGHT PER FOOT. THE WEIGHT PER FOOT SHALL BE NOT GREATER THAN 7051 POUND(S).
7056	MAXIMUM WEIGHT PER 100 FEET. THE WEIGHT PER 100 FEET SHALL BE NOT GREATER THAN 7056 POUND(S).
7347	MAXIMUM WEIGHT PER 1000 FEET. THE WEIGHT PER 1000 FEET SHALL BE NOT GREATER THAN 7347 POUND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
MAXIMUM WEIGHT PER UNIT LENGTH (CONT)	
SI (SELECT ONE)	
PER METER (SELECT ONE)	
(GRAMS)	7400
(KILOGRAMS)	7401
PER KILOMETER (KILOGRAMS)	7407
ADHESION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1770
AS FOLLOWS:	1771
MINIMUM SHEAR STRENGTH (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	1772
SI	
(KILOPASCALS)	1774

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7400	MAXIMUM WEIGHT PER METER. THE WEIGHT PER METER SHALL BE NOT GREATER THAN 7400 GRAM(S).
7401	MAXIMUM WEIGHT PER METER. THE WEIGHT PER METER SHALL BE NOT GREATER THAN 7401 KILOGRAM(S).
7407	MAXIMUM WEIGHT PER KILOMETER. THE WEIGHT PER KILOMETER SHALL BE NOT GREATER THAN 7407 KILOGRAM(S).
1770	ADHESION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1770.
1771	ADHESION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1772	THE SHEAR STRENGTH SHALL BE NOT LESS THAN 1772 POUNDS PER SQUARE INCH.
1774	THE SHEAR STRENGTH SHALL BE NOT LESS THAN 1774 KILOPASCALS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADHESION (CONT)	
AS FOLLOWS: (CONT)	
MINIMUM SEPARATION FORCE (SELECT ONE)	
U.S.	
(POUNDS)	1776
SI	
(NEWTONS)	1778
NO REMOVAL OF TEST FILM BY THE TAPE.	1780
NO AFFECT BY CONTACT WITH DISTILLED WATER.	1782
ADHERES TIGHTLY WITHOUT LIFTING OR SCALING.	1784
NO FLAKING, CHIPPING, OR POWDERING.	1786
MINIMUM SEPARATION FORCE AT LOW TEMPERATURE (SELECT ONE)	
U.S.	
(OUNCES PER INCH WIDTH)	1783
SI	
(MILLINEWTONS PER MILLIMETER WIDTH)	1790

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1776	THE SEPARATION FORCE SHALL BE NOT LESS THAN 1776 POUND(S).
1778	THE SEPARATION FORCE SHALL BE NOT LESS THAN 1778 NEWTON(S).
1780	THERE SHALL BE NO REMOVAL OF TEST FILM BY THE TAPE.
1782	CONTACT WITH DISTILLED WATER SHALL NOT CAUSE ADVERSE AFFECT.
1784	ITEM SHALL ADHERE TIGHTLY WITHOUT LIFTING OR SCALING.
1786	THERE SHALL BE NO FLAKING, CHIPPING, OR POWDERING.
1788	THE SEPARATION FORCE AT LOW TEMPERATURE SHALL BE NOT LESS THAN 1788 OUNCES PER INCH OF WIDTH.
1790	THE SEPARATION FORCE AT LOW TEMPERATURE SHALL BE NOT LESS THAN 1790 MILLINEWTONS PER MILLIMETER OF WIDTH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADHESION (CONT)	
AS FOLLOWS: (CONT)	
MINIMUM SEPARATION FORCE AT HIGH TEMPERATURE (SELECT ONE)	
U.S.	
(OUNCES PER INCH WIDTH)	1792
SI	
(MILLINEWTONS PER MILLIMETER WIDTH)	1794
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1742
PER DOCUMENT (DOC DES)	1744
TEST SPECIMEN THICKNESS (SELECT ONE)	
U.S.	
(INCHES)	1746
SI	
(MILLIMETERS)	1748
MAXIMUM CURE TEMPERATURE (DEGREES CELSIUS)	1750

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1792	THE SEPARATION FORCE AT HIGH TEMPERATURE SHALL BE NOT LESS THAN 1792 OUNCES PER INCH OF WIDTH.
1794	THE SEPARATION FORCE AT HIGH TEMPERATURE SHALL BE NOT LESS THAN 1794 MILLINEWTONS PER MILLIMETER OF WIDTH.
1742	ADHESION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1742.
1744	ADHESION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1744.
1746	THE TEST SPECIMEN THICKNESS SHALL BE 1746 INCH(S).
1748	THE TEST SPECIMEN THICKNESS SHALL BE 1748 MILLIMETER(S).
1750	THE CURING TEMPERATURE SHALL BE NOT GREATER THAN 1750 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADHESION (CONT)	
PER DOCUMENT (CONT)	
MAXIMUM CURE PERIOD (SELECT ONE)	
(HOURS)	1752
(MINUTES)	1754
RELATIVE HUMIDITY (PERCENT)	1756
HUMIDITY TOLERANCE (PLUS OR MINUS PERCENT)	1758
MINIMUM INTERVAL BETWEEN APPLICATION AND REMOVAL OF TAPE (MINUTES)	1762
LOW TEMPERATURE (DEGREES CELSIUS)	1764
HIGH TEMPERATURE (DEGREES CELSIUS)	1766
BONDING STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1868
AS FOLLOWS:	1870
MINIMUM PERIOD BEFORE BOND SEPARATION (MINUTES)	1872

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1752	THE CURING PERIOD SHALL BE NOT GREATER THAN 1752 HOUR(S).
1754	THE CURING PERIOD SHALL BE NOT GREATER THAN 1754 MINUTE(S).
1756	THE CURING RELATIVE HUMIDITY SHALL BE 1756 PERCENT.
1758	THE CURING RELATIVE HUMIDITY TOLERANCE SHALL BE PLUS OR MINUS 1758 PERCENT.
1762	THE INTERVAL BETWEEN APPLICATION AND REMOVAL OF THE TAPE SHALL BE NOT LESS THAN 1762 MINUTE(S).
1764	TESTING AT LOW TEMPERATURE SHALL BE PERFORMED AT 1764 DEGREES CELSIUS.
1766	TESTING AT HIGH TEMPERATURE SHALL BE PERFORMED AT 1766 DEGREES CELSIUS.
1868	BONDING STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1868.
1870	BONDING STRENGTH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1872	THE PERIOD BEFORE BOND SEPARATION SHALL BE NOT LESS THAN 1872 Minute(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
BONDING STRENGTH (CONT)	
AS FOLLOWS: (CONT)	
MINIMUM STRENGTH (SELECT ONE)	
U.S.	
(POUNDS)	1874
SI	
(NEWTONS)	1876
MINIMUM SHEAR STRENGTH (SELECT ONE)	
U.S.	
(POUNDS PER SQUARE INCH)	1878
SI	
(KILOPASCALS)	1880
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1834
PER DOCUMENT (DOC DES)	1836
SPECIMEN LENGTH (SELECT ONE)	
U.S.	
(INCHES)	1838
SI	
(MILLIMETERS)	1840

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1874	THE BOND STRENGTH SHALL BE NOT LESS THAN 1874 POUND(S).
1876	THE BOND STRENGTH SHALL BE NOT LESS THAN 1876 NEWTON(S).
1878	THE BOND STRENGTH SHALL BE NOT LESS THAN 1878 POUNDS PER SQUARE INCH.
1880	THE BOND STRENGTH SHALL BE NOT LESS THAN 1880 KILOPASCALS.
1834	BONDING STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1834.
1836	BONDING STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1836.
1838	THE TEST SPECIMEN LENGTH SHALL BE 1838 INCH(S).
1840	THE TEST SPECIMEN LENGTH SHALL BE 1840 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
BONDING STRENGTH (CONT)	
PER DOCUMENT (CONT)	
SPECIMEN WIDTH (SELECT ONE)	
U.S.	
(INCHES)	1842
SI	
(MILLIMETERS)	1844
SPECIMEN THICKNESS (SELECT ONE)	
U.S.	
(INCHES)	1846
SI	
(MILLIMETERS)	1848
NUMBER OF TEST SPECIMEN (QUANTITY)	1850
MACHINE STEEL BALL DIAMETER (SELECT ONE)	
U.S.	
(INCHES)	1852
SI	
(MILLIMETERS)	1854

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1842	THE TEST SPECIMEN WIDTH SHALL BE 1842 INCH(S).
1844	THE TEST SPECIMEN WIDTH SHALL BE 1844 Millimeter
1846	THE TEST SPECIMEN THICKNESS SHALL BE 1846 INCH(S).
1848	THE TEST SPECIMEN THICKNESS SHALL BE 1848 MILLIMETER(S).
1850	THE NUMBER OF SPECIMENS TO BE TESTED SHALL BE 1850.
1852	THE TEST MACHINE STEEL BALL DIAMETER SHALL BE 1852 INCH(S).
1854	THE TEST MACHINE STEEL BALL DIAMETER SHALL BE 1854 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
BONDING STRENGTH (CONT)	
PER DOCUMENT (CONT)	
SPEED OF TEST (SELECT ONE)	
U.S.	
(INCHES PER MINUTE)	1856
SI	
(MILLIMETERS PER MINUTE)	1858
TEST WEIGHT (SELECT ONE)	
U.S.	
(OUNCES)	1860
SI	
(GRAMS)	1861
TENSILE TESTER CROSSHEAD RATE (SELECT ONE)	
U.S.	
(INCHES PER MINUTE)	1862
SI	
(MILLIMETERS PER MINUTE)	1864

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:24Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
1856	THE SPEED OF THE TEST SHALL BE 1856 INCHES PER MINUTE.
1858	THE SPEED OF THE TEST SHALL BE 1858 MILLIMETERS PER MINUTE.
1860	THE TEST WEIGHT SHALL BE 1860 OUNCES.
1861	THE TEST WEIGHT SHALL BE 1861 GRAMS.
1862	THE TENSILE TESTER CROSSHEAD RATE SHALL BE 1862 INCHES PER MINUTE.
1864	THE TENSILE TESTER CROSSHEAD RATE SHALL BE 1864 MILLIMETERS PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
BREAKING STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1816
AS FOLLOWS:	1818
MINIMUM STRENGTH (SELECT ONE)	
U.S.	
(POUNDS PER INCH WIDTH)	1820
SI	
(NEWTONS PER MILLIMETER WIDTH)	1822
COLD BAND BREAKING LOAD (SELECT ONE)	
U.S.	
(POUNDS)	1824
SI	
(NEWTONS)	1826
HOT BAND BREAKING LOAD (SELECT ONE)	
U.S.	
(POUNDS)	1828
SI	
(NEWTONS)	1830

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:24Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
1816	BREAKING STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1816.
1818	BREAKING STRENGTH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1820	THE BREAKING STRENGTH SHALL BE NOT LESS THAN 1820 POUNDS PER INCH OF WIDTH.
1822	THE BREAKING STRENGTH SHALL BE NOT LESS THAN 1822 NEWTONS PER MILLIMETER OF WIDTH.
1824	THE COLD BAND BREAKING LOAD SHALL BE 1824 POUNDS.
1826	THE COLD BAND BREAKING LOAD SHALL BE 1826 NEWTONS.
1828	THE HOT BAND BREAKING LOAD SHALL BE 1828 POUNDS.
1830	THE HOT BAND BREAKING LOAD SHALL BE 1830 NEWTONS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
BREAKING STRENGTH (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1802
PER DOCUMENT (DOC DES)	1804
HOT BAND TEST PERIOD (HOURS)	1806
*TEST TEMPERATURE (DEGREES CELSIUS)	1808
COLD BAND TEST PERIOD (HOURS)	1810
*TEST TEMPERATURE (DEGREES CELSIUS)	1812
CHEMICAL COMPOSITION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1912
PER CHEMICAL COMPOSITION TABLE.	

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:24Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
1802	BREAKING STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1802.
1804	BREAKING STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1804.
1806	THE HOT BAND TEST PERIOD SHALL BE 1806 HOURS.
1808	THE HOT BAND TEST TEMPERATURE SHALL BE 1808 DEGREES CELSIUS.
1810	THE COLD BAND TEST PERIOD SHALL BE 1810 HOURS.
1812	THE COLD BAND TEST TEMPERATURE SHALL BE 1812 DEGREES CELSIUS.
1912	CHEMICAL COMPOSITION- THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1912. CHEMICAL COMPOSITION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE CHEMICAL COMPOSITION TABLE.

CHEMICAL COMPOSITION TABLE

INGREDIENT	QUANTITY	UNITS
3500	35011	3502
3503	3504	3505
3506	3507	3508
3509	3510	3511
3512	3513	3514
3515	3516	3517
3518	3519	3520
3521	3522	3523
3524	3525	3526
3527	3528	3529

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CHEMICAL COMPOSITION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1902
SUPPLIER CERTIFICATION OF COMPLIANCE MAY BE ACCEPTED IN LIEU OF A SPECIFIC TEST.	1904
PER DOCUMENT (DOC DES)	1906
TEST METHOD (DESIGNATE)	1908
COLOR	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1958
AS FOLLOWS:	1960
CATALYZED OR SINGLE MATERIAL (SELECT ONE)	
COLOR (NAME)	1962
(DES)	1964
*APPLICABLE DOCUMENT (DOC DES)	1966
CLASS (NUMBER)	1968
GARDNER SCALE (NUMBER)	1970

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1902	CHEMICAL COMPOSITION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1902.
1904	CHEMICAL COMPOSITION* SUPPLIERS CERTIFICATION OF COMPLIANCE WITH THE CHEMICAL COMPOSITION REQUIREMENTS MAY BE ACCEPTED IN LIEU OF A SPECIFIC TEST.
1906	CHEMICAL Composition TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1906.
1908	THE APPLICABLE TEST METHOD SHALL BE 1908.
1958	COLOR. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1958.
1960	COLOR. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1962	THE CATALYZED OR SINGLE MATERIAL COLOR SHALL BE 1962.
1964	THE COLOR DESIGNATION SHALL BE 1964 IN ACCORDANCE WITH
1966	1966.
1968	THE COLOR CLASS SHALL BE 1968.
1970	THE COLOR SHALL BE IN ACCORDANCE WITH GARDNER SCALE NUMBER 1970.

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COLOR (CONT)	
AS FOLLOWS: (CONT)	
BASE MATERIAL (SELECT ONE)	
COLOR	1972
(DES)	1974
*APPLICABLE DOCUMENT (DOC DES)	1976
CLASS (NUMBER)	1978
GARDNER SCALE (NUMBER)	1980
CATALYST MATERIAL (SELECT ONE)	
COLOR	1982
(DES)	1984
*APPLICABLE DOCUMENT (DOC DES)	1986
CLASS (NUMBER)	1988
GARDNER SCALE (NUMBER)	1990
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1950
PER FED-STD-141, METHOD 4243.	1952
PER APPLICABLE COLOR DOCUMENT	1954

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
1972	THE BASE MATERIAL COLOR SHALL BE 1972.	
1974 1976	THE COLOR DESIGNATION SHALL BE 1974 IN ACCORDANCE WITH 1976.	
1978	THE COLOR CLASS SHALL BE 1978.	
1980	THE COLOR SHALL BE IN ACCORDANCE WITH GARDNER SCALE NUMBER 1980.	
1982	THE CATALYST MATERIAL COLOR SHALL BE 1982.	
1984 1986	THE COLOR DESIGNATION SHALL BE 1984 IN ACCORDANCE WITH 1986.	
1988	THE COLOR CLASS SHALL BE 1988.	
1990	THE COLOR SHALL BE IN ACCORDANCE WITH GARDNER SCALE NUMBER 1990.	
1950	COLOR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1950,	
1952	COLOR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 4243 OF FED-STD-141.	
1954	COLOR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE APPLICABLE COLOR DOCUMENT.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CORROSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2036
NO PITTING, CORROSION, OR ADVERSE AFFECT.	2038
NO COPPER REMOVAL FROM TEST MIRROR.	2040
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2002
PER DOCUMENT (DOC DES)	2004
SPECIMEN LENGTH (SELECT ONE)	
U.S.	
(INCHES)	2006
SI	
(MILLIMETERS)	2008
SPECIMEN WIDTH (SELECT ONE)	
U.S.	
(INCHES)	2010
SI	
(MILLIMETERS)	2012

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:24Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
2036	CORROSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2036.
2038	CORROSION. THERE SHALL BE NO PITTING, CORROSION, OR ADVERSE AFFECT.
2040	CORROSION. THERE SHALL BE NO COPPER REMOVABLE FROM THE TEST MIRROR.
2002	CORROSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2002.
2004	CORROSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2004.
2006	THE TEST SPECIMEN LENGTH SHALL BE 2006 INCH(S).
2008	THE TEST SPECIMEN LENGTH SHALL BE 2008 MILLIMETER(S).
2010	THE TEST SPECIMEN WIDTH SHALL BE 2010 INCH(S).
2012	THE TEST SPECIMEN WIDTH SHALL BE 2012 MILLIMETER(S)-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CORROSION (CONT)	
PER DOCUMENT (CONT)	
SPECIMEN THICKNESS (SELECT ONE)	
U.S.	
(INCHES)	2014
SI	
(MILLIMETERS)	2016
TEST PERIOD (SELECT ONE)	
(HOURS)	2018
(DAYS)	2020
TEST TEMPERATURE (DEGREES CELSIUS)	2022
TEST RELATIVE HUMIDITY (PERCENT)	2024
NUMBER OF SPECIMENS (QUANTITY)	2026
PRECONDITIONING TEMPERATURE (DEGREES CELSIUS)	2028
PRECONDITIONING PERIOD (HOURS)	2030
PRECONDITIONING RELATIVE HUMIDITY (PERCENT)	2032

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2014	THE TEST SPECIMEN THICKNESS SHALL BE 2014 INCH(S).
2016	THE TEST SPECIMEN THICKNESS SHALL BE 2016 Millimeter
2018	THE TEST PERIOD SHALL BE 2018 HOURS.
2020	THE TEST PERIOD SHALL BE 2020 DAYS.
2022	THE TEST TEMPERATURE SHALL BE 2022 DEGREES CELSIUS.
2024	THE TEST RELATIVE HUMIDITY SHALL BE 2024 PERCENT.
2026	THE NUMBER OF SPECIMENS TO BE TESTED SHALL BE 2026.
2028	THE PRECONDITIONING TEMPERATURE SHALL BE 2028 DEGREES CELSIUS.
2030	THE PRECONDITIONING PERIOD SHALL BE 2030 HOURS.
2032	THE PRECONDITIONING RELATIVE HUMIDITY SHALL BE 2032 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC CONSTANT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2082
AS FOLLOWS:	2084
MINIMUM DIELECTRIC CONSTANT AT 60 HERTZ	2086
MINIMUM DIELECTRIC CONSTANT AT 1 KILOHERTZ	2088
MINIMUM DIELECTRIC CONSTANT AT 1 MEGAHERTZ	2090
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2044
PER DOCUMENT (DOC DES)	2046
NUMBER OF TEST SPECIMENS (QUANTITY)	2048
SPECIMEN DIAMETER (SELECT ONE)	
U.S.	
(INCHES)	2050
SI	
(MILLIMETERS)	2052

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2082	DIELECTRIC CONSTANT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2082.
2084	DIELECTRIC CONSTANT. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2086	THE DIELECTRIC CONSTANT AT 60 HERTZ SHALL BE NOT LESS THAN 2086.
2088	THE DIELECTRIC CONSTANT AT 1 KILOHERTZ SHALL BE NOT LESS THAN 2088.
2090	THE DIELECTRIC CONSTANT AT 1 MEGAHERTZ SHALL BE NOT LESS THAN 2090.
2044	DIELECTRIC CONSTANT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2044.
2046	DIELECTRIC CONSTANT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2046.
2048	THE NUMBER OF SPECIMENS TO BE TESTED SHALL BE 2048.
2050	THE TEST SPECIMEN DIAMETER SHALL BE 2050 INCH(S).
2052	THE TEST SPECIMEN DIAMETER SHALL BE 2052 MILLIMETER(S),

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC CONSTANT (CONT)	
PER DOCUMENT (CONT)	
SPECIMEN THICKNESS (SELECT ONE)	
U.S.	
(INCHES)	2054
SI	
(MILLIMETERS)	2056
SPECIMEN LENGTH (SELECT ONE)	
U.S.	
(INCHES)	2060
SI	
(MILLIMETERS)	2062
SPECIMEN WIDTH (SELECT ONE)	
U.S.	
(INCHES)	2064
SI	
(MILLIMETERS)	2066
ELECTRODES PER DOCUMENT (DES)	2068
NUMBER OF MEASUREMENTS AT EACH FREQUENCY (QUANTITY)	2070

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2054 THE TEST SPECIMEN THICKNESS SHALL BE 2054 INCH(S).

2056 THE TEST SPECIMEN THICKNESS SHALL BE 2056 Millimeter

2060 THE TEST SPECIMEN LENGTH SHALL BE 2060 INCH(S).

2062 THE TEST SPECIMEN LENGTH SHALL BE 2062 MILLIMETER(S)-

2064 THE TEST SPECIMEN WIDTH SHALL BE 2064 INCH(S).

2066 THE TEST SPECIMEN WIDTH SHALL BE 2066 MILLIMETER(S).

2068 THE TEST ELECTRODES SHALL BE IN ACCORDANCE WITH 2068.

2070 THE NUMBER OF TESTS AT EACH FREQUENCY SHALL BE 2070.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC CONSTANT (CONT)	
PER DOCUMENT (CONT)	
SPECIMEN IMMERSED IN DISTILLED WATER.	2072
IMMERSION PERIOD (HOURS)	2074
WATER TEMPERATURE (DEGREES CELSIUS)	2076
EDGE CORRECTIONS PERMITTED*	2078
DIELECTRIC STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2152
AS FOLLOWS: (SELECT ONE)	2154
MINIMUM DIELECTRIC STRENGTH (SELECT ONE)	
(VOLTS PER MIL)	2156
(VOLTS PER MILLIMETER)	2158
MINIMUM BREAKDOWN VOLTAGE (VOLTS)	2160
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2102
PER DOCUMENT (DOC DES)	2104
NUMBER OF TEST SPECIMEN (QUANTITY)	2106

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2072	THE SPECIMEN SHALL BE IMMERSED IN DISTILLED WATER.
2074	THE IMMERSION PERIOD SHALL BE 2074 HOURS.
2076	THE DISTILLED WATER TEMPERATURE SHALL BE ~~2076~~ DEGREES CELSIUS.
2078	EDGE CORRECTIONS SHALL BE PERMITTED-
2152	DIELECTRIC STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT ~~2152.~~
2154	DIELECTRIC STRENGTH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2156	THE DIELECTRIC STRENGTH SHALL BE NOT LESS THAN ~~2156~~ VOLTS PER MIL.
2158	THE DIELECTRIC STRENGTH SHALL BE NOT LESS THAN ~~2158~~ VOLTS PER MILLIMETER.
2160	THE BREAKDOWN VOLTAGE SHALL BE NOT LESS THAN ~~2160~~ VOLT(S).
2102	DIELECTRIC STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT ~~2102.~~
2104	DIELECTRIC STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2104.
2106	THE NUMBER OF SPECIMENS TO BE TESTED SHALL BE ~~2106.~~

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC STRENGTH (CONT)	
PER DOCUMENT (CONT)	
SPECIMEN LENGTH (SELECT ONE)	
U.S.	
(INCHES)	2108
SI	
(MILLIMETERS)	2110
SPECIMEN WIDTH (SELECT ONE)	
U.S.	
(INCHES)	2112
SI	
(MILLIMETERS)	2114
SPECIMEN THICKNESS (SELECT ONE)	
U.S.	
(INCHES)	2116
SI	
(MILLIMETERS)	2118
SPECIMEN DIAMETER (SELECT ONE)	
U.S.	
(INCHES)	2120
SI	
(MILLIMETERS)	2122

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
2108	THE TEST SPECIMEN LENGTH SHALL BE	2108 INCH(S).
2110	THE TEST SPECIMEN LENGTH SHALL BE	2110 Millimeter
2112	THE TEST SPECIMEN WIDTH SHALL BE	2112 INCH(S).
2114	THE TEST SPECIMEN WIDTH SHALL BE	2114 MILLIMETER(S).
2116	THE TEST SPECIMEN THICKNESS SHALL BE	2116 INCH(S).
2118	THE TEST SPECIMEN THICKNESS SHALL BE	2118 MILLIMETER(S).
2120	THE TEST SPECIMEN DIAMETER SHALL BE	2120 INCH(S).
2122	THE TEST SPECIMEN DIAMETER SHALL BE	2122 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC STRENGTH (CONT)	
PER DOCUMENT (CONT)	
TEST MEDIUM (SELECT ONE)	
OIL.	2124
AIR.	2126
TEST VOLTAGE (SELECT ONE)	
VOLTS DC	2128
VOLTS AC	2130
*FREQUENCY (HERTZ)	2132
SHORT TIME TEST TO BREAKDOWN.	2134
MAXIMUM VOLTAGE APPLICATION RATE (VOLTS PER SECOND)	2136
TEST TEMPERATURE (DEGREES CELSIUS)	2138
TEMPERATURE TOLERANCE (PLUS OR MINUS DEGREES CELSIUS)	2140
TEST HUMIDITY (PERCENT)	2142
HUMIDITY TOLERANCE (PLUS OR MINUS DEGREES CELSIUS)	2144
NUMBER OF TESTS (QUANTITY)	2146
ELECTRODES PER DOCUMENT (DES)	2148

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2124 THE TEST MEDIUM SHALL BE OIL.

2126 THE TEST MEDIUM SHALL BE AIR.

2128 THE TEST VOLTAGE SHALL BE 2128 VOLTS DC.

2130 THE TEST VOLTAGE SHALL BE 2130 VOLTS AC AT A FREQUENCY
2132 OF 2132 HERTZ.

2134 THE SHORT TIME TEST TO BREAKDOWN METHOD SHALL BE USED.

2136 THE VOLTAGE APPLICATION RATE SHALL BE NOT GREATER THAN 2136 VOLTS PER SECOND.

2138 THE TEST TEMPERATURE SHALL BE 2138 DEGREES CELSIUS.

2140 THE TEST TEMPERATURE SHALL BE PLUS OR MINUS 2140 DEGREES CELSIUS.

2142 THE TEST RELATIVE HUMIDITY SHALL BE 2142 PERCENT.

2144 THE TEST RELATIVE HUMIDITY TOLERANCE SHALL BE PLUS OR MINUS 2144 PERCENT.

2146 THE NUMBER OF TESTS SHALL BE 2146.

2148 THE TEST ELECTRODES SHALL BE IN ACCORDANCE WITH 2148.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DISSIPATION FACTOR	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2202
AS FOLLOWS:	2204
MINIMUM DISSIPATION FACTOR AT 60 HERTZ	2206
MINIMUM DISSIPATION FACTOR AT 1 KILOHERTZ	2208
MINIMUM DISSIPATION FACTOR AT 1 MEGAHERTZ	2210
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2164
PER DOCUMENT (DOC DES)	2166
NUMBER OF TEST SPECIMENS (QuANTITY)	2168
SPECIMEN DIAMETER (SELECT ONE)	
U.S.	
(INCHES)	2170
SI	
(MILLIMETERS)	2172

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2202	DISSIPATION FACTOR. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2202.
2204	DISSIPATION FACTOR, THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2206	THE DISSIPATION FACTOR AT 60 HERTZ SHALL BE NOT LESS THAN 2206.
2208	THE DISSIPATION FACTOR AT 1 KILOHERTZ SHALL BE NOT LESS THAN 2208.
2210	THE DISSIPATION FACTOR AT 1 MEGAHERTZ SHALL BE NOT LESS THAN 2210.
2164	DISSIPATION FACTOR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2164.
2166	DISSIPATION FACTOR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2166.
2168	THE NUMBER OF SPECIMENS TO BE TESTED SHALL BE 2168.
2170	THE TEST SPECIMEN DIAMETER SHALL BE 2170 INCH(S).
2172	THE TEST SPECIMEN DIAMETER SHALL BE 2172 MILLIMETER(S)-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DISSIPATION FACTOR (CONT)	
PER DOCUMENT (CONT)	
SPECIMEN THICKNESS (SELECT ONE)	
U.S.	
(INCHES)	2174
SI	
(MILLIMETERS)	2176
SPECIMEN LENGTH (SELECT ONE)	
U.S.	
(INCHES)	2178
SI	
(MILLIMETERS)	2180
SPECIMEN WIDTH (SELECT ONE)	
U.S.	
(INCHES)	2182
SI	
(MILLIMETERS)	2184
ELECTTRODES PER DOCUMENT (DES)	2186
NUMBER OF MEASUREMENTS (QUANTITY)	2188
SPECIMEN IMMERSED IN DISTILLED WATER.	2190

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2174	THE TEST SPECIMEN THICKNESS SHALL BE 2174 INCH(S).
2176	THE TEST SPECIMEN THICKNESS SHALL BE 2176 MILLIMETER(S)-
2178	THE TEST SPECIMEN LENGTH SHALL BE 2178 INCH(S).
2180	THE TEST SPECIMEN LENGTH SHALL BE 2180 MILLIMETER(S).
2182	THE TEST SPECIMEN WIDTH SHALL BE 2182 INCH(S).
2184	THE TEST SPECIMEN WIDTH SHALL BE 2184 Millimeter
2186	THE TEST ELECTRODES SHALL BE IN ACCORDANCE WITH 2186.
2188	THE NUMBER OF MEASUREMENTS AT EACH FREQUENCY SHALL BE 2188.
2190	THE TEST SPECIMEN SHALL BE IMMERSED IN DISTILLED WATER.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DISSIPATION FACTOR (CONT)	
SPECIMEN IMMERSED IN DISTILLED WATER (CONT)	
IMMERSION PERIOD (HOURS)	2192
WATER TEMPERATURE (DEGREES CELSIUS)	2194
EDGE CORRECTIONS PERMITTED.	2196
DRYING (CURE, GEL)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2246
AS FOLLOWS:	2248
TIME TO REACH STRINGY STATE (SELECT ONE)	
(HOURS)	2250
(MINUTES)	2252
TIME TO REACH TACK FREE STATE (SELECT ONE)	
(HOURS)	2254
(MINUTES)	2256
TIME TO REACH FULL CURE (SELECT ONE)	
(HOURS)	2258
(MINUTES)	2260
SPECIMEN CONFORMS TO COLOR REQUIREMENTS.	2262
SPECIMEN CONFORMS TO HARDNESS REQUIREMENTS.	2264

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2192	THE IMMERSION PERIOD SHALL BE 2192 HOURS.
2194	THE DISTILLED WATER TEMPERATURE SHALL BE 2194 DEGREES CELSIUS.
2196	EDGE CORRECTIONS SHALL BE PERMITTED.
2246	DRYING (CURE, GEL). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2246.
2248	DRYING (CURE, GEL). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2250	THE PERIOD TO REACH STRINGY STATE SHALL BE 2250 HOURS.
2252	THE PERIOD TO REACH STRINGY STATE SHALL BE 2252 MINUTES.
2254	THE PERIOD TO REACH TACK FREE STATE SHALL BE 2254 HOURS.
2256	THE PERIOD TO REACH TACK FREE STATE SHALL BE 2256 MINUTES.
2258	THE PERIOD TO REACH FULL CURE SHALL BE 2258 HOURS.
2260	THE PERIOD TO REACH FULL CURE SHALL BE 2260 MINUTES.
2262	THE SPECIMEN SHALL CONFORM TO THE COLOR REQUIREMENTS AFTER TEST.
2264	THE SPECIMEN SHALL CONFORM TO THE HARDNESS REQUIREMENTS AFTER TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DRYING (CURE, GEL) (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2214
PER DOCUMENT (DOC DES)	2216
SPECIMEN LENGTH (SELECT ONE)	
U.S.	
(INCHES)	2218
SI	
(MILLIMETERS)	2220
SPECIMEN WIDTH (SELECT ONE)	
U.S.	
(INCHES)	2222
SI	
(MILLIMETERS)	2224
SPECIMEN THICKNESS (SELECT ONE)	
U.S.	
(INCHES)	2226
SI	
(MILLIMETERS)	2228

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2214	DRYING (CURE, GEL). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2214.
2216	DRYING (CURE, GEL). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2216.
2218	THE TEST SPECIMEN LENGTH SHALL BE 2218 INCH(S).
2220	THE TEST SPECIMEN LENGTH SHALL BE 2220 MILLIMETER(S).
2222	THE TEST SPECIMEN WIDTH SHALL BE 2222 INCH(S)-
2224	THE TEST SPECIMEN WIDTH SHALL BE 2224 Millimeter
2226	THE TEST SPECIMEN THICKNESS SHALL BE 2226 INCH(S).
2228	THE TEST SPECIMEN THICKNESS SHALL BE 2228 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DRYING (CURE, GEL) (CONT)	
PER DOCUMENT (CONT)	
RELATIVE HUMIDITY (PERCENT)	2230
HUMIDITY TOLERANCE (PLUS OR MINUS PERCENT)	2232
MAXIMUM DRYING TEMPERATURE (DEGREES CELSIUS)	2234
MAXIMUM DRYING PERIOD (SELECT ONE)	
(HOURS)	2236
(MINUTES)	2238
TEST SPECIMEN AMOUNT (SELECT ONE)	
U.S.	
(OUNCES)	2240
SI	
(GRAMS)	2242
ELONGATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2280
MINIMUM ELONGATION (PERCENT)	2282

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2230	THE TEST RELATIVE HUMIDITY SHALL BE 2230 PERCENT.
2232	THE TEST RELATIVE HUMIDITY TOLERANCE SHALL BE PLUS OR MINUS 2232 PERCENT.
2234	THE DRYING TEMPERATURE SHALL BE NOT GREATER THAN 2234 DEGREES CELSIUS.
2236	THE DRYING PERIOD SHALL BE NOT GREATER THAN 2236 HOUR(S).
2238	THE DRYING PERIOD SHALL BE NOT GREATER THAN 2238 MINUTE(S).
2240	THE TEST SPECIMEN AMOUNT SHALL BE 2240 OUNCES.
2242	THE TEST SPECIMEN AMOUNT SHALL BE 2242 GRAMS.
2280	ELONGATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2280.
2282	ELONGATION. THE ELONGATION SHALL BE NOT LESS THAN 2282 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELONGATION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2268
PER FED-STD-228. METHOD 3031	2270
DISTANCE BETWEEN BENCH MARKS (SELECT ONE)	
U.S.	
(INCHES)	2272
SI	
(MILLIMETERS)	2274
NUMBER OF TEST SPECIMENS (QUANTITY)	2276
FLAMMABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2332
AS FOLLOWS:	2334
SPECIMEN (SELECT ONE)	
SELF-EXTINGUISHING.	2336
NON-BURNING.	2338

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2268	ELONGATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2268.
2270	ELONGATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 3031 OF FED-STD-228.
2272	THE DISTANCE BETWEEN BENCH MARKS SHALL BE 2272 INCHES.
2274	THE DISTANCE BETWEEN BENCH MARKS SHALL BE 2274 MILLIMETER(S).
2276	THE NUMBER OF SPECIMENS TO BE TESTED SHALL BE 2276.
2332	FLAMMABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2332.
2334	FLAMMABILITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2336	THE SPECIMEN SHALL BE SELF-EXTINGUISHING,
2338	THE SPECIMEN SHALL BE NON-BURNING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLAMMABILITY (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM BURN DISTANCE (SELECT ONE)	
U.S.	
(INCHES)	2340
SI	
(MILLIMETERS)	2342
MAXIMUM BURN PERIOD (SECONDS)	2344
MAXIMUM SMOLDERING PERIOD (SECONDS)	2346
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2302
PER DOCUMENT (DOC DES)	2304
TEST METHOD (DESIGNATE)	2306
NUMBER OF SPECIMENS (QUANTITY)	2308
SPECIMEN LENGTH (SELECT ONE)	
U.S.	
(INCHES)	2310
SI	
(MILLIMETERS)	2312

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2340	THE BURN DISTANCE SHALL BE NOT GREATER THAN 2340 INCH(S).
2342	THE BURN DISTANCE SHALL BE NOT GREATER THAN 2342 MILLIMETER(S).
2344	THE BURN PERIOD SHALL BE NOT GREATER THAN 2344 SECOND(S).
2346	THE sMoLDERING PERIOD SHALL BE Not Greater than 2346 SECOND(S).
2302	FLAMMABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2302.
2304	FLAMMABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2304.
2306	THE APPLICABLE TEST METHOD SHALL BE 2306.
2308	THE NUMBER OF SPECIMENS TO BE TESTED SHALL BE 2308.
2310	THE TEST SPECIMEN LENGTH SHALL BE 2310 INCH(S).
2312	THE TEST SPECIMEN LENGTH SHALL BE 2310 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLAMMABILITY (CONT)	
PER DOCUMENT (CONT)	
SPECIMEN WIDTH (SELECT ONE)	
U.S.	
(INCHES)	2314
SI	
(MILLIMETERS)	2316
SPECIMEN THICKNESS (SELECT ONE)	
U.S.	
(INCHES)	2318
SI	
(MILLIMETERS)	2320
SPECIMEN WEIGHT (SELECT ONE)	
U.S.	
(OUNCES)	2322
SI	
(GRAMS)	2324
TIMES FLAME APPLIED (QUANTITY)	2326
FLAME APPLICATION PERIOD (SECONDS)	2328

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2314	THE TEST SPECIMEN WIDTH SHALL BE 2314 INCH(S).
2316	THE TEST SPECIMEN WIDTH SHALL BE 2316 MILLIMETER(S).
2318	THE TEST SPECIMEN THICKNESS SHALL BE 2318 INCH(S).
2320	THE TEST SPECIMEN THICKNESS SHALL BE 2320 MILLIMETER(S).
2322	THE TEST SPECIMEN WEIGHT SHALL BE 2322 OUNCES.
2324	THE TEST SPECIMEN WEIGHT SHALL BE 2324 GRAMS.
2326	THE NUMBER OF TIMES THE FLAME SHALL BE APPLIED TO THE SPECIMEN SHALL BE 2326.
2328	THE FLAME APPLICATION PERIOD SHALL BE 2328 SECONDS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLASH POINT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2356
MINIMUM FLASH POINT TEMPERATURE (DEGREES CELSIUS)	2358
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2350
PER FED-STD-141, METHOD 4291	2352
FLEXIBILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2394
NO EVIDENCE OF CRACKING, CHIPPING, CRAZING, SPLITTING, OR Delamination	2396
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2362
PER DOCUMENT (DOC DES)	2364
TEST METHOD (DESIGNATE)	2366

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2356	FLASH POINT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2356.
2358	FLASH POINT. THE FLASH POINT TEMPERATURE SHALL BE LESS THAN 2358 DEGREES CELSIUS.
2350	FLASH POINT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2350.
2352	FLASH POINT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 4291 OF FED-STD-141.
2394	FLEXIBILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2394.
2396	FLEXIBILITY. THERE SHALL BE NO EVIDENCE OF CRACKING, CHIPPING, CRAZING, OR DELAMINATION
2362	FLEXIBILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2362.
2364	FLEXIBILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2364.
2366	THE APPLICABLE TEST METHOD SHALL BE 2366.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLEXIBILITY (CONT)	
PER DOCUMENT (CONT)	
TEST TEMPERATURE (DEGREES CELSIUS)	2368
TEMPERATURE TOLERANCE (PLUS OR MINUS DEGREES CELSIUS)	2370
NUMBER OF TEST SPECIMEN (QUANTITY)	2372
SPECIMEN LENGTH (SELECT ONE)	
U.S.	
(INCHES)	2374
SI	
(MILLIMETERS)	2376
SPECIMEN WIDTH (SELECT ONE)	
U.S.	
(INCHES)	2378
SI	
(MILLIMETERS)	2380
SPECIMEN THICKNESS (SELECT ONE)	
U.S.	
(INCHES)	2382
SI	
(MILLIMETERS)	2384

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2368	THE TEST TEMPERATURE SHALL BE 2368 DEGREES CELSIUS.
2370	THE TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2370 DEGREES CELSIUS.
2372	THE NUMBER OF SPECIMENS TO BE TESTED SHALL BE 2372.
2374	THE TEST SPECIMEN LENGTH SHALL BE 2374 INCH(S).
2376	THE TEST SPECIMEN LENGTH SHALL BE 2376 MILLIMETER(S).
2378	THE TEST SPECIMEN WIDTH SHALL BE 2378 INCH(S).
2380	THE TEST SPECIMEN WIDTH SHALL BE 2380 MILLIMETER(S).
2382	THE TEST SPECIMEN THICKNESS SHALL BE 2382 INCH(S).
2384	THE TEST SPECIMEN THICKNESS SHALL BE 2384 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLEXIBILITY (CONT)	
PER DOCUMENT (CONT)	
MANDREL DIAMETER (SELECT ONE)	
U.S.	
(INCHES)	2386
SI	
(MILLIMETERS)	2388
SPECIMEN BEND AROUND MANDREL (DEGREES)	2390
FREE SULFUR	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2408
NO FREE SULFUR.	2410
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2402
PER ASTMD1275.	2404

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2386	THE BEND MANDREL DIAMETER SHALL BE 2386 INCHES.
2388	THE BEND MANDREL DIAMETER SHALL BE 2388 MILLIMETERS.
2390	THE SPECIMEN BEND AROUND THE MANDREL SHALL BE 2390 DEGREES.
2408	FREE SULFUR. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2408.
2410	FREE SULFUR. THERE SHALL BE NO FREE SULFUR IN THE TEST SPECIMEN.
2402	FREE SULFUR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2402.
2404	FREE SULFUR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD1275.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4760
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761
NO EVIDENCE OF FUNGUS GROWTH BY TEST.	4762
MAXIMUM GROWTH RATING ASTMG21 (NUMBER)	2430
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4754
PER DOCUMENT (DOC DES)	2412
TEST METHOD (DESIGNATE)	2414
PANEL LENGTH (SELECT ONE)	
U.S. (INCHES)	2416

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4760	FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.
4765	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED, THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4762	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
2430	FUNGUS. THE FUNGUS GROWTH RATING SHALL BE NOT GREATER THAN 2430 IN ACCORDANCE WITH ASTMG21.
4754	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.
2412	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2412.
2414	THE APPLICABLE TEST METHOD SHALL BE 2414.
2416	THE TEST SPECIMEN LENGTH SHALL BE 2416 INCH(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FUNGUS (CONT)	
PANEL LENGTH (CONT)	
SI	
(MILLIMETERS)	2418
PANEL WIDTH (SELECT ONE)	
U.S.	
(INCHES)	2420
SI	
(MILLIMETERS)	2422
PANEL THICKNESS (SELECT ONE)	
U.S.	
(INCHES)	2424
SI	
(MILLIMETERS)	2426
TEST PERIOD (DAYS)	4756
HARDNESS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2466
AS FOLLOWS:	2468
MINIMUM AVERAGE DUROMETER READING	2470
MINIMUM DUROMETER READING (NUMBER)	2472

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
2418	THE TEST SPECIMEN LENGTH SHALL BE 2418 MILLIMETER(S).	
2420	THE TEST SPECIMEN WIDTH SHALL BE 2420 INCH(S),	
2422	THE TEST SPECIMEN WIDTH SHALL BE 2422 MILLIMETER(S).	
2424	THE TEST SPECIMEN THICKNESS SHALL BE 2424 INCH(S).	
2426	THE TEST SPECIMEN THICKNESS SHALL BE 2426 MILLIMETER(S).	
4756	TEST PERIOD SHALL BE 4756 DAY(S).	
2466	HARDNESS.	THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2466.
2468	HARDNESS.	THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2470	THE AVERAGE DUROMETER READING SHALL BE NOT LESS THAN 2470.	
2472	THE DUROMETER READING SHALL BE NOT LESS THAN 2472.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HARDNESS (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2434
PER DOCUMENT (DOC DES)	2436
TEST METHOD (DESIGNATE)	2437
TEST TEMPERATURE (DEGREES CELSIUS)	2438
TEMPERATURE TOLERANCE (PLUS OR MINuS DEGREES CELSIUS)	2440
APPLICABLE DUROMETER SCALE (LETTER)	2442
INDENTATION DURATION (SECONDS)	2444
SPECIMEN LENGTH (SELECT ONE)	
U.S.	
(INCHES)	2446
SI	
(MILLIMETERS)	2448
SPECIMEN WIDTH (SELECT ONE)	
U.S.	
(INCHES)	2450
SI	
(MILLIMETERS)	2452

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2434	HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2434.
2436	HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2436.
2437	THE APPLICABLE TEST METHOD SHALL BE 2437.
2438	THE TEST TEMPERATURE SHALL BE 2438 DEGREES CELSIUS,
2440	THE TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2440 DEGREES CELSIUS.
2442	THE APPLICABLE TESTER DUROMETER SCALE LETTER SHALL BE 2442.
2444	THE INDENTATION DURATION SHALL BE 2444 SECONDS.
2446	THE TEST SPECIMEN LENGTH SHALL BE 2446 INCH(S).
2448	THE TEST SPECIMEN LENGTH SHALL BE 2448 MILLIMETER(S)-
2450	THE TEST SPECIMEN WIDTH SHALL BE 2450 INCH(S).
2452	THE TEST SPECIMEN WIDTH SHALL BE 2452 Millimeter

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HARDNESS (CONT)	
PER DOCUMENT (CONT)	
SPECIMEN THICKNESS (SELECT ONE)	
U.S.	
(INCHES)	2454
SI	
(MILLIMETERS)	2456
SPECIMEN DIAMETER (SELECT ONE)	
U.S.	
(INCHES)	2458
SI	
(MILLIMETERS)	2460
NUMBER OF TEST SPECIMENS (QUANTITY)	2462
HEAT AGING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2512
NO EVIDENCE OF CRACKING OR CRAZING.	2514
SPECIMEN CONFORMS TO DIELECTRIC STRENGTH REQUIREMENTS AFTER HEAT AGING.	2516

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2454	THE TEST SPECIMEN THICKNESS SHALL BE 2454 INCH(S).
2456	THE TEST SPECIMEN THICKNESS SHALL BE 2456 MILLIMETER(S)-
2458	THE TEST SPECIMEN DIAMETER SHALL BE 2458 INCH(S),
2460	THE TEST SPECIMEN DIAMETER SHALL BE 2460 MILLIMETER(S).
2462	THE NUMBER OF SPECIMENS TO BE TESTED SHALL BE 2462.
2512	HEAT AGING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2512.
2514	HEAT AGING. THERE SHALL BE NO EVIDENCE OF CRACKING OR CRAZING.
2516	HEAT AGING. THE SPECIMEN SHALL CONFORM TO THE DIELECTRIC STRENGTH REQUIREMENTS AFTER THE HEAT AGING TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HEAT AGING (CONT)	
REQUIREMENTS (CONT)	
SPECIMEN CONFORMS TO HARDNESS REQUIREMENTS AFTER HEAT AGING.	2518
NO EVIDENCE OF Reversion	2520
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2476
PER DOCUMENT (DOC DES)	2478
OVEN TEMPERATURE (DEGREES CELSIUS)	2480
TEMPERATURE TOLERANCE (PLUS OR MINUS DEGREES CELSIUS)	2482
CONDITIONING. PERIOD (HOURS)	2484
MAXIMUM AIR VELOCITY (SELECT ONE)	
U.S.	
(FEET PER MINUTE)	2486
SI	
(METERS PER MINUTE)	2488

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2518	HEAT AGING. THE SPECIMEN SHALL CONFORM TO THE HARDNESS REQUIREMENTS AFTER THE HEAT AGING TEST.
2520	HEAT AGING. THERE SHALL BE NO EVIDENCE OF REVERSION OF THE MATERIALS
2476	HEAT AGING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2476.
2478	HEAT AGING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2478.
2480	THE OVEN TEMPERATURE SHALL BE 2480 DEGREES CELSIUS.
2482	THE OVEN TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2482 DEGREES CELSIUS,
2484	THE CONDITIONING PERIOD SHALL BE 2484 HOURS.
2486	THE AIR VELOCITY IN THE OVEN SHALL BE NOT GREATER THAN 2486 FEET PER MINUTE.
2488	THE AIR VELOCITY IN THE OVEN SHALL BE NOT GREATER THAN 2488 METERS PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HEAT AGING (CONT)	
PER DOCUMENT (CONT)	
MANDREL DIAMETER (SELECT ONE)	
U.S.	
(INCHES)	2490
SI	
(MILLIMETERS)	2492
WRAP OR BEND ON MANDREL (DEGREES)	2494
SPECIMEN LENGTH (SELECT ONE)	
U.S.	
(INCHES)	2498
SI	
(MILLIMETERS)	2500
SPECIMEN WIDTH (SELECT ONE)	
U.S.	
(INCHES)	2502
SI	
(MILLIMETERS)	2504

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2490	THE DIAMETER OF THE MANDREL OVER WHICH THE SPECIMEN IS WOUND SHALL BE 2490 INCHES.
2492	THE DIAMETER OF THE MANDREL OVER WHICH THE SPECIMEN IS WOUND SHALL BE 2492 MILLIMETER(S).
2494	THE SPECIMEN SHALL BE WRAPPED OR BENT ON THE MANDREL 2494 DEGREES.
2498	THE TEST SPECIMEN LENGTH SHALL BE 2498 INCH(S).
2500	THE TEST SPECIMEN LENGTH SHALL BE 2500 Millimeter
2502	THE TEST SPECIMEN WIDTH SHALL BE 2502 INCH(S).
2504	THE TEST SPECIMEN WIDTH SHALL BE 2504 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HEAT AGING (CONT)	
PER DOCUMENT (CONT)	
SPECIMEN THICKNESS (SELECT ONE)	
U.S.	
(INCHES)	2506
SI	
(MILLIMETERS)	2508
HYDROLYTIC STABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2566
NO EVIDENCE OF REVERSION, TACKINESS, FLOW, OR SOFTENING.	2568
MINIMUM DIELECTRIC STRENGTH (VOLTS)	2570
MAXIMUM REDUCTION IN HARDNESS (PERCENT)	2572
CONFORMS TO VOLUME RESISTIVITY REQUIREMENT DURING AND AFTER TEST.	2574

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2506	THE TEST SPECIMEN THICKNESS SHALL BE 2506 INCH(S).
2508	THE TEST SPECIMEN THICKNESS SHALL BE 2508 Millimeter
2566	HYDROLYTIC STABILITY THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2566.
2568	HYDROLYTIC STABILITY. THERE SHALL BE NO EVIDENCE OF REVERSION, TACKINESS, FLOW, OR SOFTENING OF THE MATERIAL AFTER TEST.
2570	HYDROLYTIC STABILITY. THE DIELECTRIC STRENGTH VOLTAGE AFTER TEST SHALL BE NOT LESS THAN 2570 VOLT(S)
2572	HYDROLYTIC STABILITY. THE REDUCTION IN HARDNESS SHALL BE NOT GREATER THAN 2572 PERCENT OF INITIAL HARDNESS.
2574	HYDROLYTIC STABILITY. THE SPECIMEN SHALL CONFORM TO THE VOLUME RESISTIVITY REQUIREMENTS AT THE MEASUREMENT INTERVALS AND AFTER TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HYDROLYTIC STABILITY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2524
PER DOCUMENT (DOC DES)	2526
SPECIMEN LENGTH (SELECT ONE)	
U.S.	
(INCHES)	2528
SI	
(MILLIMETERS)	2530
SPECIMEN WIDTH (SELECT ONE)	
U.S.	
(INCHES)	2532
SI	
(MILLIMETERS)	2534
SPECIMEN THICKNESS (SELECT ONE)	
U.S.	
(INCHES)	2536
SI	
(MILLIMETERS)	2538

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2524	HYDROLYTIC STABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2524.
2526	HYDROLYTIC STABILITY TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2526.
2528	THE TEST SPECIMEN LENGTH SHALL BE 2528 INCH(S).
2530	THE TEST SPECIMEN LENGTH SHALL BE 2530 MILLIMETER(S).
2532	THE TEST SPECIMEN WIDTH SHALL BE 2532 INCH(S).
2534	THE TEST SPECIMEN WIDTH SHALL BE 2534 MILLIMETER(S).
2536	THE TEST SPECIMEN THICKNESS SHALL BE 2536 INCH(S).
2538	THE TEST SPECIMEN THICKNESS SHALL BE 2538 Millimeter

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HYDROLYTIC STABILITY (CONT)	
PER DOCUMENT (CONT)	
SPECIMEN DIAMETER (SELECT ONE)	
U.S.	
(INCHES)	2540
SI	
(MILLIMETERS)	2542
EACH TEST PERIOD DURATION (DAYS)	2544
MEASUREMENT INTERVALS (DAYS)	2546
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	2548
TEMPERATURE TOLERANCE (PLUS OR MINUS DEGREES CELSIUS)	2550
FIRST TEST RELATIVE HUMIDITY (PERCENT)	2552
HUMIDITY TOLERANCE (PLUS OR MINUS PERCENT)	2554
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	2556
TEMPERATURE TOLERANCE (PLUS OR MINUS DEGREES CELSIUS)	2558

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2540 THE TEST SPECIMEN DIAMETER SHALL BE 2540 INCH(S).

2542 THE TEST SPECIMEN DIAMETER SHALL BE 2542 MILLIMETER(S).

2544 THE DURATION OF EACH TEST SHALL BE 2544 DAYS.

2546 THE MEASUREMENT INTERVALS SHALL BE 2546 DAYS.

2548 THE FIRST OR SINGLE TEST TEMPERATURE SHALL BE 2548 DEGREES CELSIUS.

2550 THE FIRST OR SINGLE TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2550 DEGREES CELSIUS.

2552 THE FIRST OR SINGLE TEST RELATIVE HUMIDITY SHALL BE 2552 PERCENT,

2554 THE FIRST OR SINGLE TEST RELATIVE HUMIDITY TOLERANCE SHALL BE PLUS OR MINUS 2554 PERCENT.

2556 THE SECOND TEST TEMPERATURE SHALL BE 2556 DEGREES CELSIUS.

2558 THE SECOND TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2558 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HYDROLYTIC STABILITY (CONT)	
PER DOCUMENT (CONT)	
SECOND TEST RELATIVE HUMIDITY (PERCENT)	2560
HUMIDITY TOLERANCE (PLUS OR MINUS PERCENT)	2562
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1380
AS FOLLOWS:	6359
*MINIMUM INSULATION RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387
NO EVIDENCE OF PHYSICAL DAMAGE.	1407

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2560	THE SECOND TEST RELATIVE HUMIDITY SHALL BE 2560 PERCENT.
2562	THE SECOND TEST RELATIVE HUMIDITY TOLERANCE SHALL BE PLUS OR MINUS 2562 PERCENT.
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.
6359	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1386	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 1386 MEGOHM(S).
1384	INSULATION RESISTANCE SHALL BE NOT LESS THAN 11384 MEGOHM(S) AT THE FIRST TEST TEMPERATURE.
1387	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHM(S) AT THE SECOND TEST TEMPERATURE.
1407	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1371
PER DOCUMENT (DOC DES)	2576
TEST METHOD (DESIGNATE)	2578
SPECIMEN LENGTH (SELECT ONE)	
U.S.	
(INCHES)	2580
SI	
(MILLIMETERS)	2582
SPECIMEN WIDTH (SELECT ONE)	
U.S.	
(INCHES)	2584
SI	
(MILLIMETERS)	2586
SPECIMEN THICKNESS (SELECT ONE)	
U.S.	
(INCHES)	2588
SI	
(MILLIMETERS)	2590

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1371	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.
2576	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2576.
2578	THE APPLICABLE TEST METHOD SHALL BE 2578.
2580	THE TEST SPECIMEN LENGTH SHALL BE 2580 INCH(S).
2582	THE TEST SPECIMEN LENGTH SHALL BE 2582 MILLIMETER(S).
2584	THE TEST SPECIMEN WIDTH SHALL BE 2584 INCH(S).
2586	THE TEST SPECIMEN WIDTH SHALL BE 2586 MILLIMETER(S)-
2588	THE TEST SPECIMEN THICKNESS SHALL BE 2588 INCH(S).
2590	THE TEST SPECIMEN THICKNESS SHALL BE 2590 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
PER DOCUMENT (CONT)	
SPECIMEN DIAMETER (SELECT ONE)	
U.S.	
(INCHES)	2592
SI	
(MILLIMETERS)	2594
ELECTRODES PER DOCUMENT (DOC DES)	2596
CONDITION (SELECT ONE)	
TEST CONDTION (LETTER)	1378
TEST VOLTAGE (VOLTS, DC)	1373
ELECTRIFICATION TIME (SECONDS)	1376
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	1377
SPECIAL PREPARATIONS OR CONDITIONS PER DOCUMENT (DOC DES)	1520
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	1372
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	1381
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1383

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2592	THE TEST SPECIMEN DIAMETER SHALL BE 2592 INCH(S).
2594	THE TEST SPECIMEN DIAMETER SHALL BE 2594 MILLIMETER(S).
2596	THE TEST ELECTRODES SHALL BE IN ACCORDANCE WITH 2596.
1378	TEST CONDITION LETTER 1378 SHALL APPLY.
1373	TEST POTENTIAL SHALL BE 1373 VOLTS, DC.
1376	ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S).
1377	THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.
1520	SPECIAL PREPARATIONS OR CONDITIONS SHALL BE IN ACCORDANCE WITH 1520.
1372	FIRST TEST TEMPERATURE SHALL BE 1372 DEGREES CELSIUS.
1381	SECOND TEST TEMPERATURE SHALL BE 1381 DEGREES CELSIUS.
1383	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1383 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LONGITUDINAL SHRINKAGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2626
MAXIMUM SHRINKAGE (PERCENT)	2628
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2602
PER DOCUMENT (DOC DES)	2604
SPECIMEN LENGTH (SELECT ONE)	
U.S.	
(INCHES)	2606
SI	
(MILLIMETERS)	2608
SPECIMEN WIDTH (SELECT ONE)	
U.S.	
(INCHES)	2610
SI	
(MILLIMETERS)	2612

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2626	LONGITUDINAL Shrinkage THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2626.
2628	LONGITUDINAL Shrinkage THE SHRINKAGE SHALL BE NOT GREATER THAN 2628 PERCENT.
2602	LONGITUDINAL SHRINKAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2602.
2604	LONGITUDINAL SHRINKAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2604.
2606	THE TEST SPECIMEN LENGTH SHALL BE 2606 INCH(S).
2608	THE TEST SPECIMEN LENGTH SHALL BE 2608 MILLIMETER(S).
2610	THE TEST SPECIMEN WIDTH SHALL BE 2610 INCH(S).
2612	THE TEST SPECIMEN WIDTH SHALL BE 2612 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LONGITUDINAL SHRINKAGE (CONT)	
PER DOCUMENT (CONT)	
SPECIMEN THICKNESS (SELECT ONE)	
U.S.	
(INCHES)	2614
SI	
(MILLIMETERS)	2616
TEST TEMPERATURE (DEGREES CELSIUS)	2618
TEMPERATURE TOLERANCE (PLUS OR MINUS DEGREES CELSIUS)	2620
TEST PERIOD (HOURS)	2622
MOISTURE RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1400
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	1396
REMAIN WITHIN SPECIFIED Tolerance	1398
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1394
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	1432

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2614	THE TEST SPECIMEN THICKNESS SHALL BE 2614 INCH(S).
2616	THE TEST SPECIMEN THICKNESS SHALL BE 2616 MILLIMETER(S).
2618	THE TEST TEMPERATURE SHALL BE 2618 DEGREES CELSIUS.
2620	THE TEST TEMPERATURE SHALL BE PLUS OR MINUS 2620 DEGREES CELSIUS.
2622	THE TEST PERIOD SHALL BE 2622 HOURS.
1400	MOISTURE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1400.
1396	MOISTURE RESISTANCE. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
1398	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1394	THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING OR INSULATION BREAKDOWN, WHEN DIELECTRIC WITHSTANDING VOLTAGE IS APPLIED.
1432	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1432 MEGOHM(S) AT HIGH HUMIDITY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE. (CONT)	
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	1406
MAXIMUM INCREASE IN ANY DIMENSION (PERCENT)	2650
MAXIMUM WATER ABSORPTION (SELECT ONE)	
(OUNCES)	2652
(GRAMS)	2654
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1391
PER MIL-STD-202, METHOD 106.	1397
POLARIZING VOLTAGE (VOLTS, DC)	11395
PERCENT OF SAMPLE SUBJECTED TO POLARIZING VOLTAGE (PERCENT)	4991
STEP 7A NOT Applicable	4985
STEP 7B NOT APPLICABLE.	4986
MOUNT PER DOCUMENT (DOC DES)	1449

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1406	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1406 MEGOHM(S) AFTER DRYING.
2650	THE INCREASE IN ANY DIMENSION OVER THE INITIAL DIMENSION SHALL BE NOT GREATER THAN 2650 PERCENT.
2652	THE WEIGHT OF WATER ABSORPTION SHALL BE NOT GREATER THAN 2652 OUNCES.
2654	THE WEIGHT OF WATER ABSORPTION SHALL BE NOT GREATER THAN 2654 GRAMS.
1391	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1391.
1397	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 106 OF MIL-STD-202.
1395	POLARIZING VOLTAGE SHALL BE 1395 VOLTS, DC.
4991	4991 PERCENT OF THE SAMPLE SHALL BE SUBJECTED TO THE POLARIZING VOLTAGE.
4985	STEP 7A OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
4986	STEP 7B OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE*
1449	MOUNTING SHALL BE IN ACCORDANCE WITH 1449.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 106. (CONT)	
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	4983
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING*	4984
SPECIMEN LENGTH (SELECT ONE)	
U.S.	
(INCHES)	2634
SI	
(MILLIMETERS)	2636
SPECIMEN WIDTH (SELECT ONE)	
U.S.	
(INCHES)	2638
SI	
(MILLIMETERS)	2640
SPECIMEN THICKNESS (SELECT ONE)	
U.S.	
(INCHES)	2642
SI	
(MILLIMETERS)	2644
NUMBER OF TEST SPECIMENS (QUANTITY)	2646

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4983	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.
4984	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.
2634	THE TEST SPECIMEN LENGTH SHALL BE 2634 INCH(S).
2636	THE TEST SPECIMEN LENGTH SHALL BE 2636 MILLIMETER(S).
2638	THE TEST SPECIMEN WIDTH SHALL BE 2638 INCH(S).
2640	THE TEST SPECIMEN WIDTH SHALL BE 2640 MILLIMETER(S).
2642	THE TEST SPECIMEN THICKNESS SHALL BE 2642 INCH(S).
2644	THE TEST SPECIMEN THICKNESS SHALL BE 2644 MILLIMETER(S).
2646	THE NUMBER OF SPECIMENS TO BE TESTED SHALL BE 2646.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NONVOLATILE CONTENT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2670
AS FOLLOWS:	2672
MINIMUM NONVOLATILE CONTENT (PERCENT)	2674
MAXIMUM NONVOLATILE CONTENT (PERCENT)	2676
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2658
PER FED-STD-141, METHOD 4041.	2660
TEST TEMPERATURE (DEGREES CELSIUS)	2662
TEMPERATURE TOLERANCE (PLUS OR MINUS DEGREES CELSIUS)	2664
TEST PERIOD (HOURS)	2666

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2670	NONVOLATILE CONTENT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2670.
2672	NONVOLATILE CONTENT. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2674	THE NONVOLATILE CONTENT SHALL BE NOT LESS THAN 2674 PERCENT.
2676	THE NONVOLATILE CONTENT SHALL BE NOT GREATER THAN 2676 PERCENT.
2658	NONVOLATILE CONTENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2658.
2660	NONVOLATILE CONTENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 4041 OF FED-STD-141.
2662	THE TEST TEMPERATURE SHALL BE 2662 DEGREES CELSIUS.
2664	THE TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2664 DEGREES CELSIUS.
2666	THE TEST PERIOD SHALL BE 2666 HOURS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OIL AND SOLVENT RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2709
NO EVIDENCE OF WARPING, SPLITTING, OR SOFTENING OF MATERIAL.	2711
MAXIMUM DIMENSIONAL CHANGE (PERCENT)	2713
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2680
PER DOCUMENT (DOC DES)	2682
MEDIA (SELECT ONE)	
PER DESIGNATED DOCUMENT (DOC DES)	2684
PER DESIGNATED DOCUMENT EXCEPT _____	2686
EXPOSURE TO MEDIA PER DOCUMENT (DOC DES)	2690
MEDIA TEMPERATURE (DEGREES CELSIUS)	2692
EXPOSURE DURATION (HOURS)	2694
PORTION OF SOLUTION (PERCENT)	2696

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2709	OIL AND SOLVENT RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2709.
2711	OIL AND SOLVENT RESISTANCE. THERE SHALL BE NO EVIDENCE OF WARPING, SPLITTING, OR SOFTENING OF MATERIALS.
2713	OIL AND SOLVENT RESISTANCE. THE CHANGE IN ANY DIMENSION FROM INITIAL DIMENSION SHALL BE NOT GREATER THAN 2713 PERCENT.
2680	OIL AND SOLVENT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2680.
2682	OIL AND SOLVENT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2682.
2684	THE TEST MEDIA SHALL BE IN ACCORDANCE WITH THE TEST DOCUMENT.
2686	THE TEST MEDIA SHALL BE IN ACCORDANCE WITH THE TEST DOCUMENT EXCEPT 2686.
2690	THE TEST SPECIMEN SHALL BE EXPOSED TO OIL OR SOLVENT IN ACCORDANCE WITH 2690.
2692	THE TEST MEDIA TEMPERATURE SHALL BE 2692 DEGREES CELSIUS.
2694	THE DURATION OF EXPOSURE TO THE TEST MEDIA SHALL BE 2694 HOURS.
2696	THE PERCENTAGE OF THE TEST MEDIA IN A SOLUTION SHALL BE 2696 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OZONE RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2748
NO CRACKING.	2750
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2716
PER FED-STD-228. METHOD 4111.	2718
ELONGATION (PERCENT)	2720
EXPOSURE DURATION (SELECT ONE)	
(HOURS)	2722
(MINUTES)	2724
OZONE CONCENTRATION TEMPERATURE (DEGREES CELSIUS)	2724
TEMPERATURE TOLERANCE (PLUS OR MINUS DEGREES CELSIUS)	2728
MINIMUM OZONE CONCENTRATION BY VOLUME (PERCENT)	2730

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2748	OZONE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2748.
2750	OZONE RESISTANCE. THERE SHALL BE NO EVIDENCE OF CRACKING OF THE TEST SPECIMEN*
2716	OZONE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2716.
2718	OZONE Resistance TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 4111 OF FED-STD-228.
2720	THE TEST SPECIMEN SHALL BE ELONGATED 2720 PERCENT.
2722	THE DURATION OF EXPOSURE SHALL BE 2722 HOURS.
2724	THE DURATION OF EXPOSURE SHALL BE 2724 MINUTES.
2726	THE TEMPERATURE OF THE OZONE CONCENTRATION SHALL BE 2726 DEGREES CELSIUSa.
2728	THE TEMPERATURE TOLERANCE OF THE OZONE CONCENTRATION SHALL BE PLUS OR MINUS 2728 DEGREES CELSIUS.
2730	THE OZONE CONCENTRATION SHALL BE NOT LESS THAN 2730 PERCENT BY VOLUME.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OZONE RESISTANCE (CONT)	
TEST METHODS (CONT)	
PER ASTMD1149.	2734
MINIMUM OZONE CONCENTRATION BY VOLUME (PARTS PER MILLION)	2736
OZONE CONCENTRATION TEMPERATURE (DEGREES CELSIUS)	2738
TEMPERATURE TOLERANCE (PLUS OR MINUS DEGREES CELSIUS)	2740
EXPOSURE DURATION (SELECT ONE)	
(HOURS)	2742
(MINUTES)	2744
PACKAGE STRENGTH/AIR INCLUSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2766
AS FOLLOWS:	2768
NO LEAKAGE FROM INNER BAG OR BETWEEN COMPARTMENTS,	2770

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2734	OZONE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD1149.
2736	THE OZONE CONCENTRATION SHALL BE NOT LESS THAN 2736 PARTS PER MILLION BY VOLUME.
2738	THE TEMPERATURE OF THE OZONE CONCENTRATION SHALL BE 2738 DEGREES CELSIUS.
2740	THE TEMPERATURE TOLERANCE OF THE OZONE CONCENTRATION SHALL BE PLUS OR MINUS 2740 DEGREES CELSIUS,
2742	THE EXPOSURE DURATION SHALL BE 2742 HOURS.
2744	THE EXPOSURE DURATION SHALL BE 2744 MINUTES.
2766	PACKAGE STRENGTH/AIR INCLUSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2766.
2768	PACKAGE STRENGTH/AIR INCLUSION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2770	THERE SHALL BE NO LEAKAGE FROM INNER BAG OR BETWEEN COMPARTMENTS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PACKAGE STRENGTH/AIR INCLUSION (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM AIR BUBBLE AREA (SELECT ONE)	
(SQUARE INCHES)	2772
(SQUARE MILLIMETERS)	2774
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2754
PER MIL-I-22266.	2756
MINIMUM HYDRAULIC PRESS LOAD (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2758
(KILOPASALS)	2760
LOAD DURATION (MINUTES)	2762
POUR POINTS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2784
MAXIMUM POUR TEMPERATURE (DEGREES CELSIUS)	2786

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2772	THE COMBINED AIR BUBBLE AREA SHALL BE NOT GREATER THAN 2772 SQUARE INCH(S).
2774	THE COMBINED AIR BUBBLE AREA SHALL BE NOT GREATER THAN 2774 SQUARE MILLIMETER(S).
2754	PACKAGE STRENGTH/AIR INCLUSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2754.
2756	PACKAGE STRENGTH/AIR INCLUSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-I-22266.
2758	THE HYDRAULIC PRESS LOAD ON THE PACKAGE SHALL BE NOT LESS THAN 2758 POUNDS PER SQUARE INCH.
2760	THE HYDRAULIC PRESS' LOAD ON THE PACKAGE SHALL BE NOT LESS THAN 2760 KILOPASCALS.
2762	THE DURATION OF THE LOAD APPLICATION SHALL BE 2762 MINUTES.
2784	POUR POINT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2784.
2786	POUR POINT. THE POUR TEMPERATURE SHALL BE NOT GREATER THAN 2786 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
POUR POINT (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2778
PER ASTMD97.	2780
SOFTENING POINT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2844
MINIMUM SOFTENING TEMPERATURE (DEGREES CELSIUS)	2846
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2824
PER MIL-I-631.	2826
MAXIMUM TEMPERATURE RISE PER MINUTE (DEGREES CELSIUS)	2832
PER MIL-I-3064.	2834
CURING PERIOD (HOURS)	2836
MAXIMUM TEMPERATURE RISE PER MINUTE (DEGREES CELSIUS)	2840

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2778	POUR POINT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2778.
2780	POUR POINT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD97.
2844	SOFTENING POINT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2844.
2846	SOFTENING POINT. THE SOFTENING TEMPERATURE SHALL BE NOT LESS THAN 2846 DEGREES CELSIUS.
2824	SOFTENING POINT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2824.
2826	SOFTENING POINT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-I-631.
2832	THE TEMPERATURE RISE SHALL BE NOT GREATER THAN 2832 DEGREES CELSIUS PER MINUTE.
2834	SOFTENING POINT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-I-3064.
2836	THE CURING PERIOD BEFORE RING MOUNTING SHALL BE 2836 HOURS.
2840	THE TEMPERATURE RISE SHALL BE NOT GREATER THAN 2840 DEGREES CELSIUS PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SPECIFIC GRAVITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2886
AS FOLLOWS:	2888
MINIMUM SPECIFIC GRAVITY (NUMBER)	2890
MAXIMUM SPECIFIC GRAVITY (NUMBER)	2892
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2850
PER DOCUMENT (DOC DES)	2852
METHOD (DESIGNATE)	2854
TEST RELATIVE HUMIDITY (PERCENT)	2856
HUMIDITY,TOLERANCE (PLUS OR MINUS PERCENT)	2858
TEST TEMPERATURE (DEGREES CELSIUS)	2860
TEMPERATURE TOLERANCE (PLUS OR MINUS DEGREES CELSIUS)	2862
TEST INSTRUMENTS CERTIFIED BY NATIONAL BUREAU OF STANDARDS.	2864

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2886	SPECIFIC GRAVITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2886.
2888	SPECIFIC GRAVITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2890	THE SPECIFIC GRAVITY SHALL BE NOT LESS THAN 2890.
2892	THE SPECIFIC GRAVITY SHALL BE NOT GREATER THAN 2892.
2850	SPECIFIC GRAVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2850.
2852	SPECIFIC GRAVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2852.
2854	THE APPLICABLE TEST METHOD SHALL BE 2854.
2856	THE TEST RELATIVE HUMIDITY SHALL BE 2856 PERCENT.
2858	THE TEST RELATIVE HUMIDITY TOLERANCE SHALL BE PLUS OR MINUS 2858 PERCENT.
2860	THE TEST TEMPERATURE SHALL BE 2860 DEGREES CELSIUS.
2862	THE TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2862 DEGREES CELSIUS.
2864	THE TEST INSTRUMENTS SHALL BE CERTIFIED BY THE NATIONAL BUREAU OF STANDARDS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SPECIFIC GRAVITY (CONT)	
PER DOCUMENT (CONT)	
SPECIMEN LENGTH (SELECT ONE)	
U s .	
(INCHES)	2866
SI	
(MILLIMETERS)	2868
SPECIMEN WIDTH [SELECT ONE)	
U.S.	
(INCHES)	2870
SI	
(MILLIMETERS)	2872
SPECIMEN THICKNESS (SELECT ONE)	
U.S.	
(INCHES)	2874
SI	
(MILLIMETERS)	2876
NUMBER OF TEST SPECIMENS (QUANTITY)	2878
SPECIMEN MINIMUM VOLUME (SELECT ONE)	
U.S.	
(CUBIC INCHES)	2880

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2866	THE TEST SPECIMEN LENGTH SHALL BE 2866 INCH(S).
2868	THE TEST SPECIMEN LENGTH SHALL BE 2868 MILLIMETER(S).
2870	THE TEST SPECIMEN WIDTH SHALL BE 2870 INCH(S).
2872	THE TEST SPECIMEN WIDTH SHALL BE 2872 MILLIMETER(S).
2874	THE TEST SPECIMEN THICKNESS SHALL BE 2874 INCH(S).
2876	THE TEST SPECIMEN THICKNESS SHALL BE 2876 MILLIMETER(S).
2878	THE NUMBER OF SPECIMENS TO BE TESTED SHALL BE 2878.
2880	THE TEST SPECIMEN VOLUME SHALL BE NOT LESS THAN 2880 CUBIC INCHES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SPECIFIC GRAVITY (CONT)	
SPECIMEN MINIMUM VOLUME (CONT)	
SI	
(CUBIC MILLIMETERS)	2882
TEAR RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2920
AS FOLLOWS:	2921
TEARING STRENGTH (SELECT ONE)	
CLOTH	
MINIMUM IN WARP DIRECTION (SELECT ONE)	
(GRAMS)	2922
(POUNDS)	2924

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2882	THE TEST SPECIMEN VOLUME SHALL BE NOT LESS THAN 2882 CUBIC MILLIMETERS.
2920	TEAR RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2920.
2921	TEAR RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2922	THE CLOTH SHALL WITHSTAND NOT LESS THAN 2922 GRAM(S) IN THE WARP DIRECTION.
2924	THE CLOTH SHALL WITHSTAND NOT LESS THAN 2924 POUND(S) IN THE WARP DIRECTION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEAR RESISTANCE (CONT)	
CLOTH (CONT)	
MINIMUM IN FILL DIRECTION (SELECT ONE)	
(GRAMS)	2926
(POUNDS)	2928
MATERIALS	
MINIMUM STRENGTH (SELECT ONE)	
(POUNDS PER INCH OF THICKNESS)	2930
(NEWTONS PER MILLIMETER OF THICKNESS)	2932

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2926	THE CLOTH SHALL WITHSTAND NOT LESS THAN 2926 GRAM(S) IN THE FILL DIRECTION.
2928	THE CLOTH SHALL WITHSTAND NOT LESS THAN 2928 POUND(S) IN THE FILL DIRECTION.
2930	THE MATERIAL SHALL WITHSTAND NOT LESS THAN 2930 POUNDS PER INCH OF THICKNESS.
2932	THE MATERIAL SHALL WITHSTAND NOT LESS THAN 2932 NEWTONS PER MILLIMETER OF THICKNESS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEAR RESISTANCE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2902
PER DOCUMENT (DOC DES)	2904
TEST METHOD (DESIGNATE)	2905
DIE (LETTER)	2906
TEST SPECIMEN CONDITIONING PERIOD (HOURS)	2908
CONDITIONING TEMPERATURE (DEGREES CELSIUS)	2910
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2912
HUMIDITY (PERCENT)	2914
HUMIDITY TOLERANCE (PERCENT)	2916
TEMPERATURE, LOW	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	6318
NO EVIDENCE OF PHYSICAL DAMAGE.	6319

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2902	TEAR RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2902.
2904	TEAR RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2904.
2905	THE APPLICABLE TEST METHOD SHALL BE 2905.
2906	THE APPLICABLE DIE LETTER SHALL BE 2906.
2908	THE DURATION OF TEST SPECIMEN CONDITION SHALL BE 2908 HOURS.
2910	THE CONDITIONING TEMPERATURE SHALL BE 2910 DEGREES CELSIUS.
2912	THE TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2912 DEGREES CELSIUS.
2914	THE CONDITIONING RELATIVE HUMIDITY SHALL BE 2914 PERCENT.
2916	THE TEST RELATIVE HUMIDITY TOLERANCE SHALL BE PLUS OR MINUS 2916 PERCENT.
6318	TEMPERATURE, LOW. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6318.
6319	TEMPERATURE, LOW. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, LOW (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	6231
PER DOCUMENT (DOC DES)	2938
TEST METHOD (DESIGNATE)	2940
SPECIMEN LENGTH (SELECT ONE)	
U.S.	
(INCHES)	2942
SI	
(MILLIMETERS)	2944
SPECIMEN WIDTH (SELECT ONE)	
U.S.	
(INCHES)	2946
SI	
(MILLIMETERS)	2948
SPECIMEN THICKNESS (SELECT ONE)	
U.S.	
(INCHES)	2950
SI	
(MILLIMETERS)	2952

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6231	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6231.
2938	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2938.
2940	THE APPLICABLE TEST METHOD SHALL BE 2940.
2942	THE TEST SPECIMEN LENGTH SHALL BE 2942 INCH(S).
2944	THE TEST SPECIMEN LENGTH SHALL BE 2944 MILLIMETER(S).
2946	THE TEST SPECIMEN WIDTH SHALL BE 2946 INCH(S).
2948	THE TEST SPECIMEN WIDTH SHALL BE 2948 MILLIMETER(S).
2950	THE TEST SPECIMEN THICKNESS SHALL BE 2950 INCH(S).
2952	THE TEST SPECIMEN THICKNESS SHALL BE 2952 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, LOW (CONT)	
PER DOCUMENT (CONT)	
TEST TEMPERATURE (DEGREES CELSIUS)	2954
TEMPERATURE TOLERANCE (PLUS OR MINUS DEGREES CELSIUS)	2956
CONDITIONING PERIOD (HOURS}	2958
MANDREL DIAMETER (SELECT ONE)	
U.S.	
(INCHES)	2960
SI	
(MILLIMETERS)	2962
WRAP OR BEND ON MANDREL (DEGREES)	2964
TENSILE STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2988
AS FOLLOWS:	2990
SINGLE REQUIREMENT	
MINIMUM TENSILE STRENGTH (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2992
(KILOPASCALS)	2994

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2954	THE TEST TEMPERATURE SHALL BE 2954 DEGREES CELSIUS.
2956	THE TEST TEMPERATURE SHALL BE PLUS OR MINUS 2956 DEGREES CELSIUS.
2958	THE CONDITIONING PERIOD SHALL BE 2958 HOUR(S).
2960	THE TEST MANDREL DIAMETER SHALL BE 2960 INCH(S).
2962	THE TEST MANDREL DIAMETER SHALL BE 2962 MILLIMETER(S).
2964	THE SPECIMEN SHALL BE WRAPPED OR BENT ON THE MANDREL 2964 DEGREES.
2988	TENSILE STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2988.
2990	TENSILE STRENGTH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2992	THE TENSILE STRENGTH SHALL BE NOT LESS THAN 2992 POUNDS PER SQUARE INCH.
2994	THE TENSILE STRENGTH SHALL BE NOT LESS THAN 2994 KILOPASCALS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TENSILE STRENGTH (CONT)	
AS FOLLOWS: (CONT)	
DUAL REQUIREMENT	
MINIMUM WARP TENSILE STRENGTH (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2996
(KILOPASCALS)	2998
MINIMUM FILL TENSILE STRENGTH (SELECT ONE)	
(POUNDS PER SQUARE INCH)	3000
(KILOPASCALS)	3002
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2974
PER DOCUMENT (DOC DES)	2976
TEST METHOD (DESIGNATE)	2978
TEST TEMPERATURE (DEGREES CELSIUS)	2980
TEMPERATURE TOLERANCE (PLUS OR MINUS DEGREES CELSIUS)	2982
NUMBER OF TEST SPECIMENS (QUANTITY)	2984

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2996	THE WARP TENSILE STRENGTH SHALL BE NOT LESS THAN 2996 POUNDS PER SQUARE INCH.
2998	THE WARP TENSILE STRENGTH SHALL BE NOT LESS THAN 2998 KILOPASCALS.
3000	THE FILL TENSILE STRENGTH SHALL BE NOT LESS THAN 3000 POUNDS PER SQUARE INCH.
3002	THE FILL TENSILE STRENGTH SHALL BE NOT LESS THAN 3002 KILOPASCALS.
2974	TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2974.
2976	TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2976.
2978	THE APPLICABLE TEST METHOD SHALL BE 2978.
2980	THE TEST TEMPERATURE SHALL BE 2980 DEGREES CELSIUS.
2982	THE TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2982 DEGREES CELSIUS.
2984	THE NUMBER OF SPECIMENS TO BE TESTED SHALL BE 2984.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST SPECIMEN PREPARATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1726
AS FOLLOWS:	1727
MATERIAL CURED THROUGHOUT.	1728
MATERIAL HAS NO VOIDS.	1730
MATERIAL SUPPORTS EMBEDDED PART.	1732
MATERIAL CAUSES NO DETERIORATION OF EMBEDDED PART.	1734
MATERIAL CAUSES NO DISCOLORATION OF EMBEDDED PART.	1736
MATERIAL REQUIRES NO EXTERNAL SUPPORT AFTER CURING.	1738
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1702
PER DOCUMENT (DOC DES)	1704
SPECIMEN SIZE (SELECT ONE)	
(SQUARE INCHES)	1706
(SQUARE MILLIMETERS)	1708

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1726	TEST SPECIMEN PREPARATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1726.
1727	TEST SPECIMEN PREPARATION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1728	THE MATERIAL SHALL BE CURED THROUGHOUT.
1730	THE MATERIAL SHALL HAVE NO VOIDS.
1732	THE MATERIAL SHALL SUPPORT THE EMBEDDED PART.
1734	THE MATERIAL SHALL NOT CAUSE DETERIORATION OF THE EMBEDDED PART.
1736	THE MATERIAL SHALL NOT CAUSE DECOLORATION OF THE EMBEDDED PART.
1738	THE MATERIAL SHALL NOT REQUIRE EXTERNAL SUPPORT AFTER CURING.
1702	TEST SPECIMEN Preparation TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1702.
1704	TEST SPECIMEN PREPARATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1704.
1706	THE TEST SPECIMEN SIZE SHALL BE 1706 SQUARE INCHES.
1708	THE TEST SPECIMEN SIZE SHALL BE 1708 SQUARE MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST SPECIMEN PREPARATION (CONT)	
PER DOCUMENT (CONT)	
SPECIMEN THICKNESS (SELECT ONE)	
U.S.	
(INCHES)	1710
SI	
(MILLIMETERS)	1712
CURE TEMPERATURE (DEGREES CELSIUS)	1714
TEMPERATURE TOLERANCE (PLUS OR MINUS DEGREES CELSIUS)	1716
CURE RELATIVE HUMIDITY (PERCENT)	1718
HUMIDITY TOLERANCE (PLUS OR MINUS PERCENT)	1720
CURE PERIOD (HOURS)	1722
THERMAL SHOCK (TEMPERATURE CYCLING)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4722
NO EVIDENCE OF PHYSICAL DAMAGE.	4723
CONFORMS TO DIELECTRIC STRENGTH REQUIREMENTS.	3020

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1710	THE TEST SPECIMEN THICKNESS SHALL BE 1710 INCH(S).
1712	THE TEST SPECIMEN THICKNESS SHALL BE 1712 MILLIMETER(S).
1714	THE CURING TEMPERATURE SHALL BE 1714 DEGREES CELSIUS.
1716	THE CURING TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1716 DEGREES CELSIUS.
1718	THE CURING RELATIVE HUMIDITY SHALL BE 1718 PERCENT.
1720	THE CURING RELATIVE HUMIDITY TOLERANCE SHALL BE PLUS OR MINUS 1720 PERCENT.
1722	THE CURING PERIOD SHALL BE 1722 HOURS.
4722	THERMAL SHOCK (TEMPERATURE CYCLING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4722.
4723	THERMAL SHOCK (TEMPERATURE CYCLING), THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE,
3020	THE SPECIMEN SHALL CONFORM TO THE DIELECTRIC STRENGTH REQUIREMENTS AFTER THE THERMAL SHOCK TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THERMAL SHOCK (TEMPERATURE CYCLING) (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
CONFORMS TO TENSILE STRENGTH REQUIREMENTS.	3022
CONFORMS TO HARDNESS REQUIREMENTS.	3024
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4713
PER MIL-STD-202, METHOD 107.	4714
*TEST CONDITION (LETTER)	4715
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4719
SPECIMEN LENGTH (SELECT ONE)	
U.S.	
(INCHES)	3004
SI	
(MILLIMETERS)	3006
SPECIMEN WIDTH (SELECT ONE)	
U.S.	
(INCHES)	3008
SI	
(MILLIMETERS)	3010

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3022	THE SPECIMEN SHALL CONFORM TO THE TENSILE STRENGTH REQUIREMENTS AFTER THE THERMAL SHOCK TEST.
3024	THE SPECIMEN SHALL CONFORM TO THE HARDNESS REQUIREMENTS AFTER THE THERMAL SHOCK TEST.
4713	THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4713.
4714	THERMAL-SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 107 OF MIL-STD-202.
4715	TEST CONDITION LETTER 4715 SHALL APPLY.
4719	MOUNTING SHALL BE IN ACCORDANCE WITH 4719.
3004	THE TEST SPECIMEN LENGTH SHALL BE 3004 INCH(S).
3006	THE TEST SPECIMEN LENGTH SHALL BE 3006 Millimeter
3008	THE TEST SPECIMEN WIDTH SHALL BE 3008 INCH(S).
3010	THE TEST SPECIMEN WIDTH SHALL BE 3010 MILLIMETER(S),

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THERMAL SHOCK (TEMPERATURE CYCLING) (CONT)	
PER MIL-STD-202, METHOD 107. (CONT)	
SPECIMEN THICKNESS (SELECT ONE)	
U.S.	
(INCHES)	3012
SI	
(Millimeters	3014
SPECIMEN DIAMETER (SELECT ONE)	
U.S.	
(INCHES)	3016
SI	
(MILLIMETERS)	3018
ULTIMATE ELONGATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	3038
MINIMUM PERCENT OF ULTIMATE ELONGATION OF THE UNAGED SPECIMEN (PERCENT)	3040
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	3028

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3012	THE TEST SPECIMEN THICKNESS SHALL BE 3012 INCH(S),
3014	THE TEST SPECIMEN THICKNESS SHALL BE 3014 MILLIMETER(S)-
3016	THE TEST SPECIMEN DIAMETER SHALL BE 3016 INCH(S),
3018	THE TEST SPECIMEN DIAMETER SHALL BE 3018 MILLIMETER(S)-
3038	ULTIMATE ELONGATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3038.
3040	ULTIMATE Elongation THE ULTIMATE ELONGATION OF THE UNAGED SPECIMEN SHALL BE NOT LESS THAN 3040 PERCENT.
3028	ULTIMATE ELONGATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3028.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ULTIMATE ELONGATION (CONT)	
TEST METHODS (CONT)	
PER ASTMD412.	3030
TEST TEMPERATURE (DEGREES CELSIUS)	3032
TEMPERATURE TOLERANCE (PLUS OR MINUS DEGREES CELSIUS)	3034
VISCOSITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	3062
AS FOLLOWS:	3064
MIXED INSULATION MATERIAL (SELECT ONE)	
EFFLUX PERIOD (SECONDS)	3066
EFFLUX PERIOD TOLERANCE (PLUS OR MINUS SECONDS)	3068
FRICTION (SELECT ONE)	
(CENTIPOISES)	3070
FRICTION TOLERANCE (PLUS OR MINUS CENTIPOISES)	3072
(PASCALS PER SECOND)	3074
FRICTION TOLERANCE (PLUS OR MINUS PASCALS PER SECOND)	3076

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH

3030 ULTIMATE ELONGATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD412.

3032 THE TEST TEMPERATURE SHALL BE 3032 DEGREES CELSIUS.

3034 THE TEST TEMPERATURE SHALL BE PLUS OR MINUS 3034 DEGREES CELSIUS.

3062 VISCOSITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3062.

3064 Viscosity THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

3066 THE MIXED MATERIAL EFFLUX PERIOD SHALL BE 3066 SECONDS.

3068 THE MIXED MATERIAL EFFLUX PERIOD TOLERANCE SHALL BE PLUS OR MINUS 3068 SECONDS.

3070 THE MIXED MATERIAL FRICTION SHALL BE 3070 CENTIPOISES,

3072 THE MIXED MATERIAL FRICTION TOLERANCE SHALL BE PLUS OR MINUS 3072 CENTIPOISES.

3074 THE MIXED MATERIAL FRICTION SHALL BE 3074 PASCALS PER SECOND.

3076 THE MIXED MATERIAL FRICTION TOLERANCE SHALL BE PLUS OR MINUS 3076 PASCALS PER SECOND.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VISCOSITY (CONT)	
AS FOLLOWS: (CONT)	
BASE MATERIAL (SELECT ONE)	
EFFLUX PERIOD (SECONDS)	3078
EFFLUX PERIOD TOLERANCE (PLUS OR MINUS SECONDS)	3080
FRICTION (SELECT ONE)	
(CENTIPOISES)	3082
FRICTION TOLERANCE (PLUS OR MINUS CENTIPOISES)	3084
(PASCALS PER SECOND)	3086
FRICTION TOLERANCE (PLUS OR MINUS PASCALS PER SECOND)	3090
EPOXY MATERIAL (SELECT ONE)	
EFFLUX PERIOD (SECONDS)	3092
EFFLUX PERIOD TOLERANCE (PLUS OR MINUS SECONDS)	3094
FRICTION (SELECT ONE)	
(CENTIPOISES)	3096
FRICTION TOLERANCE (PLUS OR MINUS CENTIPOISES)	3098

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
3078	THE BASE MATERIAL EFFLUX PERIOD SHALL BE 3078 SECONDS.	
3080	THE BASE MATERIAL EFFLUX PERIOD TOLERANCE SHALL BE PLUS OR MINUS 3080 SECONDS.	
3082	THE BASE MATERIAL FRICTION SHALL BE 3082 CENTIPOISES.	
3084	THE BASE MATERIAL FRICTION TOLERANCE SHALL BE PLUS OR MINUS 3084 CENTIPOISES.	
3086	THE BASE MATERIAL FRICTION SHALL BE 3086 PASCALS PER SECOND.	
3090	THE BASE MATERIAL FRICTION TOLERANCE SHALL BE PLUS OR MINUS 3090 PASCALS PER SECOND.	
3092	THE EPOXY MATERIAL EFFLUX PERIOD SHALL BE 3092 SECONDS.	
3094	THE EPOXY MATERIAL EFFLUX PERIOD TOLERANCE SHALL BE PLUS OR MINUS 3094 SECONDS.	
3096	THE EPOXY MATERIAL FRICTION SHALL BE 3096 CENTIPOISES.	
3098	THE EPOXY MATERIAL FRICTION TOLERANCE SHALL BE PLUS OR MINUS 3098 CENTIPOISES.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VISCOSITY (CONT)	
FRICTION (CONT)	
(PASCALS PER SECOND)	3100
FRICTION TOLERANCE (PLUS OR MINUS PASCALS PER SECOND)	3102
THINNER MATERIAL (SELECT ONE)	
EFFLUX PERIOD (SECONDS)	3104
EFFLUX PERIOD TOLERANCE (PLUS OR MINUS SECONDS)	3106
FRICTION (SELECT ONE)	
(CENTIPOISES)	3108
FRICTION TOLERANCE (PLUS OR MINUS CENTIPOISES)	3110
(PASCALS PER SECOND)	3112
FRICTION TOLERANCE (PLUS OR MINUS PASCALS PER SECOND)	3114

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3100	THE EPOXY MATERIAL FRICTION SHALL BE 3100 PASCALS PER SECOND.
3102	THE EPOXY MATERIAL FRICTION TOLERANCE SHALL BE PLUS OR MINUS 3102 PASCALS PER SECOND.
3104	THE THINNER MATERIAL EFFLUX PERIOD SHALL BE 3104 SECONDS.
3106	THE THINNER MATERIAL EFFLUX PERIOD TOLERANCE SHALL BE PLUS OR MINUS 3106 SECONDS.
3108	THE THINNER MATERIAL FRICTION SHALL BE 3108 CENTIPOISES.
3110	THE THINNER MATERIAL FRICTION TOLERANCE SHALL BE PLUS OR MINUS 3110 CENTIPOISES.
3112	THE THINNER MATERIAL FRICTION SHALL BE 3112 PASCALS PER SECOND.
3114	THE THINNER MATERIAL FRICTION TOLERANCE SHALL BE PLUS OR MINUS 3114 PASCALS PER SECOND.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VISCOSITY (CONT)	
AS FOLLOWS: (CONT)	
INGREDIENT PER DOCUMENT (DOC DES) (SELECT ONE)	3116
EFFLUX PERIOD (SECONDS)	3118
EFFLUX PERIOD TOLERANCE (PLUS OR MINUS SECONDS)	3120
FRICTION (SELECT ONE)	
(CENTIPOISES)	3122
FRICTION TOLERANCE (PLUS OR MINUS CENTIPOISES)	3124
(PASCALS PER SECOND)	3126
FRICTION TOLERANCE (PLUS OR MINUS PASCALS PER SECOND)	3128
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	3044
PER DOCUMENT (DOC DES)	3046
TEST METHOD (DESIGNATE)	3048
TEST TEMPERATURE (DEGREES CELSIUS)	3050
TEMPERATURE TOLERANCE (PLUS OR MINUS DEGREES CELSIUS)	3052

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3116	THE INGREDIENT SHALL BE IN ACCORDANCE WITH 3116.
3118	THE INGREDIENT EFFLUX PERIOD SHALL BE 3118 SECONDS.
3120	THE INGREDIENT EFFLUX PERIOD TOLERANCE SHALL BE PLUS OR MINUS 3120 SECONDS.
3122	THE INGREDIENT FRICTION SHALL BE 3122 Centipoises
3124	THE INGREDIENT FRICTION TOLERANCE SHALL BE PLUS OR MINUS 3124 CENTIPOISES.
3126	THE INGREDIENT FRICTION SHALL BE 3126 PASCALS PER SECOND.
3128	THE INGREDIENT FRICTION TOLERANCE SHALL BE PLUS OR MINUS 3128 PASCALS PER SECOND.
3044	VISCOSITY TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3044.
3046	VISCOSITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3046.
3048	THE APPLICABLE TEST METHOD SHALL BE 3048.
3050	THE TEST TEMPERATURE SHALL BE 3050 DEGREES CELSIUS.
3052	THE TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 3052 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VISCOSITY (CONT)	
PER DOCUMENT (CONT)	
RELATIVE HUMIDITY (PERCENT)	3054
HUMIDITY TOLERANCE (PLUS OR MINUS PERCENT)	3056
VOLUME RESISTIVITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	3176
NO EVIDENCE OF PHYSICAL DAMAGE,	3178
MINIMUM VOLUME RESISTIVITY AT INITIAL MEASUREMENT (SELECT ONE)	
(OHMS PER INCH)	3180
(OHMS PER MILLIMETER)	3182
MINIMUM VOLUME RESISTIVITY AFTER CONDITIONING (SELECT ONE)	
(OHMS PER INCH)	3184
(OHMS PER MILLIMETER)	3186

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3054	THE TEST RELATIVE HUMIDITY SHALL BE 3054 PERCENT.
3056	THE TEST RELATIVE HUMIDITY TOLERANCE SHALL BE PLUS OR MINUS 3056 PERCENT.
3176	VOLUME RESISTIVITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3176.
3178	VOLUME RESISTIVITY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
3180	THE VOLUME RESISTIVITY AT THE INITIAL MEASUREMENT SHALL BE NOT LESS THAN 3180 OHMS PER INCH.
3182	THE VOLUME RESISTIVITY AT THE INITIAL MEASUREMENT SHALL BE NOT LESS THAN 3182 OHMS PER MILLIMETER.
3184	THE VOLUME RESISTIVITY AFTER CONDITIONING SHALL BE NOT LESS THAN 3184 OHMS PER INCH.
3186	THE VOLUME RESISTIVITY AFTER CONDITIONING SHALL BE NOT LESS THAN 3186 OHMS PER MILLIMETER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VOLUME RESISTIVITY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	3132
PER DOCUMENT (DOC DES)	3134
TEST METHOD (DESIGNATE)	3136
TEST VOLTAGE (VOLTS DC)	3138
MAXIMUM ELECTRIFICATION PERIOD (SECONDS)	3140
TEST TEMPERATURE (DEGREES CELSIUS)	3142
TEMPERATURE TOLERANCE (PLUS OR MINUS DEGREES CELSIUS)	3144
TEST RELATIVE HUMIDITY (PERCENT)	3146
HUMIDITY TOLERANCE (PLUS OR MINUS PERCENT)	3148
CONDITIONING PERIOR (SELECT ONE)	
(HOURS)	3150
(DAYS)	3152
NUMBER OF SPECIMENS (QUANTITY)	3154
SPECIMEN LENGTH (SELECT ONE)	
U.S.	
(INCHES)	3156

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3132	VOLUME RESISTIVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3132.
3134	VOLUME RESISTIVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3134.
3136	THE APPLICABLE TEST METHOD SHALL BE 3136.
3138	THE TEST VOLTAGE SHALL BE 3138 VOLTS DC.
3140	THE ELECTRIFICATION PERIOD SHALL BE NOT GREATER THAN 3140 SECOND(S).
3142	THE TEST TEMPERATURE SHALL BE 3142 DEGREES CELSIUS,
3144	THE TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 3144 DEGREES CELSIUS.
3146	THE TEST RELATIVE HUMIDITY SHALL BE 3146 PERCENT.
3148	THE TEST RELATIVE HUMIDITY TOLERANCE SHALL BE PLUS OR MINUS 3148 PERCENT.
3150	THE CONDITIONING PERIOD SHALL BE 3150 HOURS.
3152	THE CONDITIONING PERIOD SHALL BE 3152 DAYS.
3154	THE NUMBER OF SPECIMENS TO BE TESTED SHALL BE 3154.
3156	THE TEST SPECIMEN LENGTH SHALL BE 3156 INCH(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VOLUME RESISTIVITY (CONT)	
SPECIMEN LENGTH (CONT)	
SI	
(MILLIMETERS)	3158
SPECIMEN WIDTH (SELECT ONE)	
U.S.	
(INCHES)	3160
SI	
(MILLIMETERS)	3162
SPECIMEN THICKNESS (SELECT ONE)	
U.S.	
(INCHES)	3164
SI	
(MILLIMETERS)	3166
SPECIMEN DIAMETER (SELECT ONE)	
U.S.	
(INCHES)	3168
SI	
(MILLIMETERS)	3170
TEST ELECTRODES PER DOCUMENT (DOC DES)	3172

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD	PARAGRAPH
3158	THE TEST SPECIMEN LENGTH SHALL BE 3158 MILLIMETER(S).	
3160	THE TEST SPECIMEN WIDTH SHALL BE 3160 INCH(S).	
3162	THE TEST SPECIMEN WIDTH SHALL BE 3162 MILLIMETER(S).	
3164	THE TEST SPECIMEN THICKNESS SHALL BE 3164 INCH(S).	
3166	THE TEST SPECIMEN THICKNESS SHALL BE 3166 MILLIMETER(S).	
3168	THE TEST SPECIMEN DIAMETER SHALL BE 3168 INCH(S).	
3170	THE TEST SPECIMEN DIAMETER SHALL BE 3170 MILLIMETER(S).	
3172	THE TEST ELECTRODES SHALL BE IN ACCORDANCE WITH 3172.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STORAGE CONDITIONS	
(YEARS)	1529
CERTIFY MAXIMUM CURE DATE TO DELIVERY (QUARTERS)	4942
CERTIFY MINIMUM SHELF LIFE AFTER DELIVERY (QUARTERS)	4943
CERTIFY MAXIMUM MANUFACTURE DATE TO DELIVERY (QUARTERS)	4944
AGE LIMITATION PER MIL-STD-1523.	5209
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A_____	7001
B_____	7002
C_____	7003
D_____	7004
E_____	7005

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	STORAGE CONDITIONS.
1529	ITEMS SHALL WITHSTAND 1529 YEARS OF STORAGE WHEN PROPERLY PRESERVED, PACKAGED AND MECHANICALLY PROTECTED WITHOUT REQUIRING MAJOR REPAIR.
4942	MANUFACTURER SHALL CERTIFY THAT THE CURE DATE SHALL BE NOT GREATER THAN 4942 QUARTERS PRIOR TO DELIVERY DATE.
4943	MANUFACTURER SHALL CERTIFY THAT THERE SHALL BE NOT LESS THAN 4943 QUARTERS OF SHELF LIFE AFTER DELIVERY.
4944	MANUFACTURER SHALL CERTIFY THAT THE DATE OF MANUFACTURE SHALL BE NOT GREATER THAN 4944 QUARTERS PRIOR TO DATE OF DELIVERY.
5209	AGE LIMITATIONS OF THE FINISHED PRODUCT SHALL BE IN ACCORDANCE WITH MIL-STD-1523.
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	Workmanship WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629
ADDITIONAL PART MARKING	
A_____	6991
B_____	6992
C_____	6993
D_____	6994
E_____	6995
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army- ER
Army-ME
Army-MR
Army- CR

User activity:
Army- AR

Preparing activity:
Army-MI


(Project EDS-A337)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.


APPENDIX A

ILLUSTRATIONS


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

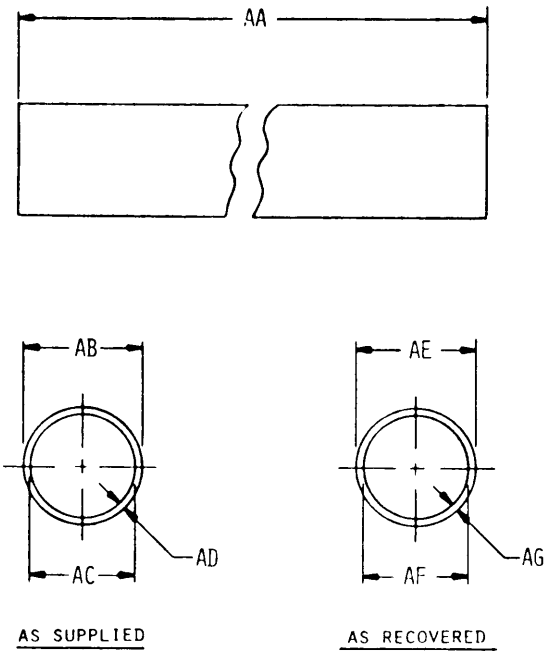

810-01-1

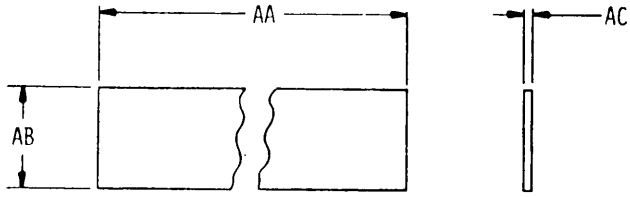


810-02-1




810-02-2


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

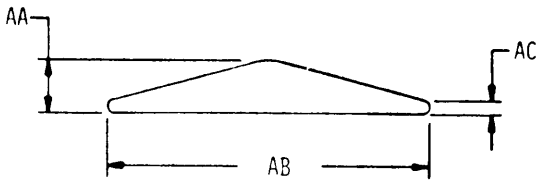

810-02-3




AS SUPPLIED

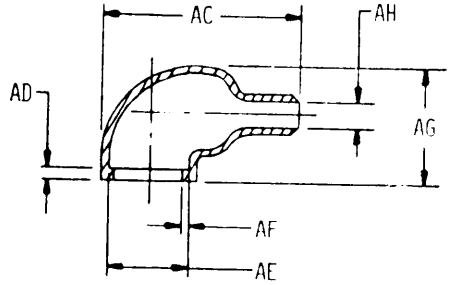


AS RECOVERED

810-03-1




AS SUPPLIED

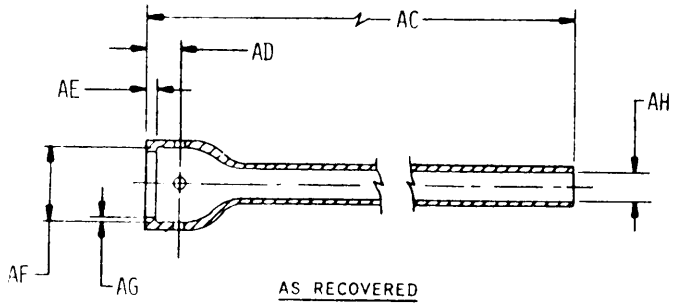

AS RECOVERED

810-03-2


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

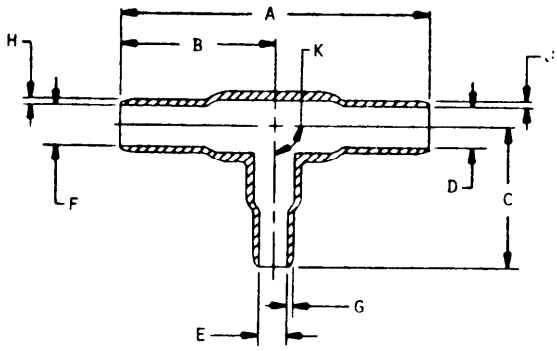

AS RECOVERED

	A	B	C	D	E	F	G	H	J	K
AS SUPPLIED	AA	AB	AC	AD	AE	AF	AG	AH	AJ	AK
AS RECOVERED	CA	CB	CC	CD	CE	CF	CG	CH	CJ	CK

810-03-3

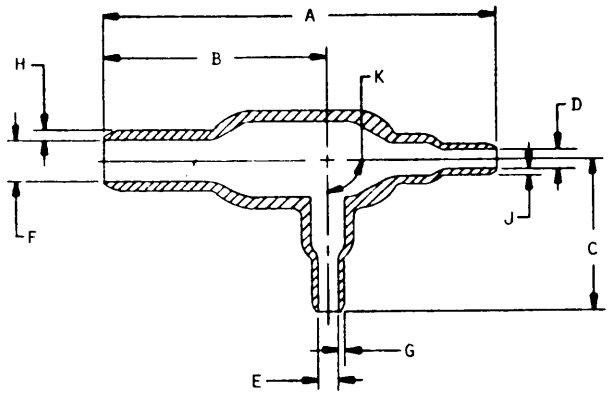


AS RECOVERED

	A	B	C	D	E	F	G	H	J	K
AS SUPPLIED	AA	AB	AC	AD	AE	AF	AG	AH	AJ	AK
AS RECOVERED	CA	CB	CC	CD	CE	CF	CG	CH	CJ	CK

810-03-4


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

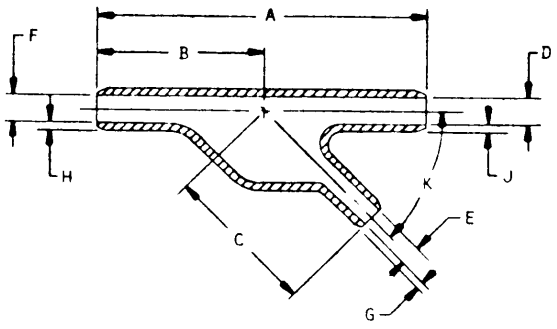

AS RECOVERED

	A	B	C	D	E	F	G	H	J	K
AS SUPPLIED	AA	AB	AC	AD	AE	AF	AG	AH	AJ	AK
AS RECOVERED	CA	CB	CC	CD	CE	CF	CG	CH	CJ	CK

810-03-5

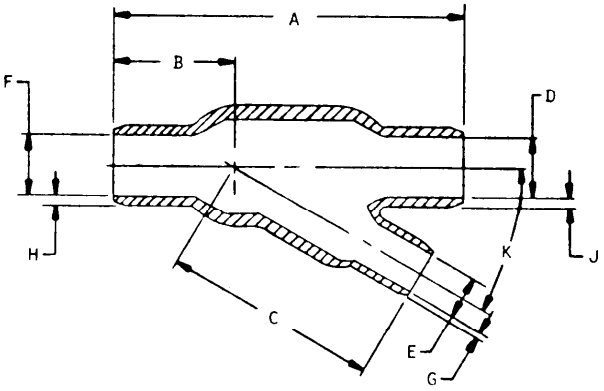


AS RECOVERED

	A	B	C	D	E	F	G	H	J	K
AS SUPPLIED	AA	AB	AC	AD	AE	AF	AG	AH	AJ	AK
AS RECOVERED	CA	CB	CC	CD	CE	CF	CG	CH	CJ	CK

810-03-6


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

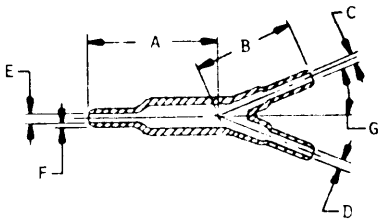

AS RECOVERED

	A	B	C	D	E	F	G
AS SUPPLIED	AA	AB	AC	AD	AE	AF	AG
AS RECOVERED	CA	CB	CC	CD	CE	CF	CG


810-03-7

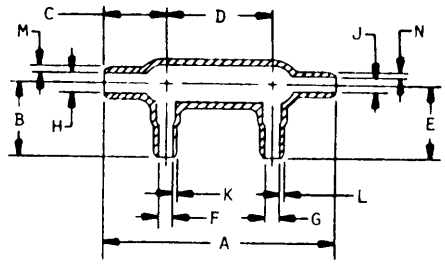

AS RECOVERED

	A	B	C	D	E	F	G	H	J	K	L	M	N
AS SUPPLIED	AA	AB	AC	AD	AE	AF	AG	AH	AJ	AK	AL	AM	AN
AS RECOVERED	CA	CB	CC	CD	CE	CF	CG	CH	CJ	CK	CL	CM	CN

810-03-8

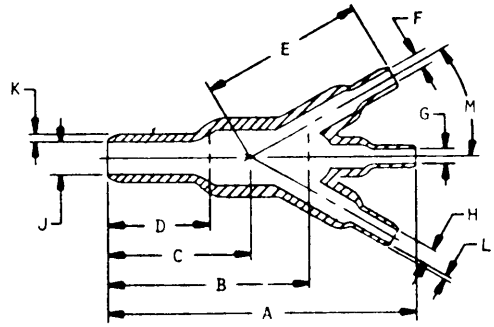


AS RECOVERED

	A	B	C	D	E	F	G	H	J	K	L	M
AS SUPPLIED	AA	AB	AC	AD	AE	AF	AG	AH	AJ	AK	AL	AM
AS RECOVERED	CA	CB	CC	CD	CE	CF	CG	CH	CJ	CK	CL	CM

810-03-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

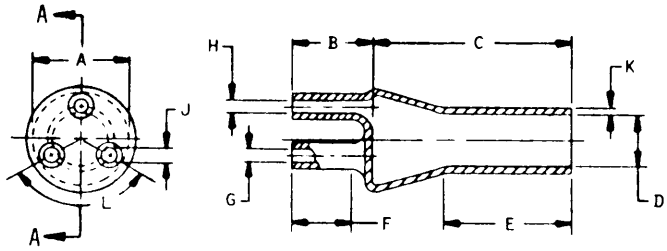


SECTION A-A


AS RECOVERED

	A	B	C	D	E	F	G	H	J	K	L
AS SUPPLIED	AA	AB	AC	AD	AE	AF	AG	AH	AJ	AK	AL
AS RECOVERED	CA	CB	CC	CD	CE	CF	CG	CH	CJ	CK	CL

810-03-11

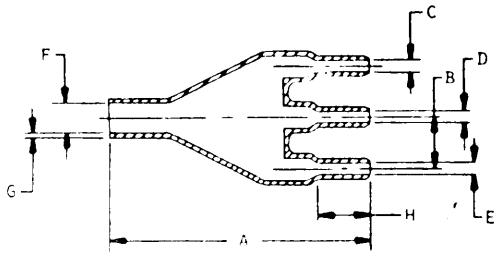

AS RECOVERED

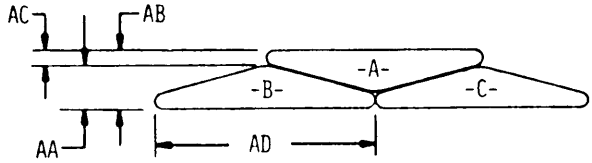

AC = AB-AA

	A	B	C	D	E	F	G	H
AS SUPPLIED	AA	AB	AC	AD	AE	AF	AG	AH
AS RECOVERED	CA	CB	CC	CD	CE	CF	CG	CH

810-03-10

Dimensions:

AA = Tape Thickness
AB = Height of lapped tape
AC = Edge thickness
AD = Width

810-04-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	18	1562	22	1644	32	1750	50
0102	18	1564	22	1646	32	1752	52
0103	18	1566	22	1648	32	1754	52
0104	18	1568	22	1650	32	1756	52
0105	18	1570	22	1652	32	1758	52
0107	20	1572	40	1654	34	1762	52
0108	20	1574	40	1664	34	1764	52
0700	18	1576	40	1666	34	1766	52
0800	18	1578	40	1668	34	1770	46
1003	16	1580	40	1670	34	1771	46
1004	18	1582	40	1680	34	1772	46
1005	18	1584	40	1682	34	1774	46
1006	18	1586	40	1684	36	1776	48
1008	18	1588	42	1686	36	1778	48
1009	24	1590	42	1688	36	1780	48
1371	124	1592	42	1690	36	1782	48
1372	126	1594	42	1700	38	1784	48
1373	126	1596	28	1702	164	1786	48
1376	126	1598	28	1704	164	1788	48
1377	126	1600	28	1706	164	1790	48
1378	126	1602	28	1708	164	1792	50
1380	122	1604	28	1710	166	1794	50
1381	126	1606	28	1712	166	1802	62
1383	126	1608	28	1714	166	1804	62
1384	122	1610	28	1716	166	1806	62
1386	122	1612	28	1718	166	1808	62
1387	122	1614	28	1720	166	1810	62
1391	132	1616	28	1722	166	1812	62
1394	130	1618	28	1726	164	1816	60
1395	132	1620	36	1727	164	1818	60
1395	130	1622	36	1728	164	1820	60
1397	132	1624	36	1730	164	1822	60
1398	130	1626	36	1732	164	1824	60
1400	130	1628	42	1734	164	1826	60
1406	132	1630	32	1736	164	1828	60
1407	122	1632	32	1738	164	1830	60
1432	130	1634	32	1742	50	1834	54
1443	132	1636	32	1744	50	1836	54
1520	126	1640	32	1746	50	1838	54
1529	136	1642	32	1748	50	1840	54

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	P AGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1842	56	1962	64	2056	74	2152	76
1844	56	1964	64	2060	74	2154	76
1846	56	1966	64	2062	74	2156	76
1848	56	1968	64	2064	74	2158	76
1580	56	1970	64	2966	74	2160	76
1852	56	1972	66	2060	74	2164	82
1854	56	1974	66	2070	74	2166	82
1856	58	1576	66	2072	76	2168	82
1858	58	1978	66	2074	76	2170	82
1860	58	1980	66	2076	76	2172	82
1861	58	1982	66	2078	76	2174	84
1862	58	1984	66	2002	72	2176	84
1864	58	1986	66	2084	72	2178	84
1868	52	1988	66	2086	72	2180	84
1870	52	1990	66	2088	72	2182	84
1872	52	2002	68	2090	72	2184	84
1874	54	2004	68	2102	76	2186	84
1876	54	2006	68	2104	76	2168	84
1878	54	2008	68	2106	76	2190	84
1880	54	2010	68	2108	78	2192	86
1902	64	2012	68	2110	78	2194	86
1904	64	2014	70	2112	78	2196	86
1906	64	2016	70	2114	78	2202	82
1908	64	2018	70	2116	78	2204	82
1912	52	2020	70	2118	78	2206	82
1928	30	2022	70	2120	78	2208	82
1930	30	2024	70	2122	76	2210	82
1932	30	2026	70	2124	80	2214	88
1934	30	2028	70	2126	80	2216	88
1936	30	2030	70	2128	80	2218	88
1938	30	2032	70	2130	80	2220	68
1940	30	2036	68	2132	80	2222	88
1942	30	2038	68	2134	80	2224	88
1944	30	2040	68	2136	80	2226	88
1946	30	2044	72	2138	80	2228	88
1953	66	2046	72	2140	80	2230	90
1952	66	2040	72	2142	80	2232	90
1954	66	2050	72	2144	80	2234	90
1958	64	2052	72	2146	80	2236	90
1960	64	2054	74	2148	80	2238	90

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2243	90	2346	94	2442	108	2532	118
2242	90	2350	98	2444	108	2534	118
2246	86	2352	98	2446	108	2536	118
2248	86	2356	98	2448	108	2538	118
2250	86	2358	98	2450	108	2540	120
2252	86	2362	98	2452	108	2542	120
2254	86	2364	98	2454	110	2544	120
2256	86	2366	98	2456	110	2546	120
2258	86	2368	100	2458	110	2548	120
2260	86	2370	100	2460	110	2550	120
2262	86	2372	100	2462	110	2552	120
2264	86	2374	100	2466	106	2554	120
2268	92	2376	100	2468	106	2556	120
2270	92	2378	100	2470	106	2558	120
2272	92	2380	100	2472	106	2560	122
2274	92	2382	100	2476	112	2562	122
2276	92	2384	100	2478	112	2566	116
2280	90	2386	102	2480	112	2568	116
2282	90	2308	102	2482	112	2570	116
2302	94	2390	102	2484	112	2572	116
2304	94	2394	98	2486	112	2574	116
2306	94	2396	98	2488	112	2576	124
2308	94	2402	102	2490	114	2578	124
2310	94	2404	102	2492	114	2580	124
2312	94	2408	102	2494	114	2582	124
2314	96	2410	102	2498	114	2584	124
2316	96	2412	104	2500	114	2586	124
2318	96	2414	104	2502	114	2588	124
2320	96	2416	104	2504	114	2590	124
2322	36	2418	106	2506	116	2592	126
2324	96	2420	106	2508	116	2594	126
2326	96	2422	106	2512	110	2596	126
2328	96	2424	106	2514	110	2602	128
2332	92	2426	106	2516	110	2604	128
2334	92	2430	104	2518	112	2606	128
2336	92	2434	108	2520	112	2608	128
2338	92	2436	108	2524	118	2610	128
2340	94	2437	108	2526	118	2612	128
2342	94	2438	108	2528	118	2614	130
2344	94	2440	108	2530	118	2616	130

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2618	130	2726	140	2836	146	2930	154
2620	130	2728	140	2840	146	2932	154
2622	130	2730	140	2844	146	2938	158
2626	128	2734	142	2846	146	2940	158
2628	128	2736	142	2850	148	2942	158
2634	134	2738	142	2852	148	2944	158
2636	134	2740	142	2854	148	2946	158
2638	134	2742	142	2856	148	2948	158
2640	134	2744	142	2858	148	2950	158
2642	134	2748	140	2860	148	2952	158
2644	134	2750	140	2862	148	2954	160
2646	134	2754	144	2864	148	2956	160
2650	132	2756	144	2866	150	2958	160
2652	132	2758	144	2868	150	2960	160
2654	132	2760	144	2870	150	2962	160
2658	136	2762	144	2872	150	2964	160
2660	136	2766	142	2874	150	2974	162
2662	136	2768	142	2876	150	2976	162
2664	136	2770	142	2678	150	2978	162
2666	136	2772	144	2880	150	2980	162
2670	136	2774	144	2882	152	2982	162
2672	136	2778	146	2886	148	2984	162
2674	136	2780	146	2888	148	2988	160
2676	136	2784	144	2890	148	2990	160
2680	138	2786	144	2892	148	2992	160
2682	138	2804	38	2902	156	2994	160
2684	130	2806	38	2904	156	2996	162
2686	138	2808	38	2505	156	2998	162
2690	138	2810	38	2906	156	3000	162
2692	138	2812	38	2908	156	3002	162
2694	138	2814	38	2910	156	3004	168
2696	138	2816	38	2912	156	3006	168
2709	138	2817	38	2914	156	3008	168
2711	138	2818	40	2916	156	3010	168
2713	138	2819	40	2920	152	3012	170
2716	140	2820	38	2921	152	3014	170
2718	140	2824	146	2922	152	3016	170
2723	140	2826	146	2924	152	3018	170
2722	140	2832	146	2926	154	3020	166
2724	140	2834	146	2928	154	3022	168

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3024	168	3116	178	3506	63	4950	26
3029	170	3116	178	3507	63	4983	134
3030	172	3120	178	3508	63	4984	134
3032	172	3122	178	3509	63	4985	132
3034	172	3124	178	3510	63	4986	132
3038	170	3126	178	3511	63	4991	132
3040	170	3128	178	3512	63	5060	22
3044	178	3132	182	3513	63	5061	22
3046	178	3134	182	3514	63	5209	186
3048	178	3136	182	3515	63	6231	158
3050	178	3138	182	3516	63	6318	156
3052	178	3140	182	3517	63	6319	156
3054	180	3142	182	3518	63	6359	122
3056	180	3144	182	3519	63	6369	18
3062	172	3146	162	3520	63	6372	188
3064	172	3148	182	3521	63	6375	28
3066	172	3150	182	3522	63	6796	42
3068	172	3152	182	3523	63	6797	42
3070	172	3154	182	3524	63	6801	42
3072	172	3156	182	3525	63	6802	42
3074	172	3158	184	3526	63	6870	186
3076	172	3160	184	3527	63	6873	18
3078	174	3162	184	3528	63	6874	20
3080	174	3164	184	3529	63	6941	20
3082	174	3166	184	4713	168	6942	20
3084	174	3168	184	4714	168	6991	188
3086	174	3170	184	4715	168	6992	188
3090	174	3172	184	4719	168	6993	188
3092	174	3176	180	4722	166	6994	188
3094	174	3178	180	4723	166	6995	188
3096	174	3180	180	4754	104	7001	186
3098	174	3182	180	4756	106	7002	186
3100	176	3184	100	4760	104	7003	186
3102	176	3186	180	4761	104	7004	186
3104	176	3500	63	4762	104	7005	186
3106	176	3561	63	4904	22	7021	44
3108	176	3502	63	4905	22	7022	44
3110	176	3503	63	4942	186	7023	44
3112	176	3504	63	4943	186	7024	44
3114	176	3505	63	4944	186	7050	44

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAP CODE	PAGE NO.
7051	44						
7056	44						
7301	22						
7302	22						
7347	44						
7400	46						
7401	46						
7407	46						
7572	24						
7573	24						
7574	24						
7576	26						
7577	26						
7578	26						
7600	24						
7601	24						
7602	24						
7609	24						
7610	24						
7611	24						
7629	188						
7630	188						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Additional Part Marking	188
Additional Requirements	186
Adhesion	46
Altitude Rating	22
Aperture Cards Required	20
Applicable Documents	188
Application Method	28
Base Document	18
Bonding Strength	52
Breaking Strength	60
Chemical Composition	62
City, State, Zip	18
Classification	22
Cloth Construction	30
Color	64
Company Name/Command	18
Composition	28
Configuration	24
Container	32
Contract Number/Office Symbol	18
Control, Source	18
Control, Specification	20
Corrosion	68
Date	18
Design and Construction	28
Dielectric Constant	72
Dielectric Strength	76
Dissipation Factor	82
Drying (Cure, Gel)	86
Elongation	90
Flammability	92
Flash Point	98
Flexibility	98
Format	18
Free Sulfur	102
Fungus	104
Government Design Activity FSCM	18
Hardness	106

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

Page

Heat Aging - - -

INDEX (CONT)

	Page
Tabulated Characteristics	26
Tape Construction	42
Tear Resistance	152
Temperature	42
Temperature, Low	156
Temperature Rating	22
Tensile Strength	160
Test Specimen Preparation	164
Thermal Shock (Temperature Cycling)	166
Toxicity	42
Ultimate Elongation	170
Units of Measure	20,24
Viscosity	172
Voltage Rating	24
Volume Resistivity	180
Weight	44
Workmanship	186

*U.S. GOVERNMENT PRINTING OFFICE: 1987-704436/70630

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET___OF___

*TITLE CODE 1 2 3 4 5 6	*REQUESTER NO. 7 8 9 10 11 12	CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE 20 25 30 35 40 45 50 55 60 65 70 75	LINE NO. 79 80
*REQUESTER'S NAME		Ø 1 Ø 1		
*COMPANY NAME/COMMAND		Ø 1 Ø 2		
*STREET/BUILDING		Ø 1 Ø 3		
*CITY, STATE, ZIP		Ø 1 Ø 4		
*PHONE NO. INCLUDE A/C AUTOVON IF APPLICABLE		Ø 1 Ø 5		
*DATE		1 Ø Ø 3		
*REQUESTER FSCM		1 Ø Ø 4		
*CONTRACT NO./OFFICE SYMBOL		1 Ø Ø 5		
*BASE DOCUMENT		1 Ø Ø 6		
*SYSTEM APPLICATION		1 Ø Ø 8		
*GOVERNMENT DESIGN ACTIVITY FSCM		6 3 6 9		
*FORMAT SIX SECTION DOCUMENT.		Ø 7 Ø Ø		
ONE SECTION DOCUMENT.		Ø 8 Ø Ø		
SEARCH ONLY.		Ø 1 Ø 6		
APERTURE CARDS REQUIRED.		Ø 1 Ø 7		
REVISION OF AEDPS DOCUMENT NO.		Ø 1 Ø 8		
*CONTROL SOURCE.		6 8 7 3		
SPECIFICATION.		6 8 7 4		
*SOURCE TABLE		9 1 5 1		
UNIT OF MEASURE U.S.		6 9 4 1		
SI.		6 9 4 2		

PLEASE SUPPLY THE FOLLOWING:

DASH-NUMBERED PART _____ REV _____ NOTICE # _____

AS A FINAL CHECK, SCAN THE SRS FOR THE FOLLOWING COMMON ERRORS:

- ☐ MANDATORY CHARACTERISTIC CODES AND VALUES NOT SUPPLIED
- ☐ ZERO (Ø) WRITTEN WITHOUT VIRGULE (O)
- ☐ USE OF POUND SIGN (#) WITHOUT ACCOMPANYING CHARACTERISTIC VALUE
- ☐ POUND SIGN (#) OMITTED FROM END OF STATEMENT (CHARACTERISTIC VALUE)
- ☐ CHARACTERISTIC CODE USED MORE THAN ONCE (OTHER THAN MULTILINE STATEMENT)
- ☐ MULTILINE STATEMENT NOT NUMBERED IN COLUMN 80

*MANDATORY

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET ___ OF ___

TITLE CODE 1 2 3 4 5 6	REQUESTER NO. 7 8 9 10 11 12	CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE 20 25 30 35 40 45 50 55 60 65 70 75	LINE NO. 79 80

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY
Commander
US Army Missile Command
ATTN: DRSMI-RSDS
Redstone Arsenal, AL 35898

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Missile Command
ATTN: DRSMI-RSDS
Redstone Arsenal, AL 35898

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions -- Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
DOD-STD-35-111B(MI)	INSULATION, ELECTRICAL

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* — Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* — Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* — Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.