DOD-STD-35-114(MI)
2 June 1978

MILITARY STANDARD

CLAMPS, HARDWARE

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

FSC EDS

DEPARTMENT OF THE ARMY
U. S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Clamps, Hardware
Automated Engineering
Document Preparation System

DOD-STD-35-114(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-114(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification, Exceptions for hardware clamps.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35 and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	7
	2.1	Issues of documents	7
	2.2	Other publications	8
	3.	DEFINITIONS	11
	4.	GENERAL REQUIREMENTS	13
	4.1	Introduction	13
	4.2	Specification Requirement Sheet (SRS)	13
	4.3	Configuration	13
	4.3.1	Dimensions	13
	4.3.2	Illustrations	13
	4.4	Units of measure	13
	5.	DETAILED REQUIREMENTS	15
	5.1	Introduction	15
	5.2	MSE Formats	15
	5.3	Referenced documents	15
	5.4	Test matrix	15
	5.5	Tabulation	16
	5.6	Keyword Code Index (KCI) and Standard Paragraphs	19
	5.6.1	Interrelationship of Codes	19
	5.6.2	Automated MSE Data	19
	5.6.3	DOD-STD-35 Tables	19

TABLES

Table	I.	Title Index	3
	II.	Test matrix	16
	III.	Tabulation candidates	17

APPENDICES

Appendix	A.	Illustrations	79
	B.	Characteristics Code Index	91
		Index	95

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for hardware clamps.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
CLAMP, HALF	147001	MS39294	HYDRAULIC, 4-BOLT SPLIT FLANGE TYPE, 0 TO 4000 PSI, PRESSURE AND SUCTION LINE
		MS39295	HYDRAULIC, 4-BOLT SPLIT FLANGE TYPE, 4500 TO 5000 PSI
CLAMP, HOSE AND TUBE	147002	WW-C-440	LOW PRESSURE
		MS35842	LOW PRESSURE, TYPE F (BAND)
		MS39326	SPRING, LOW PRESSURE, TYPE E (SPRING)
		MIL-C-6985	FLAT BAND
		AN737	AIRCRAFT
		MIL-C-8783	FLAT BAND 500 DEG.F
		MS21920	FLAT BAND 500 DEG.F
		MIL-C-11569	WATER UNIVERSAL 3/8 TO 3 INCH
		MIL-C-11760	PNEUMATIC FOR UNIVERSAL COUPLINGS
		MS22064	OXYGEN

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
CLAMP, HOSE AND TUBE	147002 (CONT)	MS53041	EXHAUST MUFFLER AND TAILPIPE
CLAMP, INSTRUMENT MOUNTING	147003	MIL-C-6818	AIRCRAFT
		MS28042	AIRCRAFT
CLAMP, LEAK REPAIR, PIPE COUPLING	147004	MIL-C-11418	METALLIC
CLAMP, LOOP	147005	MIL-C-8603	TUBE SUPPORT
		AN742	PLAIN
		MS21919	CUSHIONED
		MIL-C-8956	TUBE SUPPORT PLAIN OR CUSHIONED
		MS21103	PLAIN
		MS21104	CUSHIONED 212 DEG. F
		MS21105	CUSHIONED, CRES 500 DEG. F
		MS21106	CUSHIONED, CRES 1200 DEG. F
		MS21122	CUSHIONED, PTFE
		AN735	BONDING

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
CLAMP, LOOP	147005 (CONT)	MS9024	CUSHIONED, JOGGLED
		MS9025	SUPPORT
		MS9349	CUSHIONED, JOGGLED, CRES
		MS9350	CUSHIONED, JOGGLED, CRES
		MS9351	CUSHIONED, JOGGLED, ALUMINUM
		MS9352	CUSHIONED, JOGGLED, ALUMINUM
		MS9353	ALUMINUM
		MS9354	ALUMINUM
		MS9391	MULTIPLE TUBE
		MS21322	PLAIN AND CUSHIONED, ALUMINUM
		MS21333	PLAIN AND CUSHIONED, STEEL
		MS21334	PLAIN AND CUSHIONED, DOUBLE, STEEL
		MS25281	WIRE SUPPORT, PLASTIC

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
CLAMP, LOOP	147005 (CONT)	MS27405	PLATED OR UNPLATED, METALLIC
		MS122900 THRU MS122939	SUPPORT, HEAT RESISTANT
CLAMP, POLE LINE	147006	MS39032	CABLE SUSPENSION
		MS39041	ELECTRICIAL, STRAND, GROUND
		MS39046	ELECTRICAL, LASHING
		MS90498	DEAD END STRAIN
CLAMP, REPAIR PIPE	147007	MIL-C-12386	SPLIT OR PIN HOLE, GASOLINE RESISTANT SEAL
CLAMP, WIRE ROPE	147008	FF-C-450	BOLTED AND THREADED
		MS16842	SINGLE SADDLE AND GRIP, STEEL
		MS16843	DOUBLE GRIP, THREADED, STEEL
		MS51868	DOUBLE SADDLE AND GRIP, STEEL

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

FEDERAL

FF-C-450	Clamps, Wire Rope
WW-C-440	Clamp Hose, (Low Pressure)

MILITARY

MIL-C-6985	Clamp, Hose
MIL-C-8956	Clamps, Loop, Tube Support
MIL-C-11418	Clamps, Leak Repair Pipe Coupling: Steel and Ductile Iron for Use Over Ground Type Couplings
MIL-C-12386	Clamp, Repair, Pipe; With Gasoline Resistant Gasket, General Specification For

STANDARDS

FEDERAL

FED-STD-595	Colors
FED-STD-601	Rubber: Sampling and Testing

MILITARY

MIL-STD-810	Environmental Test Methods

PUBLICATIONS

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTMB117	Standard Method of Salt Spray (Fog) Testing
ASTMD395	Compression Set of Vulcanized Rubber
ASTMD412	Tension Testing of Vulcanized Rubber
ASTMD471	Standard Method of Test for Change in Properties of Elastomeric Vulcanizates Resulting from Immersion in Liquids
ASTMD573	Accelerated Aging of Vulcanized Rubber by the Oven Method
ASTMD624	Tear Resistance of Vulcanized Rubber
ASTMD792	Standard Methods of Test for Specific Gravity and Density of Plastics by Displacement
ASTMD1053	Standard Method for Measuring Low-temperature Stiffening of Rubber and Rubber-like Materials by Means of a Torsional Wire Apparatus
ASTMD1149	Standard Method of Test for Accelerated Ozone Cracking of Vulcanized Rubber
ASTMD2137	Standard Low-temperature Impact Test for Brittleness Determination of Flexible Polymeric Materials or Fabrics Coated, Therewith, or Both
ASTMD2240	Standard Method of Test for Indentation Hardness of Rubber and Plastics by Means of a Durometer

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

ASTME8	Tension Testing of Metallic Materials, Methods Of
ASTME10	Method of Test for Brinell Hardness of Metallic Materials
ASTME18	Rockwell Hardness and Rockwell Superficial Hardness of Metallic Materials, Test For
ASTME380	Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, Pa. 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35-1 are applicable to Clamps, Hardware.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Clamps, Hardware, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Clamps, Hardware.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Clamps, Hardware.

4.3.2 Illustrations. Illustrations applicable to Clamps, Hardware are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Test matrix. A test matrix is supplied as a guide for selecting documents to specify tests (see table II). The test matrix presents documents most applicable for use to satisfy the statement "TEST PER (DOC DES)". Any document listed in the Title Index may be used to satisfy the statement. However, the selected document from the Title Index must contain the desired test. Government test method documents and approved industry standards such as ASTM test methods may also be used to satisfy the statement "TEST PER (DOC DES)".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Table II. Test Matrix.

DOCUMENT	CODE / TEST	1964 / Fluid Immersion, Media	2424 / Leakage Pressure	2436 / Leakage pressure Media
WW-C-440			X	
MIL-T-5624		X		X
MIL-L-6082				X
MIL-C-11418			X	
MIL-C-12386			X	
MIL-C-23699		X		X
ASTMD471		X		X

5.5 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table III provides codes for column headings which may be used for hardware clamps characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1590	SIZE ID (INCHES) NOMINAL	1592	SIZE ID (MM) NOMINAL	1626	HOSE OD (INCHES) NOMINAL
1628	HOSE OD (MM) NOMINAL	1630	ADJUSTMENT ID MIN (INCHES)	1632	ADJUSTMENT ID MAX (INCHES)
1634	ADJUSTMENT ID MIN (MM)	1636	ADJUSTMENT ID MAX (MM)	7021	MAX WEIGHT EACH (GRAMS)
7022	MAX WEIGHT EACH (OUNCES)	7023	MAX WEIGHT EACH (POUNDS)	7024	MAX WEIGHT EACH (KG)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.6 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.6.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.6.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.6.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT.	0700
ONE SECTION DOCUMENT.	0800
*CONTROL (SELECT ONE)	
SOURCE	6873

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT NUMBER	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6874 THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOT THE ITEM(S).

0107

0108 0108.

SCOPE.

SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

6941 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES.

6942 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION	
CLAMP TYPE	
BASE DOCUMENT TYPE (DESIGNATION)	1570
CLAMP CLASS	
BASE DOCUMENT CLASS (DESIGNATION)	1580
CUSHION OR GASKET TYPE	
BASE DOCUMENT TYPE (DESIGNATION)	1612
RATINGS	
TEMPERATURE RATING, NOMINAL	
SERVICE (DEGREES CELSIUS)	5049
TEMPERATURE RATING, MINIMUM	
SERVICE (DEGREES CELSIUS)	4904
TEMPERATURE RATING, MAXIMUM	
SERVICE (DEGREES CELSIUS)	4905

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1570	CLAMP TYPE. THE TYPE DESIGNATION SHALL BE 1570 IN ACCORDANCE WITH THE BASE DOCUMENT.
1580	CLAMP CLASS. THE CLASS DESIGNATION SHALL BE 1580 IN ACCORDANCE WITH THE BASE DOCUMENT.
1612	CUSHION OR GASKET TYPE. TYPE 1612 SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT.
	TEMPERATURE RATING, NOMINAL.
5049	SERVICE TEMPERATURE SHALL BE 5049 DEGREES CELSIUS.
	TEMPERATURE RATING, MINIMUM.
4904	SERVICE TEMPERATURE SHALL BE 4904 DEGREES CELSIUS.
	TEMPERATURE RATING, MAXIMUM.
4905	SERVICE TEMPERATURE SHALL BE 4905 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RATINGS (CONT)	
SERVICE PRESSURE RATING, MAXIMUM	
WORKING PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	1640
(KILOPASCALS)	1642
HYDROSTATIC PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	1644
(KILOPASCALS)	1646
CONFIGURATION	
(ILLUSTRATION NUMBER)	1009
DIMENSION TABLE, (SEE TABLE III, DOD-STD-35)	
ILLUSTRATIONS	
(NUMBER)	4950
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.	
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	SERVICE PRESSURE RATING, MAXIMUM.
1640	WORKING PRESSURE SHALL BE NOT GREATER THAN 1640 POUNDS PER SQUARE INCH.
1642	WORKING PRESSURE SHALL BE NOT GREATER THAN 1642 KILOPASCALS.
1644	HYDROSTATIC PRESSURE SHALL BE NOT GREATER THAN 1644 POUNDS PER SQUARE INCH.
1646	HYDROSTATIC PRESSURE SHALL BE NOT GREATER THAN 1646 KILOPASCALS.
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	
COMPOSITION	
COMPOSITION, FORMULATION OR MIXTURE.	6375
*INGREDIENT TABLE, (SEE TABLE XI, DOD-STD-35)	
METALS	
DISSIMILAR METALS.	7580

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
6375	COMPOSITION. THE COMPOSITION, FORMULATION OR MIXTURE (AS APPLICABLE) SHALL BE AS SPECIFIED HEREIN. THE INGREDIENT QUANTITIES SHALL BE SHOWN IN INTERNATIONAL (SI) SYSTEM OF UNITS SUCH AS GRAMS, LITERS, ETC., OR U.S. STANDARDS SUCH AS PINTS, QUARTS OR GALLONS, AS SPECIFIED IN THE TABLE.
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION	
CLAMP SIZE ID, NOMINAL (SELECT ONE)	
(INCHES)	1590
(MILLIMETERS)	1592
CLAMP COLOR	
COLOR (NAME)	1600
(DESIGNATION)	1602
*PER DOCUMENT (DOC DES)	1604
CLASS (NUMBER)	1606
CUSHION OR GASKET COLOR	
COLOR (NAME)	1614
(DESIGNATION)	1616
*PER DOCUMENT (DOC DES)	1618
CLASS (NUMBER)	1620
EDGES AND HOLES FINISH	
SURFACES FREE FROM BURRS OR SHARP EDGES THAT AFFECT SERVICEABILITY.	1622
HOSE OR TUBE SIZE OD, NOMINAL (SELECT ONE)	
(INCHES)	1626
(MILLIMETERS)	1628

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1590 CLAMP SIZE ID, NOMINAL. THE NOMINAL INSIDE DIAMETER SHALL BE 1590 INCH(S).

1592 CLAMP SIZE ID, NOMINAL. THE NOMINAL INSIDE DIAMETER SHALL BE 1592 MILLIMETER(S).

CLAMP COLOR.

1600 THE COLOR SHALL BE 1600.

1602 THE COLOR DESIGNATION SHALL BE 1602.

1604 THE COLOR SHALL BE IN ACCORDANCE WITH 1604.

1606 THE COLOR CLASS SHALL BE 1606.

CUSHION OR GASKET COLOR.

1614 THE COLOR SHALL BE 1614.

1616 THE COLOR DESIGNATION SHALL BE 1616.

1618 THE COLOR SHALL BE IN ACCORDANCE WITH 1618.

1620 THE COLOR CLASS SHALL BE 1620.

1622 EDGES AND HOLES FINISH. ALL SURFACES SHALL BE FREE OF BURRS OR SHARP EDGES THAT AFFECT SERVICEABILITY.

1626 HOSE OR TUBE SIZE. THE HOSE OR TUBE SHALL HAVE A NOMINAL OUTSIDE DIAMETER OF 1626 INCH(S).

1628 HOSE OR TUBE SIZE. THE HOSE OR TUBE SHALL HAVE A NOMINAL OUTSIDE DIAMETER OF 1628 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
NOMINAL WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	6996
(POUNDS)	6997
SI (SELECT ONE)	
(GRAMS)	6998
(KILOGRAMS)	6999
MINIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	6943
(POUNDS)	6944
SI (SELECT ONE)	
(GRAMS)	6945
(KILOGRAMS)	6946

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6996	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6996 OUNCE(S).
6997	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6997 POUND(S).
6998	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6998 GRAM(S).
6999	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6999 KILOGRAM(S).
6943	MINIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT LESS THAN 6943 OUNCE(S).
6944	MINIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT LESS THAN 6944 POUND(S).
6945	MINIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT LESS THAN 6945 GRAM(S).
6946	MINIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT LESS THAN 6946 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024
PERFORMANCE	
INSIDE DIAMETER ADJUSTMENT (SELECT ONE)	
U.S.	
MINIMUM (INCHES)	1630
MAXIMUM (INCHES)	1632
SI	
MINIMUM (MILLIMETERS)	1634
MAXIMUM (MILLIMETERS)	1636

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

7022 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).

7023 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).

7021 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).

7024 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).

PERFORMANCE.

INSIDE DIAMETER ADJUSTMENT. THE INSIDE DIAMETER ADJUSTMENT SHALL BE AS FOLLOWS:

1630 THE INSIDE DIAMETER SHALL BE NOT LESS THAN 1630 INCHES.

1632 THE INSIDE DIAMETER SHALL BE NOT GREATER THAN 1632 INCHES.

1634 THE INSIDE DIAMETER SHALL BE NOT LESS THAN 1634 MILLIMETERS.

1636 THE INSIDE DIAMETER SHALL BE NOT GREATER THAN 1636 MILLIMETERS.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLOSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1802
AS FOLLOWS:	1804
HOLES ALIGNMENT DEVIATION, MAXIMUM (SELECT ONE)	
(INCHES)	1806
(MILLIMETERS)	1808
CLAMP WIDTH AND CIRCUMFERENCE FLATNESS DEVIATION, MAXIMUM	
(INCHES)	1810
(MILLIMETERS)	1812
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1822
PER MIL-C-8956.	1824

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1802 CLOSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1802.

1804 CLOSURE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

1806 THE CLAMP HOLES ALIGNMENT DEVIATION SHALL BE NOT GREATER THAN 1806 INCH(S).

1808 THE CLAMP HOLES ALIGNMENT DEVIATION SHALL BE NOT GREATER THAN 1808 MILLIMETER(S).

1810 THE CLAMP WIDTH AND CIRCUMFERENCE DEVIATION FROM FLATNESS SHALL BE NOT GREATER THAN 1810 INCH(S).

1812 THE CLAMP WIDTH AND CIRCUMFERENCE DEVIATION FROM FLATNESS SHALL BE NOT GREATER THAN 1812 MILLIMETER(S).

1822 CLOSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1822.

1824 CLOSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-8956.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CUSHION OR GASKET	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1902
AS FOLLOWS:	1904
NO FRACTURES, CRACKS, BREAKING OR SWELLING OF MATERIAL.	1906
MAXIMUM COMPRESSION SET DIMENSIONAL CHANGE (PERCENT)	1908
MINIMUM HARDNESS, DUROMETER (VALUE)	1910
MINIMUM SPECIFIC GRAVITY (NUMBER)	1912
MAXIMUM SPECIFIC GRAVITY (NUMBER)	1914
MINIMUM TEAR RESISTANCE (SELECT ONE)	
(KILONEWTONS/METER)	1916
(POUNDS/INCH)	1918
MINIMUM TENSILE STRENGTH (SELECT ONE)	
(POUNDS PER SQUARE INCH)	1920
(KILOPASCALS)	1922

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1902	CUSHION OR GASKET. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1902.
1904	CUSHION OR GASKET. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1906	THERE SHALL BE NO FRACTURES, CRACKS, BREAKING OR SWELLING OF THE MATERIAL.
1908	THE COMPRESSION SET DIMENSIONAL CHANGE SHALL BE NOT GREATER THAN 1908 PERCENT.
1910	THE DUROMETER HARDNESS SHALL BE NOT LESS THAN 1910.
1912	THE SPECIFIC GRAVITY SHALL BE NOT LESS THAN 1912.
1914	THE SPECIFIC GRAVITY SHALL BE NOT GREATER THAN 1914.
1916	THE TEAR RESISTANCE SHALL BE NOT LESS THAN 1916 KILONEWTONS PER METER OF THICKNESS.
1918	THE TEAR RESISTANCE SHALL BE NOT LESS THAN 1918 POUNDS PER INCH OF THICKNESS.
1920	THE TENSILE STRENGTH SHALL BE NOT LESS THAN 1920 POUNDS PER SQUARE INCH.
1922	THE TENSILE STRENGTH SHALL BE NOT LESS THAN 1922 KILOPASCALS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CUSHION OR GASKET (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM TORSIONAL STIFFNESS RATIO (VALUE)	1924
MINIMUM ULTIMATE ELONGATION (PERCENT)	1926
MAXIMUM VOLUME CHANGE (PERCENT)	1928
MAXIMUM WEATHERING DECREASE IN TENSILE STRENGTH (PERCENT)	1930
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1952
AS FOLLOWS:	1954
BRITTLENESS PER ASTMD2137.	1956
COMPRESSION SET PER ASTMD395.	1958
FLUID IMMERSION PER ASTMD471.	1960
MEDIA (NAME)	1962
MEDIA (DOC DES)	1964
TEMPERATURE (DEGREES CELSIUS)	1966
DURATION (HOURS)	1968

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1924	THE TORSIONAL STIFFNESS RATIO SHALL BE NOT GREATER THAN 1924.
1926	THE ULTIMATE ELONGATION SHALL BE NOT LESS THAN 1926 PERCENT.
1928	THE VOLUME CHANGE SHALL BE NOT GREATER THAN 1928 PERCENT.
1930	THE WEATHERING DECREASE IN TENSILE STRENGTH SHALL BE NOT GREATER THAN 1930 PERCENT.
1952	CUSHION OR GASKET. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1952.
1954	CUSHION OR GASKET. TESTING SHALL BE PERFORMED AS FOLLOWS:
1956	BRITTLENESS SHALL BE TESTED IN ACCORDANCE WITH ASTMD2137.
1958	COMPRESSION SET SHALL BE TESTED IN ACCORDANCE WITH ASTMD395.
1960	FLUID IMMERSION SHALL BE TESTED IN ACCORDANCE WITH ASTMD471.
1962	MEDIA SHALL BE 1962.
1964	MEDIA SHALL BE IN ACCORDANCE WITH 1964.
1966	MEDIA TEMPERATURE SHALL BE 1966 DEGREES CELSIUS.
1968	DURATION OF IMMERSION SHALL BE 1968 HOURS.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CUSHION OR GASKET (CONT)	
AS FOLLOWS: (CONT)	
HARDNESS PER ASTMD2240.	1970
HEAT AGING PER ASTMD573.	1972
OZONE RESISTANCE PER ASTMD1149.	1974
SPECIFIC GRAVITY PER ASTMD792.	1976
TEAR RESISTANCE PER ASTMD624.	1978
TENSILE STRENGTH PER ASTMD412.	1980
TORSIONAL STIFFNESS PER ASTMD1053.	1982
ULTIMATE ELONGATION PER ASTMD412.	1984
VOLUME CHANGE PER FED-STD-601, METHOD 6211.	1986
WEATHERING PER FED-STD-601, METHOD 7311.	1988
DEFORMATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2002
AS FOLLOWS:	2004
NO DEFORMATION.	2006

Source: http://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1970	HARDNESS SHALL BE TESTED IN ACCORDANCE WITH ASTMD2240.
1972	HEAT AGING SHALL BE TESTED IN ACCORDANCE WITH ASTMD573.
1974	OZONE RESISTANCE SHALL BE TESTED IN ACCORDANCE WITH ASTMD1149.
1976	SPECIFIC GRAVITY SHALL BE TESTED IN ACCORDANCE WITH ASTMD792.
1978	TEAR RESISTANCE SHALL BE TESTED IN ACCORDANCE WITH ASTMD624.
1980	TENSILE STRENGTH SHALL BE TESTED IN ACCORDANCE WITH ASTMD412.
1982	TORSIONAL STIFFNESS SHALL BE TESTED IN ACCORDANCE WITH ASTMD1053.
1984	ULTIMATE ELONGATION SHALL BE TESTED IN ACCORDANCE WITH ASTMD412.
1986	VOLUME CHANGE SHALL BE TESTED IN ACCORDANCE WITH METHOD 6211 OF FED-STD-601.
1988	WEATHERING SHALL BE TESTED IN ACCORDANCE WITH METHOD 7311 OF FED-STD-601.
2002	DEFORMATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2002.
2004	DEFORMATION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2006	THERE SHALL BE NO DEFORMATION OF THE HOSE OR TUBING.

Source: https://assist.dla.mil -- Downloaded: 20261O-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DEFORMATION (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM ID DECREASE (SELECT ONE)	
(INCHES)	2008
(MILLIMETERS)	2010
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2022
PER MIL-C-6985.	2024
ADJUSTING SCREW TORQUE	
(POUND-INCHES)	2026
(NEWTON METERS)	2028
DUCTILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2102
NO EVIDENCE OF BREAKS, CRACKS OR FRACTURES.	2104
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2122

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR. CODE	STANDARD PARAGRAPH
2008	THE HOSE OR TUBING INSIDE DIAMETER DECREASE SHALL BE NOT GREATER THAN 2008 INCH(S).
2010	THE HOSE OR TUBING INSIDE DIAMETER DECREASE SHALL BE NOT GREATER THAN 2010 MILLIMETER(S).
2022	DEFORMATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2022.
2024	DEFORMATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-6985.
2026	THE ADJUSTING SCREW TORQUE SHALL BE 2026 POUND-INCHES.
2028	THE ADJUSTING SCREW TORQUE SHALL BE 2028 NEWTON METERS.
2102	DUCTILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2102.
2104	DUCTILITY. THERE SHALL BE NO EVIDENCE OF BREAKS, CRACKS OR FRACTURES.
2122	DUCTILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2122.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DUCTILITY (CONT)	
TEST METHODS (CONT)	
PER WW-C-440.	2124
DEGREES OF BEND (DEGREES)	2126
DEGREES OF BEND TOLERANCE PLUS OR MINUS (DEGREES)	2128
DIAMETER OF ARBOR (SELECT ONE)	
(INCHES)	2130
TOLERANCE PLUS OR MINUS (INCH)	2132
(MILLIMETERS)	2134
TOLERANCE PLUS OR MINUS (MILLIMETERS)	2136
THE FREE TANG SHALL PASS AROUND THE STATIONARY TANG.	2138
DURABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2202
NO EXCESSIVE WEAR OF SCREW THREADS OR BAND SLOTS OF THE CLAMP.	2204

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2124	DUCTILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH WW-C-440.
2126	THE BEND SHALL BE 2126 DEGREES.
2128	THE BEND TOLERANCE SHALL BE PLUS OR MINUS 2128 DEGREES.
2130	THE DIAMETER OF THE ARBOR SHALL BE 2130 INCH(S).
2132	THE ARBOR DIAMETER TOLERANCE SHALL BE PLUS OR MINUS 2132 INCH.
2134	THE DIAMETER OF THE ARBOR SHALL BE 2134 MILLIMETERS.
2136	THE ARBOR DIAMETER TOLERANCE SHALL BE PLUS OR MINUS 2136 MILLIMETERS.
2138	THE FREE TANG SHALL PASS AROUND THE STATIONARY TANG.
2202	DURABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2202.
2204	DURABILITY. THERE SHALL BE NO DEFORMATION OR EXCESSIVE WEAR OF THE SCREW THREADS OR BAND SLOTS OF THE CLAMP.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DURABILITY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2222
PER WW-C-440.	2224
APPLIED SCREW TORQUE (SELECT ONE)	
U.S. (SELECT ONE)	
(POUND-INCHES)	2226
(POUND-FEET)	2228
SI	
(NEWTON METERS)	2230
HARDNESS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2302
AS FOLLOWS:	2304

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2222	DURABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2222.
2224	DURABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH WW-C-440.
2226	THE APPLIED TORQUE SHALL BE 2226 POUND-INCHES.
2228	THE APPLIED TORQUE SHALL BE 2228 POUND-FEET.
2230	THE APPLIED TORQUE SHALL BE 2230 NEWTON METERS.
2302	HARDNESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2302.
2304	HARDNESS. THE HARDNESS OF THE MATERIAL SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HARDNESS (CONT)	
AS FOLLOWS: (CONT)	
MINIMUM HARDNESS (SELECT ONE)	
BRINELL (VALUE)	2306
ROCKWELL (VALUE)	2308
*SCALE (LETTER)	2310
DUROMETER (VALUE)	2312
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2322
PER ASTME10.	2324
PER ASTME18.	2326
PER ASTMD2240.	2328
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4798

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2306	THE BRINELL HARDNESS SHALL BE NOT LESS THAN 2306.
2308 2310	THE ROCKWELL HARDNESS SHALL BE NOT LESS THAN 2308 ON THE 2310 SCALE.
2312	THE DUROMETER HARDNESS SHALL BE NOT LESS THAN 2312.
2322	HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2322.
2324	HARDNESS. BRINELL HARDNESS TESTING SHALL BE IN ACCORDANCE WITH ASTME10.
2326	HARDNESS. ROCKWELL HARDNESS TESTING SHALL BE IN ACCORDANCE WITH ASTME18.
2328	HARDNESS. DUROMETER HARDNESS TESTING SHALL BE IN ACCORDANCE WITH ASTMD2240.
4798	HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	4799
NO DEGRADATION OF PERFORMANCE.	4815
REMAIN WITHIN SPECIFIED TOLERANCE.	4791
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4788
PER MIL-STD-810, METHOD 507.	4871
*PROCEDURE NUMBER (SELECT ONE)	
TEST PROCEDURE I.	4767
EXTREME TEMPERATURE BEFORE TESTING (DEGREES CELSIUS)	4777
*DURATION OF TEMPERATURE EXPOSURE (HOURS)	4778
TEST PROCEDURE II.	6334
CYCLE LIMITED TO 24 HOURS DURATION.	4716
TEST PROCEDURE III.	6335

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4799	HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
4815	THERE SHALL BE NO DEGRADATION OF PERFORMANCE.
4791	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4788	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.
4871	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 507 OF MIL-STD-810.
4767	PROCEDURE NUMBER I SHALL APPLY.
4777	SPECIMEN(S) SHALL BE EXPOSED TO 4777 DEGREES CELISUS BEFORE TESTING.
4778	DURATION OF EXPOSURE TO EXTREME TEMPERATURE SHALL BE 4778 HOURS.
6334	PROCEDURE NUMBER II SHALL APPLY.
4716	CYCLES SHALL BE LIMITED TO 24 HOURS DURATION.
6335	PROCEDURE NUMBER III SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
PROCEDURE NUMBER (CONT)	
TEST PROCEDURE IV.	6336
TEST PROCEDURE V.	6337
NUMBER OF CYCLES (NUMBER)	4800
WATER PURITY BY CONDUCTIVITY METHOD.	4764
LEAKAGE PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2402
NO LEAKAGE.	2404
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2422
PER DOCUMENT (DOC DES)	2424
TEST PRESSURE, GAGE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2426
(KILOPASCALS)	2428

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6336	PROCEDURE NUMBER IV SHALL APPLY.
6337	PROCEDURE NUMBER V SHALL APPLY.
4800	THERE SHALL BE 4800 TEST CYCLES.
4764	WATER PURITY SHALL BE DETERMINED BY THE CONDUCTIVITY METHOD.
2402	LEAKAGE PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2402.
2404	LEAKAGE PRESSURE. THERE SHALL BE NO LEAKAGE AT THE SPECIFIED HYDRAULIC OR HYDROSTATIC PRESSURES.
2422	LEAKAGE PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2422.
2424	LEAKAGE PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2424.
2426	THE TEST PRESSURE SHALL BE AT A GAGE PRESSURE OF 2426 POUNDS PER SQUARE INCH.
2428	THE TEST PRESSURE SHALL BE AT A GAGE PRESSURE OF 2428 KILOPASCALS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LEAKAGE PRESSURE (CONT)	
PER DOCUMENT (DOC DES) (CONT)	
APPLIED TORQUE (SELECT ONE)	
(POUND-INCHES)	2430
(NEWTON METERS)	2432
MEDIA (NAME)	2434
MEDIA (DOC DES)	2436
MEDIA TEMPERATURE (DEGREES CELSIUS)	2438
TEMPERATURE TOLERANCE PLUS OR MINUS (DEGREES CELSIUS)	2440
PRESSURE DURATION (MINUTES)	2442
LOAD RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2602
AS FOLLOWS:	2604
MINIMUM YIELD (SELECT ONE)	
(POUNDS)	2606
(KILOGRAMS)	2608

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2430	THE APPLIED TORQUE SHALL BE 2430 POUND-INCHES.
2432	THE APPLIED TORQUE SHALL BE 2432 NEWTON METERS.
2434	THE TEST MEDIA SHALL BE 2434.
2436	THE TEST MEDIA DOCUMENT SHALL BE 2436.
2438	THE TEST MEDIA TEMPERATURE SHALL BE 2438 DEGREES CELSIUS.
2440	THE TEST MEDIA TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2440 DEGREES CELSIUS.
2442	THE TEST PRESSURE DURATION SHALL BE 2442 MINUTES.
2602	LOAD RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2602.
2604	LOAD RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2606	THE YIELD RESISTANCE SHALL BE NOT LESS THAN 2606 POUNDS.
2608	THE YIELD RESISTANCE SHALL BE NOT LESS THAN 2608 KILOGRAMS.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LOAD RESISTANCE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2622
PER MIL-C-6985.	2624
MAXIMUM HYDRAULIC GAGE PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2626
(KILOPASCALS)	2628
MINIMUM SCREW TORQUE (SELECT ONE)	
(POUND-INCHES)	2630
(NEWTON METERS)	2632
SAFE WORKING LOAD	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2702
AS FOLLOWS:	2704
CLAMP GRIP, MINIMUM PERCENT OF WIRE ROPE BREAKING STRENGTH (PERCENT)	2706
NO SEPARATION OF HOSE, CLAMP, OR COUPLING.	2708

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2622	LOAD RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2622.
2624	LOAD RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-6985.
2626	THE HYDRAULIC GAGE PRESSURE SHALL BE NOT GREATER THAN 2626 POUNDS PER SQUARE INCH.
2628	THE HYDRAULIC GAGE PRESSURE SHALL BE NOT GREATER THAN 2628 KILOPASCALS.
2630	THE SCREW TORQUE SHALL BE NOT LESS THAN 2630 POUND-INCHES.
2632	THE SCREW TORQUE SHALL BE NOT LESS THAN 2632 NEWTON METERS.
2702	SAFE WORKING LOAD. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2702.
2704	SAFE WORKING LOAD. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2706	THE CLAMP GRIP SHALL BE NOT LESS THAN 2706 PERCENT OF THE WIRE ROPE BREAKING STRENGTH.
2708	THERE SHALL BE NO SEPARATION OF THE HOSE, CLAMP, OR COUPLING AS A RESULT OF THE VERTICAL PULL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SAFE WORKING LOAD (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2722
PER FF-C-450.	2724
WIRE ROPE BREAKING STRENGTH (SELECT ONE)	
(POUNDS)	2726
(KILOGRAMS)	2728
PER MIL-C-11760.	2730
MINIMUM VERTICAL PULL (SELECT ONE)	
(POUNDS)	2732
(NEWTONS)	2734
DURATION (MINUTES)	2736
SALT SPRAY/FOG	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6356
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE.	6357

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2722	SAFE WORKING LOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2722.
2724	SAFE WORKING LOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH FF-C-450.
2726	THE BREAKING STRENGTH OF THE WIRE ROPE SHALL BE 2726 POUNDS.
2728	THE BREAKING STRENGTH OF THE WIRE ROPE SHALL BE 2728 KILOGRAMS.
2730	SAFE WORKING LOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-11760.
2732	THE VERTICAL PULL SHALL BE NOT LESS THAN 2732 POUNDS.
2734	THE VERTICAL PULL SHALL BE NOT LESS THAN 2734 NEWTONS.
2736	THE DURATION OF VERTICAL PULL SHALL BE 2736 MINUTES.
6356	SALT SPRAY/FOG. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6356.
6357	SALT SPRAY/FOG. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY/FOG (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6353
PER ASTMB117.	6354
EXPOSURE PERIOD (HOURS)	4783
TENSILE STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2802
AS FOLLOWS:	2804
MINIMUM TENSILE STRENGTH (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2806
(KILOPASCALS)	2808
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2822
PER ASTME8.	2824
MAXIMUM LOAD (SELECT ONE)	
(POUNDS)	2826
(KILOGRAMS)	2828

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6353 SALT SPRAY/FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6353.

6354 SALT SPRAY/FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMB117.

4783 DURATION OF THE TEST SHALL BE 4783 HOURS.

2802 TENSILE STRENGTH. THE REQUIREMENTS(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2802.

2804 TENSILE STRENGTH. THE TENSILE STRENGTH SHALL BE AS FOLLOWS:

2806 THE TENSILE STRENGTH SHALL BE NOT LESS THAN 2806 POUNDS PER SQUARE INCH.

2808 THE TENSILE STRENGTH SHALL BE NOT LESS THAN 2808 KILOPASCALS.

2822 TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2822.

2824 TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTME8.

2826 THE LOAD SHALL BE NOT GREATER THAN 2826 POUNDS.

2828 THE LOAD SHALL BE NOT GREATER THAN 2828 KILOGRAMS.

Source: https://assist.dla.mil -- Downloaded: 2024-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TORQUE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3002
AS FOLLOWS:	3004
NO DISTORTION OF CLAMP OR CLAMP ASSEMBLY.	3006
NO BINDING OF CLAMP SCREWS.	3008
MAXIMUM FREE TORQUE (SELECT ONE)	
U.S. (SELECT ONE)	
(POUND-INCHES)	3010
(POUND-FEET)	3012
SI	
(NEWTON METERS)	3014

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3002	TORQUE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3002.
3004	TORQUE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3006	THERE SHALL BE NO DISTORTION OF THE CLAMP OR CLAMP ASSEMBLY.
3008	THERE SHALL BE NO BINDING OF THE CLAMP SCREWS.
3010	THE FREE TORQUE SHALL BE NOT GREATER THAN 3010 POUND-INCHES.
3012	THE FREE TORQUE SHALL BE NOT GREATER THAN 3012 POUND-FEET.
3014	THE FREE TORQUE SHALL BE NOT GREATER THAN 3014 NEWTON METERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TORQUE (CONT)	
AS FOLLOWS: (CONT)	
MINIMUM RELEASE TORQUE (SELECT ONE)	
U.S. (SELECT ONE)	
(POUND-INCHES)	3016
(POUND-FEET)	3018
SI	
(NEWTON METERS)	3020
MINIMUM OVERTIGHTENING BREAKING TORQUE (SELECT ONE)	
U.S. (SELECT ONE)	
(POUND-INCHES)	3022
(POUND-FEET)	3024
SI	
(NEWTON METERS)	3026

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3016	THE RELEASE TORQUE SHALL BE NOT LESS THAN 3016 POUND-INCHES.
3018	THE RELEASE TORQUE SHALL BE NOT LESS THAN 3018 POUND-FEET.
3020	THE RELEASE TORQUE SHALL BE NOT LESS THAN 3020 NEWTON METERS.
3022	THE OVERTIGHTENING BREAKING TORQUE SHALL BE NOT LESS THAN 3022 POUND-INCHES.
3024	THE OVERTIGHTENING BREAKING TORQUE SHALL BE NOT LESS THAN 3024 POUND-FEET.
3026	THE OVERTIGHTENING BREAKING TORQUE SHALL BE NOT LESS THAN 3026 NEWTON METERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TORQUE (CONT)	
AS FOLLOWS: (CONT)	
NUT OR WRENCH TORQUE VERSUS LOAD TEST	
MINIMUM APPLIED LOAD (SELECT ONE)	
(POUNDS)	3028
(KILOGRAMS)	3030
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3042
PER MIL-C-6985.	3044
MEASURE FREE TORQUE.	3046
RELEASE TORQUE INITIAL APPLIED LOAD (SELECT ONE)	
U.S. (SELECT ONE)	
(POUND-INCHES)	3048
(POUND-FEET)	3050
SI	
(NEWTON METERS)	3052

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3018	THE APPLIED LOAD IN THE NUT OR WRENCH TORQUE VERSUS LOAD TEST SHALL BE NOT LESS THAN 3028 POUNDS.
3030	THE APPLIED LOAD IN THE NUT OR WRENCH TORQUE VERSUS LOAD TEST SHALL BE NOT LESS THAN 3030 KILOGRAMS.
3042	TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3042.
3044	TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-6985.
3046	FREE TORQUE SHALL BE MEASURED.
3048	THE RELEASE TORQUE INITIAL LOAD SHALL BE 3048 POUND-INCHES.
3050	THE RELEASE TORQUE INITIAL LOAD SHALL BE 3050 POUND-FEET.
3052	THE RELEASE TORQUE INITIAL LOAD SHALL BE 3052 NEWTON METERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TORQUE (CONT)	
PER MIL-C-6985. (CONT)	
APPLY OVERTIGHTENING TORQUE TO FRACTURE.	3054
NUT OR WRENCH TORQUE VS LOAD TEST (SELECT ONE)	
U.S. (SELECT ONE)	
(POUND-INCHES)	3056
(POUND-FEET)	3058
SI	
(NEWTON METERS)	3060
VIBRATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4681
NO EVIDENCE OF PHYSICAL DAMAGE.	4682
REMAIN WITHIN SPECIFIED TOLERANCE.	1538

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3054	MEASURE TORQUE REQUIRED TO FRACTURE THE CLAMP.
3056	THE APPLIED TORQUE IN THE NUT OR WRENCH TORQUE VERSUS LOAD TEST SHALL BE 3056 POUND-INCHES.
3058	THE APPLIED TORQUE IN THE NUMBER WRENCH TORQUE VERSUS LOAD TEST SHALL BE 3058 POUND-FEET.
3060	THE APPLIED TORQUE IN THE NUT OR WRENCH TORQUE VERSUS LOAD TEST SHALL BE 3060 NEWTON METERS.
4681	VIBRATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4681.
4682	VIBRATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1538	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1505
PER MIL-STD-810, METHOD 514.	1514
*PROCEDURE NUMBER (ROMAN NUMERAL)	1518
EQUIPMENT (CATEGORY)	1540
CURVE (LETTERS)	1525
APPLICABLE TABLE (NO.)	1532
APPLICABLE FIGURE (NO.)	1559
OPERATION NOT REQUIRED.	1424
TEMPERATURE (DEGREES CELSIUS)	1542
TEMPERATURE TOLERANCE PLUS OR MINUS (DEGREES CELSIUS)	1543
DURATION AT TEMPERATURE (HOURS)	1544

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1505	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1505.
1514	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 514 OF MIL-STD-810.
1518	PROCEDURE NUMBER 1518 SHALL APPLY.
1540	THE EQUIPMENT CATEGORY SHALL BE 1540 IN ACCORDANCE WITH METHOD 514 OF MIL-STD-810.
1525	CURVE 1525 SHALL APPLY.
1532	PROCEDURE AND TIME SCHEDULE SHALL BE AS SHOWN ON TABLE 1532 OF METHOD 514 OF MIL-STD-810.
1559	TEST CURVES ARE AS SHOWN IN FIGURE 1559 OF METHOD 514 OF MIL-STD-810.
1424	OPERATION DURING THE TEST IS NOT REQUIRED.
1542	VIBRATION TEST SHALL BE DONE AT A TEMPERATURE OF 1542 DEGREES CELSIUS.
1543	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1543 DEGREES CELSIUS.
1544	THE TEMPERATURE TIME DURATION SHALL BE 1544 HOURS.

Source: https://assist.dla.mil -- Downloaded: 2026-07-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE | STANDARD PARAGRAPH

MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.

6870 WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.

ADDITIONAL REQUIREMENTS.

7001 (A) 7001.

7002 (B) 7002.

7003 (C) 7003.

7004 (D) 7004.

7005 (E) 7005.

6372 PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.

7630 PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.

7629 PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995
DEFINITION OF HERMETIC SEALING	
NOTE: AUTOMATIC WHEN CODES ARE USED TO REQUIRE HERMETIC SEALING.	
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

DEFINITION OF HERMETIC SEALING. FOR THE PURPOSE OF THIS DOCUMENT, A HERMETICALLY-SEALED ITEM IS ONE IN WHICH THE ELEMENT IS CONTAINED WITHIN A SEALED ENCLOSURE OF CERAMIC, GLASS OR METAL, OR A COMBINATION THEREOF, WHERE SEALING IS ACCOMPLISHED BY MATERIAL FUSION, WELDING, BRAZING OR SOLDERING.

Custodians:
Army-MI

Review Activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User Activity:
Army-MU

Preparing Activity:
Army-MI


(Project EDS-A207)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.


APPENDIX A

ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

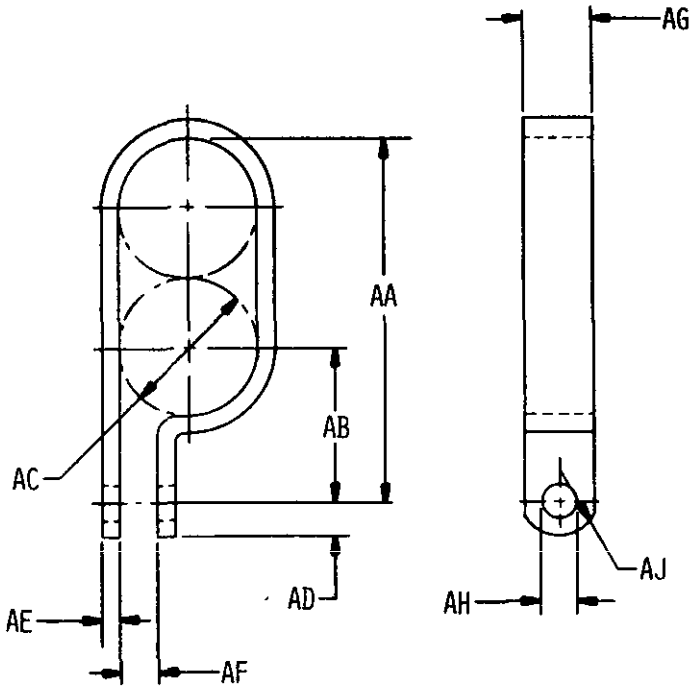


147-01-1

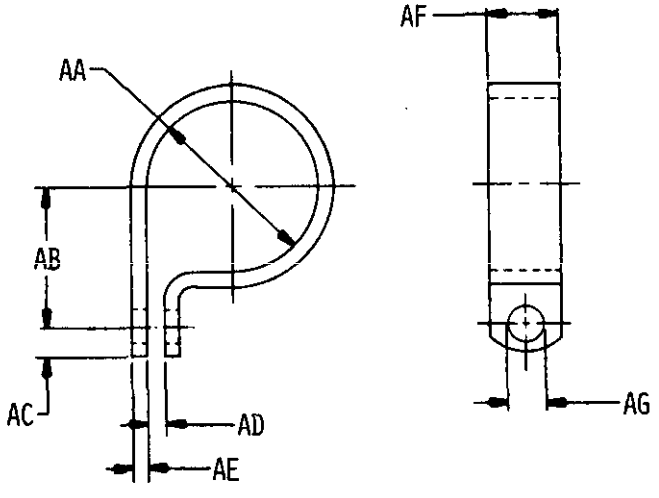


147-01-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

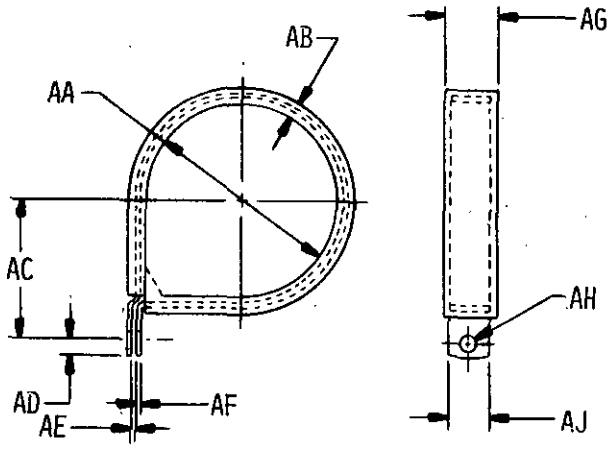


147-01-3

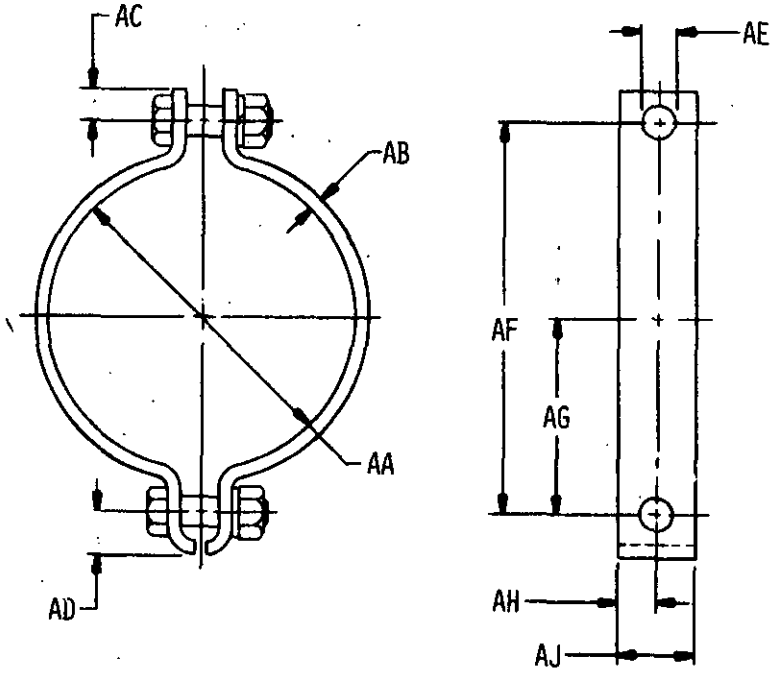


147-01-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

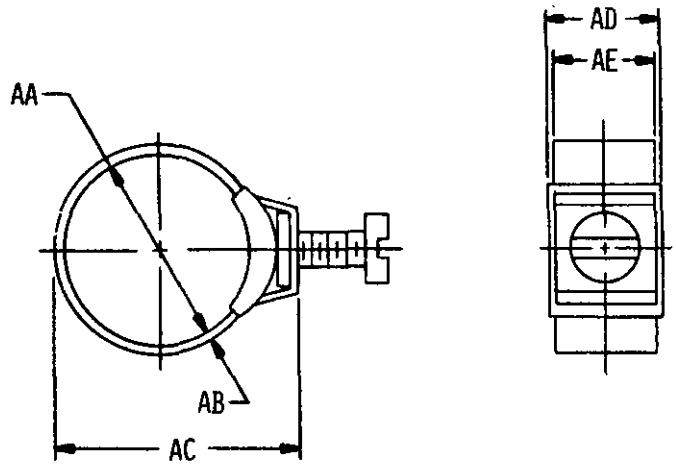


147-01-5

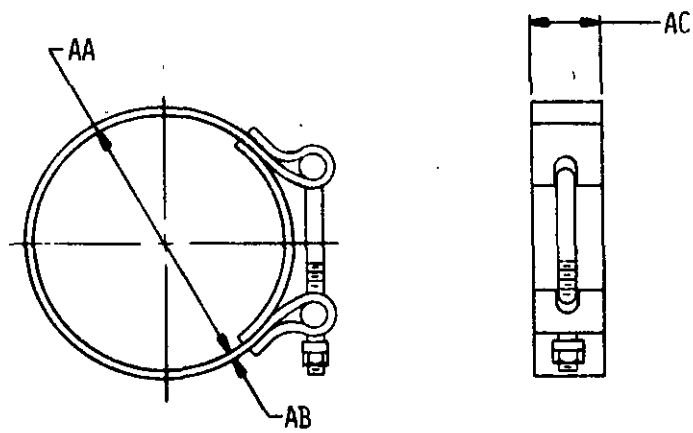


147-01-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

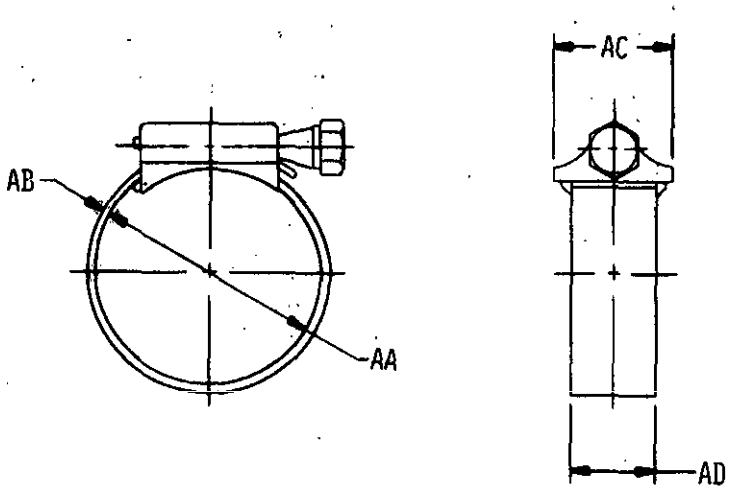


147-01-7

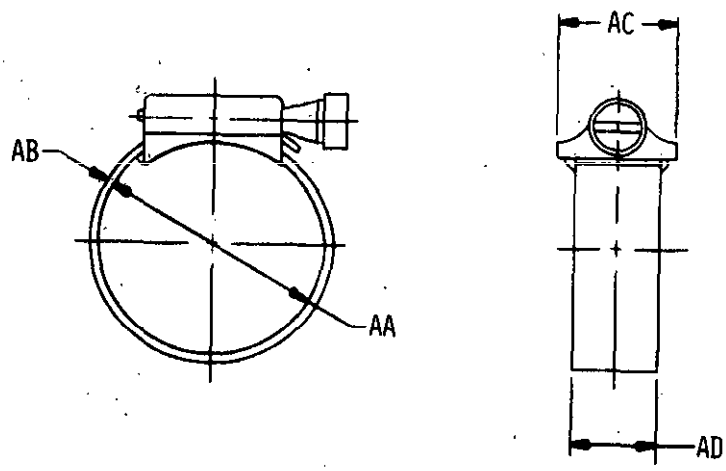


147-01-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

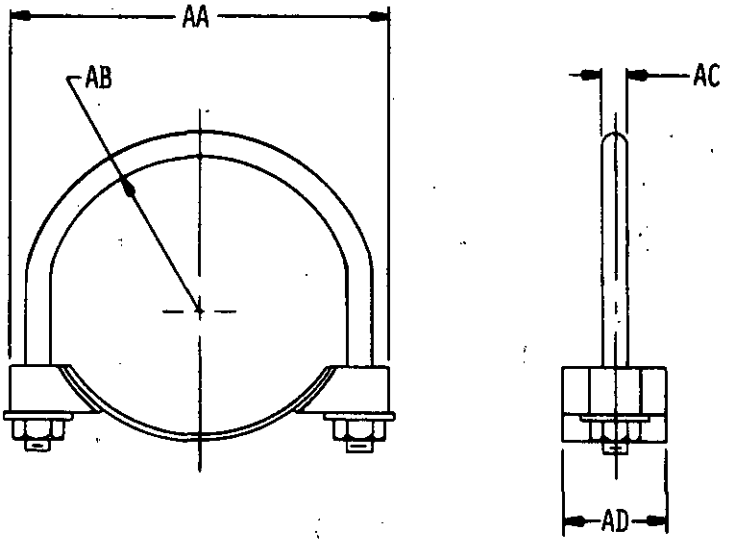


147-01-9

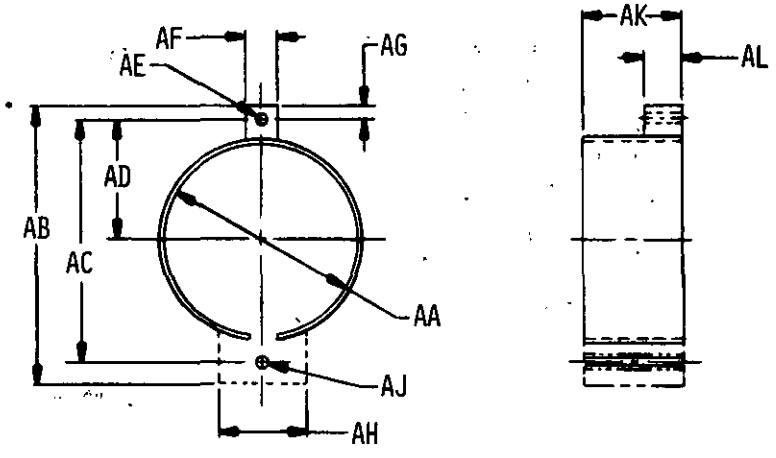


147-01-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

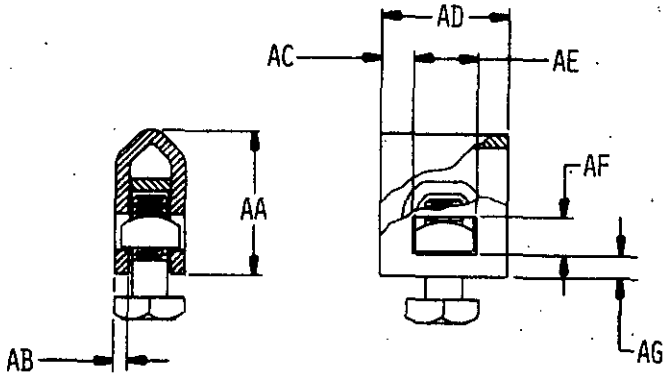


147-01-11

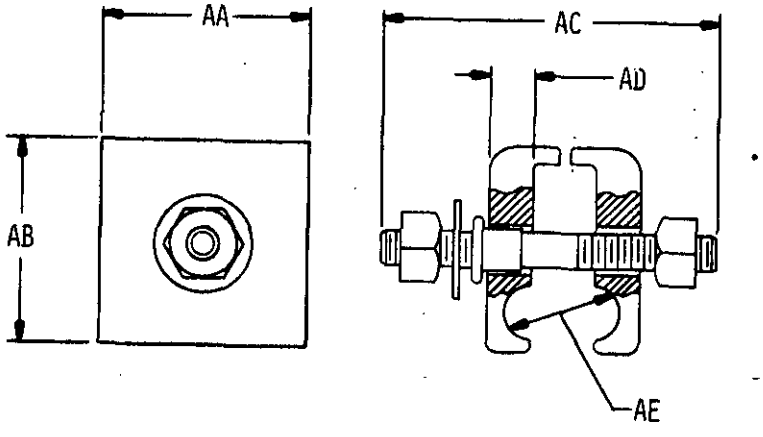


147-01-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

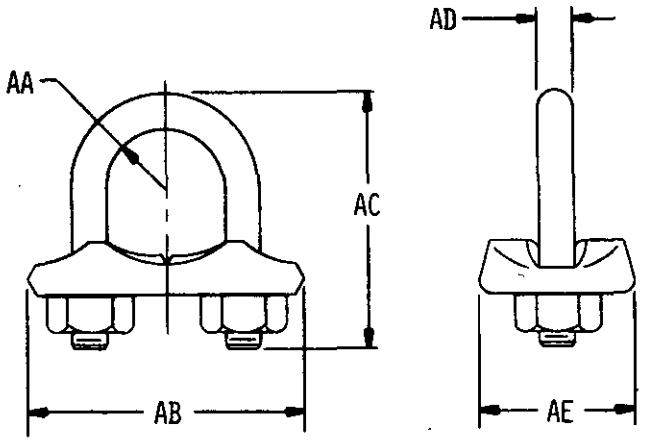


147-01-13

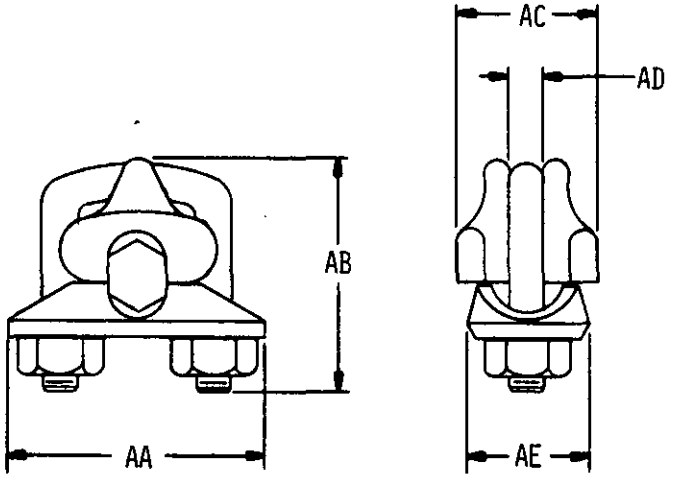


147-01-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

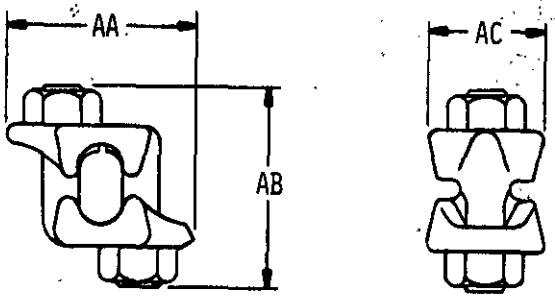


147-01-15

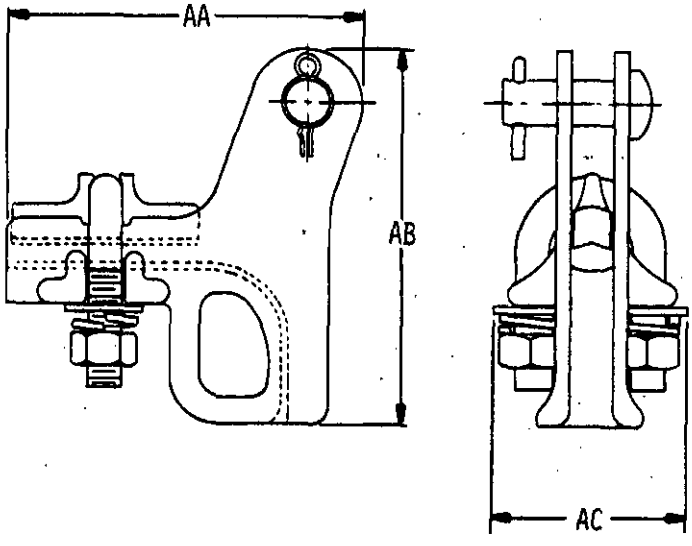


147-01-16

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

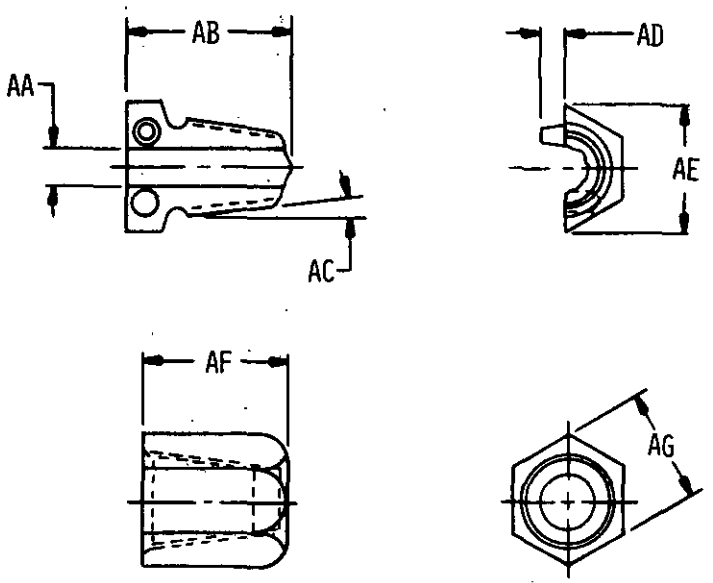


147-01-17

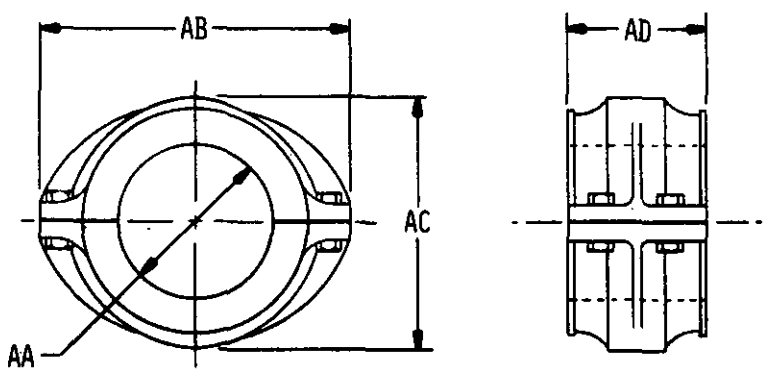

147-01-18

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

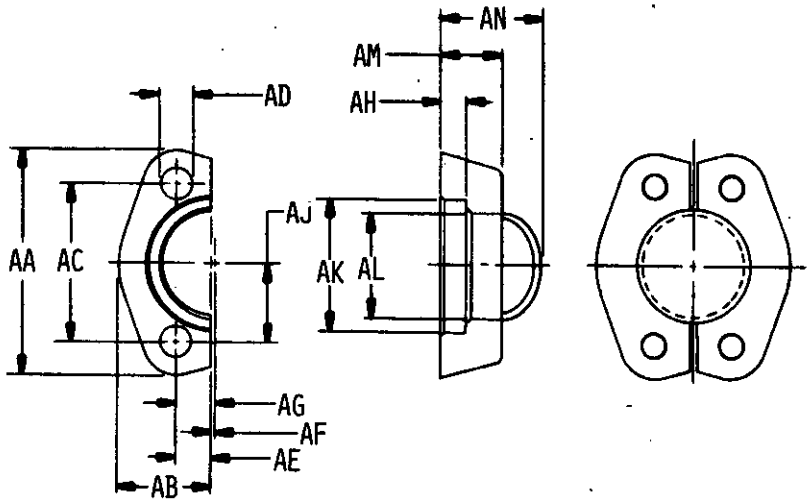

147-01-19

Source: https://standards.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	20	1622	30	1964	40	2303	48
0102	20	1626	30	1966	40	2304	48
0103	20	1628	30	1968	40	2306	50
0104	20	1630	34	1970	42	2308	50
0105	20	1632	34	1972	42	2310	50
0107	22	1634	34	1974	42	2312	50
0108	22	1636	34	1976	42	2322	50
0700	20	1640	26	1978	42	2324	50
0800	20	1642	26	1980	42	2326	50
1003	20	1644	26	1982	42	2328	50
1004	20	1646	26	1984	42	2402	54
1005	20	1802	36	1986	42	2404	54
1006	20	1804	36	1988	42	2422	54
1008	20	1806	36	2002	42	2424	54
1009	26	1808	36	2004	42	2426	54
1424	72	1810	36	2006	42	2428	54
1505	72	1812	36	2008	44	2430	56
1514	72	1822	36	2010	44	2432	56
1518	72	1824	36	2022	44	2434	56
1525	72	1902	38	2026	44	2436	56
1532	72	1904	38	2028	44	2438	56
1538	70	1906	38	2042	44	2440	56
1540	72	1908	38	2102	44	2442	56
1542	72	1910	38	2104	44	2602	56
1543	72	1912	38	2122	44	2604	56
1544	72	1914	38	2124	46	2606	56
1559	72	1916	38	2126	46	2608	56
1570	24	1918	38	2128	46	2622	58
1580	24	1920	38	2130	46	2624	58
1590	30	1922	38	2132	46	2626	58
1592	30	1924	40	2134	46	2628	58
1600	30	1926	40	2136	46	2630	58
1602	30	1928	40	2138	46	2632	58
1604	30	1930	40	2202	46	2702	58
1606	30	1952	40	2204	46	2704	58
1612	24	1954	40	2222	48	2706	58
1614	30	1956	40	2224	48	2708	58
1616	30	1958	48	2226	48	2722	60
1618	30	1960	48	2228	48	2724	60
1620	30	1962	40	2230	48	2726	60

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2726	60	4716	52	6994	76		
2730	60	4764	54	6995	76		
2732	60	4767	52	6996	32		
2734	60	4777	52	6997	32		
2736	60	4778	52	6998	32		
2802	62	4783	62	6999	32		
2804	62	4788	52	7001	74		
2806	62	4791	52	7002	74		
2808	62	4798	50	7003	74		
2822	62	4799	52	7004	74		
2824	62	4800	54	7005	74		
2826	62	4815	52	7021	34		
2828	62	4871	52	7022	34		
3002	64	4904	24	7023	34		
3004	64	4905	24	7024	34		
3006	64	4950	26	7580	28		
3008	64	5049	24	7629	74		
3010	64	6334	52	7630	74		
3012	64	6335	52				
3014	64	6336	54				
3016	66	6337	54				
3018	66	6353	62				
3020	66	6354	62				
3022	66	6356	60				
3024	66	6357	60				
3026	66	6369	20				
3028	68	6372	74				
3030	68	6375	28				
3042	68	6870	74				
3044	68	6873	20				
3046	68	6874	22				
3048	68	6941	22				
3050	68	6942	22				
3052	68	6943	32				
3054	70	6944	32				
3056	70	6945	32				
3058	70	6946	32				
3060	70	6991	76				
4681	70	6992	76				
4682	70	6993	76				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Additional Part Marking	76
Additional Requirements	74
Aperture Cards Required	22
Applicable Documents	76
Base Document	20
City, State, Zip	20
Clamp Color	30
Clamp Size ID, Nominal	30
Classification	24
Closure	36
Company Name/Command	20
Composition	28
Configuration	26
Contract Number/Office Symbol	20
Control	20
Cushion or Gasket	38
Cushion or Gasket Color	30
Date	20
Definition of Hermetic Sealing	76
Deformation	42
Design and Construction	30
Ductility	44
Durability	46
Edges and Holes Finish	30
Finishes	28
Format	20
Government Design Activity FSCM	20
Hardness	48
Hose or Tube Size OD, Nominal	30
Humidity	50
Illustrations	26
Leakage Pressure	54
Load Resistance	56

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Materials	28
Maximum Weight per Unit	34
Metals	28
Minimum Weight per Unit	32
Mounting Hardware	74
Nomenclature	76
Nominal Weight per Unit	32
Notes	76
Packaging	76
Part Marking	74
Part Number	22
Part Number Cross-Reference	76
Performance	34
Phone Number	20
Quality Assurance Provisions	76
Ratings	24
Requester FSCM	20
Requester's Name	20
Revision of AEDPS Document Number	22
Safe Working Load	58
Salt Spray/Fog	60
Scope	22
Source Table	22
Street/Building	20
Superseded Document	76
System Application	20
Tabulated Characteristics	26
Tensile Strength	62
Torque	64
Units of Measure	22
Vibration	70
Workmanship	74

☆U.S. GOVERNMENT PRINTING OFFICE: 1980-603-121/670

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-114(MI), dated 2 June 1978 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-114(MI), dated 2 June 1978 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

DOD-STD-35-114

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander,
U.S. Army Missile R & D Command,
ATTN: DRDMI-ESD,
Redstone Arsenal, Alabama 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.