# DOD-STD-35-117(MI)

16 JUNE 1978

# MILITARY STANDARD

# SWITCHES, PRESSURE

# AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

**FSC EDS**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Switches, Pressure
Automated Engineering
Document Preparation System

DOD-STD-35-117(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

# FOREWORD

1. The purpose of DOD-STD-35-117(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for pressure switches.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CONTENTS

| | | | Page |
|---|---|---|---|
| Paragraph | 1. | SCOPE | 1 |
| | 1.1 | General | 1 |
| | 1.2 | Purpose | 1 |
| | 1.3 | Utilization | 1 |
| | 1.4 | Military Specification Exception Title Index | 1 |
| | 2. | REFERENCED DOCUMENTS | 5 |
| | 2.1 | Issues of documents | 5 |
| | 2.2 | Other publications | 6 |
| | 3. | DEFINITIONS | 7 |
| | 4. | GENERAL REQUIREMENTS | 9 |
| | 4.1 | Introduction? | 9 |
| | 4.2 | Specification Requirement Sheet (SRS) | 9 |
| | 4.3 | Configuration | 9 |
| | 4.3.1 | Dimensions | 9 |
| | 4.3.2 | Illustrations | 9 |
| | 4.4 | Units of measure | 9 |
| | 5. | DETAILED REQUIREMENTS | 11 |
| | 5.1 | Introduction | 11 |
| | 5.2 | MSE Formats | 11 |
| | 5.3 | Referenced documents | 11 |
| | 5.4 | Test matrix | 11 |
| | 5.5 | Tabulation | 12 |
| | 5.6 | Keyword Code Index (KCI) and Standard Paragraphs | 15 |
| | 5.6.1 | Interrelationship of Codes | 15 |
| | 5.6.2 | Automatic MSE Data | 15 |
| | 5.6.3 | DOD-STD-35 Tables | 15 |

TABLES

| | | | |
|---|---|---|---|
| Table | I. | Title Index | 3 |
| | II. | Test matrix | 12 |
| | III. | Tabulation candidates | 13 |

APPENDICES

| | | | |
|---|---|---|---|
| Appendix | A. | Illustrations | 167 |
| | B. | Characteristic Code Index | 175 |
| | | Index | 185 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

# 1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for pressure switches.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for an MSE shall be selected from one of the MSL titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable. for use as the base document.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in D0DISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX.

| MSE TITLE | TITLE CODE | BASE DOCUMENT NUMBER | BASE DOCUMENT COVERAGE |
|---|---|---|---|
| SWITCH, PRESSURE | 016001 | MIL-S-8932 | AIRCRAFT, GENERAL SPECIFICATION |
| | | MS25275 | ENGINE MOUNTED |
| | | MS25276 | BULKHEAD MOUNTED |
| | | MIL-S-8933 | AIRCRAFT, ABSOLUTE |
| | | MIL-S-8934 | AIRCRAFT, DIFFERENTIAL |
| | | MIL-S-8935 | AIRCRAFT, GAGE |
| | | MIL-S-8936 | AIRCRAFT, APPROXIMATE GAGE |
| | | MIL-S-9395 | ABSOLUTE, GAGE AND DIFFERENTIAL, GENERAL SPECIFICATION |
| | | MIL-S-12211 | AUTOMOTIVE |
| | | MS27152 | 60 PSI |
| | | MS75062 | AIR BRAKE SYSTEM |
| | | MS75063 | HYDRAULIC BRAKE SYSTEM |
| | | MS90530 | 24 VOLT DC |
| | | MIL-S-45869 | ABSOLUTE PRESSURE, NIKE HERCULES TEST SET |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

## 2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

| | |
|---|---|
| MIL-S-8932 | Switches, Pressure, Aircraft, General Specification for |
| MIL-S-9395 | Switches, Pressure (Absolute, Gauge and Differential) General Specification for |
| MIL-S-12211 | Switch, Pressure |
| MIL-E-13856 | Electrical Components for Automotive Vehicles; Waterproofness Tests |
| MIL-F-13927 | Fungus Resistance Test; Automotive Component |
| MIL-S-45869 | Switch, Pressure, For T4016 (T31O) Test Set |

STANDARDS

MILITARY

| | |
|---|---|
| MIL-STD-35-1 | Automated Engineering Document Preparation System |
| MIL-STD-202 | Test Methods for Electronic and Electrical Component Parts |
| MIL-STD-81O | Environmental Test Methods |
| MIL-STD-1523 | Age Control of Age-Sensitive Elastomeric Materials |
| MS33540 | Safety Wiring and Cotter Pinning, General Practices for |

(copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)



Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:24Z
Check the source to verify that this is the currentversion before use.

2.2 Other publications. The following documents form a part of this standar to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTME380 Metric Practice Guide

(Application for copies should be addressed to the American Society for testing and Materials, 1916 Race St., Philadelphia, PA 19103.)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

## 3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Switches, Pressure.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

# 4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Switches, Pressure, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to pressure switches.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to pressure switches.

4.3.2 Illustrations. Illustrations applicable to Switches, Pressure are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

## 5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to Prepare a six-section or a single-section document. The six-section document" appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 3 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Test matrix. A test matrix is supplied as a guide for selecting documents to specity tests (see table II). The test matrix presents documents most applicable for use to satisfy the statement "TEST PER (DOC DES)". Any document listed in the Title Index may be used to satisfy the statement. However, the selected document from the Title Index must contain the desired test. Government test method documents and approved industry standards such as ASTM test methods may also be used to satisfy the statement "TEST PER (DOC DES)".



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE II. TEST MATRIX,

| DOCUMENT | TEST CODE | Calibration 1759 | Endurance (Elect) 1814 | Endurance (Mech) 1854 | Leakage (Media) 2104 | Pressure, Burst 2174 | Pressure, Proof 2224 |
|---|---|---|---|---|---|---|---|
| MIL-S-8932 | | | X | X | X | X | X |
| MIL-S-9395 | | X | X | X | | X | X |
| MIL-S-12211 | | X | X | X | | | X |
| MIL-S-45869 | | | X | X | X | | |

5.5 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table III provides codes for additional specific column headings which may be used for pressure switch characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES.

| CODE | COLUMN HEADING | CODE | COLUMN HEADING | CODE | COLUMN HEADING |
|---|---|---|---|---|---|
| 4030 | ACTUATION PRESSURE | 4033 | DEACTG PRESSURE | 4042 | SYSTEM PRESSURE |
| 4048 | ADJUSTMENT RANGE MINIMUM | 4049 | ADJUSTMENT RANGE MAXIMUM | 1620 | PORT 1 DOCUMENT DOC DES |
| 1630 | PORT 1 THREAD DES | 1632 | PORT 2 DOCUMENT DOC DES | 1642 | PORT 2 THREAD DES |
| 4036 | PROOF PRESSURE | 4039 | BURST PRESSURE | 4045 | DEAD BAND |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

5.6 Keyword Code Indes (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.6.1 Interrelationship of codes. The interrelationship of the codes is shown by the Indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.6.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.6.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

# KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| *REQUESTER'S NAME | 0101 |
| *COMPANY NAME/COMMAND | 0102 |
| *STREET/BUILDING | 0103 |
| *CITY, STATE, ZIP | 0104 |
| *PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE | 0105 |
| *DATE | 1003 |
| *REQUESTER FSCM | 1004 |
| *CONTRACT NUMBER/OFFICE SYMBOL | 1005 |
| *BASE DOCUMENT | 1006 |
| *SYSTEM APPLICATION | 1008 |
| *GOVERNMENT DESIGN ACTIVITY FSCM | 6369 |
| *FORMAT (SELECT ONE) | |
| SIX SECTION DOCUMENT. | 0700 |
| ONE SECTION DOCUMENT. | 0800 |
| *CONTROL (SELECT ONE) | |
| SOURCE. | 6873 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 0101 | 0101. |
| 0102 | 0102. |
| 0103 | 0103. |
| 0104 | 0104. |
| 0105 | 0105. |
| 1003 | 1003. |
| 1004 | USER(S) FSCM(S) 1004. |
| 1005 | CONTRACT NUMBER OR OFFICE SYMBOL 1005. |
| 1006 | THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM S DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN* |
| 1008 | SYSTEM APPLICATION 1008. |
| 6369 | GOVERNMENT DESIGN ACTIVITY FSCM 6369. |
| 0700 | |
| 0800 | |
| | SOURCE(S). |
| 6873 | THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| CONTROL (CONT) | |
| SPECIFICATION. | 6874 |
| *SOURCE TABLE | |
| NOTE: REFER TO TABLE V OF DOD-STD-35. | |
| APERTURE CARDS REQUIRED. | 0107 |
| REVISION OF AEDPS DOCUMENT NUMBER | 0108 |
| SCOPE | |
| NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED. | |
| PART NUMBER | |
| NOTE: AUTOMATIC WITH A SINGLE ITEM MSE. | |
| NOTE : AUTOMATIC WITH A MULTI-ITEM MSE. | |
| UNITS OF MEASURE (SELECT ONE) | |
| U.S. | 6941 |
| SI. | 6942 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6874 THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

0107

O108 0108.

SCOPE.

SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

6941 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES.

6942 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| PROOF PRESSURE RATING | |
| MINIMUM PROOF PRESSURE (SELECT ONE) | |
| (POUNDS PER SQUARE INCH) | 7587 |
| (KILOPASCALS) | 7588 |
| BURST PRESSURE RATING | |
| MINIMUM BURST PRESSURE (SELECT ONE) | |
| (POUNDS PER SQUARE INCH) | 7589 |
| (KILOPASCALS) | 7590 |
| TEMPERATURE RATING | |
| MAXIMUM OPERATING (DEGREES CELSIUS) | 5069 |
| MAXIMUM NONOPERATING (DEGREES CELSIUS) | 5071 |
| MINIMUM OPERATING (DEGREES CELSIUS) | 5068 |
| MINIMuM NONOPERATING (DEGREES CELSIUS) | 5070 |
| NOMINAL OPERATING (DEGREES CELSIUS) | 5046 |
| NOMINAL NONOPERATING (DEGREES CELSIUS) | 5047 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| | PROOF PRESSURE RATING. |
| 7587 | THE MINIMUM PROOF PRESSURE RATING SHALL BE 7587 POUNDS PER SQUARE INCH. |
| 7588 | THE MINIMUM PROOF PRESSURE RATING SHALL BE 7588 KILOPASCALS. |
| | BURST PRESSURE RATING. |
| 7589 | THE MINIMUM BURST PRESSURE RATING SHALL BE 7589 POUNDS PER SQUARE INCH. |
| 7590 | THE MINIMUM BURST PRESSURE RATING SHALL BE 7590 KILOPASCALS. |
| | TEMPERATURE RATING. |
| 5069 | THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS. |
| 5071 | THE MAXIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5071 DEGREES CELSIUS. |
| 5068 | THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS. |
| 5070 | THE MINIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5070 DEGREES CELSIUS. |
| 5046 | THE NOMINAL OPERATING TEMPERATURE RATING SHALL BE 5046 DEGREES CELSIUS. |
| 5047 | THE NOMINAL NONOPERATING TEMPERATURE RATING SHALL BE 5047 DEGREES CELSIUS. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| ALTITUDE RATING | |
| OPERATING (SELECT ONE) | |
| SEA LEVEL TO (FEET) | 5060 |
| SEA LEVEL TO (METERS) | 5061 |
| OPERATING PRESSURE RATING | |
| MINIMUM OPERATING PRESSURE (SELECT ONE) | |
| (POUNDS PER SQUARE INCH) | 7581 |
| (KILOPASCALS) | 7582 |
| MAXIMUM OPERATING PRESSURE (SELECT ONE) | |
| (POUNDS PER SQUARE INCH) | 7583 |
| (KILOPASCALS) | 7584 |
| NOMINAL OPERATING PRESSURE (SELECT ONE) | |
| (POUNDS PER SQUARE INCH) | 7585 |
| (KILOPASCALS) | 7586 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

ALTITUDE RATING.

5060 THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5060 FEET.

5061 THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5061 METERS.

OPERATING PRESSURE RATING.

7581 THE MINIMUM OPERATING PRESSURE RATING SHALL BE 7581 POUNDS PER SQUARE INCH.

7582 THE MINIMUM OPERATING PRESSURE RATING SHALL BE 7582 KILOPASCALS.

7583 THE MAXIMUM OPERATING PRESSURE RATING SHALL BE 7583 POUNDS PER SQUARE INCH.

7584 THE MAXIMUM OPERATING PRESSURE RATING SHALL BE 7584 KILOPASCALS.

7585 THE NOMINAL OPERATING PRESSURE RATING SHALL BE 7585 POUNDS PER SQUARE INCH.

7586 THE NOMINAL OPERATING PRESSURE RATING SHALL BE 7586 KILOPASCALS.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| RATED LOAD (CURRENT CARRYING CAPACITY) | |
| (SEE RATED LOAD TABLE (CURRENT CARRYING CAPACITY)) | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

RATED LOAD (CURRENT CARRYING CAPACITY). THE RATED LOAD (CURRENT CARRYING CAPACITY) OF THE ITEM(S) SHALL BE IN ACCORDANCE WITH THE RATED LOAD TABLE (CURRENT CARRYING CAPACITY).

RATED LOAD TABLE (CURRENT CARRYING CAPACITY)

| | DC | | AC | | | PRESSURE |
|---|---|---|---|---|---|---|
| LOAD TYPE | VOLTS | AMPERES | RMS | HERTZ | AMPERES | MILLIMETERS OF MERCURY |
| RESISTIVE | 4060 | 4061 | 4062 | 4063 | 4064 | 4065 |
| RESISTIVE | 4066 | 4067 | 4068 | 4069 | 4070 | 4071 |
| RESISTIVE | 4072 | 4073 | 4074 | 4075 | 4076 | 4077 |
| RESISTIVE | 4078 | 4079 | 4080 | 4081 | 4082 | 4083 |
| INDUCTIVE | 4084 | 4085 | 4086 | 4087 | 4088 | 4089 |
| INDUCTIVE | 4090 | 4091 | 4092 | 4093 | 4094 | 4095 |
| INDUCTIVE | 4096 | 4097 | 4098 | 4099 | 4100 | 4141 |
| INDUCTIVE | 4102 | 4103 | 4104 | 4105 | 4106 | 4107 |
| MOTOR | 4108 | 4109 | 4110 | 4111 | 4112 | 4113 |
| MOTOR | 4114 | 4115 | 4116 | 4117 | 4118 | 4119 |
| MOTOR | 4120 | 4121 | 4122 | 4123 | 4124 | 4125 |
| MOTOR | 4126 | 4127 | 4128 | 4129 | 4130 | 4131 |
| LAMP | 4132 | 4133 | 4134 | 4135 | 4136 | 4137 |
| LAMP | 4138 | 4139 | 4140 | 4141 | 4142 | 4143 |
| LAMP | 4144 | 4145 | 4146 | 4147 | 4148 | 4149 |
| LAMP | 4150 | 4151 | 4152 | 4153 | 4154 | 4155 |
| LOW-LEVEL (DRY CKT) | 4156 | 4157 | 4158 | 4159 | 4160 | 4161 |
| LOW-LEVEL (DRY CKT) | 4162 | 4163 | 4164 | 4165 | 4166 | 4167 |
| LOW-LEVEL (DRY CKT) | 4168 | 4169 | 4170 | 4171 | 4172 | 4173 |
| LOW-LEVEL (DRY CKT) | 4174 | 4175 | 4176 | 4177 | 4178 | 4179 |
| 3000 | 3001 | 3002 | 3003 | 3004 | 3005 | 3006 |
| 3007 | 3008 | 3009 | 3010 | 3011 | 3012 | 3013 |
| 3014 | 3015 | 3016 | 3017 | 3018 | 3019 | 3020 |
| 3021 | 3022 | 3023 | 3024 | 3025 | 3026 | 3027 |

NOTE: A 3028
B 3029
C 3030
D 3031
E 3032



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| RATED LOAD (MAKE AND BREAK CAPACITY) | |
| (SEE RATED LOAD TABLE (MAKE AND BREAK CAPACITY) | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

RATED LOAD (MAKE AND BREAK CAPACITY). THE RATED LOAD (MAKE AND BREAK CAPACITY) OF THE ITEM(S) SHALL BE IN ACCORDANCE WITH THE RATED LOAD TABLE (MAKE AND BREAK CAPACITY) .

RATED LOAD TABLE (MAKE AND BREAK CAPACITY)

| | DC | | AC | | | PRESSURE |
|---|---|---|---|---|---|---|
| LOAD TYPE | VOLTS | AMPERES | VOLTS RMS | FREQ. HERTZ | AMPERES | MILLIMETRES OF MERCURY |
| RESISTIVE | 4300 | 4301 | 4302 | 4303 | 4304 | 4305 |
| RESISTIVE | 4306 | 4307 | 4308 | 4309 | 4310 | 4311 |
| RESISTIVE | 4312 | 4313 | 4314 | 43115 | 4316 | 4317 |
| RESISTIVE | 4318 | 4319 | 4320 | 4321 | 4322 | 4323 |
| INDUCTIVE | 4324 | 4325 | 4326 | 4327 | 4328 | 4329 |
| INDUCTIVE | 4330 | 4331 | 4332 | 4333 | 4334 | 4335 |
| INDUCTIVE | 4336 | 4337 | 4338 | 4339 | 4340 | 4341 |
| INDUCTIVE | 4342 | 4343 | 4344 | 4345 | 4346 | 4347 |
| MOTOR | 4348 | 4349 | 4350 | 43511 | 4352 | 4353 |
| MOTOR | 4354 | 4355 | 4356 | 4357 | 4358 | 4359 |
| MOTOR | 4360 | 4361 | 4362 | 4363 | 4364 | 4365 |
| MOTOR | 4366 | 4367 | 4368 | 4369 | 4370 | 4371 |
| LAMP | 4372 | 4373 | 4374 | 4375 | 4376 | 4377 |
| LAMP | 4378 | 4379 | 4380 | 4381 | 4382 | 4383 |
| LAMP | 4384 | 4385 | 4386 | 4387 | 4388 | 4389 |
| LAMP | 4390 | 4391 | 4392 | 4393 | 4394 | 4395 |
| LOW-LEVEL (DRY CKT) | 4396 | 4397 | 4398 | 4399 | 4400 | 4401 |
| LOW-LEVEL (DRY CKT) | 4402 | 4403 | 4404 | 4405 | 4406 | 4407 |
| LOW-LEVEL (DRY CKT) | 4408 | 4409 | 4410 | 4411 | 4412 | 4413 |
| LOW-LEVEL (DRY CKT) | 4414 | 44115 | 4416 | 4437 | 4418 | 4419 |
| 3050 | 30511 | 3052 | 3053 | 3054 | 3055 | 3056 |
| 3057 | 3058 | 3059 | 3060 | 3061 | 3062 | 3063 |
| 3064 | 3065 | 3066 | 3067 | 3068 | 3069 | 3070 |
| 3071 | 3072 | 3073 | 3074 | 3075 | 3076 | 3077 |

NOTE: A 3078
B 3079
C 3080
D 3081
E 3082



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

# KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| CONFIGURATION | |
| (ILLUSTRATION NUMBER) | 1009 |
| DIMENSION TABLE, (SEE TABLE III, DOD-STD-35) | |
| ILLUSTRATIONS | |
| (NUMBER) | 4950 |
| NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS. | |
| TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35) | |
| MATERIALS (SEE TABLES VI AND VII, DOD-STD-35) | |
| NOTE: AUTOMATIC WHEN TABLE IX IS USED. | |
| FINISHES (SEE TABLE VIII AND IX, DOD-STD-35) | |
| NOTE: AUTOMATIC WHEN TABLE IX IS USED. | |
| METALS | |
| DISSIMILAR METALS. | 7580 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| | CONFIGURATION |
| 1009 | CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009. |
| 4950 | ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS. |
| | MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.) |
| | FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.) |
| 7580 | METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST Corrosion DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER (UNLESS SUITABLE FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

# KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| DESIGN AND CONSTRUCTION | |
| CASE DESIGN (SELECT ONE) | |
| UNSEALED. | 1562 |
| WATERTIGHT. | 1564 |
| HERMETICALLY SEALED. | 1566 |
| ELECTRICAL CHAMBER DESIGN (SELECT ONE) | |
| UNSEALED. | 11568 |
| WATERTIGHT. | 1570 |
| HERMETICALLY SEALED. | 1572 |
| PRESSURE CHAMBER DESIGN (SELECT ONE) | |
| UNSEALED. | 1574 |
| WATERTIGHT. | 1576 |
| HERMETICALLY SEALED. | 1578 |
| REFERENCE CHAMBER DESIGN (SELECT ONE) | |
| UNSEALED. | 1580 |
| WATERTIGHT. | 1582 |
| HERMETICALLY SEALED. | 1584 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

DESIGN AND CONSTRUCTION.

1562 THE SWITCH CASE SHALL BE UNSEALED.

1564 THE SWITCH CASE SHALL BE WATERTIGHT.

1566 THE SWITCH CASE SHALL BE HERMETICALLY SEALED.

1568 THE ELECTRICAL CHAMBER SHALL BE UNSEALED.

1570 THE ELECTRICAL CHAMBER SHALL BE WATERTIGHT.

1572 THE ELECTRICAL CHAMBER SHALL BE HERMETICALLY SEALED.

1574 THE PRESSURE CHAMBER SHALL BE UNSEALED.

1576 THE PRESSURE CHAMBER SHALL BE WATERTIGHT.

1578 THE PRESSURE CHAMBER SHALL BE HERMETICALLY SEALED.

1580 THE REFERENCE CHAMBER SHALL BE UNSEALED.

1582 THE REFERENCE CHAMBER SHALL BE WATERTIGHT.

1584 THE REFERENCE CHAMBER SHALL BE HERMETICALLY SEALED.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| DESIGN AND CONSTRUCTION (CONT) | |
| ADJUSTABLE FEATURES (SELECT ONE) | |
| EXTERNAL ADJUSTMENT. | 1600 |
| MANUFACTURER ADJUSTED; NO EXTERNAL ADJUSTMENT. | 1602 |
| TAMPERPROOF CALIBRATION REQUIRED. | 1610 |
| POSITIVE LOCKING OF ADJUSTMENTS REQUIRED, | 1616 |
| PRESSURE PORT 1 | |
| DOCUMENT (DOC DES) | 1620 |
| STYLE (LETTER) | 1622 |
| SIZE (SELECT ONE) | |
| (INCHES) | 1624 |
| (MILLIMETERS) | 1626 |
| (DESIGNATION) | 1628 |
| THREAD (DESIGNATION) | 1630 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1600 THE SWITCH SHALL BE SUPPLIED WITH EXTERNAL ADJUSTMENT FEATURES.

1602 THE SWITCH SHALL BE SET BY THE MANUFACTURER WITH NO EXTERNAL ADJUSTMENT FEATURES.

1610 THE SWITCH SHALL BE SO SEALED THAT ANY TAMPERING WITH THE CALIBRATION AFTER FINAL ADJUSTMENT BY THE MANUFACTURER SHALL REQUIRE REMOVAL OF THE SWITCH FROM THE APPLICATION, DISMANTLING OF THE SWITCH OR THE BREAKING OF A SEAL.

1616 ADJUSTMENTS SHALL BE POSITIVELY LOCKED TO PREVENT LOOSENING DUE TO SHOCK, VIBRATION OR STRAIN.

1620 PORT ONE SHALL BE IN ACCORDANCE WITH 1620.

1622 THE PORT ONE STYLE SHALL BE 1622.

1624 THE PORT ONE SIZE SHALL BE 1624 INCHES.

1626 THE PORT ONE SIZE SHALL BE 1626 MILLIMETERS.

1628 THE PORT ONE DESIGNATION SHALL BE 1628.

1630 THE PORT ONE THREAD SHALL BE 1630.



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| DESIGN AND CONSTRUCTION (CONT) | |
| PRESSURE PORT 2 | |
| DOCUMENT (DOC DES) | 1632 |
| STYLE (LETTER) | 1634 |
| SIZE (SELECT ONE) | |
| (INCHES) | 1636 |
| (MILLIMETERS) | 1638 |
| (DESIGNATION) | 1640 |
| THREAD (DESIGNATION) | 1642 |
| PRESSURE PORT 3 | |
| DOCUMENT (DOC DES) | 1644 |
| STYLE (LETTER) | 1646 |
| SIZE (SELECT ONE) | |
| (INCHES) | 1648 |
| (MILLIMETERS) | 1650 |
| (DESIGNATION) | 1652 |
| THREAD (DESIGNATION) | 1654 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 1632 | PORT TWO SHALL BE IN ACCORDANCE WITH 1632. |
| 1634 | THE PORT TWO STYLE SHALL BE 1634. |
| 1636 | THE PORT TWO SIZE SHALL BE 1636 INCHES. |
| 1638 | THE PORT TWO SIZE SHALL BE 1638 MILLIMETERS. |
| 1640 | THE PORT TWO DESIGNATION SHALL BE 1640. |
| 1642 | THE PORT TWO THREAD SHALL BE 1642. |
| 1644 | PORT THREE SHALL BE IN ACCORDANCE WITH 1644. |
| 1646 | THE PORT THREE STYLE SHALL BE 1646. |
| 1648 | THE PORT THREE SIZE SHALL BE 1648 INCHES. |
| 1650 | THE PORT THREE SIZE SHALL BE 1650 MILLIMETERS. |
| 1652 | THE PORT THREE DESIGNATION SHALL BE 1652. |
| 1654 | THE PORT THREE THREAD SHALL BE 1654. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| DESIGN AND CONSTRUCTION (CONT) | |
| SERVICE MEDIA TEMPERATURE | |
| MINIMUM (DEGREES CELSIUS) | 1670 |
| MAXIMUM (DEGREES CELSIUS) | 1672 |
| NOMINAL (DEGREES CELSIUS) | 1674 |
| CONTACT ARRANGEMENT | |
| CIRCUIT (NUMBER) | 1690 |
| OTHER ARRANGEMENTS (SELECT ONE) | |
| SPST. | 1680 |
| SPDT. | 1682 |
| DPDT. | 1684 |
| POLE (NUMBER) | 1686 |
| *THROW (NUMBER) | 1688 |
| MARKING AND AGE CONTROLS REQUIRED PER MIL-STD-1523. | 1692 |
| SAFETY (LOCK) WIRING (SELECT ONE) | |
| PROVISIONS FOR LOCKWIRE REQUIRED. | 1694 |
| SAFETY WIRING IN ACCORDANCE WITH MS33540. | 1696 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| | THE SERVICE MEDIA TEMPERATURE SHALL BE AS FOLLOWS: |
| 1670 | THE SWITCH SHALL OPERATE WITH MEDIA AT A TEMPERATURE NOT LESS THAN 1670 DEGREES CELSIUS. |
| 1672 | THE SWITCH SHALL OPERATE WITH MEDIA AT A TEMPERATURE NOT GREATER THAN 1672 DEGREES CELSIUS. |
| 1674 | THE SWITCH SHALL OPERATE WITH MEDIA AT A NOMINAL TEMPERATURE OF 1674 DEGREES CELSIUS. |
| 1690 | THE CONTACT ARRANGEMENT SHALL BE 1690 CIRCUIT. |
| 1680 | THE CONTACT ARRANGEMENT SHALL BE SINGLE POLE, SINGLE THROW. |
| 1682 | THE CONTACT ARRANGEMENT SHALL BE SINGLE POLE, DOUBLE THROW. |
| 1684 | THE CONTACT ARRANGEMENT SHALL BE DOUBLE POLE, DOUBLE THROW. |
| 1686<br>1688 | THE CONTACT ARRANGEMENT SHALL BE 1686 POLE, 1688 THROW. |
| 1692 | MARKING AND AGE CONTROLS FOR SYNTHETIC RUBBER PARTS SHALL BE IN ACCORDANCE WITH MIL-STD-1523. |
| 1694 | THERE SHALL BE PROVISIONS FOR LOCKWIRING THREADED PARTS. |
| 1696 | SAFETY WIRING OF THREADED PARTS SHALL BE IN ACCORDANCE WITH MS33540. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| DESIGN AND CONSTRUCTION (CONT) | |
| PRESSURE PORT 4 | |
| DOCUMENT (DOC DES) | 1656 |
| STYLE (LETTER) | 1658 |
| SIZE (SELECT ONE) | |
| (IN.) | 1660 |
| (MILLIMETERS) | 1662 |
| (DESIGNATION) | 1664 |
| THREAD (DESIGNATION) | 1666 |
| SERVICE MEDIA TABLE | |
| ELECTRICAL RECEPTACLES | |
| DOCUMENTS (DOC DES) | 2500 |
| VENDOR IDENTIFICATIONS (FSCM) | 2502 |
| PART NUMBERS | 2504 |
| MATE WITH (PART NUMBER) | 2506 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1656 PORT FOUR SHALL BE IN ACCORDANCE WITH 1656.

1658 THE PORT FOUR STYLE SHALL BE 1658.

1660 THE PORT FOUR SIZE SHALL BE 1660 INCHES.

1662 THE PORT FOUR SIZE SHALL BE 1662 MILLIMETERS.

1664 THE PORT FOUR THREAD SHALL BE 1666.

1666 THE PORT FOUR THREAD SHALL BE 1666.

THE PRESSURE SWITCH SHALL BE CAPABLE OF OPERATING WITH THE MEDIA SPECIFIED IN THE SERVICE MEDIA TABLE.

SERVICE MEDIA TABLE

| MEDIA NAME | DOCUMENT DESIGNATION |
|---|---|
| 4000 | 4001 |
| 4002 | 4003 |
| 4004 | 4005 |
| 4006 | 4007 |
| 4008 | 4009 |
| 4010 | 4011 |
| 4012 | 4013 |
| 4014 | 4015 |
| 4016 | 4017 |
| 4018 | 4019 |

2500 THE ELECTRICAL RECEPTACLE(S) SHALL BE IN ACCORDANCE WITH 2500.

2502 THE ELECTRICAL RECEPTACLE(S) VENDOR FEDERAL SUPPLY CODE(S) FOR MANUFACTURER SHALL BE 2502.

2504 THE ELECTRICAL RECEPTACLE PART NUMBER(S) SHALL BE 2504.

2506 THE ELECTRICAL RECEPTACLE(S) SHALL MATE WITH 2506.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| DESIGN AND CONSTRUCTION (CONT) | |
| SCHEMATIC/TERMINATION IDENTIFICATION | |
| (ILLUSTRATION) | 1698 |
| *SCHEMATIC/TERMINATION IDENTIFICATION TABLE | |
| NOTE: USE LETTER SHOWN ON SCHEMATICS IN APPENDIX A AND SPECIFY IDENTIFICATION DESIRED WITH COMPONENT TERMINATION. | |
| WEIGHT | |
| MAXIMUM WEIGHT PER UNIT (SELECT ONE) | |
| U.S. (SELECT ONE) | |
| (OUNCES) | 7022 |
| (POUNDS) | 7023 |
| SI (SELECT ONE) | |
| (GRAMS) | 7021 |
| (KILOGRAMS) | 7024 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1698 THE SCHEMATIC/TERMINATION SHALL BE IN ACCORDANCE WITH ILLUSTRATION 1698 AND THE SCHEMATIC/TERMINATION IDENTIFICATION TABLE.

SCHEMATIC/TERMINATION IDENTIFICATION TABLE

| SCHEMATIC IDENTIFIER | COMPONENT TERMINATION IDENTIFICATION |
|---|---|
| 4200 | 4201 |
| 4202 | 4203 |
| 4204 | 4205 |
| 4206 | 4207 |
| 4208 | 4209 |
| 4210 | 4211 |
| 4212 | 4213 |
| 4214 | 4215 |
| 4216 | 4217 |
| 4218 | 4219 |

7022 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).

7023 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).

7021 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).

7024 MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| PRESSURE CHARACTERISTICS TABLE | 1708 |

NOTE: THIS TABLE IS USED FOR SPECIFYING VARIOUS OPERATING AND SWITCHING PRESSURES AND TOLERANCES. A PRESSURE UNIT OF MEASURE MUST BE SPECIFIED IF THE TABLE IS USED.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 1708 | PRESSURE CHARACTERISTICS. THE PRESSURE CHARACTERISTICS SHALL BE AS SPECIFIED IN THE PRESSURE CHARACTERISTICS TABLE. |

PRESSURE CHARACTERISTICS TABLE

| PRESSURE CHARACTERISTICS | PRESSURE VALUE |
|---|---|
| ACTUATION PR3ESSURE | 4030 |
| PLUS TOLERANCE | 4031 |
| MINUS TOLERANCE | 4032 |
| DEACTUATION PRESSURE | 4033 |
| PLUS TOLERANCE | 4034 |
| MINUS TOLERANCE | 4035 |
| PROOF PRESSURE | 4036 |
| PLUS TOLERANCE | 4037 |
| MINUS TOLERANCE | 4038 |
| BURST PRESSURE | 4039 |
| PLUS TOLERANCE | 4040 |
| MINUS TOLERANCE | 4041 |
| SYSTEM PRESSURE | 4042 |
| PLUS TOLERANCE | 4043 |
| MINUS TOLERANCE | 4044 |
| DEAD BAND | 4045 |
| PLUS TOLERANCE | 4046 |
| MINUS TOLERANCE | 4047 |
| ADJUSTMENT RANGE | |
| MINIMUM | 4048 |
| MAXIMUM | 4049 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| PRESSURE CHARACTERISTICS (CONT) | |
| *PRESSURE UNIT OF MEASURE (SELECT ONE) | |
| POUNDS PER SQUARE INCH, GAGE. | 1710 |
| POUNDS PER SQUARE INCH, ABSOLUTE. | 1712 |
| POUNDS PER SQUARE INCH, DIFFERENTIAL. | 1714 |
| PASCALS, GAGE. | 1716 |
| PASCALS, ABSOLUTE. | 1718 |
| PASCALS, DIFFERENTIAL. | 1720 |
| KILOPASCALS, GAGE. | 1722 |
| KILOPASCALS, ABSOLUTE. | 1724 |
| KILOPASCALS, DIFFERENTIAL. | 1726 |
| INCHES OF WATER. | 1728 |
| INCHES OF WATER, DIFFERENTIAL. | 1730 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 1710 | THE PRESSURE UNIT OF MEASURE FOR THE OPERATING CHARACTERISTICS SHALL BE POUNDS PER SQUARE INCH, GAGE. |
| 1712 | THE PRESSURE UNIT OF MEASURE FOR THE OPERATING CHARACTERISTICS SHALL BE POUNDS PER SQUARE INCH, ABSOLUTE. |
| 1714 | THE PRESSURE UNIT OF MEASURE FOR THE OPERATING CHARACTERISTICS SHALL BE POUNDS PER SQUARE INCH, DIFFERENTIAL. |
| 1716 | THE PRESSURE UNIT OF MEASURE FOR THE OPERATING CHARACTERISTICS SHALL BE PASCALS, GAGE. |
| 1718 | THE PRESSURE UNIT OF MEASURE FOR THE OPERATING CHARACTERISTICS SHALL BE PASCALS, ABSOLUTE. |
| 1720 | THE PRESSURE UNIT OF MEASURE FOR THE OPERATING CHARACTERISTICS SHALL BE PASCALS, DIFFERENTIAL. |
| 1722 | THE PRESSURE UNIT OF MEASURE FOR THE OPERATING CHARACTERISTICS SHALL BE KILOPASCALS, GAGE. |
| 1724 | THE PRESSURE UNIT OF MEASURE FOR THE OPERATING CHARACTERISTICS SHALL BE KILOPASCALS, ABSOLUTE. |
| 1726 | THE-PRESSURE UNIT OF MEASURE FOR THE OPERATING CHARACTERISTICS SHALL BE KILOPASCALS, DIFFERENTIAL. |
| 1728 | THE PRESSURE UNIT OF MEASURE FOR THE OPERATING CHARACTERISTICS SHALL BE INCHES OF WATER. |
| 1730 | THE PRESSURE UNIT OF MEASURE FOR THE OPERATING CHARACTERISTICS SHALL BE INCHES OF WATER, Differentiable |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| PRESSURE CHARACTERISTICS (CONT) | |
| MILLIMETERS OF MERCURY. | 1732 |
| MILLIMETERS OF MERCURY, DIFFERENTIAL. | 1734 |
| CASE PRESSURE RELIEF (DIFFERENTIAL PRESSURE BETWEEN INTERNAL CASE PRESSURE RELATIVE TO THE ATMOSPHERE) (SELECT ONE) | |
| U.S. | |
| (POUNDS PER SQUARE INCH, DIFFERENTIAL) | 1740 |
| SI (SELECT ONE) | |
| (PASCALS, DIFFERENTIAL) | 1742 |
| (KILOPASCALS, DIFFERENTIAL) | 1744 |
| PERFORMANCE | |
| MINIMUM MECHANICAL LIFE | |
| (CYCLES) | 1700 |
| MINIMUM ELECTRICAL LIFE | |
| (CYCLES) | 1702 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 1732 | THE PRESSURE UNIT OF MEASURE FOR THE OPERATING CHARACTERISTICS SHALL BE MILLIMETERS OF MERCURY. |
| 1734 | THE PRESSURE UNIT OF MEASURE FOR THE OPERATING CHARACTERISTICS SHALL BE MILLIMETERS OF MERCURY, DIFFERENTIAL. |
| 1749 | THE SWITCH SHALL BE EQUIPPED WITH A PRESSURE RELIEF DEVICE CAPABLE OF RELIEVING AN INTERNAL CASE DIFFERENTIAL PRESSURE, RELATIVE TO THE ATMOSPHERE, OF 1740 POUNDS PER SQUARE INCH. |
| 1742 | THE SWITCH SHALL BE EQUIPPED WITH A PRESSURE RELIEF DEVICE CAPABLE OF RELIEVING AN INTERNAL CASE DIFFERENTIAL PRESSURE. RELATIVE TO THE ATMOSPHERE, OF 1742 PASCALS. |
| 1744 | THE SWITCH SHALL BE EQUIPPED WITH A PRESSURE RELIEF DEVICE CAPABLE OF RELIEVING AN INTERNAL CASE DIFFERENTIAL PRESSURE, RELATIVE TO THE ATMOSPHERE, OF 1744 KILOPASCALS. |
| | PERFORMANCE. |
| 1700 | THE MECHANICAL LIFE OF THE SWITCH SHALL BE NOT LESS THAN 1700 CYCLES. |
| 1702 | THE ELECTRICAL LIFE OF THE SWITCH SHALL BE NOT LESS THAN 1702 CYCLES. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| PERFORMANCE (CONT) | |
| MAXIMUM ALLOWABLE MEDIA LEAKAGE (SELECT ONE) | |
| (CUBIC CENTIMETERS PER MINUTE) | 1704 |
| (MICRON CUBIC FOOT PER HOUR AT ONE ATMOSPHERE) | 1706 |
| ACCELERATION | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 6272 |
| NO EVIDENCE OF PHYSICAL DAMAGE. | 6273 |
| NO DISCONTINUITY. | 7345 |
| NO LAMP IN TEST CIRCUIT SHALL LIGHT. | 1547 |
| REMAIN WITHIN SPECIFIED TOLERANCE. | 6277 |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 6250 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 1704 | THE ALLOWABLE MEDIA LEAKAGE SHALL BE NOT GREATER THAN 1704 CUBIC CENTIMETERS PER MINUTE. |
| 1706 | THE ALLOWABLE MEDIA LEAKAGE SHALL BE NOT GREATER THAN 1706 MICRON CUBIC FOOT PER HOUR AT ONE ATMOSPHERE. |
| 6272 | ACCELERATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6272. |
| 6273 | ACCELERATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE. |
| 7345 | THERE SHALL BE NO ELECTRICAL DISCONTINUITY DURING THE TEST. |
| 1547 | NO LAMP IN THE TEST CIRCUIT SHALL LIGHT. |
| 6277 | ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE. |
| 6250 | ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6250. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| ACCELERATION (CONT) | |
| TEST METHODS (CONT) | |
| PER MIL-STD-202, METHOD 212. | 6251 |
| *TEST CONDITION LETTER (SELECT ONE) | |
| TEST CONDITION LETTER A. | 6226 |
| *LEVEL (SELECT ONE) | |
| 20 G'S. | 4863 |
| 50 G'S. | 4864 |
| 100 G'S. | 4865 |
| TEST CONDITION LETTER B. | 6233 |
| *LEVEL (SELECT ONE) | |
| 10,000 G'S. | 4868 |
| 20,000 G'S. | 4892 |
| *DIRECTION (SELECT ONE) | |
| ONE DIRECTION. | 1557 |
| BOTH DIRECTIONS. | 1558 |
| TEST CONDITION LETTER C. | 6239 |
| *LEVEL (G's) | 4893 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6251 ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 212 OF MIL-STD-202.

6226 TEST CONDITION LETTER A SHALL APPLY.

4863 THE TEST LEVEL SHALL BE 20 G'S.

4864 THE TEST LEVEL SHALL BE 50 G'S.

4865 THE TEST LEVEL SHALL BE 100 G'S.

6233 TEST CONDITION LETTER B SHALL APPLY.

4868 THE TEST LEVEL SHALL BE 10,000 G'S.

4892 THE TEST LEVEL SHALL BE 20,000 G'S.

1557 THE SPECIMEN SHALL BE ACCELERATED IN ONE DIRECTION ONLY.

1558 THE SPECIMEN SHALL BE ACCELERATED IN BOTH DIRECTIONS*

6239 TEST CONDITION LETTER C SHALL APPLY.

4893 THE TEST LEVEL SHALL BE 4893 G'S.



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| ACCELERATION (CONT) | |
| PER MIL-STD-202, METHOD 212. (CONT) | |
| *MOUNTING (SELECT ONE) | |
| MOUNT BY ANY SUITABLE METHOD. | 6263 |
| MOUNT BY NORMAL METHOD. | 6264 |
| MOUNT PER DOCUMENT (DOC DES) | 6265 |
| PERCENT RATED LOAD APPLIED (PCT) | 6210 |
| MONITOR PER METHOD 310 OF MIL-STD-202 | |
| *TEST CIRCUIT (LETTER) | 1548 |
| *TEST CONDITION (LETTER) | 1549 |
| CALIBRATION | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 1752 |
| REMAIN WITHIN SPECIFIED TOLERANCES. | 1754 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 6263 | MOUNTING SHALL BE BY ANY SUITABLE METHOD. |
| 6264 | MOUNTING SHALL BE BY THE NORMAL METHOD. |
| 6265 | MOUNTING SHALL BE IN ACCORDANCE WITH 6265. |
| 6210 | THE ELECTRICAL LOAD SHALL BE 6210 PERCENT OF THE RATED LOAD. |
| 1548 | MONITORING DURING THE TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1548 SHALL APPLY. |
| 1549 | TEST CONDITION LETTER 1549 IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202 SHALL APPLY. |
| 1752 | CALIBRATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1752, |
| 1754 | CALIBRATION. THE SWITCH SHALL REMAIN WITHIN SPECIFIED TOLERANCES. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| CALIBRATION (CONT) | |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 1757 |
| PER DOCUMENT (DOC DES) | 1759 |
| CASE PRESSURE RELIEF | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 1932 |
| AS FOLLOWS: | 1933 |
| RELIEF DEVICE SHALL OPERATE AT TEST PRESSURE. | 1934 |
| NO EVIDENCE OF FRACTURE OF SWITCH CASE. | 1936 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 1757 | CALIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1757. |
| 1759 | CALIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1759. |
| 1932 | CASE PRESSURE RELIEF. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1932. |
| 1933 | CASE PRESSURE RELIEF. THE REQUIREMENT(S) SHALL BE AS FOLLOWS: |
| 1934 | THE RELIEF DEVICE SHALL OPERATE AT THE SPECIFIED TEST PRESSURE. |
| 1936 | THERE SHALL BE NO EVIDENCE OF FRACTURE OF THE SWITCH CASE. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| CASE PRESSURE RELIEF (CON-T) | |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 1902 |
| PER MIL-S-8932. | 1904 |
| TEST PRESSURE (SELECT ONE) | |
| U.S. | |
| (POUNDS PER SQUARE INCH, GAGE) | 1906 |
| PLUS PRESSURE TOLERANCE (POUNDS PER SQUARE INCH, GAGE) | 1908 |
| MINUS PRESSURE TOLERANCE (POUNDS PER SQUARE INCH, GAGE) | 1910 |
| SI (SELECT ONE) | |
| (PASCALS, GAGE) | 1912 |
| PLUS PRESSURE TOLERANCE (PASCALS, GAGE ) | 1914 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD | PARAGRAPH |
|---|---|---|
| 1902 | CASE PRESSURE RELIEF. | TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1902. |
| 1904 | CASE PRESSURE RELIEF. | TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-8932. |
| 1906 | THE TEST PRESSURE SHALL BE A GAGE PRESSURE OF 1906 POUNDS PER SQUARE INCH. | |
| 1908 | THE PLUS PRESSURE TOLERANCE SHALL BE A GAGE PRESSURE OF 1908 POUNDS PER SQUARE INCH. | |
| 1910 | THE MINUS PRESSURE TOLERANCE SHALL BE A GAGE PRESSURE OF 1910 POUNDS PER SQUARE INCH. | |
| 1912 | THE TEST PRESSURE SHALL BE A GAGE PRESSURE OF 1912 PASCALS. | |
| 1914 | THE PLUS PRESSURE TOLERANCE SHALL BE A GAGE PRESSURE OF 1914 PASCALS. | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| CASE PRESSURE RELIEF (CONT) | |
| (PASCALS, GAGE) (CONT) | |
| MINUS PRESSURE TOLERANCE (PASCALS, GAGE) | 1916 |
| (KILOPASCALS, GAGE) | 1918 |
| PLUS PRESSURE TOLERANCE (KILOPASCALS, GAGE) | 1920 |
| MINUS PRESSURE TOLERANCE (KILOPASCALS, GAGE) | 1922 |
| COINCIDENCE OF OPERATING AND RELEASE POINTS (MULTIPOLE SWITCHES ONLY) | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 1962 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD | PARAGRAPH |
|---|---|---|
| 1916 | THE MINUS PRESSURE TOLERANCE SHALL BE A GAGE PRESSURE OF 1916 PASCALS. | |
| 1918 | THE TEST PRESSURE SHALL BE A GAGE PRESSURE OF 1918 KILOPASCALS. | |
| 1920 | THE PLUS PRESSURE TOLERANCE SHALL BE A GAGE PRESSURE OF 1920 KILOPASCALS. | |
| 1922 | THE MINUS PRESSURE TOLERANCE SHALL BE A GAGE PRESSURE OF 1922 KILOPASCALS. | |
| 1962 | COINCIDENCE OF OPERATING AND RELEASE POINTS. | THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1962. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| COINCIDENCE OF OPERATING AND RELEASE POINTS (CONT) (MULTIPOLE SWITCHES ONLY) | |
| REQUIREMENTS (CONT) | |
| ALL CONTACTS TRANSFER WITHIN (MILLISECONDS) | 1964 |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 1942 |
| PER MIL-S-9395. | 1944 |
| TEST MEDIA (NAME) | 1946 |
| TEST MEDIA DOCUMENT (DOC DES) | 1948 |
| MAXIMUM TEST PRESSURE CHANGE RATE (PERCENT OF SYSTEM PRESSURE PER SECOND) | 1950 |
| POINT AT WHICH TEST PRESSURE CHANGE RATE IS APPLIED (PERCENT) | 1952 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 1964 | COINCIDENCE OF OPERATING AND RELEASE POINTS. ALL POLES SHALL TRANSFER CONTACTS WITHIN 1964 Milliseconds |
| 1942 | COINCIDENCE OF OPERATING AND RELEASE POINTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1942. |
| 1944 | COINCIDENCE OF OPERATING AND RELEASE POINTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-9395. |
| 1946 | THE TEST MEDIA SHALL BE 1946. |
| 1948 | THE TEST MEDIA SHALL BE IN ACCORDANCE WITH 1948. |
| 1950 | THE RATE AT WHICH THE TEST PRESSURE IS INCREASED OR DECREASED SHALL BE NOT GREATER THAN 1950 PERCENT OF THE SYSTEM PRESSURE PER SECOND. |
| 1952 | THE POINT AT WHICH THE TEST PRESSURE CHANGE RATE IS APPLIED SHALL BE WITHIN 1952 PERCENT OF THE SWITCHING POINTS. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| CONNECTOR TORQUE | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT _____ | 1982 |
| NO LOOSENING, ROTATION OR DAMAGE, | 1984 |
| REMAIN WITHIN SPECIFIED TOLERANCES* | 1986 |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | |
| PER MIL-S-9395. | |
| APPLIED TORQUE (SELECT ONE) | |
| (POUND-FEET) | 1976 |
| (NEWTON METERS) | 1978 |
| CONTACT BOUNCE | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT _____ | 1772 |
| MAXIMUM DURATION OF CONTACT BOUNCE (MILLISECONDS) | 1774 |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 1762 |
| PER MIL-S-9395. | 1764 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 1982 | CONNECTOR TORQUE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1982. |
| 1984 | CONNECTOR TORQUE. THERE SHALL BE NO LOOSENING, ROTATION OR DAMAGE. |
| 1986 | OPERATING POINTS SHALL REMAIN WITHIN SPECIFIED TOLERANCES. |
| 1972 | CONNECTOR TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1972. |
| 1974 | CONNECTOR TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-9395. |
| 1976 | THE APPLIED TEST TORQUE SHALL BE 1976 POUND-FEET. |
| 1978 | THE APPLIED TEST TORQUE SHALL BE 1978 NEWTON METERS. |
| 1772 | CONTACT BOUNCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1772. |
| 1774 | CONTACT BOUNCE. THE DURATION OF CONTACT BOUNCE SHALL BE NOT GREATER THAN 1774 MILLISECONDS. |
| 1762 | CONTACT BOUNCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1762. |
| 1764 | CONTACT BOUNCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-9395. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| CONTACT RESISTANCE | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 1802 |
| MAXIMUM CONTACT RESISTANCE (MILLIONS) | 1804 |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 1782 |
| PER MIL-STD-202, METHOD 307. MAXIMUM TEST CURRENT (AMPERES) | 1784 |
| MAXIMUM OPEN CIRCUIT VOLTAGE (VOLTS DC) | 1786 |
| NUMBER OF TEST ACTIVATIONS BEFORE TEST (QUANTITY) | 1788 |
| NUMBER OF TEST ACTIVATIONS (QUANTITY) | 1790 |
| NUMBER OF MEASUREMENTS PER TEST ACTIVATION (QUANTITY) | 1792 |
| METHOD OF CONNECTION (SPECIFY) | 1794 |
| MAXIMUM ALLOWABLE MEASUREMENT ERROR (PERCENT) | 1796 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1802 CONTACT RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1802.

1804 CONTACT RESISTANCE. THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1804 MILLIOHMS.

1782 CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1782.

1784 CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-202, METHOD 3070 THE TEST CURRENT SHALL BE NOT GREATER THAN 1784 AMPERES.

1786 THE OPEN CIRCUIT VOLTAGE SHALL BE NOT GREATER THAN 1786 VOLTS DC.

1788 THERE SHALL BE 1788 ACTIVATIONS BEFORE TEST.

1790 THERE SHALL BE 1790 TEST ACTIVATIONS.

1792 THERE SHALL BE 1792 MEASUREMENTS PER TEST ACTIVATION.

1794 THE METHOD OF CONNECTION SHALL BE 1794.

1796 THE ALLOWABLE MEASUREMENT ERROR SHALL BE NOT GREATER THAN 1796 PERCENT.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 4908 |
| NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN. | 4906 |
| MAXIMUM LEAKAGE (MILLIAMPERES) | 4894 |
| REMAIN WITHIN SPECIFIED TOLERANCE. | 4901 |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 4884 |
| PER MIL-STD-202, METHOD 301. | 6300 |
| *ALTITUDE PER METHOD 105 OF MIL-STD-202 | |
| *TEST CONDITION (LETTER) | 4886 |
| *TEST VOLTAGE (SELECT ONE) | |
| (VOLTS, DC) | 4885 |
| (VOLTS, AC) | 4849 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 4908 | DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908. |
| 4906 | DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN. |
| 4894 | THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4894 MILLIAMPERES. |
| 4901 | ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE. |
| 4884 | DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884. |
| 6300 | DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202. |
| 4886 | ALTITUDE SHALL BE IN ACCORDANCE WITH TEST CONDITION LETTER 4886 OF METHOD 105 OF MIL-STD-202. |
| 4885 | TEST VOLTAGE SHALL BE 4885 VOLTS, DC. |
| 4849 | TEST VOLTAGE SHALL BE 4849 VOLTS, AC. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT) | |
| PER MIL-STD-202, METHOD 301. (CONT) | |
| POINTS OF VOLTAGE APPLICATION: | |
| BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE. | |
| BETWEEN TERMINATIONS TIED TOGETHER AND CASE. | 6312 |
| BETWEEN MUTUALLY INSULATED PARTS. | 6292 |
| BETWEEN ALL INSULATED PARTS AND GROUND. | 6293 |
| BETWEEN CURRENT CARRYING PARTS AND THE CASE. | 6294 |
| SPECIAL PREPARATION PER DOCUMENT (DOC DES) | 4859 |
| DURATION OF VOLTAGE APPLICATION (SECONDS) | 4891 |
| MOUNTING PER DOCUMENT (DOC DES) | 6280 |
| REGULATION OF TEST VOLTAGE (PCT) | 6308 |
| MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES) | 4900 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:

6311 BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.

6312 BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.

6292 BETWEEN MUTUALLY INSULATED PARTS.

6293 BETWEEN ALL INSULATED PARTS AND GROUND.

6294 BETWEEN CURRENT CARRYING PARTS AND THE CASE.

4859 SPECIAL PREPARATION SHALL BE IN ACCORDANCE WITH 4859.

4891 DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4891 SECOND(S).

6280 MOUNTING SHALL BE IN ACCORDANCE WITH 6280.

6308 REGULATION OF THE TEST VOLTAGE SHALL BE WITHIN 6308 PERCENT.

4900 THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4900 KILOVOLTAMPERE(S).



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT) | |
| PER MIL-STD-202, METHOD 301. (CONT) | |
| MAXIMUM SURGE CURRENT (SELECT ONE) | |
| (AMPERES) | 4902 |
| (MILLIAMPERES) | 6310 |
| DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 4874 |
| NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN. | 4856 |
| MAXIMUM LEAKAGE CURRENT (MILLIAMPERES) | 4875 |
| REMAIN WITHIN SPECIFIED TOLERANCE. | 4847 |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 4861 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4902 THE SURGE CURRENT SHALL BE NOT GREATER THAN 4902 AMPERE(S).

6310 THE SURGE CURRENT SHALL BE NOT GREATER THAN 6310 MILLIAMPERE(S).

4874 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.

4856 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.

4875 THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4875 MILLIAMPERE(S) .

4847 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

4861 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT) | |
| TEST METHODS (CONT) | |
| PER MIL-STD-202, METHOD 301. | 4862 |
| *TEST VOLTAGE (SELECT ONE) | |
| (VOLTS, DC) | 4854 |
| (VOLTS, AC) | 4855 |
| POINTS OF VOLTAGE APPLICATION: | |
| BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE. | 4842 |
| BETWEEN TERMINATIONS TIED TOGETHER AND CASE. | 4848 |
| BETWEEN MUTUALLY INSULATED PARTS. | 4844 |
| BETWEEN ALL INSULATED PARTS AND GROUND. | 4845 |
| BETWEEN CURRENT CARRYING PARTS AND THE CASE. | 4846 |
| SPECIAL PREPARATION PER DOCUMENT (DOC DES) | 4850 |
| DURATION OF VOLTAGE APPLICATION (SECONDS) | 4867 |
| MOUNTING PER DOCUMENT (DOC DES) | 5000 |
| REGULATION OF TEST VOLTAGE (PCT) | 4869 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4862 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.

4854 TEST VOLTAGE SHALL BE 4854 VOLTS, DC.

4855 TEST VOLTAGE SHALL BE 4855 VOLTS, AC.

POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:

4842 BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.

4848 BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.

4844 BETWEEN MUTUALLY INSULATED PARTS.

4845 BETWEEN ALL INSULATED PARTS AND GROUND.

4846 BETWEEN CURRENT CARRYING PARTS AND THE CASE.

4850 SPECIAL PREPARATION OR CONDITIONS SHALL BE IN ACCORDANCE WITH 4850.

4867 DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).

5000 MOUNTING SHALL BE IN ACCORDANCE WITH 5000.

4869 REGULATION OF TEST VOLTAGE SHALL BE WITHIN 4869 PERCENT.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT) | |
| PER MIL-STD-202, METHOD 301. (CONT) | |
| MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES) | 4870 |
| MAXIMUM SURGE CURRENT (SELECT ONE) | |
| (AMPERES) | 4717 |
| (MILLIAMPERES) | 4897 |
| METHOD OF VOLTAGE CONNECTION DOCUMENT (DOC DES) | 6267 |
| ENDURANCE, ELECTRICAL | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 1832 |
| AS FOLLOWS: | 1833 |
| MAXIMUM CONTACT RESISTANCE (MILLIOHMS) | 1834 |
| REMAIN WITHIN SPECIFIED TOLERANCES. | 1836 |
| NO EVIDENCE OF MALFUNCTION. | 1838 |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 1812 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 4870 | THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4870 KILOVOLTAMPERE(S). |
| 4717 | THE SURGE CURRENT SHALL BE NOT GREATER THAN 4717 AMPERE(S). |
| 4897 | THE SURGE CURRENT SHALL BE NOT GREATER THAN 4897 MILLIAMPERE(S). |
| 6267 | METHOD OF CONNECTION OF TEST VOLTAGE SHALL BE IN ACCORDANCE WITH 6267. |
| 1832 | ENDURANCE, ELECTRICAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1832. |
| 1833 | ENDURANCE, ELECTRICAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS: |
| 1834 | THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1834 MILLIOHMS. |
| 1836 | ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCES. |
| 1838 | THERE SHALL BE NO EVIDENCE OF MALFUNCTION. |
| 1812 | ENDURANCE, ELECTRICAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1812. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| ENDURANCE, ELECTRICAL (CONT) | |
| TEST METHODS (CONT) | |
| PER DOCUMENT (DOC DES) | |
| MINIMUM NUMBER OF CYCLES (QUANTITY) | 1816 |
| APPLIED VOLTAGE | |
| (VOLTS, AC) | 1820 |
| (VOLTS, DC) | 1822 |
| LOAD (PERCENT OF RATED LOAD) | 1824 |
| LOAD (TYPE) | 1826 |
| TEST CYCLE RATE (CYCLES PER MINUTE) | 1828 |
| ENDURANCE, MECHANICAL | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 1882 |
| AS FOLLOWS: | 1883 |
| REMAIN WITHIN SPECIFIED TOLERANCES. | 1884 |
| NO EVIDENCE OF MALFUNCTION. | 1886 |
| MAXIMUM CONTACT RESISTANCE (MILLIOHMS) | 1888 |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 1852 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1814 ENDURANCE, ELECTRICAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1814.

1816 THE NUMBER OF OPERATION CYCLES SHALL BE NOT LESS THAN 1816.

1820 THE APPLIED VOLTAGE SHALL BE 1820 VOLTS, AC.

1822 THE APPLIED VOLTAGE SHALL BE 1822 VOLTS, DC.

1824 THE LOAD SHALL BE 1824 PERCENT OF RATED LOAD.

1826 THE LOAD TYPE SHALL BE 1826.

1828 THE TEST CYCLE RATE SHALL BE 1828 CYCLES PER MINUTE.

1882 ENDURANCE, MECHANICAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1882.

1883 ENDURANCE, MECHANCIAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

1884 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCES.

1886 THERE SHALL BE NO EVIDENCE OF MALFUNCTION.

1888 THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1888 MILLIOHMS.

1852 ENDURANCE, MECHANICAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1852.



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| ENDURANCE, MECHANICAL (CONT) | |
| TEST METHODS (CONT) | |
| PER DOCUMENT (DOC DES) | 1854 |
| NUMBER OF TEST CYCLES (QUANTITY) | 1856 |
| TEST CYCLE RATE RANGE | |
| MINIMUM (CYCLES PER MINUTE) | 1858 |
| *MAXIMUM (CYCLES PER MINUTE) | 1860 |
| PRESSURE PULSATION AMPLITUDE | |
| (PERCENT OF SYSTEM PRESSURE) | 1862 |
| PRESSURE PULSATION FREQUENCY (HERTZ) | 1864 |
| PLUS FREQUENCY TOLERANCE (HERTZ) | 1866 |
| MINUS FREQUENCY TOLERANCE (HERTZ) | 1868 |
| PRESSURE SURGE (SELECT ONE) | |
| (POUNDS PER SQUARE INCH PER SECOND) | 1870 |
| (KILOPASCALS PER SECOND) | 1872 |
| TEST PRESSURE (PERCENT OF SYSTEM PRESSURE) | 1874 |
| TEST LOAD (PERCENT OF RATED LOAD) | 1876 |
| LOAD (TYPE) | 1878 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1854 ENDURANCE, MECHANICAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1854.

1856 THERE SHALL BE NOT LESS THAN 1856 CYCLES.

1858 THE CYCLE RATE SHALL BE NOT LESS THAN 1858 CYCLES PER
1860 MINUTE NOR GREATER THAN 1860 CYCLES PER MINUTE.

1862 THE PRESSURE PULSATION AMPLITUDE SHALL BE 1862 PERCENT OF THE SYSTEM PRESSURE.

1864 THE PRESSURE PULSATION FREQUENCY SHALL BE 1864 HERTZ.

1866 THE PLUS FREQUENCY TOLERANCE SHALL BE 1866 HERTZ.

1868 THE MINUS FREQUENCY TOLERANCE SHALL BE 1868 HERTZ.

1870 THE PRESSURE SURGE SHALL BE 1870 POUNDS PER SQUARE INCH PER SECOND.

1872 THE PRESSURE SURGE SHALL BE 1872 KILOPASCALS PER SECOND.

1874 THE TEST PRESSURE SHALL BE 1874 PERCENT OF THE SYSTEM PRESSURE.

1876 THE TEST LOAD SHALL BE 1876 PERCENT OF RATED LOAD.

1878 THE LOAD TYPE SHALL BE 1878.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| EXPLOSION | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 2022 |
| AS FOLLOWS: | 2023 |
| REMAIN ELECTRICALLY AND MECHANICALLY OPERATIVE AFTER TEST. | 2024 |
| NO EXPLOSION WITHIN SWITCH OR CHAMBER | 2026 |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 2002 |
| PER MIL-STD-202, METHOD 109. | 2004 |
| TEST LOAD (PERCENT OF RATED LOAD) | 2006 |
| LOAD (TYPE) | 2008 |
| CHAMBER TEMPERATURE (DEGREES CELSIUS) | 2010 |
| PLUS TEMPERATURE TOLERANCE (DEGREES CELSIUS) | 2012 |
| MINUS TEMPERATURE TOLERANCE (DEGREES CELSIUS) | 2014 |
| PER MIL-STD-810, METHOD 511. | 2013 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 2022 | EXPLOSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2022. |
| 2023 | EXPLOSION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS: |
| 2024 | SWITCHES SHALL BE ELECTRICALLY AND MECHANICALLY OPERATIVE AFTER TEST. |
| 2026 | THERE SHALL BE NO EXPLOSION WITHIN THE SWITCH OR CHAMBER. |
| 2002 | EXPLOSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2002. |
| 2004 | EXPLOSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-202, METHOD 109. |
| 2006 | THE LOAD SHALL BE 2006 PERCENT OF THE RATED LOAD. |
| 2008 | THE LOAD TYPE SHALL BE 2008. |
| 2010 | THE CHAMBER TEMPERATURE SHALL BE 2010 DEGREES CELSIUS. |
| 2012 | THE PLUS TEMPERATURE TOLERANCE SHALL BE 2012 DEGREES CELSIUS. |
| 2014 | THE MINUS TEMPERATURE TOLERANCE SHALL BE 2014 DEGREES CELSIUS. |
| 2013 | EXPLOSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-810, METHOD 511. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| EXPLOSION (CONT) | |
| PER MIL-STD-810, METHOD 511. (CONT) | |
| *PROCEDURE (SELECT ONE) | |
| PROCEDURE I. | 2001 |
| CHAMBER TEMPERATURE (DEGREES CELSIUS) | 2003 |
| PLUS TEMPERATURE TOLERANCE (DEGREES CELSIUS) | 2005 |
| MINUS TEMPERATURE TOLERANCE (DEGREES CELSIUS) | 2007 |
| PROCEDURE (SELECT II, III OR IV) (NUMERAL) | 2015 |
| TEST VOLTAGE (SELECT ONE) | |
| (VOLTS AC) | 2016 |
| FREQUENCY (HERTZ) | 2017 |
| (VOLTS DC) | 2018 |
| TEST LOAD (PERCENT OF RATED) | 2019 |
| LOAD (TYPE) | 2021 |
| FLAMMABILITY (EXTERNAL FLAME) | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 2052 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2001 PROCEDURE I SHALL APPLY.

2003 THE CHAMBER TEMPERATURE SHALL BE 2003 DEGREES CELSIUS.

2005 THE PLUS TEMPERATURE TOLERANCE SHALL BE 2005 DEGREES CELSIUS

2007 THE MINUS TEMPERATURE TOLERANCE SHALL BE 2007 DEGREES CELSIUS.

2015 PROCEDURE 2015 SHALL APPLY.

2016 THE TEST VOLTAGE SHALL BE 2016 VOLTS AC.

2017 THE AC VOLTAGE FREQUENCY SHALL BE 2017 HERTZ.

2018 THE TEST VOLTAGE SHALL BE 2018 VOLTS DC.

2019 THE TEST LOAD SHALL BE 2019 PERCENT OF THE RATED LOAD.

2021 THE LOAD TYPE SHALL BE 2021.

2052 FLAMMABILITY (EXTERNAL FLAME). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2052.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| FLAMMABILITY (EXTERNAL FLAME) (CONT) | |
| REQUIREMENTS (CONT) | |
| AS FOLLOWS: | 2053 |
| MAXIMUM FLAME DURATION (SELECT ONE) | |
| (SECONDS) | 2054 |
| (MINUTES) | 2056 |
| NO VISIBLE FLAME. | 2058 |
| NO EVIDENCE OF EXTERNAL MEDIA LEAKAGE. | 2060 |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 2032 |
| PER MIL-STD-202, METHOD 111. | 2034 |
| AXIS OF FLAME (AXIS) | 2036 |
| POINT OF FLAME IMPINGEMENT | |
| (LOCATION) | 2038 |
| FLAME APPLICATION DURATION (SELECT ONE) | |
| (SECONDS) | 2040 |
| (MINUTES) | 2042 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2053 FLAMMABILITY (EXTERNAL FLAME). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2054 THE TIME FOR BURNING OF VISIBLE FLAME FROM SPECIMEN SHALL BE NOT GREATER THAN 2054 SECONDS.

2056 THE TIME FOR BURNING OF VISIBLE FLAME FROM SPECIMEN SHALL BE NOT GREATER THAN 2056 MINUTES.

2058 THERE SHALL BE NO BURNING OF VISIBLE FLAME FROM THE SPECIMEN.

2060 THERE SHALL BE NO EVIDENCE OF EXTERNAL MEDIA LEAKAGE.

2032 FLAMMABILITY (EXTERNAL FLAME). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2032.

2034 FLAMMABILITY (EXTERNAL FLAME), TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-202, METHOD 111.

2036 THE AXIS OF THE FLAME SHALL BE 2036.

2038 THE POINT OF IMPINGEMENT OF THE APPLIED FLAME SHALL BE 2038.

2040 THE DURATION OF THE APPLIED FLAME SHALL BE 2040 SECONDS.

2042 THE DURATION OF THE APPLIED FLAME SHALL BE 2042 MINUTES.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| FLAMMABILITY (EXTERNAL FLAME) (CONT) | |
| PER MIL-STD-202, METHOD 111. (CONT) | |
| SWITCH SHALL BE PRESSURIZED WITH SYSTEM PRESSURE. | 2044 |
| SWITCH SHALL BE UNPRESSURIZED. | 2046 |
| FUNGUS | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 4760 |
| FUNGUS RESISTANT BY CERTIFICATION OR BY TEST, | 4761 |
| NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED, | 4762 |
| NO CHANGE IN OPERATING CHARACTERISTICS. | 2090 |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 4754 |
| PER MIL-STD-810, METHOD 508. | 4755 |
| TEST PERIOD (DAYS) | 4756 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD | PARAGRAPH |
|---|---|---|
| 2044 | THE SWITCH SHALL BE PRESSURIZED WITH SYSTEM PRESSURE. | |
| 2046 | THE SWITCH SHALL BE UNPRESSURIZED. | |
| 4760 | FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760. | |
| 4761 | FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED, THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES. | |
| 4762 | FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES. | |
| 2090 | THERE SHALL BE NO CHANGE IN OPERATING CHARACTERISTICS. | |
| 4754 | FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754. | |
| 4755 | FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810. | |
| 4756 | TEST PERIOD SHALL BE 4756 DAY(S). | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| FUNGUS (CONT) | |
| TEST METHODS (CONT) | |
| PER MIL-F-1392. | 2070 |
| CLASS (SELECT ONE) | |
| 1. | 2072 |
| 2. | 2074 |
| 3. | 2076 |
| METHOD (SELECT ONE) | |
| A. | 2078 |
| B. | 2080 |
| IMMERSION | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 4819 |
| NO EVIDENCE OF PHYSICAL DAMAGE. | 4820 |
| REMAIN WITHIN SPECIFIED TOLERANCE. | 4822 |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 4809 |
| PER MIL-STD-202, METHOD 104. | 4810 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH | |
|---|---|---|
| 2070 | FUNGUS. | TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-13927. |
| 2072 | SPECIMENS SHALL BE CLASSIFIED CLASS 1. | |
| 2074 | SPECIMENS SHALL BE CLASSIFIED CLASS 2. | |
| 2076 | SPECIMENS SHALL BE CLASSIFIED CLASS 3. | |
| 2078 | TEST METHOD A SHALL APPLY. | |
| 2080 | TEST METHOD B SHALL APPLY. | |
| 4819 | IMMERSION. | THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4819. |
| 4820 | IMMERSION. | THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE. |
| 4822 | ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE* | |
| 4809 | IMMERSION. | TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4809. |
| 4810 | IMMERSION. | TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 104 OF MIL-STD-202. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| IMMERSION (CONT) | |
| PER MIL-STD-202, METHOD 104. (CONT) | |
| *TEST CONDITION (LETTER) | 4811 |
| MEASUREMENTS AFTER FINAL CYCLE (HOURS) | 4812 |
| TIME BEFORE MEASUREMENTS AFTER FINAL CYCLE (HOURS) | 4814 |
| INSULATION RESISTANCE | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 1380 |
| AS FOLLOWS: | 6359 |
| *MINIMUM INSULATION RESISTANCE (SELECT ONE) | |
| SINGLE TEST | |
| (MEGOHMS) | 1386 |
| MULTIPLE TEST | |
| *FIRST TEST (MEGOHMS) | 1384 |
| *SECOND TEST (MEGOHMS) | 1387 |
| REMAIN WITHIN SPECIFIED TOLERANCE. | 11388 |
| NO EVIDENCE OF PHYSICAL DAMAGE. | 1407 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4811 TEST CONDITION LETTER 4811 SHALL APPLY.

4832 FINAL MEASUREMENT(S) SHALL BE MADE WITHIN 4812 HOUR(S) AFTER FINAL CYCLE.

4814 MEASUREMENTS SHALL NOT BE MADE UNTIL 4814 HOUR(S) AFTER THE FINAL CYCLE.

1380 INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.

6359 INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

1386 INSULATION RESISTANCE SHALL BE NOT LESS THAN 1386 MEGOHMS.

1384 INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHMS AT THE FIRST TEST TEMPERATURE.

1387 INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHMS AT THE SECOND TEST TEMPERATURE.

1388 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

1407 THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| INSULATION RESISTANCE (CONT) | |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | |
| PER MIL-STD-202, METHOD 302. | |
| *CONDITION (SELECT ONE) | |
| TEST CONDITION (LETTER) | 1378 |
| TEST VOLTAGE (VOLTS, DC) | 11373 |
| ELECTRIFICATION TIME (SECONDS) | 1376 |
| MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PCT) | 1377 |
| POINTS OF APPLICATION OF TEST VOLTAGE: | |
| BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE. | 1497 |
| BETWEEN TERMINATIONS TIED TOGETHER AND CASE. | 1498 |
| BETWEEN MUTUALLY INSULATED PARTS. | 1522 |
| BETWEEN INSULATED PARTS AND GROUND. | 1523 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 1371 | INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371. |
| 1511 | INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 302 OF MIL-STD-202. |
| 1378 | TEST CONDITION LETTER 1378 SHALL APPLY. |
| 1373 | TEST POTENTIAL SHALL BE 1373 VOLTS, DC. |
| 1376 | ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S), |
| 1377 | THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT. |
| | POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS: |
| 1497 | BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE. |
| 1498 | BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE. |
| 1522 | BETWEEN MUTUALLY INSULATED PARTS. |
| 1523 | BETWEEN ALL INSULATED PARTS AND GROUND. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| INSULATION RESISTANCE (CONT) | |
| POINTS OF APPLICATION OF TEST VOLTAGE: (CONT) | |
| BETWEEN CURRENT CARRYING PARTS AND THE CASE. | 1524 |
| BETWEEN ADJACENT TERMINALS OF DIFFERENT POLES. | 2350 |
| BETWEEN EACH TERMINAL AND MOUNTING PLATE WHEN NORMALLY MOUNTED. | 2351 |
| SPECIAL PREPARATIONS OR CONDITIONS PER DOCUMENT (DOC DES) | 1520 |
| FIRST TEST TEMPERATURE (DEGREES CELSIUS) | 1372 |
| SECOND TEST TEMPERATURE (DEGREES CELSIUS) | 1381 |
| TEMPERATURE TOLERANCE (DEGREES CELSIUS) | 1383 |
| LEAKAGE (MEDIA) | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 2134 |
| AS FOLLOWS: | 2135 |
| MAXIMUM LEAKAGE RATE (SELECT ONE) | |
| (MICRON CUBIC FOOT PER HOUR AT ONE ATMOSPHERE) | 2136 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1524 BETWEEN CURRENT CARRYING PARTS AND THE CASE.

2350 BETWEEN ADJACENT TERMINALS OF DIFFERENT POLES.

2351 BETWEEN EACH TERMINAL AND MOUNTING PLATE WHEN NORMALLY MOUNTED.

1520 SPECIAL PREPARATIONS OR CONDITIONS SHALL BE IN ACCORDANCE WITH 1520.

1372 FIRST TEST TEMPERATURE SHALL BE 1372 DEGREES CELSIUS.

1381 SECOND TEST TEMPERATURE SHALL BE 1381 DEGREES CELSIUS.

1383 TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1383 DEGREES CELSIUS.

2134 LEAKAGE (MEDIA). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2134.

2135 LEAKAGE (MEDIA). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2136 THE LEAKAGE RATE SHALL BE NOT GREATER THAN 2136 MICRON CUBIC FOOT PER HOUR AT ONE ATMOSPHERE.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| LEAKAGE (MEDIA) (CONT) | |
| MAXIMUM LEAKAGE RATE (CONT) | |
| CUBIC CENTIMETRES (SELECT ONE) | |
| PER MINUTE (QUANTITY) | 2138 |
| PER HOUR (QUANTITY) | 2140 |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT _____ | 2102 |
| PER DOCUMENT (DOC DES) | 2104 |
| TEST PRESSURE (SELECT ONE) | |
| U.S. | |
| (POUNDS PER SQUARE INCH, GAGE) | 2106 |
| PLUS PRESSURE TOLERANCE (POUNDS PER SQUARE INCH, GAGE) | 2108 |
| MINUS PRESSURE TOLERANCE (POUNDS PER SQUARE INCH, GAGE) | 2110 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2138 THE LEAKAGE RATE SHALL BE NOT GREATER THAN 2138 CUBIC CENTIMETRES PER MINUTE.

2140 THE LEAKAGE RATE SHALL BE NOT GREATER THAN 2140 CUBIC CENTIMETRES PER HOUR.

2102 LEAKAGE (MEDIA). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2102.

2104 LEAKAGE (MEDIA). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2104.

2106 THE TEST PRESSURE SHALL BE A GAGE PRESSURE OF 2106 POUNDS PER SQUARE INCH.

2108 THE PLUS PRESSURE TOLERANCE SHALL BE A GAGE PRESSURE OF 2108 POUNDS PER SQUARE INCH.

2110 THE MINUS PRESSURE TOLERANCE SHALL BE A GAGE PRESSURE OF 2110 POUNDS PER SQUARE INCH.



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| LEAKAGE (MEDIA) (CONT) | |
| TEST PRESSURE (CONT) | |
| SI (SELECT ONE) | |
| (PASCALS, GAGE) | 2112 |
| PLUS PRESSURE TOLERANCE (PASCALS, GAGE) | 2114 |
| MINUS PRESSURE TOLERANCE (PASCALS, GAGE) | 2116 |
| (KILOPASCALS, GAGE) | 2118 |
| PLUS PRESSURE TOLERANCE (KILOPASCALS, GAGE) | 2120 |
| MINUS PRESSURE TOLERANCE (KILOPASCALS, GAGE) | 2122 |
| MINIMUM PRESSURE HOLDING DURATION (SELECT ONE) | |
| (SECONDS) | 2124 |
| (MINUTES) | 2126 |
| (HOURS) | 2128 |
| TEST MEDIA (NAME) | 2130 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2112 THE TEST PRESSURE SHALL BE A GAGE PRESSURE OF 2112 PASCALS.

2114 THE PLUS PRESSURE TOLERANCE SHALL BE A GAGE PRESSURE OF 2114 PASCALS.

2116 THE MINUS PRESSURE TOLERANCE SHALL BE A GAGE PRESSURE OF 2116 PASCALS.

2118 THE TEST PRESSURE SHALL BE A GAGE PRESSURE OF 2118 KILOPASCALS.

2120 THE PLUS PRESSURE TOLERANCE SHALL BE A GAGE PRESSURE OF 2120 KILOPASCALS.

2122 THE MINUS PRESSURE TOLERANCE SHALL BE A GAGE PRESSURE OF 2122 KILOPASCALS.

2124 THE PRESSURE HOLDING DURATION SHALL BE NOT LESS THAN 2124 SECONDS.

2126 THE PRESSURE HOLDING DURATION SHALL BE NOT LESS THAN 2126 MINUTES.

2128 THE PRESSURE HOLDING DURATION SHALL BE NOT LESS THAN 2128 HOURS.

2130 THE TEST MEDIA SHALL BE 2130.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| MOISTURE RESISTANCE | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 1400 |
| NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE. | 1396 |
| MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS) | 1432 |
| MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS) | 1406 |
| NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED, | 1394 |
| MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES) | 1429 |
| MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES) | 1404 |
| REMAIN WITHIN SPECIFIED TOLERANCE. | 1398 |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 1391 |
| PER MIL-STD-202, METHOD 106. | 1397 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 1400 | MOISTURE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1400 |
| 1396 | MOISTURE RESISTANCE- THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE. |
| 1432 | INSULATION RESISTANCE SHALL BE NOT LESS THAN 1432 MEGOHMS AT HIGH HUMIDITY. |
| 1406 | INSULATION RESISTANCE SHALL BE NOT LESS THAN 1406 MEGOHMS AFTER DRYING. |
| 1394 | THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING OR INSULATION BREAKDOWN, WHEN DIELECTRIC WITHSTANDING VOLTAGE IS APPLIED. |
| 1429 | CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1429 MILLIAMPERE(S) AT HIGH HUMIDITY. |
| 1404 | CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1404 MILLIAMPERE(S) AFTER DRYING. |
| 1398 | ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE. |
| 1391 | MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT. |
| 1397 | MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 106 OF MIL-STD-202. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| MOISTURE RESISTANCE (CONT) | |
| PER MIL-STD-202, METHOD 106. (CONT) | |
| POLARIZING VOLTAGE (VOLTS, DC) | 1395 |
| LOADING VOLTAGE (SELECT ONE) | |
| (VOLTS, AC) | 4980 |
| (VOLTS, DC) | 4981 |
| PERCENT OF SAMPLE SUBJECTED TO POLARIZING VOLTAGE (PCT) | 4991 |
| STEP 7A NOT Applicable | 4985 |
| STEP 7B NOT APPLICABLE. | 4986 |
| PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY. | 4983 |
| PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING. | 4984 |
| MOUNT PER DOCUMENT (DOC DES) | 1449 |
| OVERLOAD | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 2292 |
| THERE SHALL BE NO MECHANICAL OR ELECTRICAL FAILURE. | 2294 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 1395 | POLARIZING VOLTAGE SHALL BE 1395 VOLTS, DC. |
| 4980 | LOADING VOLTAGE SHALL BE 4980 VOLTS, AC. |
| 4981 | LOADING VOLTAGE SHALL BE 4981 VOLTS, DC. |
| 4991 | 4991 PERCENT OF THE SAMPLE SHALL BE SUBJECTED TO THE POLARIZING VOLTAGE. |
| 4985 | STEP 7A OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE. |
| 4986 | STEP 7B OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE- |
| 4983 | PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY. |
| 4984 | PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING. |
| 1449 | MOUNTING SHALL BE IN ACCORDANCE WITH 1449. |
| 2292 | OVERLOAD. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2292. |
| 2294 | OVERLOAD. THERE SHALL BE NO MECHANICAL OR ELECTRICAL FAILURE. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| OVERLOAD (CONT) | |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 2272 |
| PER MIL-S-9395. | 2274 |
| TEST LOAD (PERCENT OF RATED RESISTIVE LOAD) | 2276 |
| AMBIENT TEST TEMPERATURE (DEGREES CELSIUS) | 2278 |
| NUMBER OF TEST CYCLES (QUANTITY) | 2280 |
| PRESSURE, BURST | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 2212 |
| AS FOLLOWS: | 2213 |
| NO EVIDENCE OF LEAKAGE. | 2214 |
| NO PHYSICAL DAMAGE, | 2216 |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 2172 |
| PER DOCUMENT (DOC DES) | 2174 |
| TEST PRESSURE (SELECT ONE) | |
| AS SPECIFIED IN THE PRESSURE CHARACTERISTICS TABLE. | 2176 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 2272 | OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2272. |
| 2274 | OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-9395. |
| 2276 | THE PERCENT OF RATED RESISTIVE TEST LOAD SHALL BE 2276 PERCENT. |
| 2278 | THE AMBIENT TEST TEMPERATURE SHALL BE 2278 DEGREES CELSIUS. |
| 2280 | THE TOTAL NUMBER OF TEST CYCLES SHALL BE 2280. |
| 2112 | PRESSURE, BURST. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2212. |
| 2213 | PRESSURE, BURST. THE REQUIREMENT(S) SHALL BE AS FOLLOWS: |
| 2214 | THERE SHALL BE NO EVIDENCE OF LEAKAGE. |
| 2216 | THERE SHALL BE NO PHYSICAL DAMAGE. |
| 2172 | PRESSURE, BURST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2172. |
| 2174 | PRESSURE, BURST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2174. |
| 2176 | THE TEST PRESSURE SHALL BE AS SPECIFIED IN THE PRESSURE CHARACTERISTICS TABLE. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| PRESSURE, BURST (CONT) | |
| TEST PRESSURE (CONT) | |
| U.S. (SELECT ONE) | |
| (POUNDS PER SQUARE INCH, GAGE) | 2178 |
| PLUS PRESSURE TOLERANCE (POUNDS PER SQUARE INCH, GAGE) | 2180 |
| MINUS PRESSURE TOLERANCE (POUNDS PER SQUARE INCH, GAGE) | 2182 |
| (POUNDS PER SQUARE INCH, DIFFERENTIAL) | 2184 |
| PLUS PRESSURE TOLERANCE (POUNDS PER SQUARE INCH, DIFFERENTIAL) | 2186 |
| MINUS PRESSURE TOLERANCE (POUNDS PER SQUARE INCH, DIFFERENTIAL) | 2188 |
| SI (SELECT ONE) | |
| (KILOPASCALS, GAGE) | 2190 |
| PLUS PRESSURE TOLERANCE (KILOPASCALS, GAGE) | 2192 |
| MINUS PRESSURE TOLERANCE (KILOPASCALS, GAGE) | 2194 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2178 THE TEST PRESSURE SHALL BE A GAGE PRESSURE OF 2178 POUNDS PER SQUARE INCH.

2180 THE PLUS PRESSURE TOLERANCE SHALL BE A GAGE PRESSURE OF 2180 POUNDS PER SQUARE INCH.

2182 THE MINUS PRESSURE TOLERANCE SHALL BE A GAGE PRESSURE OF 2182 POUNDS PER SQUARE INCH.

2184 THE TEST PRESSURE SHALL BE A DIFFERENTIAL PRESSURE OF 2184 POUNDS PER SQUARE INCH,

2186 THE PLUS PRESSURE TOLERANCE SHALL BE A DIFFERENTIAL PRESSURE OF 2186 POUNDS PER SQUARE INCH.

2188 THE MINUS PRESSURE TOLERANCE SHALL BE A DIFFERENTIAL PRESSURE OF 2188 POUNDS PER SQUARE INCH.

2190 THE TEST PRESSURE SHALL BE A GAGE PRESSURE OF 2190 KILOPASCALS.

2192 THE PLUS PRESSURE TOLERANCE SHALL BE A GAGE PRESSURE OF 2192 KILOPASCALS.

2194 THE MINUS PRESSURE TOLERANCE SHALL BE A GAGE PRESSURE OF 2194 KILOPASCALS.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| PRESSURE, BURST (CONT) | |
| SI (CONT) | |
| (KILOPASCALS, DIFFERENTIAL) | 2196 |
| PLUS PRESSURE TOLERANCE (KILOPASCALS, DIFFERENTIAL) | 2198 |
| MINUS PRESSURE TOLERANCE (KILOPASCALS, DIFFERENTIAL) | 2200 |
| PRESSURE HOLDING DURATION (SELECT ONE) | |
| (MINUTES) | 2202 |
| (HOURS) | 2204 |
| TEST MEDIA (NAME) | 2206 |
| PRESSURE, PROOF | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 2262 |
| AS FOLLOWS: | 2263 |
| NO EVIDENCE OF LEAKAGE. | 2264 |
| NO EVIDENCE OF DAMAGE, | 2266 |
| REMAIN WITHIN SPECIFIED TOLERANCES. | 2268 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2196 THE TEST PRESSURE SHALL BE A DIFFERENTIAL PRESSURE OF 2196 KILOPASCALS.

2198 THE PLUS PRESSURE TOLERANCE SHALL BE A DIFFERENTIAL PRESSURE OF 2198 KILOPASCALS.

2200 THE MINUS PRESSURE TOLERANCE SHALL BE A DIFFERENTIAL PRESSURE OF 2200 KILOPASCALS.

2202 THE PRESSURE HOLDING DURATION SHALL BE 2202 MINUTES.

2204 THE PRESSURE HOLDING DURATION SHALL BE 2204 HOURS-

2206 THE TEST MEDIA SHALL BE 2206.

2262 PRESSURE, PROOF. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2262.

2263 PRESSURE, PROOF. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2264 THERE SHALL BE NO EVIDENCE OF LEAKAGE.

2266 THERE SHALL BE NO EVIDENCE OF DAMAGE,

2268 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCES.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| PRESSURE, PROOF (CONT) | |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 2222 |
| PER DOCUMENT (DOC DES) | 2224 |
| TEST PRESSURE (SELECT ONE) | |
| AS SPECIFIED IN THE PRESSURE CHARACTERISTICS TABLE. | 2226 |
| U.S. (SELECT ONE) | |
| (POUNDS PER SQUARE INCH, GAGE) | 2228 |
| PLUS PRESSURE TOLERANCE (POUNDS PER SQUARE INCH, GAGE) | 2230 |
| MINUS PRESSURE TOLERANCE (POUNDS PER SQUARE INCH, GAGE) | 2232 |
| (POUNDS PER SQUARE INCH, DIFFERENTIAL) | 2234 |
| PLUS PRESSURE TOLERANCE (POUNDS PER SQUARE INCH, DIFFERENTIAL) | 2236 |
| MINUS PRESSURE TOLERANCE (POUNDS PER SQUARE INCH, DIFFERENTIAL) | 2238 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 2222 | PRESSURE, PROOF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2222. |
| 2224 | PRESSURE, PROOF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2224. |
| 2226 | THE TEST PRESSURE SHALL BE AS SPECIFIED IN THE PRESSURE CHARACTERISTICS TABLE. |
| 2228 | THE TEST PRESSURE SHALL BE A GAGE PRESSURE OF 2228 POUNDS PER SQUARE INCH. |
| 2230 | THE PLUS PRESSURE TOLERANCE SHALL BE A GAGE PRESSURE OF 2230 POUNDS PER SQUARE INCH. |
| 2232 | THE MINUS PRESSURE TOLERANCE SHALL BE A GAGE PRESSURE OF 2232 POUNDS PER SQUARE INCH. |
| 2234 | THE TEST PRESSURE SHALL BE A DIFFERENTIAL PRESSURE OF 2234 POUNDS PER SQUARE INCH. |
| 2236 | THE PLUS PRESSURE TOLERANCE SHALL BE A DIFFERENTIAL PRESSURE OF 2236 POUNDS PER SQUARE INCH. |
| 2238 | THE MINUS PRESSURE TOLERANCE SHALL BE A DIFFERENTIAL PRESSURE OF 2238 POUNDS PER SQUARE INCH. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| PRESSURE, PROOF (CONT) | |
| TEST PRESSURE. (CONT) | |
| SI (SELECT ONE) | |
| (KILOPASCALS, GAGE) | 2240 |
| PLUS PRESSURE TOLERANCE (KILOPASCALS, GAGE) | 2242 |
| MINUS PRESSURE TOLERANCE (KILOPASCALS, GAGE) | 2244 |
| (KILOPASCALS, DIFFERENTIAL) | 2246 |
| PLUS PRESSURE TOLERANCE (KILOPASCALS, DIFFERENTIAL) | 2248 |
| MINUS PRESSURE TOLERANCE (KILOPASCALS, DIFFERENTIAL) | 2250 |
| PRESSURE HOLDING DURATION (SELECT ONE) | |
| (MINUTES) | 2252 |
| (HOURS) | 2254 |
| TEST MEDIA (NAME) | 2256 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2240 THE TEST PRESSURE SHALL BE A GAGE PRESSURE OF 2240 KILOPASCALS.

2242 THE PLUS PRESSURE TOLERANCE SHALL BE A GAGE PRESSURE OF 2242 KILOPASCALS.

2244 THE MINUS PRESSURE TOLERANCE SHALL BE A GAGE PRESSURE OF 2244 KILOPASCALS.

2246 THE TEST PRESSURE SHALL BE A DIFFERENTIAL PRESSURE OF 2246 KILOPASCALSs

2248 THE PLUS PRESSURE TOLERANCE SHALL BE A DIFFERENTIAL PRESSURE OF 2248 KILOPASCALS.

2250 THE MINUS PRESSURE TOLERANCE SHALL BE A DIFFERENTIAL PRESSURE OF 2250 KILOPASCALS.

2252 THE PRESSURE HOLDING DURATION SHALL BE 2252 MINUTES.

2254 THE PRESSURE HOLDING DURATION SHALL BE 2254 HOURS,

2256 THE TEST MEDIA SHALL BE 2256.



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| REPEATABILITY | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 2342 |
| REMAIN WITHIN SPECIFIED TOLERANCES. | 2344 |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENTS EXCEPT ____ | 2332 |
| PER MIL-S-8932. | 2334 |
| NUMBER OF ACTUATIONS (QUANTITY) | 2336 |
| SALT SPRAY | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 4878 |
| NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE. | 4782 |
| TEST METHOD'S (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 4770 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 2342 | REPEATABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2342. |
| 2344 | REPEATABILITY. THE SWITCH SHALL REMAIN WITHIN SPECIFIED TOLERANCES. |
| 2332 | REPEATABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2332. |
| 2334 | REPEATABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-8932. |
| 2336 | THERE SHALL BE 2336 SWITCH ACTUATIONS. |
| 4878 | SALT SPRAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878. |
| 4782 | SALT SPRAY. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF Performance |
| 4770 | SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4770. |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| SALT SPRAY (CONT) | |
| TEST METHODS (CONT) | |
| PER MIL-STD-202, METHOD 101. | 4771 |
| *TEST CONDITION (LETTER) | 4772 |
| MOUNTING (SELECT ONE) | |
| SPECIAL MOUNTING PER DOCUMENT (DOC DES) | 4773 |
| MOUNTING SHALL BE BY NORMAL METHOD. | 4765 |
| MOUNTING SHALL BE BY ANY SUITABLE METHOD. | 4766 |
| SAND AND DUST | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 4958 |
| NO EVIDENCE OF DUST PENETRATION. | 4959 |
| REMAIN WITHIN SPECIFIED TOLERANCES. | 2353 |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 4952 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 4773 | SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 101 OF MIL-STD-202. |
| 4772 | TEST CONDITION LETTER 4772 SHALL APPLY. |
| 4773 | MOUNTING SHALL BE IN ACCORDANCE WITH 4773. |
| 4765 | MOUNTING SHALL BE BY THE NORMAL METHOD. |
| 4766 | MOUNTING SHALL BE BY ANY SUITABLE METHOD. |
| 4958 | SAND AND DUST. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4958. |
| 4959 | SAND AND DUST. THERE SHALL BE NO EVIDENCE OF DUST PENETRATION. |
| 2353 | ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCES |
| 4952 | SAND AND DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4952. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| SAND AND DUST (CONT) | |
| TEST METHODS (CONT) | |
| PER MIL-STD-202, METHOD 110. | 4960 |
| TEST SPECIMEN(S) SHALL BE OPERATED DURING TEST STEP(S) (NUMBER) | 4872 |
| *DURATION OF OPERATION (HOURS) | 6299 |
| SPECIMEN ORIENTATION SHALL BE CHANGED DURING TEST. | 1539 |
| SECOND 6-HOUR TEST REQUIRED IMMEDIATELY FOLLOWING TEMPERATURE STABILIZATION IN STEP 2. | 4956 |
| SEAL | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 4745 |
| AS FOLLOWS: | 6370 |
| SPECIFIED TEST METHOD SENSITIVITY. | 4746 |
| NO BUBBLES INDICATIVE OF LEAKAGE. | 4748 |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 4734 |
| PER MIL-STD-202, METHOD 112. | 4732 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4960 SAND AND DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 11O OF MIL-STD-202.

4872 ITEMS SHALL BE OPERATED DURING STEP(S) 4872.

6299 DURATION OF OPERATION SHALL BE 6299 HOUR(S),

1539 ORIENTATION SHALL BE CHANGED DURING THE TEST.

4956 THE SECOND 6-HOUR TEST SHALL BE PERFORMED IMMEDIATELY AFTER REACHING TEMPERATURE STABILIZATION IN STEP 2.

4745 SEAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4745.

6370 SEAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

4746 THE REQUIREMENTS SHALL BE IN ACCORDANCE WITH THE SPECIFIED TEST METHOD SENSITIVITY.

4748 THERE SHALL BE NO BUBBLES INDICATIVE OF LEAKAGE.

4734 SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4734.

4732 SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 112 OF MIL-STD-202.



Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:24Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| SEAL (CONT) | |
| PER MIL-STD-202, METHOD 112. (CONT) | |
| *TEST CONDITION LETTER | |
| LETTER A. | 4737 |
| LIQUID FOR BATH (NAME) | 4738 |
| MINIMUM BATH TEMPERATURE (DEGREES CELSIUS) | 4739 |
| LETTER B. | 6320 |
| LIQUID FOR BATH (NAME) | 6321 |
| MINIMUM BATH TEMPERATURE (DEGREES CELSIUS) | 6322 |
| LETTER C. | 6323 |
| *LEAK RATE SENSITIVITY (ATM CC/SEC) | 4741 |
| *TEST PROCEDURE (SELECT ONE) | |
| TEST PROCEDURE I. | 4740 |
| BACKFILL PRESSURE (SELECT ONE) | |
| (PSI) | 4742 |
| (KILOPASCALS) | 4736 |
| TEST PROCEDURE II. | 6324 |
| BACKFILL PRESSURE (SELECT ONE) | |
| (PSI) | 6325 |
| (KILOPASCALS) | 6326 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 4737 | TEST CONDITION LETTER A SHALL APPLY. |
| 4738 | LIQUID FOR BUBBLE TEST BATH SHALL BE 4738. |
| 4739 | TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 4739 DEGREES CELSIUS. |
| 6320 | TEST CONDITION LETTER B SHALL APPLY. |
| 6321 | LIQUID FOR BUBBLE TEST BATH SHALL BE 6321. |
| 6322 | TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 6322 DEGREES CELSIUS. |
| 6323 | TEST CONDITION LETTER C SHALL APPLY. |
| 4741 | LEAK SENSITIVITY RATE SHALL BE 4741 ATM CC/SEC. |
| 4740 | PROCEDURE NUMBER I SHALL APPLY. |
| 4742 | BACKFILL PRESSURE SHALL BE 4742 PSI. |
| 4736 | BACKFILL PRESSURE SHALL BE 4736 KILOPASCALSo |
| 6324 | PROCEDURE NUMBER II SHALL APPLY. |
| 6325 | BACKFILL PRESSURE SHALL BE 6325 PSI. |
| 6326 | BACKFILL PRESSURE SHALL BE 6326 KILOPASCALS. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| SEAL (CONT) | |
| TEST PROCEDURE II. (CONT) | |
| NUMBER OF PRESSURE CYCLES (QUANTITY) | 4749 |
| TEST PROCEDURE III. | 6328 |
| GROSS LEAK TEST CONDITION (LETTER) | 4750 |
| TEST PROCEDURE IV. | 6329 |
| CHAMBER PRESSURE (SELECT ONE) | |
| (TORR) | 4751 |
| (KILOPASCALS) | 4735 |
| DURATION OF REDUCED PRESSURE (MINUTES) | 4752 |
| GROSS LEAK TEST CONDITION (LETTER) | 6330 |
| LETTER D. | 6331 |
| ANY SUITABLE MOUNTING FIXTURE. | 4743 |
| LETTER E. | 6332 |
| ANY SUITABLE MOUNTING FIXTURE. | 6333 |
| SHOCK, HIGH IMPACT | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 1494 |
| NO EVIDENCE OF PHYSICAL DAMAGE. | 1495 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4749 THERE SHALL BE 4749 PRESSURE CYCLES.

6328 PROCEDURE NUMBER III SHALL APPLY.

4750 GROSS LEAK TEST CONDITION LETTER 4750 SHALL APPLY.

6329 PROCEDURE NUMBER IV SHALL APPLY.

4751 CHAMBER PRESSURE SHALL BE 4751 TORR.

4735 CHAMBER PRESSURE SHALL BE 4735 KILOPASCALS.

4752 DURATION AT LOW PRESSURE SHALL BE 4752 MINUTES.

6330 GROSS LEAK TEST CONDITION LETTER 6330 SHALL APPLY.

6333 TEST CONDITION LETTER D SHALL APPLY.

4743 MOUNTING SHALL BE BY ANY SUITABLE METHOD.

6332 TEST CONDITION LETTER E SHALL APPLY.

6333 MOUNTING SHALL BE BY ANY SUITABLE METHOD.

1494 SHOCK, HIGH IMPACT.THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1494.

1495 SHOCK, HIGH IMPACT.THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| SHOCK, HIGH IMPACT (CONT) | |
| NO EVIDENCE OF PHYSICAL DAMAGE. (CONT) | |
| NO LAMP IN TEST CIRCUIT SHALL LIGHT. | 1550 |
| REMAIN WITHIN SPECIFIED TOLERANCE. | 1464 |
| DISCONTINUITY (SELECT ONE) | |
| NO DISCONTINUITY DURING TEST. | 1451 |
| MAXIMUM DISCONTINUITY (SELECT ONE) | |
| (MILLISECONDS) | 2357 |
| (MICROSECONDS) | 1897 |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 1486 |
| PER MIL-STD-202, METHOD 207. | 1482 |
| *MOUNTING FIXTURE (SELECT ONE) | |
| FIGURE NUMBER FROM METHOD 207 OF MIL-STD-202 (NO.) | 1488 |
| ANY SUITABLE MOUNTING FIXTURE. | 1478 |
| MOUNTING FIXTURE PER DOCUMENT (DOC DES) | 1468 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 1550 | NO LAMP IN THE TEST CIRCUIT SHALL LIGHT. |
| 1464 | ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE. |
| 1451 | THERE SHALL BE NO DISCONTINUITY DURING THE TEST. |
| 2357 | THE DISCONTINUITY SHALL BE NOT GREATER THAN 2357 MILLISECONDS. |
| 1897 | THE DISCONTINUITY SHALL BE NOT GREATER THAN 1897 MICROSECONDS. |
| 1486 | SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1486. |
| 1482 | SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 207 OF MIL-STD-202. |
| 1488 | THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH FIGURE 1488 OF METHOD 207 OF MIL-STD-202. |
| 1478 | THE MOUNTING FIXTURE SHALL BE ANY SUITABLE MOUNTING FIXTURE. |
| 1468 | THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH 1468. |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| PER MIL-STD-202, METHOD 207. (CONT) | |
| MONITOR CONTACT CHATTER PER METHOD 310 OF MIL-STD-202. | |
| *TEST CIRUIT (LETTER) | 1487 |
| *TEST CONDITION (LETTER) | 1479 |
| PERCENT RATED LOAD APPLIED (PCT) | 6203 |
| TEST PRESSURE BELOW ACTUATION PRESSURE (PCT) | 2355 |
| TEST PRESSURE ABOVE DEACTUATION PRESSURE (PCT) | 2356 |
| SHOCK, SPECIFIED PULSE | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 1508 |
| NO EVIDENCE OF PHYSICAL DAMAGE. | 1509 |
| NO LAMP IN TEST CIRCUIT SHALL LIGHT. | 1551 |
| REMAIN WITHIN SPECIFIED TOLERANCE. | 4703 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 1487 | MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1487 SHALL APPLY. |
| 1479 | TEST CONDITION LETTER 1479 FROM METHOD 310 OF MIL-STD-202 SHALL APPLY, |
| 6203 | THE ELECTRICAL LOAD SHALL BE 6203 PERCENT OF THE RATED LOAD . |
| 2355 | THE TEST PRESSURE SHALL BE 2355 PERCENT BELOW ACTUATION PRESSURE. |
| 2356 | THE TEST PRESSURE SHALL BE 2356 PERCENT ABOVE DEACTUATION PRESSURE. |
| 1508 | SHOCK, SPECIFIED PULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1508. |
| 1509 | SHOCK, SPECIFIED PULSE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE. |
| 1551 | NO LAMP IN THE TEST CIRCUIT SHALL LIGHT. |
| 4703 | ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| SHOCK, SPECIFIED PULSE (CONT) | |
| NO EVIDENCE OF PHYSICAL DAMAGE. (CONT) | |
| DISCONTINUITY (SELECT ONE) | |
| NO DISCONTINUITY DURING TEST. | 1471 |
| MAXIMUM DISCONTINUITY (SELECT ONE) | |
| (MICROSECONDS) | 2354 |
| (MILLISECONDS) | 1896 |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 1502 |
| PER MIL-STD-202, METHOD 213. | 1500 |
| *TEST CONDITION (LETTER) | 1504 |
| METHOD OF MOUNTING (SELECT ONE) | |
| MOUNT PER DOCUMENT (DOC DES) | 4684 |
| NORMAL MOUNTING METHOD. | 4685 |
| ANY SUITABLE METHOD. | 4686 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 4711 | THERE SHALL BE NO DISCONTINUITY DURING THE TEST. |
| 2354 | THE DISCONTINUITY SHALL BE NOT GREATER THAN 2354 MICROSECONDS. |
| 1896 | THE DISCONTINUITY SHALL BE NOT GREATER THAN 1896 MILLISECONDS. |
| 1502 | SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1502. |
| 1500 | SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 213 OF MIL-STD-202. |
| 1504 | TEST CONDITION LETTER 1504 SHALL APPLY. |
| 4684 | MOUNTING SHALL BE IN ACCORDANCE WITH 4684. |
| 4685 | MOUNTING SHALL BE BY THE NORMAL METHOD. |
| 4686 | MOUNTING SHALL BE BY ANY SUITABLE METHOD. |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| SHOCK, SPECIFIED PULSE (CONT) | |
| PER MIL-STD-202, METHOD 213. (CONT) | |
| MONITOR CONTACT CHATTER PER METHOD 310 OF MIL-STD-202. | |
| *TEST CIRCUIT (LETTER) | 1503 |
| *TEST CONDITION (LETTER) | 11499 |
| PERCENT RATED LOAD APPLIED (PCT) | 6204 |
| TEST PRESSURE BELOW ACTUATION PRESSURE (PCT) | 2358 |
| TEST PRESSURE ABOVE DEACTUATION PRESSURE (PCT) | 2359 |
| SHORT CIRCUIT | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 2322 |
| NO WELDING OR STICKING OF CONTACTS. | 2324 |
| MECHANICALLY AND ELECTRICALLY OPERATIVE. | 2326 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 1503 | MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1503 SHALL APPLY. |
| 1499 | TEST CONDITION LETTER 1499 OF METHOD 310 OF MIL-STD-202 SHALL APPLY. |
| 6204 | THE ELECTRICAL LOAD SHALL BE 6204 PERCENT OF THE RATED LOAD. |
| 2358 | THE TEST PRESSURE SHALL BE 2358 PERCENT BELOW ACTUATION PRESSURE. |
| 2359 | THE TEST PRESSURE SHALL BE 2359 PERCENT ABOVE DEACTUATION PRESSURE. |
| 2322 | SHORT CIRCUIT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2322. |
| 2324 | SHORT CIRCUIT. THERE SHALL BE NO WELDING OR STICKING OF CONTACTS. |
| 2326 | THE SWITCH SHALL BE MECHANICALLY AND ELECTRICALLY OPERATIVE AFTER TESTING. |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| SHORT CIRCUIT (CONT) | |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 2302 |
| PER MIL-S-9395. | 2304 |
| MAXIMUM TEST CURRENT (AMPERES) | 2306 |
| OPEN CIRCUIT TEST VOLTAGE (VOLTS) | 2308 |
| FREQUENCY (HERTZ) | 2310 |
| LOAD (TYPE) | 2312 |
| NUMBER OF TEST CYCLES (QUANTITY) | 2314 |
| SOLDERABILITY | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 4674 |
| NO EVIDENCE OF PHYSICAL DAMAGE. | 4675 |
| MEET EVALUATION CRITERIA SPECIFIED IN METHOD 208 OF MIL-STD-202. | 4672 |
| REMAIN WITHIN SPECIFIED TOLERANCE. | 4677 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 2302 | SHORT CIRCUIT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2302. |
| 2304 | SHORT CIRCUIT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-9395. |
| 2306 | THE APPLIED TEST CURRENT SHALL BE NOT GREATER THAN 2306 AMPERES. |
| 2308 | THE OPEN CIRCUIT TEST VOLTAGE SHALL BE 2308 VOLTS. |
| 2310 | THE FREQUENCY SHALL BE 2310 HERTZ. |
| 2312 | THE LOAD TYPE SHALL BE 2312. |
| 2314 | THE NUMBER OF TEST CYCLES SHALL BE 2314. |
| 4674 | SOLDERABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4674 |
| 4675 | SOLDERABILITY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE. |
| 4672 | THE RESULTS OF THE SOLDERABILITY TEST SHALL BE IN ACCORDANCE WITH THE ACCEPTANCE CRITERIA OF METHOD 208 OF MIL-STD-202. |
| 4677 | ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| SOLDERABILITY (CONT) | |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 4662 |
| PER MIL-STD-202, METHOD 208. | 4683 |
| NUMBER OF TERMINALS TO BE TESTED (QUANTITY) | 4666 |
| DEPTH OF IMMERSION (SELECT ONE) | |
| (INCHES) | 4667 |
| (MILLIMETERS) | 4663 |
| DISTANCE WRAP WIRE APPLIED FROM BODY (SELECT ONE) | |
| (INCHES) | 4664 |
| (MILLIMETERS) | 4665 |
| SPECIAL PREPARATIONS PERMITTED. | 6205 |
| TEMPERATURE, HIGH | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 6228 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 4662 | SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4662. |
| 4683 | SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 208 OF MIL-STD-202. |
| 4666 | 4666 TERMINATION(S) PER UNIT SHALL BE TESTED. |
| 4667 | TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4667 INCH(S). |
| 4663 | TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4663 MILLIMETER(S). |
| 4664 | THE WRAP WIRE SHALL BE 4664 INCH(S) FROM THE BODY. |
| 4665 | THE WRAP WIRE SHALL BE 4665 MILLIMETER(S) FROM THE BODY. |
| 6205 | SPECIAL PREPARATION SHALL BE PERMITTED. |
| 6228 | TEMPERATURE, HIGH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6228. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| TEMPERATURE, HIGH (CONT) | |
| REQUIREMENTS (CONT) | |
| NO EVIDENCE OF PHYSICAL DAMAGE. | 6229 |
| REMAIN WITHIN SPECIFIED TOLERANCES. | 2158 |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 6217 |
| PER MIL-STD-810, METHOD 501. | 6218 |
| *PROCEDURE (ROMAN NUMERAL) | 6219 |
| STORAGE TEMPERATURE (DEGREES CELSIUS) | 6220 |
| STORAGE DURATION (HR) | 6221 |
| HIGHEST OPERATING TEMPERATURE (DEGREES CELSIUS) | 6222 |
| OPERATION TIME (SELECT ONE) | |
| (MINUTES) | 6224 |
| (HOURS) | 6225 |
| LOAD (PERCENT OF RATED LOAD) | 2150 |
| LOAD (TYPE) | 2152 |
| NUMBER OF OPERATING CYCLES (QUANTITY) | 2154 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 6229 | TEMPERATURE, HIGH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE. |
| 2158 | ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCES. |
| 6217 | TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6217. |
| 6218 | TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 501 OF MIL-STD-811. |
| 6219 | PROCEDURE NUMBER 6219 SHALL APPLY. |
| 6220 | STORAGE TEMPERATURE SHALL BE 6220 DEGREES CELSIUS. |
| 6221 | STORAGE DURATION SHALL BE 6221 HOURS. |
| 6222 | HIGHEST OPERATING TEMPERATURE SHALL BE 6222 DEGREES CELSIUS. |
| 6224 | OPERATING TIME SHALL BE 6224 MINUTE(S). |
| 6225 | OPERATING TIME SHALL BE 6225 HOUR(S). |
| 2150 | THE LOAD SHALL BE 2150 PERCENT OF RATED LOAD. |
| 2152 | THE LOAD TYPE SHALL BE 2152. |
| 2154 | THERE SHALL BE 2154 OPERATING CYCLES. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| TEMPERATURE, LOW | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 6318 |
| NO EVIDENCE OF PHYSICAL DAMAGE. | 6319 |
| REMAIN WITHIN SPECIFIED TOLERANCES, | 2168 |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 6231 |
| PER MIL-STD-810, METHOD 502. | 6232 |
| STORAGE TEMPERATURE (DEGREES CELSIUS) | 6234 |
| STORAGE DURATION (HOURS) | 6235 |
| LOWEST OPERATING TEMPERATURE (DEGREES CELSIUS) | 6236 |
| CHAMBER AIR VELOCITY (SELECT ONE) | |
| (FT/SECOND) | 6237 |
| (METERS/SECOND) | 6238 |
| OPERATION TIME (SELECT ONE) | |
| (MIN) | 6315 |
| (HOURS) | 6316 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 6318 | TEMPERATURE, LOW. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6318. |
| 6319 | TEMPERATURE, LOW. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE. |
| 2168 | ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCES |
| 6231 | TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6231. |
| 6232 | TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 502 OF MIL-STD-810. |
| 6234 | STORAGE TEMPERATURE SHALL BE 6234 DEGREES CELSIUS. |
| 6235 | STORAGE DURATION SHALL BE 6235 HOURS. |
| 6236 | LOWEST OPERATING TEMPERATURE SHALL BE 6236 DEGREES CELSIUS. |
| 6237 | CHAMBER AIR VELOCITY SHALL BE 6237 FEET PER SECOND. |
| 6238 | CHAMBER AIR VELOCITY SHALL BE 6238 METERS PER SECOND. |
| 6315 | OPERATING TIME SHALL BE 6315 Minute |
| 6316 | OPERATING TIME SHALL BE 6316 HOUR(S). |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| TEMPERATURE, LOW (CONT) | |
| PER MIL-STD-810, METHOD 502. (CONT) | |
| NUMBER OF OPERATING CYCLES (QUANTITY) | 2160 |
| LOAD (PERCENT OF RATED) | 2162 |
| LOAD (TYPE) | 2164 |
| TERMINAL STRENGTH | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 1418 |
| NO EVIDENCE OF PHYSICAL DAMAGE. | 1433 |
| REMAIN WITHIN SPECIFIED TOLERANCE. | 6296 |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 1410 |
| PER MIL-STD-202, METHOD 211. | 1375 |
| *TEST CONDITIONS | |
| TEST CONDITION A, APPLIED FORCE (SELECT ONE) | |
| (POUNDS) | 1411 |
| (NEWTONS) | 1419 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2160 THERE SHALL BE 2160 OPERATING CYCLES.

2162 THE LOAD SHALL BE 2162 PERCENT OF THE RATED LOAD.

2164 THE TYPE OF LOAD SHALL BE 2164.

1418 TERMINAL STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1418.

1433 TERMINAL STRENGTH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

6296 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

1410 TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1410.

1375 TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 211 OF MIL-STD-202.

1411 TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1411 POUND(S).

1419 TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1419 NEWTON(S).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| TERMINAL STRENGTH (CONT) | |
| *TEST CONDITIONS (CONT) | |
| TEST CONDITION B, BENDS (NO.) | 1412 |
| TEST CONDITION C, LOAD (SELECT ONE) | |
| (POUNDS) | 1413 |
| (KILOGRAMS) | 1420 |
| TEST CONDITION D. | 1414 |
| TEST CONDITION E, TORQUE (SELECT ONE) | |
| (POUND-INCHES) | 1416 |
| (NEWTON METERS) | 1421 |
| THERMAL SHOCK | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT ____ | 4722 |
| NO EVIDENCE OF PHYSICAL DAMAGE. | 4723 |
| REMAIN WITHIN SPECIFIED TOLERANCE. | 4726 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1412 TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION B. THERE SHALL BE 1412 BEND(S).

1413 TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1413 POUND(S).

1420 TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1420 KILOGRAM(S).

1414 TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION D.

1416 TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1416 POUND-INCH(S).

1421 TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1421 NEWTON METER(S).

4722 THERMAL SHOCK (TEMPERATURE CYCLING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4722.

4723 THERMAL SHOCK. (TEMPERATURE CYCLING). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

4726 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| THERMAL SHOCK (CONT) | |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT | 4733 |
| PER MIL-STD-202, METHOD 107, | 4714 |
| *TEST CONDITION (LETTER) | 4715 |
| SPECIAL MOUNTING PER DOCUMENT (DOC DES) | 4719 |
| VIBRATION, HIGH FREQUENCY | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 1455 |
| NO EVIDENCE OF PHYSICAL DAMAGE. | 1456 |
| REMAIN WITHIN SPECIFIED TOLERANCE. | 1469 |
| DISCONTINUITY (SELECT ONE) | |
| NO DISCONTINUITY DURING TEST. | 1473 |
| MAXIMUM DISCONTINUITY (SELECT ONE) | |
| (MICROSECONDS) | 1890 |
| (MILLISECONDS) | 1895 |
| NO LAMP IN THE TEST CIRCUIT SHALL LIGHT. | 1552 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 4713 | THERMAL SHOCK. (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4713. |
| 4714 | THERMAL SHOCK. (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 107 OF MIL-STD-202. |
| 4715 | TEST CONDITION LETTER 4715 SHALL APPLY. |
| 4719 | MOUNTING SHALL BE IN ACCORDANCE WITH 4719. |
| 1455 | VIBRATION, HIGH FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1455. |
| 1456 | VIBRATION, HIGH FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE. |
| 1469 | ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE. |
| 1473 | THERE SHALL BE NO DISCONTINUITY DURING TEST. |
| 1890 | THE DISCONTINUITY SHALL BE NOT GREATER THAN 1890 MICROSECONDS. |
| 1895 | THE DISCONTINUITY SHALL BE NOT GREATER THAN 1895 MILLISECONDS. |
| 1552 | NO LAMP IN THE TEST CIRCUIT SHALL LIGHT. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| VIBRATION, HIGH FREQUENCY (CONT) | |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 1446 |
| PER MIL-STD-202, METHOD 2040 | 1447 |
| *TEST CONDITION (LETTER) | 1448 |
| MONITOR CONTACT CHATTER IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. | |
| *TEST CIRCUIT (LETTER) | 1442 |
| *TEST CONDITION (LETTER) | 1444 |
| METHOD OF DETERMINING MECHANICAL RESONANCE (SELECT ONE) | |
| VISUALLY BY MEANS OF A STROBOTAC. | 1533 |
| ELECTRICAL OUTPUT INDICATORS. | 1534 |
| PERCENT RATED LOAD APPLIED (PCT) | 6200 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 1446 | VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT. EXCEPT 1446. |
| 1447 | VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 204 OF MIL-STD-202. |
| 1448 | TEST CONDITION LETTER 1448 SHALL APPLY. |
| 1442 | MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1442 SHALL APPLY. |
| 1444 | TEST CONDITION LETTER 1444 OF METHOD 310 OF MIL-STD-202 SHALL APPLY. |
| 1533 | THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE VISUALLY BY MEANS OF A STROBOTAC. |
| 1534 | THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE BY ELECTRICAL OUTPUT INDICATORS. |
| 6200 | THE LOAD SHALL BE 6200 PERCENT OF THE RATED LOAD. |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| VIBRATION, HIGH FREQUENCY (CONT) | |
| PER MIL-STD-202, METHOD 204. (CONT) | |
| METHOD OF MOUNTING (SELECT ONE) | |
| MOUNT PER DOCUMENT (DOC DES) | 4707 |
| NORMAL MOUNTING MEANS. | 4708 |
| ANY SUITABLE MOUNTING METHOD. | 4709 |
| VIBRATION, LOW FREQUENCY | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 1475 |
| NO EVIDENCE OF PHYSICAL DAMAGE. | 1476 |
| REMAIN WITHIN SPECIFIED TOLERANCE. | 1480 |
| DISCONTINUITY (SELECT ONE) | |
| NO DISCONTINUITY DURING TEST. | 1490 |
| MAXIMUM DISCONTINUITY (SELECT ONE) | |
| (MICROSECONDS) | 1891 |
| (MILLISECONDS) | 1894 |
| NO LAMP IN THE TEST CIRCUIT SHALL LIGHT. | 1553 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4707 MOUNTING SHALL BE IN ACCORDANCE WITH 4707.

4708 MOUNTING SHALL BE BY THE NORMAL METHOD.

4709 MOUNTING SHALL BE BY ANY SUITABLE METHOD.

1475 VIBRATION, LOW FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1475.

1476 VIBRATION, LOW FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

1480 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

1490 THERE SHALL BE NO DISCONTINUITY DURING TEST.

1891 THE DISCONTINUITY SHALL BE NOT GREATER THAN 1891 MICROSECONDS.

1894 THE DISCONTINUITY SHALL BE NOT GREATER THAN 1894 MILLISECONDS.

1553 NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| VIBRATION, LOW FREQUENCY (CONT) | |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 1466 |
| PER MIL-STD-202, METHOD 201. | 1467 |
| MONITOR CONTACT CHATTER IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. | |
| *TEST CIRCUIT (LETTER) | 1491 |
| *TEST CONDITION (LETTER) | 1492 |
| PERCENT RATED LOAD APPLIED (PCT) | 6201 |
| DURATION OF VIBRATION PER AXIS (HOURS) | 1470 |
| DIRECTION OF MOTION | |
| 90 DEGREES FROM THE CENTER LINE OF THE MOST SENSITIVE AXIS. | 4978 |
| ON THE CENTERLINE OF MOST SENSITIVE AXIS. | 4979 |
| PARALLEL TO LONGITUDINAL AXIS. | 1535 |
| PERPENDICULAR TO LONGITUDINAL AXIS. | 1536 |
| THREE MUTUALLY PERPENDICULAR DIRECTIONS. | 1537 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1466 VIBRATION, LOW FREQUENCY TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT? EXCEPT 1466.

1467 VIBRATION, LOW FREQUENCY TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 201 OF MIL-STD-202.

1491 MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1491 SHALL APPLY.

1492 TEST CONDITION LETTER 1492 OF METHOD 310 OF MIL-STD-202 SHALL APPLY.

6201 THE LOAD SHALL BE 6201 PERCENT OF THE RATED LOAD.

1470 DURATION OF TEST SHALL BE 1470 HOUR(S) PER AXIS.

4978 THE DIRECTION OF MOTION SHALL BE 90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.

4979 THE DIRECTION OF MOTION SHALL BE ON THE CENTERLINE OF THE MOST SENSITIVE AXIS.

1535 THE DIRECTION OF MOTION SHALL BE PARALLEL TO THE LONGITUDINAL AXIS.

1536 THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE LONGITUDINAL AXIS.

1537 THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUAL PERPENDICULAR DIRECTIONS.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| VIBRATION, LOW FREQUENCY (CONT) | |
| PER MIL-STD-202, METHOD 201. (CONT) | |
| METHOD OF MOUNTING (SELECT ONE) | |
| MOUNT PER DOCUMENT (DOC DES) | 4729 |
| NORMAL MOUNTING MEANS. | 4730 |
| ANY SUITABLE MOUNTING METHOD. | 4731 |
| VIBRATION, RANDOM | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 1435 |
| NO EVIDENCE OF PHYSICAL DAMAGE. | 1436 |
| NO LAMP IN THE TEST CIRCUIT SHALL LIGHT. | 1457 |
| REMAIN WITHIN SPECIFIED Tolerance | 1538 |
| DISCONTINUITY (SELECT ONE) | |
| NO DISCONTINUITY DURING TEST. | 1374 |
| MAXIMUM DISCONTINUITY (SELECT ONE) | |
| (MICROSECONDS) | 1892 |
| (MILLISECONDS) | 1893 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4729 MOUNTING SHALL BE IN ACCORDANCE WITH 4729.

4730 MOUNTING SHALL BE BY THE NORMAL METHOD.

4731 MOUNTING SHALL BE BY ANY SUITABLE METHOD.

1435 VIBRATION, RANDOM, THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1435.

1436 VIBRATION, RANDOM. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

1457 NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.

1538 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

1374 THERE SHALL BE NO DISCONTINUITY DURING TEST.

1892 THE DISCONTINUITY SHALL BE NOT GREATER THAN 1892 MICROSECONDS-

1893 THE DISCONTINUITY SHALL BE NOT GREATER THAN 1893 Milliseconds



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| VIBRATION, RANDOM (CONT) | |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 1426 |
| PER MIL-STD-202, METHOD 234. | 1427 |
| *TEST CONDITION (ROMAN NUMERAL AND LETTER) | 1428 |
| *DURATION OF APPLICATION (SELECT ONE) | |
| (HOURS) | 1431 |
| (MINUTES) | 1438 |
| MONITORING INSTRUMENTATION OF EXCITATION (SELECT ONE) | |
| ANY SUITABLE SYSTEM. | 1452 |
| CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDERS | 1453 |
| CALIBRATED OSCILLOSCOPE. | 1459 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1426 VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1426.

1427 VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 214 OF MIL-STD-202.

1428 TEST CONDITION NUMBER AND LETTER 1428 SHALL APPLY.

1431 THE DURATION OF THE TEST SHALL BE 1431 HOUR(S).

1438 THE DURATION OF THE TEST SHALL BE 1438 MINUTE(S).

1452 THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE ANY SUITABLE INSTRUMENTATION SYSTEM.

1453 THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.

1459 THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED OSCILLOSCOPE.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| VIBRATION, RANDOM (CONT) | |
| PER MIL-STD-202, METHOD 214. (CONT) | |
| LOCATION OF MONITORING POINTS (SELECT ONE) | |
| ANY SUITABLE LOCATION. | 1439 |
| AS CLOSE AS PRACTICAL TO TEST SPECIMEN, | 1462 |
| NUMBER OF VIBRATION MONITORING TEST POINTS (QUANTITY) | 1430 |
| MONITOR CONTACT CHATTER IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202, | |
| *TEST CIRCUIT (LETTER) | 1402 |
| *TEST CONDITION (LETTER) | 1382 |
| PERCENT OF RATED LOAD APPLIED (PCT) | 4678 |
| METHOD OF MOUNTING (SELECT ONE) | |
| MOUNT PER DOCUMENT (DOC DES) | 4975 |
| NORMAL MOUNTING METHOD. | 4976 |
| ANY SUITABLE MOUNTING METHOD. | 4977 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 1439 | THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE ANY SUITABLE LOCATION, |
| 1462 | THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE AS CLOSE AS PRACTICAL TO THE TEST SPECIMEN(S). |
| 1430 | THERE SHALL BE 1430 VIBRATION MONITORING POINT(S), |
| 1402 | MONITORING DURING THE TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1402 SHALL APPLY. |
| 1382 | TEST CONDITION LETTER 1382 IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202 SHALL APPLY. |
| 4678 | THE LOAD SHALL BE 4678 PERCENT OF THE RATED LOAD. |
| 4975 | MOUNTING SHALL BE IN ACCORDANCE WITH 4975. |
| 4976 | MOUNTING SHALL BE BY THE NORMAL METHOD. |
| 4977 | MOUNTING SHALL BE BY ANY SUITABLE METHOD. |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| WATERPROOFNESS | |
| REQUIREMENTS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 2392 |
| AS FOLLOWS: | 2393 |
| NO EVIDENCE OF WATER LEAKAGE. | 2394 |
| NO CHANGE IN DIELECTRIC WITHSTANDING VOLTAGE REQUIREMENTS. | 2396 |
| NO EVIDENCE OF MEDIA LEAKAGE. | 2398 |
| TEST METHODS (SELECT ONE) | |
| PER BASE DOCUMENT EXCEPT ____ | 2362 |
| PER MIL-E-13856. | 2364 |
| TYPE (SELECT ONE) | |
| I. | 2366 |
| II. | 2368 |
| CLASS (SELECT ONE) | |
| 1. | 2370 |
| 2. | 2372 |
| 3. | 2374 |
| 4. | 2376 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2392 WATERPROOFNESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2392.

2393 WATERPROOFNESS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2394 THERE SHALL BE NO EVIDENCE OF WATER LEAKAGE.

2396 THERE SHALL BE NO CHANGE IN DIELECTRIC WITHSTANDING VOLTAGE REQUIREMENTS.

2398 THERE SHALL BE NO EVIDENCE OF MEDIA LEAKAGE.

2362 WATERPROOFNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2362.

2364 WATERPROOFNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-E-13856.

2366 THE SWITCH SHALL BE CLASSIFIED AS TYPE I.

2368 THE SWITCH SHALL BE CLASSIFIED AS TYPE II.

2370 THE SWITCH SHALL BE CLASSIFIED AS CLASS 1.

2372 THE SWITCH SHALL BE CLASSIFIED AS CLASS 2.

2374 THE SWITCH SHALL BE CLASSIFIED AS CLASS 3.

2376 THE SWITCH SHALL BE CLASSIFIED AS CLASS 4.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| PER MIL-E-13856. (CONT) | |
| TEST PRESSURE (SELECT ONE) | |
| U.S. | |
| (POUNDS PER SQUARE INCH, GAGE) | 2378 |
| PLUS PRESSURE TOLERANCE (POUNDS PER SQUARE INCH, GAGE) | 2380 |
| MINUS PRESSURE TOLERANCE (POUNDS PER SQUARE INCH, GAGE) | 2382 |
| SI | |
| (KILOPASCALS, GAGE) | 2384 |
| PLUS PRESSURE TOLERANCE (KILOPASCALS, GAGE) | 2386 |
| MINUS PRESSURE TOLERANCE (KILOPASCALS, GAGE) | 2388 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| 2378 | THE TEST PRESSURE SHALL BE A GAGE PRESSURE OF 2378 POUNDS PER SQUARE INCH. |
| 2380 | THE PLUS PRESSURE TOLERANCE SHALL BE A GAGE PRESSURE OF 2380 POUNDS PER SQUARE INCH. |
| 2382 | THE MINUS PRESSURE TOLERANCE SHALL BE A GAGE PRESSURE 2382 POUNDS PER SQUARE INCH. |
| 2384 | THE TEST PRESSURE SHALL BE A GAGE PRESSURE OF 2384 KILOPASCALS. |
| 2386 | THE PLUS PRESSURE TOLERANCE SHALL BE A GAGE PRESSURE OF 2386 KILOPASCALS. |
| 2388 | THE MINUS PRESSURE TOLERANCE SHALL BE A GAGE PRESSURE OF 2388 KILOPASCALS. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35) | |
| NOTE: AUTOMATIC WHEN TABLE X IS USED. | |
| WORKMANSHIP | |
| (DOC DES) | 6870 |
| ADDITIONAL REQUIREMENTS | |
| A____ | 7001 |
| B____ | 7002 |
| C____ | 7003 |
| D____ | 7004 |
| E____ | 7005 |
| PART MARKING (SELECT ONE) | |
| (DOC DES) | 6372 |
| MIL-STD-1285. | 7630 |
| MIL-STD-1130. | 7629 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.

6870 WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.

ADDITIONAL REQUIREMENTS.

7001 (A) 7001.

7002 (B) 7002.

7003 (C) 7003.

7004 (D) 7004.

7005 (E) 7005.

6372 PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.

7630 PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.

7629 PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

| CHARACTERISTIC NAME | CHAR CODE |
|---|---|
| ADDITIONAL PART MARKING | |
| A_____ | 6991 |
| B_____ | 6992 |
| c_____ | 6993 |
| D_____ | 6994 |
| E_____ | 6995 |
| DEFINITION OF HERMETIC SEALING | |

APPLICABLE DOCUMENTS (SEE DOD-STD-35)

QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)

PACKAGING (SEE DOD-STD-35)

NOTES (SEE DOD-STD-35)

NOMENCLATURE (SEE DOD-STD-35)

SUPERSEDED DOCUMENT (SEE DOD-STD-35)

PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

| CHAR CODE | STANDARD PARAGRAPH |
|---|---|
| | ADDITIONAL PART MARKING. |
| 6991 | (A) 6991. |
| 6992 | (B) 6992. |
| 6993 | (C) 6993. |
| 6994 | (D) 6994. |
| 6995 | (E) 6995. |

DEFINITION OF HERMETIC SEALING. FOR THE PURPOSE OF THIS DOCUMENT, A HERMETICALLY-SEALED ITEM IS ONE IN WHICH THE ELEMENT IS CONTAINED WITHIN A SEALED ENCLOSURE OF CERAMIC, GLASS OR METAL, OR A COMBINATION THEREOF, WHERE SEALING IS ACCOMPLISHED BY MATERIAL FUSION, WELDING, BRAZING OR SOLDERING.

Custodians:
Army-MI

Review activities:

Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User Activity:
Army-MU

Preparing Activity:

Army-MI

(Project EDS-A210)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

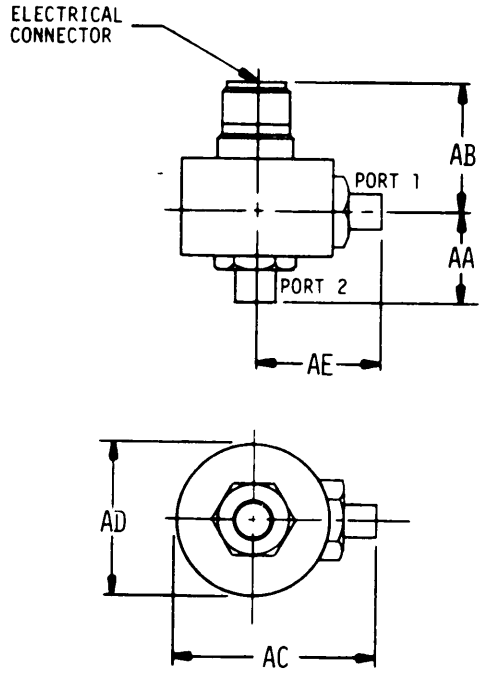
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

# APPENDIX A

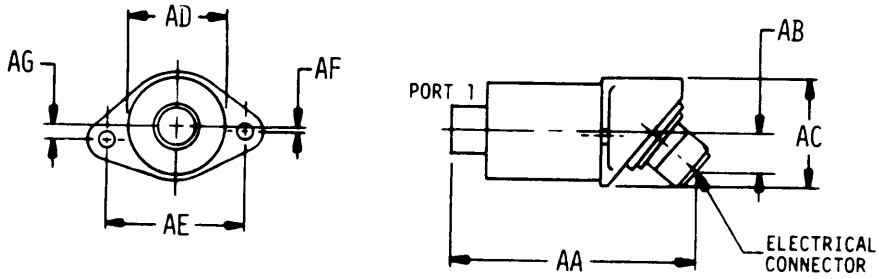
# ILLUSTRATIONS



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.



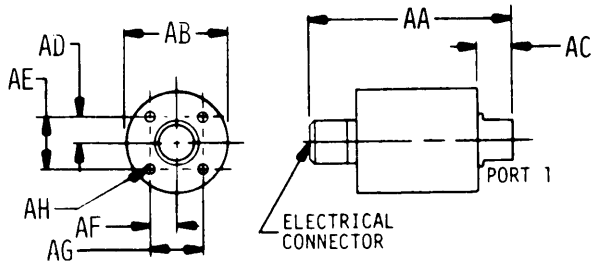

Ø16-Ø1-1



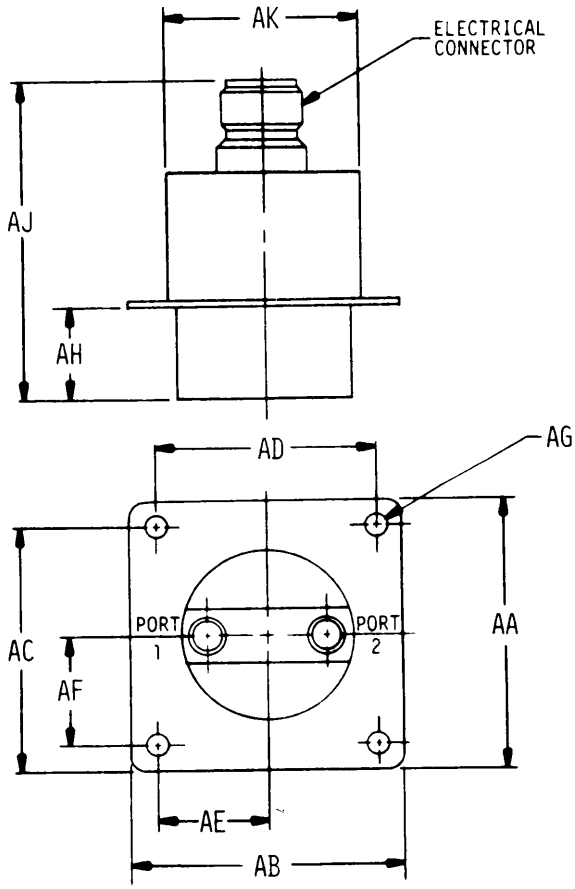

Ø16-Ø1-2



Source: https://assist.dla.mil -- Downloaded: 2026Ø1-26T07:24Z
Check the source to verify that this is the current version before use.



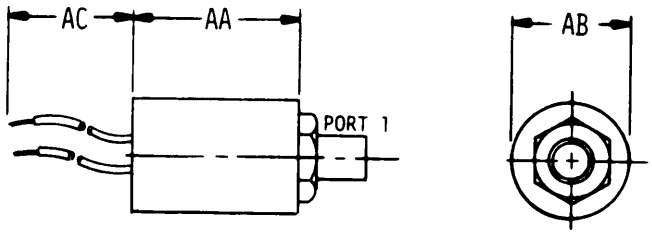

016-01-3




016-01-4




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.





016-01-5



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.





016-02-1





016-02-2



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.



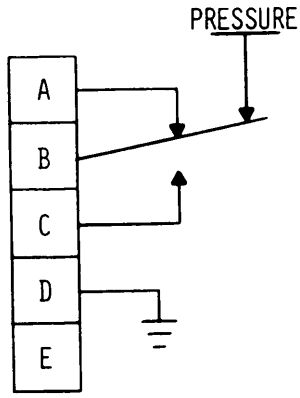

Ø16-Ø2-3



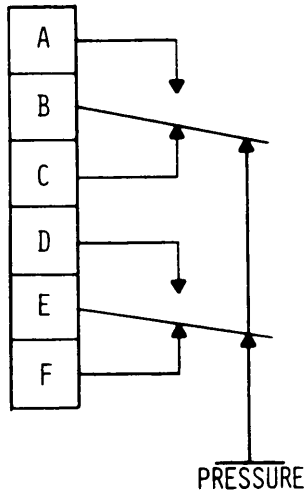

Ø16-Ø2-4



Source: https://assist.dla.mil -- Downloaded: 2026Ø-26T07:24Z
Check the source to verify that this is the current version before use.




Ø16-Ø2-5




Ø16-Ø2-6



Source: https://assist.dla.mil -- Downloaded: 2026Ø1Ø-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

# APPENDIX B

# CHARACTERISTIC CODE INDEX



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

# CHARACTERISTIC CODE INDEX


| CHAR CODE | PAGE NO. | CHAR CODE | PAGE NO. | CHAR CODE | PAGE NO. | CHAR CODE | PAGE NO. |
|---|---|---|---|---|---|---|---|
| 0101 | 16 | 1400 | 100 | 1462 | 156 | 1537 | 150 |
| 0102 | 16 | 1402 | 156 | 1464 | 124 | 1538 | 152 |
| 0103 | 16 | 1404 | 100 | 1466 | 150 | 1539 | 118 |
| 0104 | 16 | 1406 | 100 | 1467 | 150 | 1547 | 48 |
| 0105 | 16 | 1407 | 90 | 1468 | 124 | 1548 | 52 |
| 0107 | 18 | 1410 | 140 | 1469 | 144 | 1549 | 52 |
| 0108 | 18 | 1411 | 140 | 1470 | 150 | 1550 | 124 |
| 0700 | 16 | 1412 | 142 | 1471 | 128 | 1551 | 126 |
| 0800 | 16 | 1413 | 142 | 1473 | 144 | 1552 | 144 |
| 1003 | 16 | 1414 | 142 | 1475 | 148 | 1553 | 148 |
| 1004 | 16 | 1416 | 142 | 1476 | 148 | 1557 | 50 |
| 1005 | 16 | 1418 | 140 | 1478 | 124 | 1558 | 50 |
| 1006 | 16 | 1419 | 140 | 1479 | 126 | 1562 | 30 |
| 1008 | 16 | 1420 | 142 | 1480 | 148 | 1564 | 30 |
| 1009 | 28 | 1421 | 142 | 1482 | 124 | 1566 | 30 |
| 1204 | 128 | 1426 | 154 | 1486 | 124 | 1568 | 30 |
| 1306 | 132 | 1427 | 154 | 1487 | 126 | 1570 | 30 |
| 1310 | 132 | 1428 | 154 | 1488 | 124 | 1572 | 30 |
| 1371 | 92 | 1429 | 100 | 1490 | 148 | 1574 | 30 |
| 1372 | 94 | 1430 | 156 | 1491 | 150 | 1576 | 30 |
| 1373 | 92 | 1431 | 154 | 1492 | 150 | 1578 | 30 |
| 1374 | 152 | 1432 | 100 | 1494 | 122 | 1580 | 30 |
| 1375 | 140 | 1433 | 140 | 1495 | 122 | 1582 | 30 |
| 1376 | 92 | 1435 | 152 | 1497 | 92 | 1584 | 30 |
| 1377 | 92 | 1436 | 152 | 1498 | 92 | 1600 | 32 |
| 1378 | 92 | 1438 | 154 | 1499 | 130 | 1602 | 32 |
| 1380 | 90 | 1439 | 256 | 1500 | 128 | 1610 | 32 |
| 1381 | 94 | 1442 | 146 | 1502 | 128 | 1616 | 32 |
| 1382 | 156 | 1444 | 146 | 1503 | 130 | 1620 | 32 |
| 1383 | 94 | 1446 | 146 | 1508 | 126 | 1622 | 32 |
| 1384 | 90 | 1447 | 146 | 1509 | 126 | 1624 | 32 |
| 1386 | 90 | 1448 | 146 | 1511 | 92 | 1626 | 32 |
| 1387 | 90 | 1449 | 102 | 1520 | 94 | 1628 | 32 |
| 1388 | 90 | 1451 | 124 | 1522 | 92 | 1630 | 32 |
| 1391 | 100 | 1452 | 154 | 1523 | 92 | 1632 | 34 |
| 1394 | 100 | 1453 | 154 | 1524 | 94 | 1634 | 34 |
| 1395 | 102 | 1455 | 144 | 1533 | 146 | 1636 | 34 |
| 1396 | 100 | 1456 | 144 | 1534 | 146 | 1638 | 34 |
| 1397 | 100 | 1457 | 152 | 1535 | 150 | 1640 | 34 |
| 1398 | 100 | 1459 | 154 | 1536 | 150 | 1642 | 34 |




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)


| CHAR CODE | PAGE NO. | CHAR CODE | PAGE NO. | CHAR CODE | PAGE NO. | CHAR CODE | PAGE NO. |
|---|---|---|---|---|---|---|---|
| 1644 | 34 | 1730 | 44 | 1858 | 78 | 1944 | 60 |
| 1646 | 34 | 1732 | 46 | 1860 | 78 | 1946 | 60 |
| 1648 | 34 | 1734 | 46 | 1862 | 78 | 1948 | 60 |
| 1650 | 34 | 1740 | 46 | 1864 | 78 | 1950 | 60 |
| 1652 | 34 | 1742 | 46 | 1866 | 78 | 1952 | 60 |
| 1654 | 34 | 1744 | 46 | 1868 | 78 | 1962 | 58 |
| 1656 | 38 | 1752 | 52 | 1870 | 78 | 1964 | 60 |
| 1658 | 38 | 1754 | 52 | 1872 | 78 | 1972 | 62 |
| 1660 | 38 | 1757 | 54 | 1874 | 78 | 1974 | 62 |
| 1662 | 38 | 1759 | 54 | 1876 | 78 | 1976 | 62 |
| 1664 | 38 | 1762 | 62 | 1878 | 78 | 1978 | 62 |
| 1666 | 38 | 1764 | 62 | 1882 | 76 | 1982 | 62 |
| 1670 | 36 | 1772 | 62 | 1883 | 76 | 1984 | 62 |
| 1672 | 36 | 1774 | 62 | 1884 | 76 | 1986 | 62 |
| 1674 | 36 | 1782 | 64 | 1886 | 76 | 2001 | 82 |
| 1680 | 36 | 1784 | 64 | 1888 | 76 | 2002 | 80 |
| 1682 | 36 | 1786 | 64 | 1890 | 144 | 2003 | 82 |
| 1684 | 36 | 1788 | 64 | 1891 | 148 | 2004 | 80 |
| 1686 | 36 | 1790 | 64 | 1892 | 152 | 2005 | 82 |
| 1688 | 36 | 1792 | 64 | 1893 | 152 | 2006 | 80 |
| 1690 | 36 | 1794 | 64 | 1894 | 148 | 2007 | 82 |
| 1692 | 36 | 1796 | 64 | 1895 | 144 | 2008 | 80 |
| 1694 | 36 | 1802 | 64 | 1896 | 128 | 2010 | 80 |
| 1696 | 36 | 1804 | 64 | 1897 | 124 | 2012 | 80 |
| 1698 | 40 | 1812 | 74 | 1902 | 56 | 2013 | 80 |
| 1700 | 46 | 1814 | 76 | 1904 | 56 | 2014 | 80 |
| 1702 | 46 | 1816 | 76 | 1906 | 56 | 2015 | 82 |
| 1704 | 48 | 1820 | 76 | 1908 | 56 | 2016 | 82 |
| 1706 | 48 | 1822 | 76 | 1910 | 56 | 2017 | 82 |
| 1708 | 42 | 1824 | 76 | 1912 | 56 | 2018 | 82 |
| 1710 | 44 | 1826 | 76 | 1914 | 56 | 2019 | 82 |
| 1712 | 44 | 1828 | 76 | 1916 | 58 | 2021 | 82 |
| 1714 | 44 | 1832 | 74 | 1918 | 58 | 2023 | 80 |
| 1716 | 44 | 1833 | 74 | 1920 | 58 | 2024 | 80 |
| 1718 | 44 | 1834 | 74 | 1922 | 58 | 2026 | 80 |
| 1720 | 44 | 1836 | 74 | 1932 | 54 | 2032 | 84 |
| 1722 | 44 | 1838 | 74 | 1933 | 54 | 2034 | 84 |
| 1724 | 44 | 1852 | 76 | 1934 | 54 | 2036 | 84 |
| 1726 | 44 | 1854 | 78 | 1936 | 54 | 2038 | 84 |
| 1728 | 44 | 1856 | 78 | 1942 | 60 | 2040 | 84 |




Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

| CHAR CODE | PAGE NO. | CHAR CODE | PAGE NO. | CHAR CODE | PAGE NO. | CHAR CODE | PAGE NO. |
|---|---|---|---|---|---|---|---|
| 2042 | 84 | 2160 | 140 | 2252 | 112 | 2368 | 158 |
| 2044 | 86 | 2162 | 140 | 2254 | 112 | 2370 | 158 |
| 2046 | 86 | 2164 | 140 | 2256 | 112 | 2372 | 158 |
| 2052 | 82 | 2168 | 138 | 2262 | 108 | 2374 | 158 |
| 2053 | 84 | 2172 | 104 | 2263 | 108 | 2376 | 158 |
| 2054 | 82 | 2174 | 104 | 2264 | 108 | 2378 | 160 |
| 2056 | 84 | 2176 | 104 | 2266 | 108 | 2380 | 160 |
| 2058 | 84 | 2178 | 106 | 2268 | 108 | 2382 | 160 |
| 2060 | 84 | 2180 | 106 | 2272 | 104 | 2384 | 160 |
| 2070 | 88 | 2182 | 106 | 2274 | 104 | 2386 | 160 |
| 2072 | 88 | 2184 | 106 | 2276 | 104 | 2388 | 160 |
| 2074 | 88 | 2186 | 106 | 2278 | 104 | 2392 | 158 |
| 2076 | 88 | 2188 | 106 | 2280 | 104 | 2393 | 158 |
| 2078 | 88 | 2190 | 106 | 2292 | 102 | 2394 | 158 |
| 2080 | 88 | 2192 | 106 | 2294 | 102 | 2396 | 158 |
| 2090 | 86 | 2194 | 106 | 2302 | 132 | 2398 | 158 |
| 2102 | 96 | 2196 | 108 | 2304 | 132 | 2500 | 38 |
| 2104 | 96 | 2198 | 108 | 2308 | 132 | 2502 | 38 |
| 2106 | 96 | 2202 | 108 | 2312 | 132 | 2504 | 38 |
| 2108 | 96 | 2204 | 108 | 2314 | 132 | 2506 | 38 |
| 2110 | 96 | 2206 | 108 | 2322 | 130 | 3000 | 25 |
| 2112 | 98 | 2212 | 104 | 2324 | 130 | 3001 | 25 |
| 2114 | 98 | 2213 | 104 | 2326 | 130 | 3002 | 25 |
| 2116 | 98 | 2214 | 104 | 2332 | 114 | 3003 | 25 |
| 2118 | 98 | 2216 | 104 | 2334 | 114 | 3004 | 25 |
| 2120 | 98 | 2222 | 110 | 2336 | 114 | 3005 | 25 |
| 2122 | 98 | 2224 | 110 | 2342 | 114 | 3006 | 25 |
| 2124 | 98 | 2226 | 110 | 2344 | 114 | 3007 | 25 |
| 2126 | 98 | 2228 | 110 | 2350 | 94 | 3008 | 25 |
| 2128 | 98 | 2230 | 110 | 2351 | 94 | 3009 | 25 |
| 2130 | 98 | 2232 | 110 | 2353 | 116 | 3010 | 25 |
| 2134 | 94 | 2234 | 110 | 2354 | 128 | 3011 | 25 |
| 2135 | 94 | 2236 | 110 | 2355 | 126 | 3012 | 25 |
| 2136 | 94 | 2238 | 110 | 2356 | 126 | 3013 | 25 |
| 2138 | 96 | 2240 | 112 | 2357 | 124 | 3014 | 25 |
| 2140 | 96 | 2242 | 112 | 2358 | 130 | 3015 | 25 |
| 2150 | 136 | 2244 | 112 | 2359 | 130 | 3016 | 25 |
| 2152 | 136 | 2246 | 112 | 2362 | 158 | 3017 | 25 |
| 2154 | 136 | 2248 | 112 | 2364 | 158 | 3018 | 25 |
| 2158 | 136 | 2250 | 112 | 2366 | 158 | 3019 | 25 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

| CHAR CODE | PAGE NO. | CHAR CODE | PAGE NO. | CHAR CODE | PAGE NO. | CHAR CODE | PAGE NO. |
|---|---|---|---|---|---|---|---|
| 3020 | 25 | 3078 | 27 | 4046 | 43 | 4096 | 25 |
| 3021 | 25 | 3079 | 27 | 4047 | 43 | 4097 | 25 |
| 3022 | 25 | 3080 | 27 | 4048 | 43 | 4098 | 25 |
| 3023 | 25 | 3081 | 27 | 4049 | 43 | 4099 | 25 |
| 3024 | 25 | 3082 | 27 | 4060 | 25 | 4100 | 25 |
| 3025 | 25 | 4000 | 39 | 4061 | 25 | 4101 | 25 |
| 3026 | 25 | 4001 | 39 | 4062 | 25 | 4102 | 25 |
| 3027 | 25 | 4002 | 39 | 4063 | 25 | 4103 | 25 |
| 3028 | 25 | 4003 | 39 | 4064 | 25 | 4104 | 25 |
| 3029 | 25 | 4004 | 39 | 4065 | 25 | 4105 | 25 |
| 3030 | 25 | 4005 | 39 | 4066 | 25 | 4106 | 25 |
| 3031 | 25 | 4006 | 39 | 4067 | 25 | 4107 | 25 |
| 3032 | 25 | 4007 | 39 | 4068 | 25 | 4108 | 25 |
| 3050 | 27 | 4008 | 39 | 4069 | 25 | 4109 | 25 |
| 3051 | 27 | 4009 | 39 | 4070 | 25 | 4110 | 25 |
| 3052 | 27 | 4010 | 39 | 4071 | 25 | 4111 | 25 |
| 3053 | 27 | 4011 | 39 | 4072 | 25 | 4112 | 25 |
| 3054 | 27 | 4012 | 39 | 4073 | 25 | 4113 | 25 |
| 3055 | 27 | 4013 | 39 | 4074 | 25 | 4114 | 25 |
| 3056 | 27 | 4014 | 39 | 4075 | 25 | 4115 | 25 |
| 3058 | 27 | 4015 | 39 | 4076 | 25 | 4116 | 25 |
| 3059 | 27 | 4016 | 39 | 4077 | 25 | 4117 | 25 |
| 3060 | 27 | 4017 | 39 | 4078 | 25 | 4118 | 25 |
| 3061 | 27 | 4018 | 39 | 4079 | 25 | 4119 | 25 |
| 3062 | 27 | 4030 | 43 | 4080 | 25 | 4120 | 25 |
| 3063 | 27 | 4031 | 43 | 4081 | 25 | 4121 | 25 |
| 3064 | 27 | 4032 | 43 | 4082 | 25 | 4122 | 25 |
| 3065 | 27 | 4033 | 43 | 4083 | 25 | 4123 | 25 |
| 3066 | 27 | 4034 | 43 | 4084 | 25 | 4124 | 25 |
| 3067 | 27 | 4035 | 43 | 4085 | 25 | 4125 | 25 |
| 3068 | 27 | 4036 | 43 | 4086 | 25 | 4126 | 25 |
| 3069 | 27 | 4037 | 43 | 4087 | 25 | 4127 | 25 |
| 3070 | 27 | 4038 | 43 | 4088 | 25 | 4128 | 25 |
| 3071 | 27 | 4039 | 43 | 4089 | 25 | 4129 | 25 |
| 3072 | 27 | 4040 | 43 | 4090 | 25 | 4130 | 25 |
| 3073 | 27 | 4041 | 43 | 4091 | 25 | 4131 | 25 |
| 3074 | 27 | 4042 | 43 | 4092 | 25 | 4132 | 25 |
| 3075 | 27 | 4043 | 43 | 4093 | 25 | 4133 | 25 |
| 3076 | 27 | 4044 | 43 | 4094 | 25 | 4134 | 25 |
| 3077 | 27 | 4045 | 43 | 4095 | 25 | 4135 | 25 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

| CHAR CODE | PAGE NO. | CHAR CODE | PAGE NO. | CHAR CODE | PAGE NO. | CHAR CODE | PAGE NO. |
|---|---|---|---|---|---|---|---|
| 4136 | 25 | 4176 | 25 | 4316 | 27 | 4357 | 27 |
| 4137 | 25 | 4177 | 25 | 4318 | 27 | 4358 | 27 |
| 4138 | 25 | 4178 | 25 | 4319 | 27 | 4359 | 27 |
| 4139 | 25 | 4179 | 28 | 4320 | 27 | 4360 | 27 |
| 4140 | 25 | 4201 | 41 | 4321 | 27 | 4361 | 27 |
| 4141 | 25 | 4202 | 41 | 4322 | 27 | 4362 | 27 |
| 4142 | 25 | 4203 | 41 | 4323 | 27 | 4363 | 27 |
| 4143 | 25 | 4204 | 41 | 4324 | 27 | 4364 | 27 |
| 4144 | 25 | 4205 | 41 | 4325 | 27 | 4365 | 27 |
| 4145 | 25 | 4206 | 41 | 4326 | 27 | 4366 | 27 |
| 4146 | 25 | 4207 | 41 | 4327 | 27 | 4367 | 27 |
| 4147 | 25 | 4208 | 41 | 4328 | 27 | 4368 | 27 |
| 4148 | 25 | 4209 | 41 | 4329 | 27 | 4369 | 27 |
| 4149 | 25 | 4210 | 41 | 4330 | 27 | 4370 | 27 |
| 4150 | 25 | 4211 | 41 | 4331 | 27 | 4371 | 27 |
| 4151 | 25 | 4212 | 41 | 4332 | 27 | 4372 | 27 |
| 4152 | 25 | 4213 | 41 | 4333 | 27 | 4373 | 27 |
| 4153 | 25 | 4214 | 41 | 4334 | 27 | 4374 | 27 |
| 4154 | 25 | 4215 | 41 | 4335 | 27 | 4375 | 27 |
| 4155 | 25 | 4216 | 41 | 4336 | 27 | 4376 | 27 |
| 4156 | 25 | 4217 | 41 | 4337 | 27 | 4377 | 27 |
| 4157 | 25 | 4218 | 41 | 4338 | 27 | 4378 | 27 |
| 4158 | 25 | 4219 | 41 | 4339 | 27 | 4379 | 27 |
| 4159 | 25 | 4220 | 41 | 4340 | 27 | 4380 | 27 |
| 4160 | 25 | 4300 | 27 | 4341 | 27 | 4381 | 27 |
| 4161 | 25 | 4301 | 27 | 4342 | 27 | 4382 | 27 |
| 4162 | 25 | 4302 | 27 | 4343 | 27 | 4383 | 27 |
| 4163 | 25 | 4303 | 27 | 4344 | 27 | 4384 | 27 |
| 4164 | 25 | 4304 | 27 | 4345 | 27 | 4385 | 27 |
| 4165 | 25 | 4305 | 27 | 4346 | 27 | 4386 | 27 |
| 4166 | 25 | 4306 | 27 | 4347 | 27 | 4387 | 27 |
| 4167 | 25 | 4307 | 27 | 4348 | 27 | 4388 | 27 |
| 4168 | 25 | 4308 | 27 | 4349 | 27 | 4389 | 27 |
| 4169 | 25 | 4309 | 27 | 4350 | 27 | 4390 | 27 |
| 4170 | 25 | 4310 | 27 | 4351 | 27 | 4391 | 27 |
| 4171 | 25 | 4311 | 27 | 4352 | 27 | 4392 | 27 |
| 4172 | 25 | 4312 | 27 | 4353 | 27 | 4393 | 27 |
| 4173 | 25 | 4313 | 27 | 4354 | 27 | 4394 | 27 |
| 4174 | 25 | 4314 | 27 | 4355 | 27 | 4395 | 27 |
| 4175 | 25 | 4315 | 27 | 4356 | 27 | 4396 | 27 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

| CHAR CODE | PAGE NO. | CHAR CODE | PAGE NO. | CHAR CODE | PAGE NO. | CHAR CODE | PAGE NO. |
|---|---|---|---|---|---|---|---|
| 4397 | 27 | 4707 | 148 | 4771 | 116 | 4891 | 68 |
| 4398 | 27 | 4708 | 148 | 4772 | 116 | 4893 | 50 |
| 4399 | 27 | 4709 | 148 | 4773 | 116 | 4894 | 66 |
| 4400 | 27 | 4713 | 144 | 4782 | 114 | 4897 | 74 |
| 4401 | 27 | 4714 | 144 | 4809 | 88 | 4900 | 68 |
| 4402 | 27 | 4715 | 144 | 4810 | 88 | 4901 | 66 |
| 4403 | 27 | 4717 | 74 | 4811 | 90 | 4902 | 70 |
| 4406 | 27 | 4719 | 144 | 4812 | 90 | 4906 | 66 |
| 4407 | 27 | 4722 | 142 | 4814 | 90 | 4908 | 66 |
| 4408 | 27 | 4723 | 142 | 4819 | 88 | 4950 | 28 |
| 4409 | 27 | 4726 | 142 | 4820 | 88 | 4952 | 116 |
| 4410 | 27 | 4729 | 152 | 4822 | 88 | 4956 | 118 |
| 4411 | 27 | 4730 | 152 | 4842 | 72 | 4958 | 116 |
| 4412 | 27 | 4731 | 152 | 4844 | 72 | 4959 | 116 |
| 4413 | 27 | 4732 | 118 | 4845 | 72 | 4960 | 118 |
| 4414 | 27 | 4734 | 118 | 4846 | 72 | 4975 | 156 |
| 4415 | 27 | 4735 | 122 | 4847 | 70 | 4976 | 156 |
| 4416 | 27 | 4736 | 120 | 4848 | 72 | 4977 | 156 |
| 4417 | 27 | 4737 | 120 | 4849 | 66 | 4978 | 150 |
| 4418 | 27 | 4738 | 120 | 4850 | 72 | 4979 | 150 |
| 4419 | 27 | 4739 | 120 | 4854 | 72 | 4980 | 102 |
| 4434 | 27 | 4740 | 120 | 4855 | 72 | 4981 | 102 |
| 4435 | 27 | 4741 | 120 | 4856 | 70 | 4983 | 102 |
| 4662 | 134 | 4742 | 120 | 4859 | 68 | 4984 | 102 |
| 4663 | 134 | 4745 | 118 | 4861 | 70 | 4985 | 102 |
| 4664 | 134 | 4746 | 118 | 4862 | 72 | 4986 | 102 |
| 4665 | 134 | 4748 | 118 | 4863 | 50 | 4991 | 102 |
| 4666 | 134 | 4749 | 122 | 4864 | 50 | 5000 | 72 |
| 4667 | 134 | 4750 | 122 | 4865 | 50 | 5046 | 20 |
| 4672 | 132 | 4751 | 122 | 4867 | 72 | 5047 | 20 |
| 4674 | 132 | 4752 | 122 | 4868 | 50 | 5060 | 22 |
| 4675 | 132 | 4754 | 86 | 4869 | 72 | 5061 | 22 |
| 4677 | 132 | 4755 | 86 | 4870 | 74 | 5068 | 20 |
| 4678 | 156 | 4756 | 86 | 4872 | 118 | 5069 | 20 |
| 4683 | 134 | 4760 | 86 | 4874 | 70 | 5070 | 20 |
| 4684 | 128 | 4761 | 86 | 4875 | 70 | 5071 | 20 |
| 4685 | 128 | 4762 | 86 | 4878 | 114 | 6196 | 140 |
| 4686 | 128 | 4765 | 116 | 4884 | 66 | 6200 | 146 |
| 4692 | 50 | 4766 | 116 | 4885 | 66 | 6201 | 150 |
| 4703 | 126 | 4770 | 114 | 4886 | 66 | 6203 | 126 |



Source: https://assist.dla.mil -- Downloaded: 202610-26T07:24Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

| CHAR CODE | PAGE NO. | CHAR CODE | PAGE NO. | CHAR CODE | PAGE NO. | CHAR CODE | PAGE NO. |
|---|---|---|---|---|---|---|---|
| 6204 | 130 | 6311 | 68 | 7023 | 40 | | |
| 6205 | 134 | 6312 | 68 | 7024 | 40 | | |
| 6210 | 52 | 6315 | 138 | 7345 | 48 | | |
| 6217 | 136 | 6316 | 138 | 7580 | 28 | | |
| 6218 | 136 | 6318 | 138 | 7581 | 22 | | |
| 6219 | 136 | 6319 | 138 | 7582 | 22 | | |
| 6220 | 136 | 6320 | 120 | 7583 | 22 | | |
| 6221 | 136 | 6321 | 120 | 7584 | 22 | | |
| 6222 | 136 | 6322 | 120 | 7585 | 22 | | |
| 6224 | 136 | 6323 | 120 | 7586 | 22 | | |
| 6225 | 136 | 6324 | 120 | 7587 | 20 | | |
| 6226 | 50 | 6325 | 120 | 7588 | 20 | | |
| 6228 | 134 | 6326 | 120 | 7589 | 20 | | |
| 6229 | 136 | 6328 | 122 | 7590 | 20 | | |
| 6231 | 138 | 6329 | 122 | 7629 | 162 | | |
| 6232 | 138 | 6330 | 122 | 7630 | 162 | | |
| 6233 | 50 | 6331 | 122 | | | | |
| 6234 | 138 | 6332 | 122 | | | | |
| 6235 | 138 | 6333 | 122 | | | | |
| 6236 | 138 | 6359 | 90 | | | | |
| 6237 | 138 | 6369 | 16 | | | | |
| 6238 | 138 | 6370 | 118 | | | | |
| 6239 | 50 | 6372 | 162 | | | | |
| 6250 | 48 | 6870 | 162 | | | | |
| 6251 | 50 | 6873 | 16 | | | | |
| 6263 | 52 | 6874 | 18 | | | | |
| 6264 | 52 | 6941 | 18 | | | | |
| 6265 | 52 | 6942 | 18 | | | | |
| 6267 | 74 | 6991 | 164 | | | | |
| 6272 | 48 | 6992 | 164 | | | | |
| 6273 | 48 | 6993 | 164 | | | | |
| 6277 | 48 | 6994 | 164 | | | | |
| 6280 | 68 | 6995 | 164 | | | | |
| 6292 | 68 | 7001 | 162 | | | | |
| 6293 | 68 | 7002 | 162 | | | | |
| 6294 | 68 | 7003 | 162 | | | | |
| 6299 | 118 | 7004 | 162 | | | | |
| 6300 | 66 | 7005 | 162 | | | | |
| 6308 | 68 | 7021 | 40 | | | | |
| 6310 | 70 | 7022 | 40 | | | | |



Source: https://assist.dla.mil -- Downloaded: 202640-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX

| | Page |
|---|---|
| Acceleration | 48 |
| Additional Part Marking | 164 |
| Additional Requirements | 162 |
| Altitude Rating | 22 |
| Aperture Cards Required | 18 |
| Applicable Documents | 164 |
| Base Document | 16 |
| Burst Pressure Rating | 20 |
| Calibration | 52 |
| Case Pressure Relief | 54 |
| City, State, Zip | 16 |
| Coincidence of Operating and release points | 58 |
| Company Name/Command | 16 |
| Configuration | 28 |
| Connector Torque | 62 |
| Contact Bounce | 62 |
| Contact Resistance | 64 |
| Contract Number/Office Symbol | 16 |
| Control | 16 |
| Date | 16 |
| Definition of Hermetic Sealing | 164 |
| Design and Construction | 30 |
| Dielectric Withstanding Voltage at Reduced Barometric Pressure | 66 |
| Dielectric Withstanding Voltage at Sea Level | 70 |
| Endurance, Electrical | 74 |
| Endurance, Mechanical | 76 |
| Explosion | 80 |
| Finishes | 28 |
| Flammability (External Flame) | 82 |
| Format | 16 |
| Fungus | 86 |
| Government Design Activity FSCM | 16 |
| Illustrations | 28 |
| Immersion | 88 |
| Insulation Resistance | 90 |
| Leakage (Media) | 94 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

Page

Materials- - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - 28
Metals- - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - 28
Moisture Resistance- - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - 100
Mounting Hardware- - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - 162

Nomenclature - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - 164
Notes- - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - 164

Operating Pressure Rating- - - - - - - - - - - - - - - - - - - - - - - - - - - - 22
Overload - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - 102

Packaging- - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - 164
Part Number- - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - 18
Part Number Cross-Reference- - - - - - - - - - - - - - - - - - - - - - - - - - - 164
Part Marking - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - 162
Performance- - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - 46
Phone Number - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - 16
Pressure, Burst- - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - 104
Pressure-Characteristics Table - - - - - - - - - - - - - - - - - - - - - - - - - - 42
Pressure, Proof- - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - 108
Proof Pressure Rating- - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - 20

Quality Assurance Provisions - - - - - - - - - - - - - - - - - - - - - - - - - - 164

Rated Load (Current Carrying Capacity) - - - - - - - - - - - - - - - - - - - - - 24
Rated Load (Make and Break Capacity) - - - - - - - - - - - - - - - - - - - - - - 26
Repeatability- - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - 114
Requester FSCM - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - 16
Requester's Name - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - 16
Revision AEDPS Document Number - - - - - - - - - - - - - - - - - - - - - - - - - 18

Salt Spray - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - 114
Sand and Dust - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - 116
Scope- - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - 18
Seal- - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - 118
Shcok, High Impact - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - 122
Shock, Specified Pulse - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - 126
Short Circuit- - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - 130
Solderability- - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - 132
Source Table- - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - 18
Street/Building- - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - 16
Superseded Document- - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - 164
System Application - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - 16

Tabulated Characteristics- - - - - - - - - - - - - - - - - - - - - - - - - - - - - 28
Temperature, High- - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - 134



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

Page

Temperature, Low - - - - - - - - - - - - - - - - - - - - - - - - - - - - - 138
Temperature Rating - - - - - - - - - - - - - - - - - - - - - - - - - - - - 20
Terminal Strength- - - - - - - - - - - - - - - - - - - - - - - - - - - - - 140
Thermal Shock--- - - - - - - - - - - - - - - - - - - - - - - - - - - - - - 142

Unit of Measure- - - - - - - - - - - - - - - - - - - - - - - - - - - - - - 18

Vibration, High Frequency- - - - - - - - - - - - - - - - - - - - - - - - - 144
Vibration, Low Frequency- - - - - - - - - - - - - - - - - - - - - - - - - 148
Vibration, Random- - - - - - - - - - - - - - - - - - - - - - - - - - - - - 152

Waterproofness - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - 158
W e i g h t - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - 40
Workmanship)- - - - - - - - - - - - - - - - - - - - - - - - - - - - - - - 162



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

## SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET___OF___

| TITLE CODE 1 2 3 4 5 6 | REQUESTER NO. 7 8 9 10 11 12 | CHAR CODE 13 14 15 16 | CHARACTERISTIC VALUE 20 25 30 35 40 45 50 55 60 65 70 75 | LINE NO. 79 80 |
|---|---|---|---|---|
| | | | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

## SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET ____ OF ____

| *TITLE CODE 1 2 3 4 5 6 | *REQUESTER NO. 7 8 9 10 11 12 | CHAR CODE 13 14 15 16 | CHARACTERISTIC VALUE 20 25 30 35 40 45 50 55 60 65 70 75 79 | LINE NO. 80 |
|---|---|---|---|---|
| | | | | |
| *REQUESTER'S NAME | | Ø 1 Ø 1 | | |
| *COMPANY NAME/COMMAND | | Ø 1 Ø 2 | | |
| *STREET/BUILDING | | Ø 1 Ø 3 | | |
| *CITY, STATE, ZIP | | Ø 1 Ø 4 | | |
| *PHONE NO. INCLUDE A/C AUTOVON IF APPLICABLE | | Ø 1 Ø 5 | | |
| *DATE | | 1 Ø Ø 3 | | |
| *REQUESTER FSCM | | 1 Ø Ø 4 | | |
| *CONTRACT NO./OFFICE SYMBOL | | 1 Ø Ø 5 | | |
| *BASE DOCUMENT | | 1 Ø Ø 6 | | |
| *SYSTEM APPLICATION | | 1 Ø Ø 8 | | |
| *GOVERNMENT DESIGN ACTIVITY FSCM | | 6 3 6 9 | | |
| *FORMAT SIX SECTION DOCUMENT. | | Ø 7 Ø Ø | | |
| ONE SECTION DOCUMENT. | | Ø 8 Ø Ø | | |
| APERTURE CARDS REQUIRED. | | Ø 1 Ø 7 | | |
| REVISION OF AEDPS DOCUMENT NO. | | Ø 1 Ø 8 | | |
| *CONTROL SOURCE. | | 6 8 7 3 | | |
| SPECIFICATION. | | 6 8 7 4 | | |
| *SOURCE TABLE | | 9 1 5 1 | | |
| UNIT OF MEASURE U.S. | | 6 9 4 1 | | |
| SI. | | 6 9 4 2 | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

PLEASE SUPPLY THE FOLLOWING:

DASH-NUMBERED PART ____ REV ____ NOTICE # ____

AS A FINAL CHECK, SCAN THE SRS FOR THE FOLLOWING COMMON ERRORS:

- ☐ MANDATORY CHARACTERISTIC CODES AND VALUES NOT SUPPLIED
- ☐ ZERO (Ø) WRITTEN WITHOUT VIRGULE (O)
- ☐ USE OF POUND SIGN (#) WITHOUT ACCOMPANYING CHARACTERISTIC VALUE
- ☐ POUND SIGN (#) OMITTED FROM END OF STATEMENT (CHARACTERISTIC VALUE)
- ☐ CHARACTERISTIC CODE USED MORE THAN ONCE (OTHER THAN MULTILINE STATEMENT)
- ☐ MULTILINE STATEMENT NOT NUMBERED IN COLUMN 80

*MANDATORY



Source: https://assist.dla.mil -- Downloaded: 2026Ø10-26T07:24Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
DoD STD 35-117

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

**DD FORM 1 JAN 72 1426** REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander,
U.S. Army Missile R and D Command
ATTN: DRDMI-ESD,
Redstone Arsenal, Alabama 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:24Z
Check the source to verify that this is the current version before use.