DOD-STD-35-121(MI)
2 June 1978

MILITARY STANDARD

EYELETS, FERRULES, AND GROMMETS

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

FSC EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Eyelets, Ferrules, and Grommets
Automated Engineering
Document Preparation System

DOD-STD-35-121(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-121(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification, Exceptions for Eyelets, Ferrules, and Grommets.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35 and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	7
	2.1	Issues of documents	7
	2.2	Other publications	8
	3.	DEFINITIONS	11
	4.	GENERAL REQUIREMENTS	13
	4.1	Introduction	13
	4.2	Specification Requirements Sheet (SRS)	13
	4.3	Configuration	13
	4.3.1	Dimensions	13
	4.3.2	Illustrations	13
	4.4	Systems of measure	13
	5.	DETAILED REQUIREMENTS	15
	5.1	Introduction	15
	5.2	MSE formats	15
	5.3	Referenced documents	15
	5.4	Test matrix	15
	5.5	Tabulation	16
	5.6	Keyword Code Index (KCI) and Standard Paragraph	19
	5.6.1	Interrelationship of Codes	19
	5.6.2	Automatic MSE Data	19
	5.6.3	DOD-STD-35 Tables	19

TABLES

Table	I.	Title index	3
	II.	Test matrix	16
	III.	Tabulation candidates	17

APPENDIX

Appendix	A.	Illustrations	85
	B.	Characteristic Code Index	93
		Index	97

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for Eyelets, Ferrules, and Grommets.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
EYELET, METALLIC	155001	MIL-E-20652	EYELETS AND EYELET WASHERS
		AN240	LACING
FERRULE, ELECTRICAL CONDUIT	155002	AN3048	FLEXIBLE, ONE STEP, SYNTHETIC COVERED
		AN3050	FLEXIBLE
		AN3051	FLEXIBLE, ONE STEP
		AN3052	FLEXIBLE, TWO STEP
		AN3053	RIGID CONDUIT
		AN3083	FLEXIBLE, TWO STEP, SYNTHETIC COVERED
		MS39017	SPARK PLUG CABLE ELBOW (OTHER THAN AIRCRAFT)
		MS39018	SPARK PLUG CABLE (OTHER THAN AIRCRAFT)
FERRULE, SHIELDED CABLE	155003	MIL-F-21608	SHIELD TERMINATING, CRIMP STYLE
		MS18121	OUTER, INSULATED, TWO PIECE
		MS21980	OUTER, UNINSULATED, TWO PIECE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX.(CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
FERRULE, SHIELDED CABLE	155003 (CONT)	MS21981	INNER, UNINSULATED, TWO PIECE
		MS25065	FLEXIBLE CONDUIT, RADIO FREQUENCY SHIELDING
FERRULE, ELECTRICAL CONDUCTOR	155004	MS17037	TERMINAL (HERMETIC SEAL) FITTER ASSEMBLIES
GROMMET, RUBBER	155005	MIL-G-3036	HOT-OIL AND COOLANT RESISTANT
		MS35489	HOT OIL AND COOLANT RESISTANT
		MS27271	PLUG CONNECTOR RAMP POWER 416/240 VOLTS
		MS52120	RUBBER
GROMMET, METALLIC	155006	MIL-G-16491	WITH WASHERS OR RINGS, EQUIPAGE ITEMS
		MS20230	PLAIN AND SPUR WITH WASHERS, TYPES I AND III
		MS22048	GROMMET AND WASHER, PARACHUTE PACK

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
GROMMET, PLASTIC	155007	MIL-G-22529	EDGING, WIRE PROTECTOR
		AN231	DRAINAGE
		MS21266	EDGING
		NAS557	SPLIT
GROMMETS, FIBER	155008	MIL-G-18879	(FOR PROJECTILE ROTATING BANDS)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to extent specified herein.

SPECIFICATIONS

FEDERAL

O-A-548	Antifreeze/Coolant, Engine, Ethylene Glycol, Inhibited, Concentrated
TT-I-735	Isopropyl Alcohol

MILITARY

MIL-E-20652	Eyelet, Metallic, and Eyelet Washer, Metallic General Specification For
MIL-F-495	Finish, Chemical, Black, For Copper Alloys
MIL-F-21608	Ferrule, Shield Terminating, Crimp Style
MIL-G-3036	Grommet, Rubber, Hot-Oil and Coolant Resistant
MIL-G-18879	Grommets, Fiber (For Projectile Rotating Bands)
MIL-G-22529	Grommet, Plastic
MIL-H-5606	Hydraulic Fluid, Petroleum Base, Aircraft, Missile and Ordnance
MIL-L-7808	Lubricating Oil, Aircraft Turbine Engine Synthetic Base
MIL-T-5624	Turbine Fuel, Aviation, Grades JP-4 and JP-5

STANDARDS

MILITARY

MIL-STD-35-1	Automated Engineering Document Preparation System, Basic
MIL-STD-202	Test Methods For Electronic and Electrical Component Parts
MIL-STD-810	Environmental Test Methods

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

MIL-STD-1523 Age Control of Age Sensitive Elastomeric Materials

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTMD395	Compression Set of Vulcanized Rubber
ASTMD412	Tension Testing of Vulcanized Rubber
ASTMD570	Standard Method of Test For Water Absorption of Plastics
ASTMD573	Accelerated Aging of Vulcanized Rubber by the Oven Method
ASTMD746	Standard Method of Test For Brittleness Temperature of Plastics and Elastomers By Impact
ASTMD1149	Standard Method of Test for Accelerated Ozone Cracking of Vulcanized Rubber
ASTMD2240	Standard Method of Test for Indentation Hardness of Rubber and Plastics by Means of a Durometer
ASTME8	Tension Testing of Metallic Materials, Methods of
ASTME10	Method of Test for Brinell Hardness of Metallic Materials
ASTME18	Rockwell Hardness and Rockwell Superficial Hardness of Metallic Materials, Test for
ASTME380	Metric Practice Guide
ASTMG21	Standard Recommended Practice for Determining Resistance of Synthetic Polymeric Materials to Fungi

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Eyelets, Ferrules, and Grommets.

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Eyelets, Ferrules, and Grommets, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Eyelets, Ferrules, and Grommets.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Eyelets, Ferrules, and Grommets.

4.3.2 Illustrations. Illustrations applicable to Eyelets, Ferrules, and Grommets are contained in Appendix A to this document.

4.4 Units of Measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to preapre a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Test matrix. A test matrix is supplied as a guide for selecting documents to specify tests (see table II). The test matrix presents documents most applicable for use to satisfy the statement "TEST PER (DOC DES)". Any document listed in the Title Index may be used to satisfy the statement. However, the selected document from the Title Index must contain the desired test. Government test method documents and approved industry standards such as ASTM test methods may also be used to satisfy the statement "TEST PER (DOC DES)".

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Table II. Test matrix.

DOCUMENT	TEST	Coolant	Immersion	Tensile Strength
	CODE(S)	2128	2928, 2940 2952, 2964	3324
O-A-548		X		
TT-I-735		X	X	
MIL-H-5606		X	X	
MIL-T-5624			X	
MIL-L-7808			X	
MIL-F-21608				X
ASTME8				X

5.5 Tabulation. Instructions for tabulation are provided in DOD-STD-35-1. Table III provides codes for additional specific column headings which may be used for Eyelets, Ferrules, and Grommets characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES.

CODE	COLUMN HEADING
1590	OPERATING MEDIA
4905	MAXIMUM RATING TEMP DEG C
6998	NOMINAL WEIGHT EACH G
6944	MINIMUM WEIGHT EACH LB
7022	MAXIMUM WEIGHT EACH OZ
7024	MAXIMUM WEIGHT EACH KG
5049	NOMINAL RATING TEMP DEG C
6996	NOMINAL WEIGHT EACH OZ
6999	NOMINAL WEIGHT EACH KG
6945	MINIMUM WEIGHT EACH G
7023	MAXIMUM WEIGHT EACH LB
4904	MINIMUM RATING TEMP DEG C
6997	NOMINAL WEIGHT EACH LB
6943	MINIMUM WEIGHT EACH OZ
6946	MINIMUM WEIGHT EACH KG
7021	MAXIMUM WEIGHT EACH G

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

5.6 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.6.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.6.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically dependint on the type MSE selected. Explanations are noted on the KCI as required.

5.6.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*Requester's Name	0101
*Company Name/Command	0102
*Street/Building	0103
*City, State, Zip	0104
*Phone Number, Include Area Code, Autovon if Applicable	0105
*Date	1003
*Requester FSCM	1004
*Contract Number/Office Symbol	1005
*Base Document	1006
*System Application	1008
*Government Design Activity FSCM	6369
*Format (Select One)	
Six section document.	0700
One section document.	0800
*Control (select one)	
Source	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currenversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Control (Cont)	
Specification	6874
*Source Table	
Note: Refer to table V of DOD-STD-35.	
Aperture Cards Required.	0107
Revision of AEDPS Document Number	0108
Scope	
Note: This entry is automatic and determined by the title code used.	
Part Number	
Note: Automatic with a single item mse.	
Note: Automatic with a multi-item mse.	
Units of Measure (Select One)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6874	THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).
0107	
0108	0108. SCOPE.
	SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.
	PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.
	PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.
6941	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES.
6942	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Classification	
Type	
Base document type (des)	1570
Class	
Base document class (des)	1580
Rating	
Operating Media	
Media (name)	1590
Media document (doc des)	1592
Temperature Rating, Nominal	
Service (degrees Celsius)	5049
Temperature Rating, Minimum	
Service (degrees Celsius)	4904
Temperature Rating, Maximum	
Service (degrees Celsius)	4905

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH

1570 TYPE. THE TYPE DESIGNATION SHALL BE 1570 IN ACCORDANCE WITH THE BASE DOCUMENT.

1580 CLASS. THE CLASS DESIGNATION SHALL BE 1580 IN ACCORDANCE WITH THE BASE DOCUMENT.

OPERATING MEDIA.

1590 THE OPERATING MEDIA SHALL BE 1590.

1592 THE OPERATING MEDIA SHALL BE IN ACCORDANCE WITH 1592.

TEMPERATURE RATING, NOMINAL.

5049 THE NOMINAL SERVICE TEMPERATURE RATING SHALL BE 5049 DEGREES CELSIUS.

TEMPERATURE RATING, MINIMUM.

4904 THE MINIMUM SERVICE TEMPERATURE RATING SHALL BE 4904 DEGREES CELSIUS.

TEMPERATURE RATING, MAXIMUM.

4905 THE MAXIMUM SERVICE TEMPERATURE RATING SHALL BE 4905 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Configuration	
(Illustration Number)	1009
Dimension table, (See Table III, DOD-STD-35)	
Illustrations	
(Number)	4950
Note: This code is used to enter applicable illustrations which do not have dimensions.	
Tabulated Characteristics (See Table IV, DOD-STD-35)	
Materials (See Tables VI and VII, DOD-STD-35)	
Note: Automatic when table VII is used.	
Finishes (See Tables VIII And IX, DOD-STD-35)	
Note: Automatic when table IX is used.	
Composition	
Composition, formulation or mixture.	6375
*Ingredient table, (see table XI, DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
6375	COMPOSITION. THE COMPOSITION, FORMULATION OR MIXTURE (AS APPLICABLE) SHALL BE AS SPECIFIED HEREIN. THE INGREDIENT QUANTITIES SHALL BE SHOWN IN INTERNATIONAL (SI) SYSTEM OF UNITS SUCH AS GRAMS, LITRES, ETC., OR U.S. STANDARDS SUCH AS PINTS, QUARTS OR GALLONS, AS SPECIFIED IN THE TABLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Metals	
Dissimilar metals.	7580
Weight	
Maximum weight per unit (select one)	
U.S. (select one)	
(ounces)	7022
(pounds)	7023
SI (select one)	
(grams)	7021
(kilograms)	7024
Minimum weight per unit (select one)	
U.S. (select one)	
(ounces)	6943
(pounds)	6944

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLE FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.
	WEIGHT.
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).
7021	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).
6943	MINIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT LESS THAN 6943 OUNCE(S).
6944	MINIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT LESS THAN 6944 POUND(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Weight (Cont)	
Minimum weight per unit (Cont)	
SI (select one)	
(grams)	6945
(kilograms)	6946
Nominal weight per unit (select one)	
U.S. (select one)	
(ounces)	6996
(pounds)	6997
SI (select one)	
(grams)	6998
(kilograms)	6999
Absorption, Water	
Requirements (select one)	
Per base document except ____	1602
Maximum water absorption by weight (percent)	1604

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6945	MINIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT LESS THAN 6945 GRAM(S).
6946	MINIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT LESS THAN 6946 KILOGRAM(S).
6996	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6996 OUNCE(S).
6997	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6997 POUND(S).
6998	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6998 GRAM(S).
6999	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6999 KILOGRAM(S).
1602	ABSORPTION, WATER. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1602.
1604	ABSORPTION, WATER. THE WATER ABSORPTION SHALL NOT BE GREATER THAN 1604 PERCENT BY WEIGHT.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Absorption, Water (Cont)	
Test methods (select one)	
Per base document except ____	1622
Per ASTMD570.	1624
Conditioning chamber temperature (degrees Celsius)	1626
Temperature tolerance plus or minus (degrees Celsius)	1628
Temperature chamber duration (hours)	1630
Immersion duration (hours)	1632
Duration tolerance plus or minus (hours)	1634
Water temperature (degrees Celsius)	1636
Temperature tolerance plus or minus (degrees Celsius)	1638
Axial Load	
Requirements (select one)	
Per base document except ____	1702

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1622	ABSORPTION, WATER. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1622.
1624	ABSORPTION, WATER. TESTING SHALL BE IN ACCORDANCE WITH ASTMD570.
1626	THE CONDITIONING CHAMBER TEMPERATURE SHALL BE 1626 DEGREES CELSIUS.
1628	THE TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1628 DEGREES CELSIUS.
1630	THE SPECIMEN SHALL BE MAINTAINED IN THE TEMPERATURE CHAMBER FOR A PERIOD OF 1630 HOUR(S).
1632	THE SPECIMEN SHALL BE IMMERSED IN WATER FOR 1632 HOUR(S).
1634	THE IMMERSION DURATION TOLERANCE SHALL BE PLUS OR MINUS 1634 HOUR(S).
1636	THE WATER TEMPERATURE SHALL BE 1636 DEGREES CELSIUS.
1638	THE WATER TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1638 DEGREES CELSIUS.
1702	AXIAL LOAD. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1702.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Axial Load (Cont)	
Requirements (Cont)	
As follows:	1704
Maximum movement of insulation sleeve on ferrule (select one)	
(inches)	1706
(millimeters)	1708
Test methods (select one)	
Per base document except ____	1722
Per MIL-F-21608.	1724
Minimum axial load, either direction (select one)	
(pounds)	1726
(newtons)	1728
Applied axial load speed (select one)	
(in./min)	1730
(millimeters/min)	1732

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1704	AXIAL LOAD. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1706	THE MOVEMENT OF THE INSULATION SLEEVE ON THE FERRULE SHALL BE NOT GREATER THAN 1706 INCH(S).
1708	THE MOVEMENT OF THE INSULATION SLEEVE ON THE FERRULE SHALL BE NOT GREATER THAN 1708 MILLIMETER(S).
1722	AXIAL LOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1722.
1724	AXIAL LOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-21608.
1726	THE AXIAL LOAD IN EITHER DIRECTION SHALL BE NOT LESS THAN 1726 POUND(S).
1728	THE AXIAL LOAD IN EITHER DIRECTION SHALL BE NOT LESS THAN 1728 NEWTON(S).
1730	THE APPLIED AXIAL LOAD SPEED SHALL BE 1730 INCHE(S) MINUTE.
1732	THE APPLIED AXIAL LOAD SPEED SHALL BE 1732 MILLIMETER(S) PER MINUTE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Brittleness	
Requirements (select one)	
Per base document except ____	1802
No divisions or cracking at specified temperature.	1804
Test methods (select one)	
Per base document except ____	1822
Per ASTMD746.	1824
Media temperature (degrees Celsius)	1826
Media temperature tolerance plus or minus (degrees Celsius)	1828
Clinching Resistance	
Requirements (select one)	
Per base document except ____	1902
As follows:	1904
No metal cracking.	1906
No flaking of enamel.	1908

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
1802	BRITTLENESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1802.
1804	BRITTLENESS. THERE SHALL BE NO DIVISIONS OR CRACKING OF THE MATERIAL AT SPECIFIED TEMPERATURE(S).
1822	BRITTLENESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1822.
1824	BRITTLENESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD746.
1826	THE MEDIA TEMPERATURE SHALL BE 1826 DEGREES CELSIUS.
1828	THE MEDIA TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1828 DEGREES CELSIUS.
1902	CLINCHING RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1902.
1904	CLINCHING RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1906	THERE SHALL BE NO METAL CRACKING AFTER CLINCHING.
1908	THERE SHALL BE NO FLAKING OF THE ENAMEL FINISH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Clinching Resistance (Cont)	
Test methods (select one)	
Per base document except ____	1922
Per MIL-E-20652.	1924
Material (des)	1926
Compression Set	
Requirements (select one)	
Per base document except ____	2002
Maximum compression set (percent)	2004
Test methods (select one)	
Per base document except ____	2022
Per ASTMD395, Method B.	2024
Aging temperature (degrees Celsius)	2026
Temperature tolerance plus or minus (degrees Celsius)	2028
Temperature duration (hours)	2030

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1922	CLINCHING RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1922.
1924	CLINCHING RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-E-20652.
1926	THE EYELETS SHALL BE CLINCHED ONTO 1926 BY A SUITABLE EYELET FASTENING DEVICE.
2002	COMPRESSION SET. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2002.
2004	COMPRESSION SET. THE COMPRESSION SET SHALL BE NOT GREATER THAN 2004 PERCENT OF THE PRETEST SPECIMEN DIMENSION.
2022	COMPRESSION SET. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2022.
2024	COMPRESSION SET. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD B OF ASTMD395.
2026	THE AGING TEMPERATURE SHALL BE 2026 DEGREES CELSIUS.
2028	THE AGING TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2028 DEGREES CELSIUS.
2030	THE TEMPERATURE DURATION SHALL BE 2030 HOUR(S).

Source: https://assist.dla.mil Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Coolant Resistance	
Requirements (select one)	
Per base document except ____	2102
No swelling, cracking or softening of material.	2104
Test methods (select one)	
Per base document except ____	2122
Per MIL-G-3036.	2124
Coolant media (des)	2126
Coolant (doc des)	2128
Media temperature (degrees Celsius)	2130
Temperature tolerance plus or minus (degrees Celsius)	2132
Immerson duration (hours)	2134
Dielectric Withstanding Voltage At Sea Level	
Requirements (select one)	
Per base document except ____	4874

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2102	COOLANT RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2102.
2104	COOLANT RESISTANCE. THERE SHALL BE NO SWELLING, CRACKING OR SOFTENING OF THE MATERIAL.
2122	COOLANT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2122.
2124	COOLANT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-G-3036.
2126	THE COOLANT MEDIA SHALL BE 2126.
2128	THE COOLANT MEDIA DOCUMENT SHALL BE 2128.
2130	THE MEDIA TEMPERATURE SHALL BE 2130 DEGREES CELSIUS.
2132	THE MEDIA TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2132 DEGREES CELSIUS.
2134	THE SPECIMEN SHALL BE IMMERSED FOR A DURATION OF 2134 HOUR(S).
4874	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Dielectric Withstanding Voltage at Sea Level (Cont)	
Requirements (Cont)	
No evidence of flashover, mechanical damage, arcing, or insulation breakdown.	4856
Maximum leakage (milliamperes)	4875
Test methods (select one)	
Per base document except ____	4861
Per MIL-STD-202, Method 301.	4862
*Test voltage (select one)	
(volts dc)	4854
(volts ac)	4855
Points of voltage application	
Between mutually insulated parts.	4844
Special preparation per (doc des)	4850
Duration of voltage application (seconds)	4867
Mounting (doc des)	5000

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4856	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4875	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4875 MILLIAMPERE(S).
4861	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.
4862	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4854	TEST VOLTAGE SHALL BE 4854 VOLT(S), DC.
4855	TEST VOLTAGE SHALL BE 4855 VOLT(S), AC.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4844	BETWEEN MUTUALLY INSULATED PARTS.
4850	SPECIAL PREPARATION OR CONDITIONS SHALL BE IN ACCORDANCE WITH 4850.
4867	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).
5000	MOUNTING SHALL BE IN ACCORDANCE WITH 5000.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Distortion, Insulation	
Requirements (select one)	
Per base document except ____	2202
As follows:	2204
No scratches, marring or distortion	2206
Maximum force to remove basic conductor from crimped ferrule (select one)	
(pounds)	2208
(newtons)	2210
Test Methods (select one)	
Per base document except ____	2222
Per MIL-F-21608.	2224
Apply force to pull basic conductor out of the crimped ferrule.	2226
Speed of head travel per minute (select one)	
(inches)	2228
(millimeters)	2230

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2202	DISTORTION, INSULATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2202.
2204	DISTORTION, INSULATION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2206	THERE SHALL BE NO SCRATCHES, MARRING OR DISTORTION OF THE INNER CONDUCTOR INSULATION.
2208	THE FORCE NECESSARY TO REMOVE THE BASIC CONDUCTOR INSULATION FROM THE CRIMPED FERRULE SHALL BE NOT GREATER THAN 2208 POUND(S).
2210	THE FORCE NECESSARY TO REMOVE THE BASIC CONDUCTOR INSULATION FROM THE CRIMPED FERRULE SHALL BE NOT GREATER THAN 2210 NEWTON(S).
2222	DISTORTION, INSULATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2222.
2224	DISTORTION, INSULATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-21608.
2226	APPLY THE FORCE NECESSARY TO PULL THE BASIC CONDUCTOR OUT OF THE CRIMPED FERRULE.
2228	THE HEAD TRAVEL SPEED OF THE TENSILE MACHINE SHALL BE NOT GREATER THAN 2228 INCH(S).
2230	THE HEAD TRAVEL SPEED OF THE TENSILE MACHINE SHALL BE NOT GREATER THAN 2230 MILLIMETER(S).

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Eyelet Pull	
Requirements (select one)	
Per base document except ____	2302
No weakness of eyelet or surrounding fibers.	2304
Test methods (select one)	
Per base document except ____	2322
Per MIL-G-18879.	2324
Minimum load (select one)	
(pounds)	2326
(kilograms)	2328
Elongation	
Requirements (select one)	
Per base document except ____	2402
Minimum elongation (percent)	2404
Test methods (select one)	
Per base document except ____	2422

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2302	EYELET PULL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2302.
2304	EYELET PULL. THERE SHALL BE NO WEAKNESS INDICATED IN THE EYELET OR SURROUNDING FIBERS.
2322	EYELET PULL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2322.
2324	EYELET PULL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-G-18879.
2326	THE LOAD ON THE EYELET SHALL BE NOT LESS THAN 2326 POUND(S).
2328	THE LOAD ON THE EYELET SHALL BE NOT LESS THAN 2328 KILOGRAM(S).
2402	ELONGATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2402.
2404	ELONGATION. THE ELONGATION SHALL BE NOT LESS THAN 2404 PERCENT OF THE PRETEST SPECIMEN DIMENSION.
2422	ELONGATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2422.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Elongation (Cont)	
Test methods (Cont)	
Per ASTMD412.	2424
Test temperature (degrees Celsius)	2426
Tolerance plus or minus (degrees Celsius)	2428
Flexibility	
Requirements (select one)	
Per base document except ____	2502
No cuts or damage.	2504
Test methods (select one)	
Per base document except ____	2522
Per MIL-G-3036.	2524
Conditioning temperatures	
Minimum (degrees Celsius)	2526
*Maximum (degrees Celsius)	2528

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2424	ELONGATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD412.
2426	THE TEST TEMPERATURE SHALL BE 2426 DEGREES CELSIUS.
2428	THE TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2428 DEGREES CELSIUS.
2502	FLEXIBILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2502.
2504	FLEXIBILITY. THERE SHALL BE NO CUTS OR DAMAGE TO THE GROMMET AS A RESULT OF INSERTION OF THE GROMMET INTO THE TEST JIG AFTER TEMPERATURE CONDITIONING.
2522	FLEXIBILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2522.
2524	FLEXIBILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-G-3036.
2526	THE CONDITIONING TEMPERATURE SHALL BE NOT LESS THAN 2526 DEGREES CELSIUS.
2528	THE CONDITIONING TEMPERATURE SHALL BE NOT GREATER THAN 2528 DEGREES CELSIUS.

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Flexibility (Cont)	
Per MIL-G-3036 (Cont)	
Conditioning duration (hours)	2530
Nominal test jig hole diameter (select one)	
(inches)	2532
Tolerance	
Plus (inches)	2534
Minus (inches)	2536
(millimeters)	2538
Tolerance	
Plus (millimeters)	2540
Minus (millimeters)	2542
Nominal test jig thickness (select one)	
(inches)	2544
Tolerance	
Plus (inches)	2546
Minus (inches)	2548

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2530	THE DURATION OF TEMPERATURE CONDITIONING SHALL BE 2530 HOUR(S).
2532	THE TEST JIG HOLE NOMINAL DIAMETER SHALL BE 2532 INCH(S).
2534	THE TEST JIG HOLE TOLERANCE SHALL BE PLUS 2534 INCH(S).
2536	THE TEST JIG HOLE TOLERANCE SHALL BE MINUS 2536 INCH(S).
2538	THE TEST JIG HOLE NOMINAL DIAMETER SHALL BE 2538 MILLIMETER(S).
2540	THE TEST JIG HOLE TOLERANCE SHALL BE PLUS 2540 MILLIMETER(S).
2542	THE TEST JIG HOLE TOLERANCE SHALL BE MINUS 2542 MILLIMETER(S).
2544	THE TEST JIG NOMINAL THICKNESS SHALL BE 2544 INCH(S).
2546	THE TEST JIG THICKNESS TOLERANCE SHALL BE PLUS 2546 INCH(S).
2548	THE TEST JIG THICKNESS TOLERANCE SHALL BE MINUS 2548 INCH(S).

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Flexibility (Cont)	
Nominal test jig thickness (Cont)	
(millimeters)	2550
Tolerance	
Plus (millimeters)	2552
Minus (millimeters)	2554
Maximum installation time after temperature conditioning (seconds)	2556
Fungus	
Requirements (select one)	
Per base document except ____	4760
Fungus resistant by certification or by test.	4761
No evidence of fungus growth when tested.	4762
Maximum growth rating (no.)	2600

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2550	THE TEST JIG NOMINAL THICKNESS SHALL BE 2550 MILLIMETER(S).
2552	THE TEST JIG THICKNESS TOLERANCE SHALL BE PLUS 2552 MILLIMETER(S).
2554	THE TEST JIG THICKNESS TOLERANCE SHALL BE MINUS 2554 MILLIMETER(S).
2556	THE TIME INTERVAL FROM TEMPERATURE CONDITIONING TO INSTALLATION OF THE GROMMET SHALL BE NOT GREATER THAN 2556 SECONDS.
4760	FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.
4761	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4762	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GRWOTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
2600	FUNGUS. THE GROWTH RATING NUMBER SHALL NOT BE GREATER THAN 2600.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Fungus (Cont)	
Test methods (select one)	
Per base document except ____	4754
Per ASTMG21.	2620
Test method (des)	2622
Test period (days)	4756
Hardness	
Requirements (select one)	
Per base document except ____	2702
Brinell (value)	2704
Rockwell (value)	2706
*Scale (letter)	2708
Durometer (value)	2710
Test methods (select one)	
Per base document except ____	2722
Per ASTME10, Brinell.	2724

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4754	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.
2620	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMG21.
2622	THE TEST METHOD SHALL BE 2622.
4756	TEST PERIOD SHALL BE 4756 DAYS.
2702	HARDNESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2702.
2704	HARDNESS. THE ITEM SHALL HAVE A BRINELL HARDNESS OF 2704.
2706 2708	HARDNESS. THE ITEM SHALL HAVE A ROCKWELL HARDNESS OF 2706 ON THE 2708 SCALE.
2710	HARDNESS. THE ITEM SHALL HAVE A DUROMETER HARDNESS OF 2710.
2722	HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2722.
2724	HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTME10.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Hardness (Cont)	
Test methods (Cont)	
Per ASTME18, Rockwell.	2726
Per ASTMD2240, Durometer.	2728
Heat Aging	
Requirements (select one)	
Per base document except ____	2802
As follows:	2804
Maximum points of durometer hardness change from unaged specimen (points)	2806
Maximum percent tensile strength decrease from unaged specimen (percent)	2808
Maximum percent elongation decrease from unaged specimen (percent)	2810
No evidence of cracking or crazing.	2812
Test methods (select one)	
Per base document except ____	2822
Per ASTMD573.	2824

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2726	HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTME18.
2728	HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD2240.
2802	HEAT AGING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2802.
2804	HEAT AGING. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2806	DUROMETER HARDNESS CHANGE FROM AN UNAGED SPECIMEN SHALL BE NOT GREATER THAN 2806 POINTS.
2808	TENSILE STRENGTH DECREASE FROM AN UNAGED SPECIMEN SHALL BE NOT GREATER THAN 2808 PERCENT.
2810	ELONGATION DECREASE FROM AN UNAGED SPECIMEN SHALL BE NOT GREATER THAN 2810 PERCENT.
2812	THERE SHALL BE NO EVIDENCE OF CRACKING OR CRAZING OF THE MATERIAL.
2822	HEAT AGING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2822.
2824	HEAT AGING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD573.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Heat Aging (Cont)	
Per ASTMD573 (Cont)	
Aging temperature (degrees Celsius)	2826
Temperature tolerance plus or minus (degrees Celsius)	2828
Aging duration (hours)	2830
Duration tolerance plus or minus (hours)	2832
Immersion	
Requirements (select one)	
Per base document except ____	2902
As follows:	2904
No cracking, pitting, softening or material failure.	2906
Maximum volume change (percent)	2908
Maximum shore "A" durometer hardness change plus or minus (points)	2910
Test methods (select one)	
Per base document except ____	2922

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2826	THE AGING TEMPERATURE SHALL BE 2826 DEGREES CELSIUS.
2828	THE AGING TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2828 DEGREES CELSIUS.
2830	THE AGING DURATION SHALL BE 2830 HOUR(S).
2832	THE AGING DURATION TOLERANCE SHALL BE PLUS OR MINUS 2832 HOUR(S).
2902	IMMERSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2902.
2904	IMMERSION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2906	THERE SHALL BE NO CRACKING, PITTING, SOFTENING OR MATERIAL FAILURE.
2908	THE VOLUME CHANGE FROM A PRETEST SPECIMEN SHALL BE NOT GREATER THAN 2908 PERCENT.
2910	THE SHORE A DUROMETER HARDNESS CHANGE SHALL BE NOT GREATER THAN PLUS OR MINUS 2910 POINT(S).
2922	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2922.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Immersion (Cont)	
Test methods (Cont)	
Per MIL-G-22529.	2924
Delete media (letter)	2925
Media (name)	2926
Media per document (doc des)	2928
Media temperature (degrees Celsius)	2930
Tolerance plus or minus (degrees Celsius)	2932
Minimum immersion time (hours)	2934
Portion of solution (percent)	2936
Media (name)	2938
Media per document (doc des)	2940
Media temperature (degrees Celsius)	2942
Tolerance plus or minus (degrees Celsius)	2944
Minimum immersion time (hours)	2946
Portion of solution (percent)	2948
Media (name)	2950

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
2924	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-G-22529.
2925	MEDIA PER MIL-G-22529 SHALL BE USED, EXCEPT LETTER(S) 2925.
2926	THE MEDIA SHALL BE 2926.
2928	THE MEDIA DOCUMENT SHALL BE 2928.
2930	THE MEDIA TEMPERATURE SHALL BE 2930 DEGREES CELSIUS.
2932	THE MEDIA TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2932 DEGREES CELSIUS.
2934	THE IMMERSION TIME SHALL BE NOT LESS THAN 2934 HOUR(S).
2936	THE PORTION OF SOLUTION SHALL BE 2936 PERCENT.
2938	THE MEDIA SHALL BE 2938.
2940	THE MEDIA DOCUMENT SHALL BE 2940.
2942	THE MEDIA TEMPERATURE SHALL BE 2942 DEGREES CELSIUS.
2944	THE MEDIA TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2944 DEGREES CELSIUS.
2946	THE IMMERSION TIME SHALL BE NOT LESS THAN 2946 HOUR(S).
2948	THE PORTION OF SOLUTION SHALL BE 2948 PERCENT.
2950	THE MEDIA SHALL BE 2950.

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Immersion (Cont)	
Media (Cont)	
Media per document (doc des)	2952
Media temperature (degrees Celsius)	2954
Tolerance plus or minus (degrees Celsius)	2956
Minimum immersion time (hours)	2958
Portion of solution (percent)	2960
Media (name)	2962
Media per document (doc des)	2964
Media temperature (degrees Celsius)	2966
Tolerance plus or minus (degrees Celsius)	2968
Minimum immersion time (hours)	2970
Portion of solution (percent)	2972
Insulation (Dielectric Strength)	
Requirements (select one)	
Per base document except ____	3002
No evidence of flashover, mechanical damage, arcing, or insulation breakdown.	3004

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRPAH
2952	THE MEDIA DOCUMENT SHALL BE 2952.
2954	THE MEDIA TEMPERATURE SHALL BE 2954 DEGREES CELSIUS.
2956	THE MEDIA TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2956 DEGREES CELSIUS.
2958	THE IMMERSION TIME SHALL BE NOT LESS THAN 2958 HOUR(S).
2960	THE PORTION OF SOLUTION SHALL BE 2960 PERCENT.
2962	THE MEDIA SHALL BE 2962.
2964	THE MEDIA DOCUMENT SHALL BE 2964.
2966	THE MEDIA TEMPERATURE SHALL BE 2966 DEGREES CELSIUS.
2968	THE MEDIA TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2968 DEGREES CELSIUS.
2970	THE IMMERSION TIME SHALL BE NOT LESS THAN 2970 HOUR(S).
2972	THE PORTION OF SOLUTION SHALL BE 2972 PERCENT.
3002	INSULATION (DIELECTRIC STRENGTH). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3002.
3004	INSULATION (DIELECTRIC STRENGTH). THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Insulation (Dielectric Strength) (Cont)	
Test methods (select one)	
Per base document except ____	3022
Per MIL-F-21608.	3024
Salt solution (percent)	3026
Temperature (degrees Celsius)	3028
Tolerance plus or minus (degrees Celsius)	3030
Immersion duration (minutes)	3032
Minimum applied voltage (select one)	
(dc)	3034
(ac)	3036
*Frequency (hertz)	3038
Application time (seconds)	3040
Minimum breakdown voltage (volts)	3042
Ozone Resistance	
Requirements (select one)	
Per base document except ____	3102
No cracking.	3104

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3022	INSULATION (DIELECTRIC STRENGTH). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3022.
3024	INSULATION (DIELECTRIC STRENGTH). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-21608.
3026	THE SALT SOLUTION SHALL CONSIST OF 3026 PERCENT SALT.
3028	THE SOLUTION TEMPERATURE SHALL BE 3028 DEGREES CELSIUS.
3030	THE SOLUTION TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 3030 DEGREES CELSIUS.
3032	THE IMMERSION DURATION SHALL BE 3032 MINUTE(S).
3034	THE APPLIED VOLTAGE SHALL BE NOT LESS THAN 3034 VOLT(S) DC.
3036 3038	THE APPLIED VOLTAGE SHALL BE NOT LESS THAN 3036 VOLT(S) AC AT A FREQUENCY OF 3038 HERTZ.
3040	THE VOLTAGE APPLICATION TIME SHALL BE 3040 SECONDS.
3042	THE BREAKDOWN VOLTAGE SHALL NOT BE LESS THAN 3042 VOLT(S).
3102	OZONE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3102.
3104	OZONE RESISTANCE. THE MATERIAL SHALL NOT CRACK.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Ozone Resistance (Cont)	
Test methods (select one)	
Per base document except ____	3122
Per ASTMD1149.	3124
Minimum ozone concentration by volume (parts/100 million)	3126
Ozone concentration temperature (degrees Celsius)	3128
Tolerance plus or minus (degrees Celsius)	3130
Exposure duration (select one)	
(hours)	3132
(minutes)	3134
Salt Fog	
Requirements (select one)	
Per base document except ____	4998
No evidence of corrosion, physical damage or degradation of performance.	4999

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3122	OZONE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3122.
3124	OZONE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD1149.
3126	THE OZONE CONCENTRATION BY VOLUME SHALL BE 3126 PARTS PER ONE HUNDRED MILLION.
3128	THE OZONE CONCENTRATION TEMPERATURE SHALL BE 3128 DEGREES CELSIUS.
3130	THE OZONE TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 3130 DEGREES CELSIUS.
3132	THE DURATION OF EXPOSURE TO OZONE SHALL BE 3132 HOUR(S).
3134	THE DURATION OF EXPOSURE TO OZONE SHALL BE 3134 MINUTE(S).
4998	SALT FOG. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4998.
4999	SALT FOG. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OR PERFORMANCE.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Salt Fog (Cont)	
Test methods (select one)	
Per base document except ____	4779
Per MIL-STD-810, Method 509.	4780
Salt solution (percent)	4786
Exposure period (hours)	4783
Drying period (hours)	4775
Soap Resistance	
Requirements (select one)	
Per base document except ____	3202
No discoloration or furrowing.	3204
Test methods (select one)	
Per base document except ____	3222
Per MIL-E-20652.	3224
Soap solution (percent)	3226
Solution temperature (degrees Celsius)	3228
Temperature tolerance plus or minus (degrees Celsius)	3230
Immersion duration (hours)	3232

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4779	SALT FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4779.
4780	SALT FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 509 OF MIL-STD-810.
4786	SOLUTION SHALL BE 4786 PERCENT SALT.
4783	DURATION OF THE TEST SHALL BE 4783 HOUR(S).
4775	DRYING PERIOD SHALL BE 4775 HOUR(S).
3202	SOAP RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3202.
3204	SOAP RESISTANCE. THERE SHALL BE NO DISCOLORATION OR FURROWING OF THE MATERIAL.
3222	SOAP RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3222.
3224	SOAP RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-E-20652.
3226	THE SOAP SOLUTION SHALL CONSIST OF 3226 PERCENT SOAP.
3228	THE SOLUTION TEMPERATURE SHALL BE 3228 DEGREES CELSIUS.
3230	THE SOLUTION TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 3230 DEGREES CELSIUS.
3232	THE IMMERSION DURATION SHALL BE 3232 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Soap Resistance (Cont)	
Per MIL-E-20652 (Cont)	
Attempt thumbnail furrowing through enamel film.	3234
Tensile Strength	
Requirements (select one)	
Per base document except ____	3302
As follows:	3304
Minimum tensile strength (select one)	
(psi)	3306
(kilopascals)	3308
No breaks or distortion.	3310
Minimum pullout force (select one)	
(pounds)	3312
(newtons)	3314
Test methods (select one)	
Per base document except ____	3322
Per document (doc des)	3324

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3234	ATTEMPT THUMBNAIL FURROWING THROUGH ENAMEL FILM.
3302	TENSILE STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3302.
3304	TENSILE STRENGTH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3306	THE TENSILE STRENGTH SHALL BE NOT LESS THAN 3306 POUND(S) PER SQUARE INCH.
3308	THE TENSILE STRENGTH SHALL BE NOT LESS THAN 3308 KILOPASCALS.
3310	THERE SHALL BE NO BREAKS OR DISTORTION OF THE CONNECTION.
3312	THE PULLOUT FORCE SHALL BE NOT LESS THAN 3312 POUND(S).
3314	THE PULLOUT FORCE SHALL BE NOT LESS THAN 3314 NEWTON(S).
3322	TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3322.
3324	TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3324.

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Per document (Cont)	
Test method (des)	3326
Test temperature (degrees Celsius)	3330
Tolerance plus or minus (degrees Celsius)	3332
Thermal Shock	
Requirements (select one)	
Per base document except ____	4722
No evidence of physical damage.	4723
Remain within specified tolerance.	4726
Test methods (select one)	
Per base document except ____	4713
Per MIL-STD-202, Method 107.	4714
*Test condition (letter)	4715
Special mounting per (doc des)	4719
Voltage Drop	
Requirements (select one)	
Per base document except ____	3402
As follows:	3404

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3326	THE DOCUMENT TEST METHOD SHALL BE 3326.
3330	THE TEST TEMPERATURE SHALL BE 3330 DEGREES CELSIUS.
3332	THE TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 3332 DEGREES CELSIUS.
4722	THERMAL SHOCK. (TEMPERATURE CYCLING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4722.
4723	THERMAL SHOCK. (TEMPERATURE CYCLING). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4726	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4713	THERMAL SHOCK. (THEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4713.
4714	THERMAL SHOCK. (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 107 OF MIL-STD-202.
4715	TEST CONDITION LETTER 4715 SHALL APPLY.
4719	MOUNTING SHALL BE IN ACCORDANCE WITH 4719.
3402	VOLTAGE DROP. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3402.
3404	VOLTAGE DROP. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Voltage Drop (Cont)	
As follows: (Cont)	
Maximum voltage drop	
Initial (millivolts)	3406
After tests (millivolts)	3408
Test methods (select one)	
Per base document except ____	3422
Per MIL-F-21608.	3424
Stabilized temperature (degrees Celsius)	3426
Test current (amperes)	3428
Vibration, Low Frequency	
Requirements (select one)	
Per base document except ____	1475
No evidence of physical damage.	1476
Maximum voltage drop (millivolts)	3500

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3406	THE INITIAL VOLTAGE DROP SHALL BE NOT GREATER THAN 3406 MILLIVOLT(S)
3408	THE VOLTAGE DROP AFTER TESTS SHALL BE NOT GREATER THAN 3408 MILLIVOLT(S).
3422	VOLTAGE DROP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3422.
3424	VOLTAGE DROP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-21608.
3426	THE STABILIZATION TEMPERATURE SHALL BE 3426 DEGREES CELSIUS.
3428	THE TEST CURRENT SHALL BE 3428 AMPERE(S).
1475	VIBRATION, LOW FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1475.
1476	VIBRATION, LOW FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
3500	THE VOLTAGE DROP SHALL NOT BE GREATER THAN 3500 MILLIVOLT(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Vibration, Low Frequency (Cont)	
Test methods (select one)	
Per base document except ____	1466
Per MIL-STD-202, Method 201.	1467
Duration of vibration per axis (hours)	1470
Method of mounting (select one)	
Any suitable mounting method.	4731
Normal mounting means.	4730
Mount per (doc des)	4729
Direction of motion (select one)	
Parallel to longitudinal axis.	1535
Perpendicular to longitudinal axis.	1536
Weathering	
Requirements (select one)	
Per base document except ____	3602
No loosening, removal or flaking of finish.	3604

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1466	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1466.
1467	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 201 OF MIL-STD-202.
1470	DURATION OF TEST SHALL BE 1470 HOUR(S) PER AXIS.
4731	MOUNTING SHALL BE BY ANY SUITABLE MOUNTING METHOD.
4730	MOUNTING SHALL BE BY THE NORMAL METHOD.
4729	MOUNTING SHALL BE IN ACCORDANCE WITH 4729.
1535	THE DIRECTION OF MOTION SHALL BE PARALLEL TO THE LONGITUDINAL AXIS.
1536	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE LONGITUDINAL AXIS.
3602	WEATHERING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3602.
3604	WEATHERING. THERE SHALL BE NO LOOSENING, REMOVAL OR FLAKING OF THE FINISH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Weathering (Cont)	
Test methods (select one)	
Per base document except ____	3622
Per MIL-F-495.	3624
Exposure period (hours)	3626
Water temperature (degrees Celsius)	3628
Temperature tolerance plus or minus (degrees Celsius)	3630
Drying period (hours)	3632
Storage Conditions	
(Years)	1529
Certify maximum cure date to delivery (quarters)	4942
Certify minimum shelf life after delivery (quarters)	4943
Certify maximum manufacture date to delivery (quarters)	4944
Age limitation per MIL-STD-1523.	5209

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3622	WEATHERING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3622.
3624	WEATHERING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-495.
3626	THE ITEM SHALL BE EXPOSED FOR A PERIOD OF 3626 HOUR(S).
3628	THE WATER TEMPERATURE SHALL BE 3628 DEGREES CELSIUS.
3630	THE WATER TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 3630 DEGREES CELSIUS.
3632	THE DRYING PERIOD SHALL BE 3632 HOUR(S).
	STORAGE CONDITIONS.
1529	ITEMS SHALL WITHSTAND 1529 YEARS OF STORAGE WHEN PROPERLY PRESERVED, PACKAGED AND MECHANICALLY PROTECTED WITHOUT REQUIRING MAJOR REPAIR.
4942	MANUFACTURER SHALL CERTIFY THAT THE CURE DATE SHALL BE NOT GREATER THAN 4942 QUARTERS PRIOR TO DELIVERY DATE.
4943	MANUFACTURER SHALL CERTIFY THAT THERE SHALL BE NOT LESS THAN 4943 QUARTERS OF SHELF LIFE AFTER DELIVERY.
4944	MANUFACTURER SHALL CERTIFY THAT THE DATE OF MANUFACTURE SHALL BE NOT GREATER THAN 4944 QUARTERS PRIOR TO DATE OF DELIVERY.
5209	AGE LIMITATIONS OF THE FINISHED PRODUCT SHALL BE IN ACCORDANCE WITH MIL-STD-1523.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Mounting Hardware (See Table X, DOD-STD-35)	
Note: Automatic when table X is used.	
Workmanship	
(doc des)	6870
Additional Requirements	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005
Part Marking (Select One)	
(doc des)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCA WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1275,
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Additional Part Marking	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995
Definition of Hermetic Sealing	
Note: Automatic when codes are used to require hermetic sealing.	
Applicable Documents (See DOD-STD-35)	
Quality Assurance Provisions (See DOD-STD-35)	
Packaging (See DOD-STD-35)	
Notes (See DOD-STD-35)	
Nomenclature (See DOD-STD-35)	
Superseded Document (See DOD-STD-35)	
Part Number Cross-Reference (See DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

DEFINITION OF HERMETIC SEALING. FOR THE PURPOSE OF THIS DOCUMENT, A HERMETICALLY-SEALED ITEM IS ONE IN WHICH THE ELEMENT IS CONTAINED WITHIN A SEALED ENCLOSURE OF CERAMIC, GLASS OR METAL, OR A COMBINATION THEREOF, WHERE SEALING IS ACCOMPLISHED BY MATERIAL FUSION, WELDING, BRAZING OR SOLDERING.

Custodians:
Army-MI

Review activities:

Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI


(Project EDS-A214)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.


APPENDIX A

ILLUSTRATIONS

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

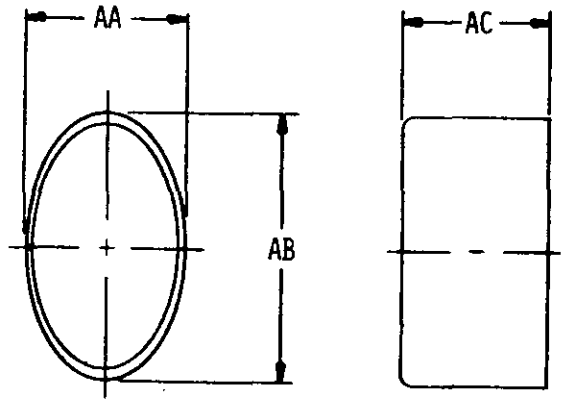


155-01-1

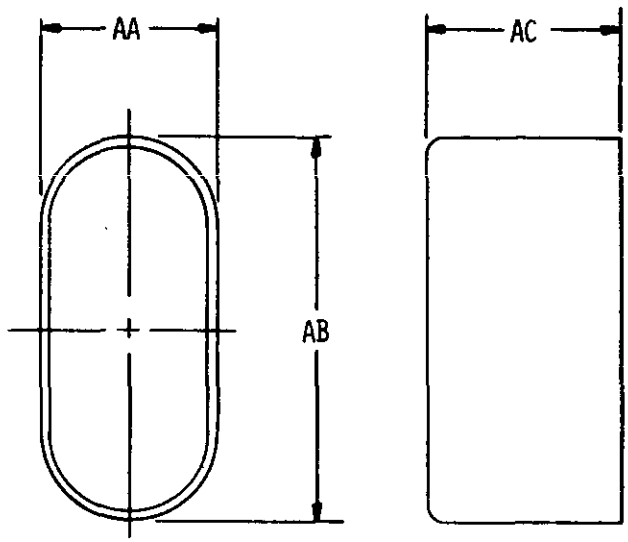


155-01-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

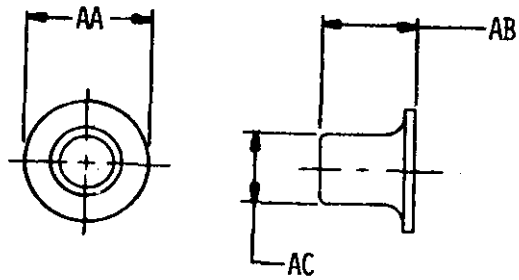


155-01-3

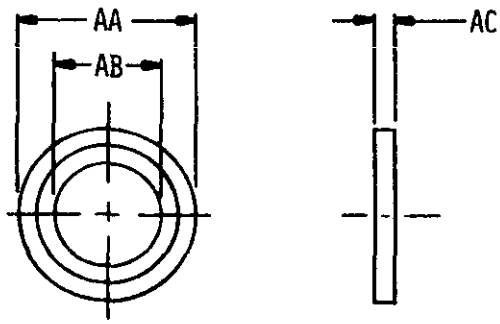


155-01-4

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

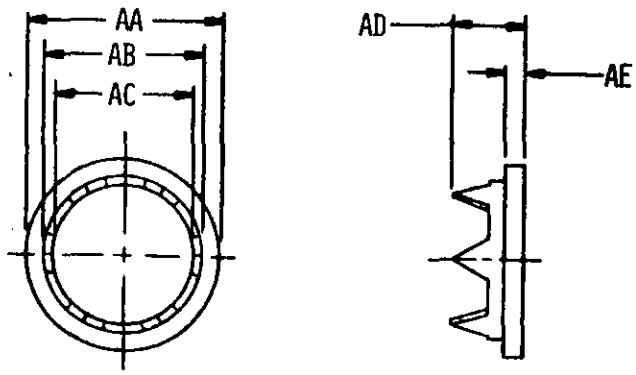


155-01-5

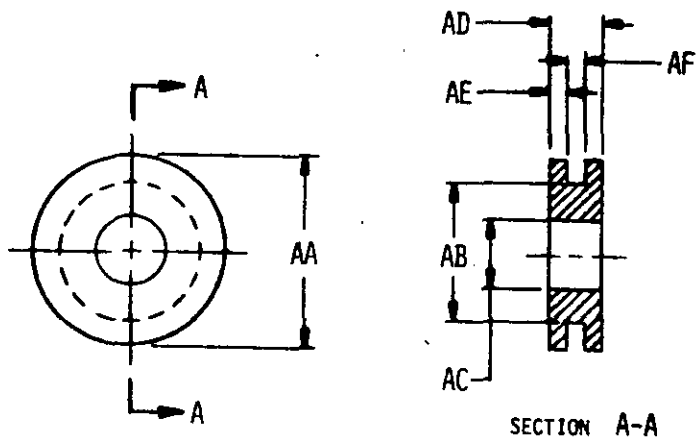


155-01-6

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

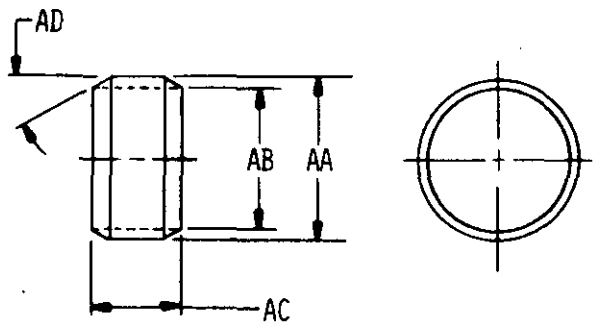


155-01-7

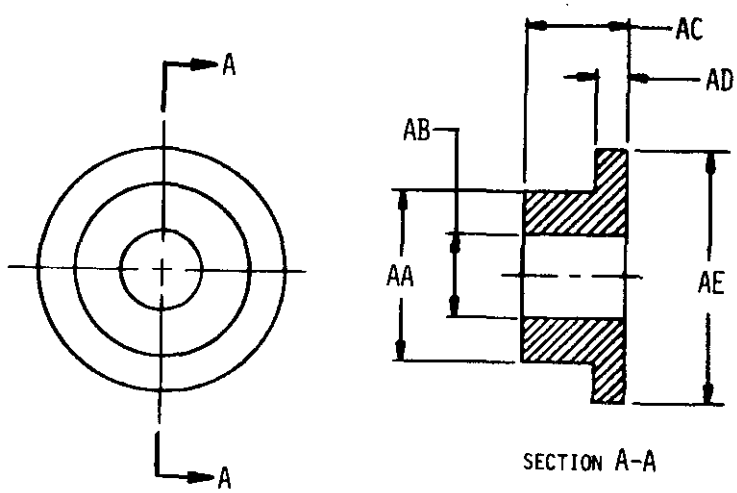


155-01-8

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

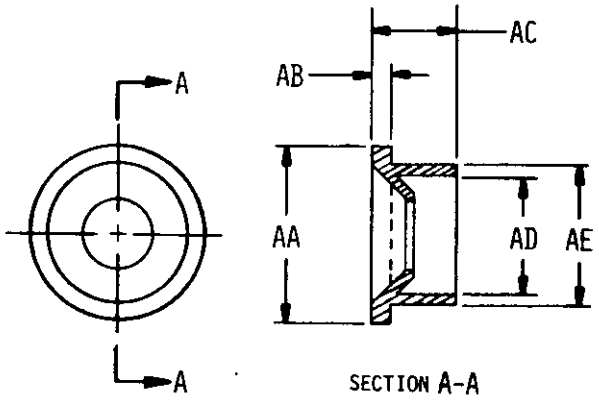

155-01-9

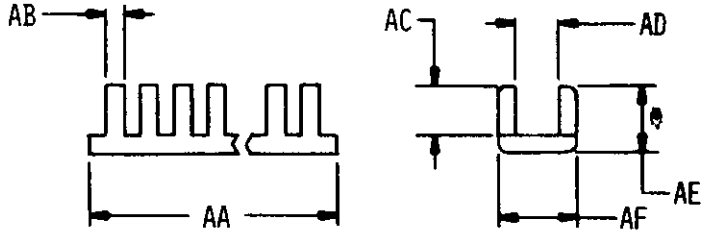

155-01-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	20	1706	34	2208	44	2620	54
0102	20	1708	34	2210	44	2622	54
0103	20	1722	34	2222	44	2702	54
0104	20	1724	34	2224	44	2704	54
0105	20	1726	34	2226	42	2706	54
0107	22	1728	34	2228	44	2708	54
0108	22	1730	34	2230	44	2710	54
0700	20	1732	34	2302	46	2722	54
0800	20	1802	36	2304	46	2724	54
1003	20	1804	36	2322	46	2726	56
1004	20	1822	36	2324	46	2728	56
1005	20	1824	36	2326	46	2802	56
1006	20	1826	36	2328	46	2804	56
1008	20	1828	36	2402	46	2806	56
1009	26	1902	36	2404	46	2808	56
1466	76	1904	36	2422	46	2810	56
1467	76	1906	36	2424	48	2812	56
1470	76	1908	36	2426	48	2822	56
1475	74	1922	38	2428	48	2824	56
1476	74	1924	38	2502	48	2826	58
1529	78	1926	38	2504	48	2828	58
1535	76	2002	38	2522	48	2830	58
1536	76	2004	38	2524	48	2832	58
1570	24	2022	38	2526	48	2902	58
1580	24	2024	38	2528	48	2904	58
1590	24	2026	38	2530	50	2906	58
1592	24	2028	38	2532	50	2908	58
1602	30	2030	38	2534	50	2910	58
1604	30	2102	40	2536	50	2922	58
1622	32	2104	40	2538	50	2924	60
1624	32	2122	40	2540	50	2925	60
1626	32	2124	40	2542	50	2926	60
1628	32	2126	40	2544	50	2928	60
1630	32	2128	40	2546	50	2930	60
1632	32	2130	40	2548	50	2932	60
1634	32	2132	40	2550	52	2934	60
1636	32	2134	40	2552	52	2936	60
1638	32	2202	44	2554	52	2938	60
1702	32	2204	44	2556	52	2940	60
1704	34	2206	44	2600	52	2942	60

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2944	60	3224	68	4723	72	6873	28
2946	60	3226	68	4726	72	6874	22
2948	60	3228	68	4729	76	6941	22
2950	60	3230	68	4730	76	6942	22
2952	62	3232	68	4731	76	6943	28
2954	62	3234	70	4754	54	6944	28
2956	62	3302	70	4756	54	6945	30
2958	62	3304	70	4760	52	6946	30
2960	62	3306	70	4761	52	6991	82
2962	62	3308	70	4762	52	6992	82
2964	62	3310	70	4775	68	6993	82
2966	62	3312	70	4779	68	6994	82
2968	62	3314	70	4780	68	6995	82
2970	62	3322	70	4783	68	6996	30
2972	62	3324	70	4786	68	6997	30
3002	62	3326	72	4844	42	6998	30
3004	62	3330	72	4850	42	6999	30
3022	64	3332	72	4854	42	7001	80
3024	64	3402	72	4855	42	7002	80
3026	64	3404	72	4856	42	7003	80
3028	64	3406	74	4861	42	7004	80
3030	64	3408	74	4862	42	7005	80
3032	64	3422	74	4867	42	7021	28
3034	64	3424	74	4874	40	7022	28
3036	64	3426	74	4875	42	7023	28
3038	64	3428	74	4904	24	7024	28
3040	64	3500	74	4905	24	7580	28
3042	64	3602	76	4942	78	7629	80
3102	64	3604	76	4943	78	7638	80
3104	64	3622	78	4944	78		
3122	66	3624	78	4950	26		
3124	66	3626	78	4998	66		
3126	66	3628	78	4999	66		
3128	66	3630	78	5000	42		
3130	66	3632	78	5049	24		
3132	66	4713	72	5209	78		
3134	66	4714	72	6369	20		
3202	68	4715	72	6372	80		
3204	68	4719	72	6375	26		
3222	68	4722	72	6870	80		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Absorption, Water	30
Additional Part Marking	82
Additional Requirements	80
Aperture Cards Required	22
Applicable Documents	82
Axial Load	32
Base Document	20
Brittleness	36
City, State, Zip	20
Classification	24
Clinching Resistance	36
Company Name/Command	20
Composition	26
Compression Set	38
Configuration	26
Contract Number/Office Symbol	20
Control	20
Coolant Resistance	40
Date	20
Definition of Hermetic Sealing	82
Dielectric Withstanding Voltage at Sea Level	40
Distortion, Insulation	44
Elongation	46
Eyelet Pull	46
Finishes	26
Flexibility	48
Format	20
Fungus	52
Government Design Activity FSCM	20
Hardness	54
Heat Aging	56
Illustrations	26
Immersion	58
Insulation (Dielectric Strength)	62

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Materials	26
Metals	28
Mounting Hardware	80
Nomenclature	82
Notes	82
Ozone Resistance	64
Packaging	82
Part Marking	80
Part Number	22
Part Number Cross-Reference	82
Phone Number	20
Quality Assurance Provisions	82
Rating	24
Requester FSCM	20
Requester's Name	20
Revision of AEDPS Document Number	22
Salt Fog	66
Scope	22
Soap Resistance	68
Source Table	22
Street/Building	20
Storage Conditions	78
Superseded Document	82
System Application	20
Tabulated Characteristics	26
Temperature Rating, Maximum	24
Temperature Rating, Minimum	24
Temperature Rating, Nominal	24
Tensile Strength	70
Thermal Shock	72
Units of Measure	22
Vibration	74
Voltage Drop	72
Weathering	76
Weight	28
Workmanship	80

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-121 (MI), dated 02 Jun 1978 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-121 (MI), dated 02 Jun 1978 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

DOD-STD-35-121

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

[ ] YES [ ] NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

U.S. MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander,
U.S. Army Missile R & D Command
ATTN: DRDMI-ESD
Redstone Arsenal, Alabama 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-04-26T07:25Z
Check the source to verify that this is the current version before use.