DOD-STD-35-122 (MI)
2 AUGUST 1978

MILITARY STANDARD

INSULATORS, ELECTRICAL

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

FSC EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Insulators, Electrical
Automated Engineering
Document Preparation System

DOD-STD-35-122(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-122(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for electrical insulators.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	5
	2.1	Issues of documents	5
	2.2	Other publications	5
	3.	DEFINITIONS	7
	4.	GENERAL REQUIREMENTS	9
	4.1	Introduction	9
	4.2	Specification Requirement Sheet (SRS)	9
	4.3	Configuration	9
	4.3.1	Dimensions	9
	4.3.2	Illustrations	9
	4.4	Units of measure	9
	5.	DETAILED REQUIREMENTS	11
	5.1	Introduction	11
	5.2	MSE Formats	11
	5.3	Referenced documents	11
	5.4	Test matrix	11
	5.5	Tabulation	12
	5.6	Keyword Code Indes (KCI) and Standard Paragraphs	15
	5.6.1	Interrelationship of Codes	15
	5.6.2	Automatic MSE Data	15
	5.6.3	DOD-STD-35 Tables	15

TABLES

Table	I.	Title Index	2
	II.	Test matrix	12
	III.	Tabulation candidates	12

APPENDICES

Appendix	A.	Illustrations	73
	B.	Characteristic Code Index	81
		Index	85

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for Insulators, Electrical.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
INSULATOR, BEAD	812001	MIL-I-23264	CERAMIC
INSULATOR, BOWL	812002	MIL-I-23264	CERAMIC
INSULATOR, BUSHING	812003	MIL-I-23264	CERAMIC
INSULATOR, CLEAT	812004	HH-I-435 MIL-I-23264	PORCELAIN CERAMIC
INSULATOR, DISK	812005	MIL-I-23264	CERAMIC
INSULATOR, ELECTRICAL	812006	MIL-I-23264	CERAMIC
INSULATOR, FEEDTHRU	812007	MIL-I-23264 MS25054	CERAMIC ANTENNA LEAD-THROUGH
INSULATOR, KNOB	812008	HH-I-435 MIL-I-23264	PORCELAIN CERAMIC
INSULATOR, PIN	812009	HH-I-435 MIL-I-23264	PORCELAIN CERAMIC
INSULATOR, SPREADER	812010	MIL-I-23264	CERAMIC

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
INSULATOR, STANDOFF	812011	HH-I-435	PORCELAIN
		MIL-I-23264	CERAMIC
INSULATOR, STRAIN	812012	HH-I-435	PORCELAIN
		MIL-I-17918	RIGGING
		MIL-I-23264	CERAMIC
		MS25052	ANTENNA
		MS75076	WITH CLEVIS
		MS75077	WITH CLEVIS
INSULATOR, SUSPENSION	812013	HH-I-435	PORCELAIN
INSULATOR, WASHER	812014	MIL-I-23264	CERAMIC
MOUNTING PAD, ELECTRICAL-ELECTRONIC COMPONENT	812015	MIL-M-38527	SEMICONDUCTOR DEVICE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-I-23264	Insulators, Ceramic, Electrical and Electronic, General Specification For

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System, Basic
MIL-STD-202	Test Methods For Electronic and Electrical Parts

PUBLICATIONS

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTMA239	Standard Method of Test For Locating the Thinnest Spot In a Zinc (Galvanized) Coating on Iron or Steel Articles by the Preece Test (Copper Sulfate Dip)
ASTMD116	Standard Methods of Testing Vitrified Ceramic Materials for Electrical Applications

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

ASTMD1868	Standard Method for Detection and Measurement of Discharge (Corona) Pulses in Evaluation of Insulation Systems
ASTME380	Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, Pa. 19103.)

ANSIC29.1	American National Standard Test Methods for Electrical Power Insulators

(Application for copies should be addressed to the American National Standards Institute, Inc., 1430 Broadway, New York, N. Y. 10018.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Insulators, Electrical.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Insulators, Electrical, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Insulators, Electrical.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Insulators, Electrical.

4.3.2 Illustrations. Illustrations applicable to Insulators, Electrical are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Test matrix. A test matrix is supplied as a guide for selecting documents to specify tests (see table II). The test matrix presents documents most applicable for use to satisfy the statement "TEST PER (DOC DES)". Any document listed in the Title Index may be used to satisfy the statement. However, the selected document from the Title Index must contain the desired test. Government test method documents and approved industry standards such as ASTM test methods may also be used to satisfy the statement "TEST PER (DOC DES)".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE II. Test Matrix.

TEST	Cantilever	Compression	Galvanizing	Tensile Strength	Torque (Torsion)
CODE	1614	1644	1666	1734	1810
DOCUMENT					
MIL-I-23264	X	X		X	X
ANSIC29.1	X	X	X	X	X
ASTMA239			X		

5.5 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table III provides codes for additional specific column headings which may be used for Insulators, Electrical characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

TABLE III. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1564	MAX CAMBER PERCENT OF L	1584	MINIMUM WKG VOLTS VOLTS, AC	1588	MINIMUM WKG VOLTS VOLTS, DC

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES. (CONT)

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1590	TENSILE STRENGTH POUNDS	1592	TENSILE STRENGTH KILOGRAMS	1594	TENSILE STRENGTH NEWTONS
1596	TENSILE STRENGTH PSI	1598	TENSILE STRENGTH KILOPASCAL	2100	CANTILEVER STRENGTH POUND-INCH
2102	CANTILEVER STRENGTH N-M	2104	CANTILEVER STRENGTH KILOGRAMS	2106	CANTILEVER STRENGTH POUNDS
2108	CPRSN STRENGTH POUNDS	2110	CPRSN STRENGTH KILOGRAMS	2112	TORQUE STRENGTH POUND-INCH
2114	TORQUE STRENGTH N-M	2118	TORQUE STRENGTH POUNDS	2116	TORQUE STRENGTH KILOGRAMS
6996	NOM WEIGHT EACH OUNCES	6997	NOM WEIGHT EACH POUNDS	6998	NOM WEIGHT EACH GRAMS
6999	NOM WEIGHT EACH KILOGRAMS	7021	MAX WEIGHT EACH GRAMS	7022	MAX WEIGHT EACH OUNCES
7023	MAX WEIGHT EACH POUNDS	7024	MAX WEIGHT EACH KILOGRAMS	2300	ITEM COLOR

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

5.6 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page nuber.

5.6.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.6.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.6.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*Requester's Name	0101
*Company Name/Command	0102
*Street/Building	0103
*City, State, Zip	0104
*Phone Number, Include Area Code, Autovon if Applicable	0105
*Date	1003
*Requester FSCM	1004
*Contract Number/Office Symbol	1005
*Base Document	1006
*System Application	1008
*Government Design Activity FSCM	6369
*Format (Select One)	
Six section document.	0700
One section document.	0800
*Control (Select One)	
Source.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Control (Cont)	
Specification.	6874
*Source Table	
Note: Refer to table V of DOD-STD-35.	
Aperture Cards Required.	0107
Revision of AEDPS Document (Number)	0108
Scope	
Note: This entry is automatic and determined by the title code used.	
Part Number	
Note: Automatic with a single item MSE.	
Note. Automatic with a multi-item MSE.	
Units of Measure (Select One)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6874	THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).
0107	
0108	0108.

SCOPE.

SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

6941	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES.
6942	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES.

Source: https://assist.dla.mil Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Ratings	
Minimum working voltage rating	
(volts, dc)	1588
(volts, ac)	1584
Frequency (hertz)	1586
Minimum rated tensile strength (select one)	
U.S. (select one)	
(pounds)	1590
(pounds per square inch)	1596
SI (select one)	
(kilograms)	1592
(newtons)	1594
(kilopascals)	1598
Minimum rated cantilever strength	
Torque (select one)	
(pound-inches)	2100
(newton meters)	2102

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	RATINGS
1588	THE MINIMUM WORKING VOLTAGE RATING SHALL BE 1588 VOLTS, DC.
1584	THE MINIMUM WORKING VOLTAGE RATING SHALL BE 1584 VOLTS, AC.
1586	THE AC VOLTAGE FREQUENCY SHALL BE 1586 HERTZ.
1590	THE MINIMUM RATED TENSILE STRENGTH SHALL BE 1590 POUNDS.
1596	THE MINIMUM RATED TENSILE STRENGTH SHALL BE 1596 POUNDS PER SQUARE INCH.
1592	THE MINIMUM RATED TENSILE STRENGTH SHALL BE 1592 KILOGRAMS.
1594	THE MINIMUM RATED TENSILE STRENGTH SHALL BE 1594 NEWTONS.
1598	THE MINIMUM RATED TENSILE STRENGTH SHALL BE 1598 KILOPASCALS.
2100	THE INSULATOR SHALL BE CAPABLE OF WITHSTANDING A MINIMUM RATED CANTILEVER TORQUE OF 2100 POUND-INCHES.
2102	THE INSULATOR SHALL BE CAPABLE OF WITHSTANDING A MINIMUM RATED CANTILEVER TORQUE OF 2102 NEWTON METERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Ratings (Cont)	
Minimum rated cantilever strength (Cont)	
Load (select one)	
(kilograms)	2104
(pounds)	2106
Minimum rated compression strength (select one)	
(pounds)	2108
(kilograms)	2110
Minimum rated torque (torsion) strength	
Torque (select one)	
(pound-inches)	2112
(newton meters)	2114
Load (select one)	
(kilograms)	2116
(pounds)	2118

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2104	THE INSULATOR SHALL BE CAPABLE OF WITHSTANDING A MINIMUM RATED CANTILEVER LOAD OF 2104 KILOGRAMS.
2106	THE INSULATOR SHALL BE CAPABLE OF WITHSTANDING A MINIMUM RATED CANTILEVER LOAD OF 2106 POUNDS.
2108	THE INSULATOR SHALL BE CAPABLE OF WITHSTANDING A MINIMUM RATED COMPRESSIVE LOAD OF 2108 POUNDS.
2110	THE INSULATOR SHALL BE CAPABLE OF WITHSTANDING A MINIMUM RATED COMPRESSIVE LOAD OF 2110 KILOGRAMS.
2112	THE INSULATOR SHALL BE CAPABLE OF WITHSTANDING A MINIMUM RATED TORQUE (TORSION) OF 2112 POUND-INCHES.
2114	THE INSULATOR SHALL BE CAPABLE OF WITHSTANDING A MINIMUM RATED TORQUE (TORSION) OF 2114 NEWTON METERS.
2116	THE INSULATOR SHALL BE CAPABLE OF WITHSTANDING A MINIMUM RATED TORQUE (TORSION) LOAD OF 2116 KILOGRAMS.
2118	THE INSULATOR SHALL BE CAPABLE OF WITHSTANDING A MINIMUM RATED TORQUE (TORSION) LOAD OF 2118 POUNDS.

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Ratings (Cont)	
Temperature Rating	
Maximum operating (degrees Celsius)	5069
Maximum nonoperating (degrees Celsius)	5071
Maximum storage (degrees Celsius)	7302
Maximum service (degrees Celsius)	4905
Minimum operating (degrees Celsius)	5068
Minimum nonoperating (degrees Celsius)	5070
Minimum storage (degrees Celsius)	7301
Minimum service (degrees Celsius)	4904
Nominal operating (degrees Celsius)	5046
Nominal storage (degrees Celsius)	5048
Service (degrees Celsius)	5049

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	TEMPERATURE RATING.
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
5071	THE MAXIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5071 DEGREES CELSIUS.
7302	THE MAXIMUM STORAGE TEMPERATURE RATING SHALL BE 7302 DEGREES CELSIUS.
4905	THE MAXIMUM SERVICE TEMPERATURE RATING SHALL BE 4905 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
5070	THE MINIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5070 DEGREES CELSIUS.
7301	THE MINIMUM STORAGE TEMPERATURE RATING SHALL BE 7301 DEGREES CELSIUS.
4904	THE MINIMUM SERVICE TEMPERATURE RATING SHALL BE 4904 DEGREES CELSIUS.
5046	THE NOMINAL OPERATING TEMPERATURE RATING SHALL BE 5046 DEGREES CELSIUS.
5048	THE NOMINAL STORAGE TEMPERATURE RATING SHALL BE 5048 DEGREES CELSIUS.
5049	THE NOMINAL SERVICE TEMPERATURE SHALL BE 5049 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Configuration	
(Illustration number), see Appendix A	1009
Dimension table, (See table III, DOD-STD-35)	
*Units (select one)	
U.S. (select one)	
(inches)	7572
(feet)	7573
(yards)	7574
SI (select one)	
(centimeters)	7576
(millimeters)	7577
(meters)	7578

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7573	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN FEET OR DEGREES.
7574	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN YARDS OR DEGREES.
7576	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN CENTIMETERS OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
7578	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN METERS OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX

CHARACTERISTIC NAME	CHAR CODE
Illustrations	
(Number), see Appendix A	4950
Note: This code is used to enter applicable illustrations which do not have dimensions.	
Tabulated Characteristics (See Table IV, DOD-STD-35)	
Materials (See Table VI and VII, DOD-STD-35)	
Note: Automatic when table VII is used.	
Finishes (See Tables VIII and IX, DOD-STD-35)	
Note: Automatic when table IX is used.	
Design and Construction	
Item color	2300

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.

MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.

FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

DESIGN AND CONSTRUCTION.

2300	THE COLOR OF THE ITEM(S) SHALL BE 2300.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Design and Construction (Cont)	
The following requirements to be specified shall be as defined in MIL-I-23264.	1562
Maximum camber to be applied to surfaces (percent of L)	1564
Ellipticity of tubes (ratio or quotient)	1566
Wall thickness of tubes	
Minimum (select one)	
(inches)	1570
(millimeters)	1572
(percent of outside diameter)	1568
Maximum (select one)	
(inches)	1576
(millimeters)	1578
(percent of outside diameter)	1574
Minimum outside diameter of tubes (select one)	
(inches)	1580
(millimeters)	1582

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1562	THE FOLLOWING REQUIREMENTS ARE AS DEFINED IN MIL-I-23264.
1564	THE MAXIMUM CAMBER PERMITTED SHALL BE 1564 PERCENT OF L.
1566	THE MAXIMUM ELLIPTICITY OF TUBES SHALL BE 1566.
1570	THE MINIMUM WALL THICKNESS OF TUBES SHALL BE 1570 INCH(S).
1572	THE MINIMUM WALL THICKNESS OF TUBES SHALL BE 1572 MILLIMETER(S).
1568	THE MINIMUM WALL THICKNESS OF TUBES SHALL BE 1568 PERCENT OF THE OUTSIDE DIAMETER.
1576	THE MAXIMUM WALL THICKNESS OF TUBES SHALLBE 1576 INCH(S).
1578	THE MAXIMUM WALL THICKNESS OF TUBES SHALL BE 1578 MILLIMETER(S)
1574	THE MAXIMUM WALL THICKNESS OF TUBES SHALL BE 1574 PERCENT OF THE OUTSIDE DIAMETER.
1580	THE MINIMUM OUTSIDE DIAMETER OF TUBES SHALL BE 1580 INCH(S).
1582	THE MINIMUM OUTSIDE DIAMETER OF TUBES SHALL BE 1582 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Design and Construction (Cont)	
Weight	
Maximum weight per unit (select one)	
U.S. (select one)	
(ounces)	7022
(pounds)	7023
SI (select one)	
(grams)	7021
(kilograms)	7024
Nominal weight per unit (select one)	
U.S. (select one)	
(ounces)	6996
(pounds)	6997
SI (select one)	
(grams)	6998
(kilograms)	6999

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).
7021	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).
6996	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6996 OUNCE(S).
6997	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6997 POUND(S).
6998	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6998 GRAM(S).
6999	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6999 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Cantilever	
Requirements (select one)	
Per base document except ____	1602
No physical damage.	1604
Test methods (select one)	
Per base document except ____	1612
Per document (doc des)	1614
Test load (select one)	
(pounds)	1622
(kilograms)	1620
Test torque (select one)	
(pound-inches)	1616
(Newton meters)	1618

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1602	CANTILEVER. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1602.
1604	CANTILEVER. THERE SHALL BE NO PHYSICAL DAMAGE.
1612	CANTILEVER. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1612.
1614	CANTILEVER. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1614.
1622	THE TEST LOAD SHALL BE 1622 POUNDS.
1620	THE TEST LOAD SHALL BE 1620 KILOGRAMS.
1616	THE TEST TORQUE SHALL BE 1616 POUND-INCHES.
1618	THE TEST TORQUE SHALL BE 1618 NEWTON METERS.

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Compression	
Requirements (select one)	
Per base document except ____	1632
No physical damage.	1634
Test methods (select one)	
Per base document except ____	1642
Per document (doc des)	1644
Test load (select one)	
(pounds)	1646
(kilograms)	1648
Corona	
Requirements (select one)	
Per base document except ____	2002
As follows:	2004
Minimum corona starting voltage (volts)	2006

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1632	COMPRESSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1632.
1634	COMPRESSION. THERE SHALL BE NO PHYSICAL DAMAGE.
1642	COMPRESSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1642.
1644	COMPRESSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1644.
1646	THE TEST LOAD SHALL BE 1646 POUNDS.
1648	THE TEST LOAD SHALL BE 1648 KILOGRAMS.
2002	CORONA. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2002.
2004	CORONA. THE REQUIREMENTS SHALL BE AS FOLLOWS:
2006	THE VOLTAGE AT WHICH CORONA IS CONTINUOUS (CORONA STARTING VOLTAGE) SHALL BE NOT LESS THAN 2006 VOLTS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Corona (Cont)	
As follows: (Cont)	
Minimum corona extinction voltage (volts)	2008
Maximum apparent corona charge at corona starting voltage (picocoulombs)	2010
Maximum corona charge (picocoulombs)	2012
*Test voltage (volts)	2014
Test methods (select one)	
Per base document except ____	2018
Per ANSIC29.1.	2020
Per ASTMD1868.	2022
Minimum equipment sensitivity (picocoulombs)	2024
Test voltage (select one)	
(dc)	2026
(ac)	2028
(percent of rated)	2030

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2008	THE VOLTAGE AT WHICH CORONA DISAPPEARS COMPLETELY (CORONA EXTINCTION VOLTAGE) SHALL BE NOT LESS THAN 2008 VOLTS.
2010	THE APPARENT CORONA CHARGE SHALL BE NOT GREATER THAN 2010 PICOCOULOMBS AT THE CORONA STARTING VOLTAGE.
2012 2014	THE APPARENT CORONA CHARGE SHALL BE NOT GREATER THAN 2012 PICOCOULOMBS AT 2014 VOLTS.
2018	CORONA. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2018.
2020	CORONA. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ANSIC29.1.
2022	CORONA. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD1868.
2024	THE EQUIPMENT SHALL HAVE A SENSITIVITY CAPABLE OF DETECTING A PULSE LEVEL OF 2024 PICOCOULOMBS OR LARGER.
2026	THE TEST VOLTAGE SHALL BE 2026 VOLTS, DC.
2028	THE TEST VOLTAGE SHALL BE 2028 VOLTS, AC.
2030	THE TEST VOLTAGE SHALL BE 2030 PERCENT OF RATED VOLTAGE

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Corona (Cont)	
Per ASTMD1868. (Cont)	
Test voltage frequency (hertz)	2032
Superimposed test voltage (volts RMS)	2034
*Voltage (volts, dc)	2036
Dielectric Withstanding Voltage At Reduced Barometric Pressure	
Requirements (select one)	
Per base document except ____	4908
No evidence of flashover, mechanical damage, arcing, or insulation breakdown.	4906
Maximum leakage (milliamperes)	4894
Remain within specified tolerance.	4901
Test methods (select one)	
Per base document except ____	4884
Per MIL-STD-202, Method 301.	6300

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2032	THE FREQUENCY OF THE AC VOLTAGE SHALL BE 2032 HERTZ.
2034 2036	THE TEST VOLTAGE SHALL BE 2034 VOLTS RMS SUPERIMPOSED ON A DC VOLTAGE OF 2036 VOLTS.
4908	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908.
4906	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4894	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4894 MILLIAMPERES.
4901	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4884	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884.
6300	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Dielectric Withstanding Voltage At Reduced Barometric Pressure (Cont)	
Per MIL-STD-202, Method 301. (Cont)	
*Altitude per Method 105 of MIL-STD-202, test condition (letter)	4886
*Test voltage (select one)	
(volts, dc)	4885
(volts, ac)	4849
Points of voltage application	
Between mutually insulated parts.	6292
Between all insulated parts and ground.	6293
Special preparation per document (doc des)	4859
Duration of voltage application (seconds)	4891
Mounting per document (doc des)	6280
Regulation of test voltage (percent)	6308
Minimum kilovoltampere rating of voltage source (kilovoltamperes)	4900

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4886	ALTITUDE SHALL BE IN ACCORDANCE WITH TEST CONDITION LETTER 4886 OF METHOD 105 OF MIL-STD-202.
4885	TEST VOLTAGE SHALL BE 4885 VOLTS, DC.
4849	TEST VOLTAGE SHALL BE 4849 VOLTS, AC.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
6292	BETWEEN MUTUALLY INSULATED PARTS.
6293	BETWEEN ALL INSULATED PARTS AND GROUND.
4859	SPECIAL PREPARATION SHALL BE IN ACCORDANCE WITH 4859.
4891	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4891 SECOND(S).
6280	MOUNTING SHALL BE IN ACCORDANCE WITH 6280.
6308	REGULATION OF THE TEST VOLTAGE SHALL BE WITHIN 6308 PERCENT.
4900	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4900 KILOVOLTAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Dielectric Withstanding Voltage At Reduced Barometric Pressure (Cont)	
Per MIL-STD-202, Method 301. (Cont)	
Maximum surge current (select one)	
(amperes)	4902
(milliamperes)	6310
Dielectric Withstanding Voltage At Sea Level	
Requirements (select one)	
Per base document except ____	4874
No evidence of flashover, mechanical damage, arcing, or insulation breakdown.	4856
Maximum leakage (milliamperes)	4875
Remain within specified tolerance.	4847
Test methods (select one)	
Per base document except ____	4861
Per MIL-STD-202, Method 301.	4862

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4902	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4902 AMPERE(S).
6310	THE SURGE CURRENT SHALL BE NOT GREATER THAN 6310 MILLIAMPERE(S).
4874	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.
4856	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4875	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4875 MILLIAMPERE(S).
4847	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4861	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.
4862	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Dielectric Withstanding Voltage At Sea Level (Cont)	
Per MIL-STD-202, Method 301. (Cont)	
*Test voltage (select one)	
(volts, dc)	4854
(volts, ac)	4855
Points of voltage application	
Between mutually insulated parts.	4844
between all insulated parts and ground.	4845
Special preparation per document (doc des)	4850
Duration of voltage application (seconds)	4867
Mounting per document (doc des)	5000
Regulation of test voltage (percent)	4869
Minimum kilovoltampere rating of voltage source (kilovoltamperes)	4870
Maximum surge current (select one)	
(amperes)	4717
(milliamperes)	4897

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
4854	TEST VOLTAGE SHALL BE 4854 VOLTS, DC.
4855	TEST VOLTAGE SHALL BE 4855 VOLTS, AC.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4844	BETWEEN MUTUALLY INSULATED PARTS.
4845	BETWEEN ALL INSULATED PARTS AND GROUND.
4850	SPECIAL PREPARATION OR CONDITIONS SHALL BE IN ACCORDANCE WITH 4850.
4867	DURATION OF TEST VOLTAGE APPLICATION SHALL BE 4867 SECOND(S).
5000	MOUNTING SHALL BE IN ACCORDANCE WITH 5000.
4869	REGULATION OF TEST VOLTAGE SHALL BE WITHIN 4869 PERCENT.
4870	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4870 KILOVOLTAMPERE(S).
4717	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4717 AMPERE(S).
4897	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4897 MILLIAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Dielectric Withstanding Voltage At Sea Level (Cont)	
Per MIL-STD-202, Method 301. (Cont)	
Method of voltage connection per document (doc des)	6267
Galvanizing	
Requirements (select one)	
Per base document except ____	1652
As follows:	1654
Minimum thickness (select one)	
(inches)	1656
(millimeters)	1658
No evidence of exposed base metal.	1660
Test methods (select one)	
Per base document except ____	1664
Per document (doc des)	1666
Number of dips (quantity)	1668
Duration of dip (select one)	
(seconds)	1670
(minutes)	1672

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6267	METHOD OF CONNECTION OF TEST VOLTAGE SHALL BE IN ACCORDANCE WITH 6267.
1652	GALVANIZING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1652.
1654	GALVANIZING. THE REQUIREMENTS SHALL BE AS FOLLOWS:
1656	THE MINIMUM FINISH THICKNESS SHALL BE 1656 INCH.
1658	THE MINIMUM FINISH THICKNESS SHALL BE 1658 MILLIMETER.
1660	THERE SHALL BE NO EVIDENCE OF EXPOSED BASE METAL.
1664	GALVANIZING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1664.
1666	GALVANIZING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1666.
1668	THERE SHALL BE 1668 DIPS.
1670	THE DURATION OF A DIP SHALL BE 1670 SECONDS.
1672	THE DURATION OF A DIP SHALL BE 1672 MINUTES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Porosity	
Requirements (select one)	
Per base document except ____	1676
No evidence of visible dye penetration of the dielectric.	1678
Test methods (select one)	
Per base document except ____	1682
Per ANSIC29.1.	1684
Per ASTMD116, method (letter)	1686
Puncture	
Requirements (select one)	
Per base document except ____	1691
Minimum puncture voltage (kilovolts, ac)	1692

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1676	POROSITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1676.
1678	POROSITY. THERE SHALL BE NO EVIDENCE OF VISIBLE DYE PENETRATION OF THE DIELECTRIC.
1682	POROSITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1682.
1684	POROSITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE ANSIC29.1.
1686	POROSITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD116, METHOD 1686.
1691	PUNCTURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1691.
1692	PUNCTURE. THE MINIMUM PUNCTURE VOLTAGE SHALL BE 1692 KILOVOLTS, AC.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Puncture (Cont)	
Test methods (select one)	
Per base document except ____	1697
Per ANSIC29.1.	1699
Radio-Influence Voltage	
Requirements (select one)	
Per base document except ___	1702
Maximum radio-influence voltage (microvolts)	1704
Test methods (select one)	
Per base document except ____	1708
Per ANSIC29.1.	1710
Test voltage (volts, ac)	1712
Plus voltage tolerance (volts, ac)	1714
Minus voltage tolerance (volts, ac)	1716

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1697	PUNCTURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1697.
1699	PUNCTURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ANSIC29.1.
1702	RADIO-INFLUENCE VOLTAGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1702.
1704	RADIO-INFLUENCE VOLTAGE. THE MAXIMUM RADIO-INFLUENCE VOLTAGE SHALL BE 1704 MICROVOLTS.
1708	RADIO-INFLUENCE VOLTAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1708.
1710	RADIO-INFLUENCE VOLTAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ANSIC29.1.
1712	THE TEST VOLTAGE SHALL BE 1712 VOLTS, AC.
1714	THE PLUS VOLTAGE TOLERANCE SHALL BE 1714 VOLTS, AC.
1716	THE MINUS VOLTAGE TOLERANCE SHALL BE 1716 VOLTS, AC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Tensile Strength	
Requirements (select one)	
Per base document except ____	1722
No physical damage.	1724
Test methods (select one)	
Per base document except ____	1732
Per document (doc des)	1734
Test load (select one)	
U.S. (select one)	
(pounds)	1736
(pounds per square inch)	1742
SI (select one)	
(kilograms)	1738
(newtons)	1740
(kilopascals)	1744

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1722	TENSILE STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1722.
1724	TENSILE STRENGTH. THERE SHALL BE NO PHYSICAL DAMAGE.
1732	TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1732.
1734	TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1734.
1736	THE TEST LOAD SHALL BE 1736 POUNDS.
1742	THE TEST LOAD SHALL BE 1742 POUNDS PER SQUARE INCH.
1738	THE TEST LOAD SHALL BE 1738 KILOGRAMS.
1740	THE TEST LOAD SHALL BE 1740 NEWTONS.
1744	THE TEST LOAD SHALL BE 1744 KILOPASCALS.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Thermal Shock	
Requirements (select one)	
Per base document except ____	4722
No evidence of physical damage.	4723
Remain within specified tolerance.	4726
Test methods (select one)	
Per base document except ____	4713
Per MIL-STD-202, Method 107.	4714
*Test condition (letter)	4715
Special mounting per (doc des)	4719
Per ANSIC29.1.	1750
Upper test temperature (degrees Celsius)	1752
Lower test temperature (degrees Celsius)	1754
Number of test cycles (quantity)	1756

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4722	THERMAL SHOCK, (TEMPERATURE CYCLING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENTS, EXCEPT 4722.
4723	THERMAL SHOCK, (TEMPERATURE CYCLING). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4726	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4713	THERMAL SHOCK, (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4713.
4714	THERMAL SHOCK, (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 107 OF MIL-STD-202.
4715	TEST CONDITION LETTER 4715 SHALL APPLY.
4719	MOUNTING SHALL BE IN ACCORDANCE WITH 4719.
1750	THERMAL SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ANSIC29.1.
1752	THE UPPER TEST TEMPERATURE SHALL BE 1752 DEGREES CELSIUS.
1754	THE LOWER TEST TEMPERATURE SHALL BE 1754 DEGREES CELSIUS.
1756	THERE SHALL BE 1756 TEST CYCLES.

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Time-Load	
Requirements (select one)	
Per base document except ____	1762
Remain within specified tolerances.	1764
Test methods (select one)	
Per base document except ____	1768
Per ANSIC29.1.	1770
Loading duration (select one)	
(seconds)	1772
(minutes)	1774
(hours)	1776
Test torque (select one)	
(pound-inches)	1778
(newton meters)	1780
Test load (select one)	
(pounds)	1782
(kilograms)	1784

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1762	TIME-LOAD. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1762.
1764	TIME-LOAD. THE INSULATOR(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCES.
1768	TIME-LOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1768.
1770	TIME-LOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ANSIC29.1.
1772	THE LOADING DURATION SHALL BE 1772 SECONDS.
1774	THE LOADING DURATION SHALL BE 1774 MINUTES.
1776	THE LOADING DURATION SHALL BE 1776 HOURS.
1778	THE TEST TORQUE SHALL BE 1778 POUND-INCHES.
1780	THE TEST TORQUE SHALL BE 1780 NEWTON METERS.
1782	THE TEST LOAD SHALL BE 1782 POUNDS.
1784	THE TEST LOAD SHALL BE 1784 KILOGRAMS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Torque (Torsion)	
Requirements (select one)	
Per base document except ____	1802
No physical damage.	1804
Test methods (select one)	
Per base document except ____	1808
Per document (doc des)	1810
Test torque (select one)	
(pound-inches)	1812
(newton meters)	1814
Test load (select one)	
(pounds)	1816
(kilograms)	1818
Voltage, Impulse Flashover	
Requirements (select one)	
Per base document except ____	1822

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1802	TORQUE (TORSION). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1802.
1804	TORQUE (TORSION). THERE SHALL BE NO PHYSICAL DAMAGE.
1808	TORQUE (TORSION). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1808.
1810	TORQUE (TORSION). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1810.
1812	THE TEST TORQUE SHALL BE 1812 POUND-INCHES.
1814	THE TEST TORQUE SHALL BE 1814 NEWTON METERS.
1816	THE TEST LOAD SHALL BE 1816 POUNDS.
1818	THE TEST LOAD SHALL BE 1818 KILOGRAMS.
1822	VOLTAGE, IMPULSE FLASHOVER. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1822.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Voltage, Impulse Flashover (Cont)	
Requirements (Cont)	
Critical impulse flashover voltage (kilovolts, ac)	1824
Test methods (select one)	
Per base document except ____	1832
Per ANSIC29.1.	1834
Voltage, Impulse Withstand	
Requirements (select one)	
Per base document except ____	1842
Minimum impulse withstand voltage (kilovolts, ac)	1844
Test methods (select one)	
Per base document except ____	1852
Per ANSIC29.1.	1854

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1824	VOLTAGE, IMPULSE FLASHOVER. THE CRITICAL IMPULSE FLASHOVER VOLTAGE SHALL BE 1824 KILOVOLTS, AC.
1832	VOLTAGE, IMPULSE FLASHOVER. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1832.
1834	VOLTAGE, IMPULSE FLASHOVER. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ANSC29.1.
1842	VOLTAGE, IMPULSE WITHSTAND. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1842.
1844	VOLTAGE, IMPULSE WITHSTAND. THE MINIMUM IMPULSE WITHSTAND VOLTAGE SHALL BE 1844 KILOVOLTS, AC.
1852	VOLTAGE, IMPULSE WITHSTAND. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1852.
1854	VOLTAGE, IMPULSE WITHSTAND. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ANSIC29.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Voltage, Low Frequency Dew Withstand	
Requirements (select one)	
Per base document except ____	1862
Minimum dew withstand voltage (kilovolts, ac)	1864
Test methods (select one)	
Per base document except ____	1872
Per ANSIC29.1.	1874
Voltage, Low Frequency Dry Flashover	
Requirements (select one)	
Per base document except ____	1882
Minimum dry flashover voltage (kilovolts, ac)	1884
Test methods (select one)	
Per base document except ____	1892
Per ANSIC29.1.	1894

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1862	VOLTAGE, LOW FREQUENCY DEW WITHSTAND. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1862.
1864	VOLTAGE, LOW FREQUENCY DEW WITHSTAND. THE MINIMUM DEW WITHSTAND VOLTAGE SHALL BE 1864 KILOVOLTS, AC.
1872	VOLTAGE, LOW FREQUENCY DEW WITHSTAND. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1872.
1874	VOLTAGE, LOW FREQUENCY DEW WITHSTAND. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ANSIC29.1.
1882	VOLTAGE, LOW FREQUENCY DRY FLASHOVER. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1882.
1884	VOLTAGE, LOW FREQUENCY DRY FLASHOVER. THE MINIMUM DRY FLASHOVER VOLTAGE SHALL BE 1884 KILOVOLTS, AC.
1892	VOLTAGE, LOW FREQUENCY DRY FLASHOVER. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1892.
1894	VOLTAGE, LOW FREQUENCY DRY FLASHOVER. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ANSIC29.1.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Voltage, Low Frequency Dry Withstand	
Requirements (select one)	
Per base document except ____	1902
Minimum dry withstand voltage (kilovolts, ac)	1904
Test methods (select one)	
Per base document except ____	1912
Per ANSIC29.1.	1914
Voltage, Low Frequency Wet Flashover	
Requirements (select one)	
Per base document except ____	1922
Minimum wet flashover voltage (kilovolts, ac)	1924
Test methods (select one)	
Per base document except ____	1932
Per ANSIC29.1.	1934

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1902	VOLTAGE, LOW FREQUENCY DRY WITHSTAND. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1902.
1904	VOLTAGE, LOW FREQUENCY DRY WITHSTAND. THE MINIMUM DRY WITHSTAND VOLTAGE SHALL BE 1904 KILOVOLTS, AC.
1912	VOLTAGE, LOW FREQUENCY DRY WITHSTAND. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1912.
1914	VOLTAGE, LOW FREQUENCY DRY WITHSTAND. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ANSIC29.1.
1922	VOLTAGE, LOW FREQUENCY WET FLASHOVER. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1922.
1924	VOLTAGE, LOW FREQUENCY WET FLASHOVER. THE MINIMUM WET FLASHOVER VOLTAGE SHALL BE 1924 KILOVOLTS, AC.
1932	VOLTAGE, LOW FREQUENCY WET FLASHOVER. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1932.
1934	VOLTAGE, LOW FREQUENCY WET FLASHOVER. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ANSIC29.1.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Voltage, Low Frequency Wet Withstand	
Requirements (select one)	
Per base document except ____	1942
Minimum wet withstand voltage (kilovolts, ac)	1944
Test methods (select one)	
Per base document except ____	1952
Per ANSIC29.1.	1954
Mounting Hardware (See Table X, DOD-STD-35)	
Workmanship	
(doc des)	6870
Additional Requirements	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1942	VOLTAGE, LOW FREQUENCY WET WITHSTAND. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1942.
1944	VOLTAGE, LOW FREQUENCY WET WITHSTAND. THE MINIMUM WET WITHSTAND VOLTAGE SHALL BE 1944 KILOVOLTS, AC.
1952	VOLTAGE, LOW FREQUENCY WET WITHSTAND. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1952.
1954	VOLTAGE, LOW FREQUENCY WET WITHSTAND. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ANSIC29.1.
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Part Marking (Select One)	
(doc des)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629
Additional Part Marking	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995
Definition of Hermetic Sealing	
Note: Automatic when codes are used to require hermetic sealing.	

Applicable Documents (See DOD-STD-35)

Quality Assurance Provisions (See DOD-STD-35)

Packaging (See DOD-STD-35)

Notes (See DOD-STD-35)

Nomenclature (See DOD-STD-35)

Superseded Document (See DOD-STD-35)

Part Number Cross-Reference (See DOD-STD-35)

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6005	(E) 6995.

DEFINITION OF HERMETIC SEALING. FOR THE PURPOSE OF THIS DOCUMENT, A HERMETICALLY-SEALED ITEM IS ONE IN WHICH THE ELEMENT IS CONTAINED WITHIN A SEALED ENCLOSURE OF CERAMIC, GLASS OR METAL, OR A COMBINATION THEREOF, WHERE SEALING IS ACCOMPLISHED BY MATERIAL FUSION, WELDING, BRAZING OR SOLDERING.

Custodians:
Army-MI

User activity:
Army-MU

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

Preparing activity:
Army-MI
(Project EDS-A215)


Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

APPENDIX A


ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

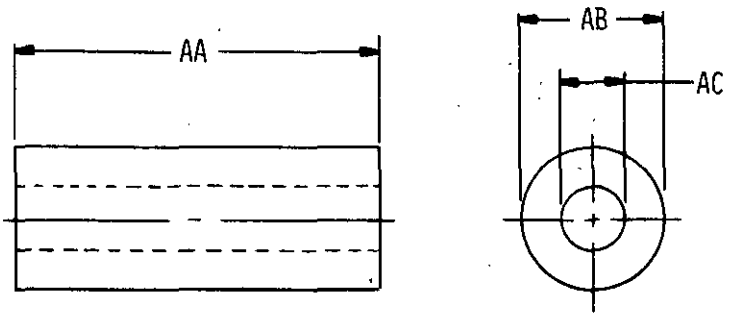


812-Ø1-1

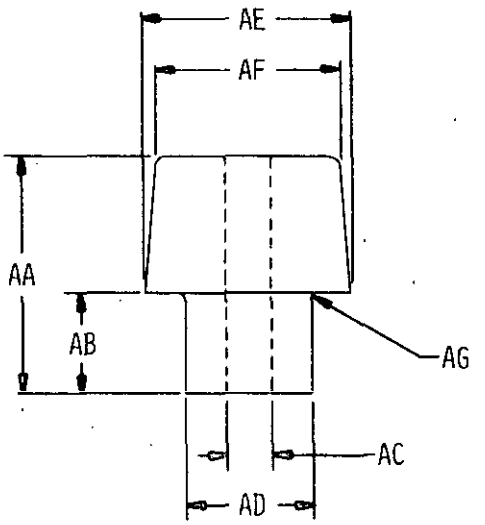


812-Ø1-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

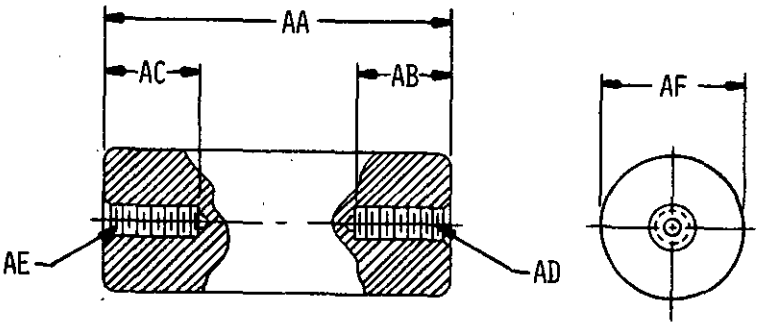


812-01-3

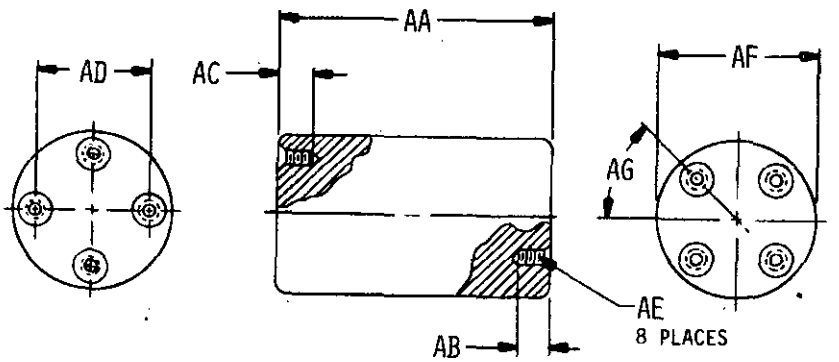


812-01-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

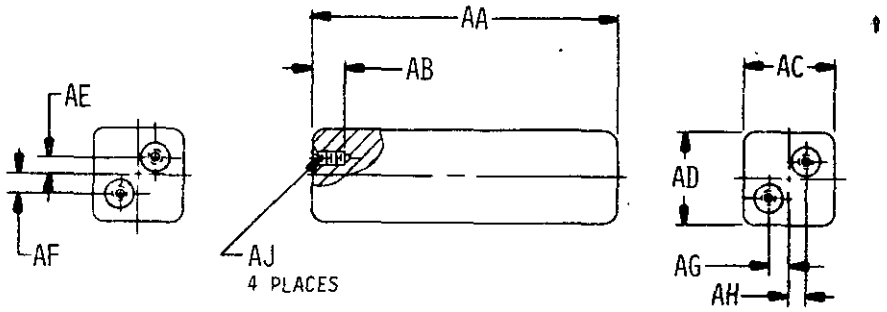


812-01-5

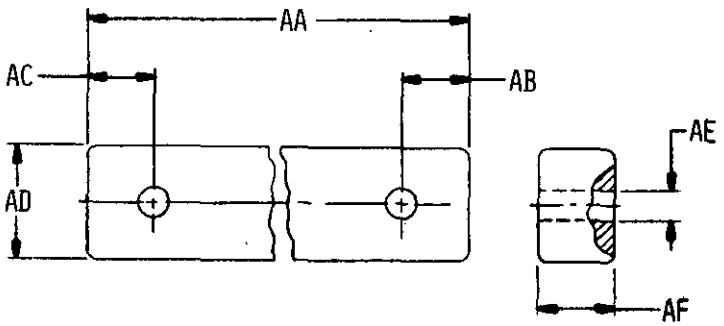


812-01-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

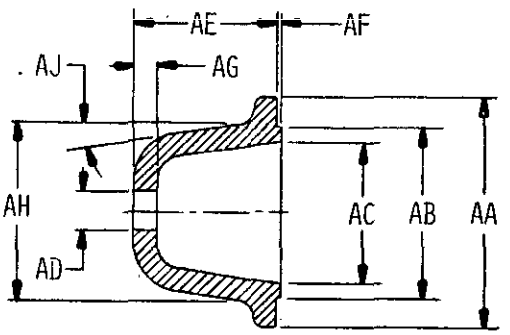


812-01-7

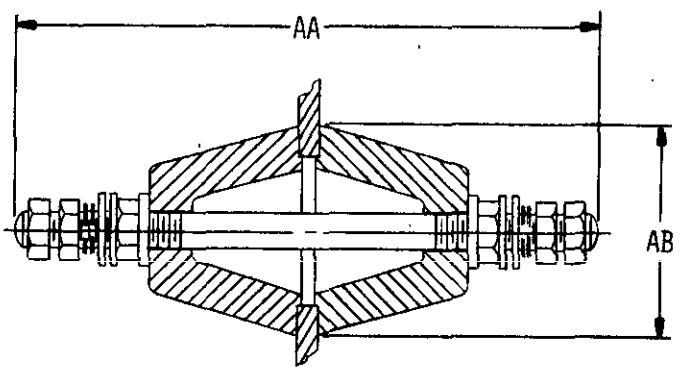


812-01-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

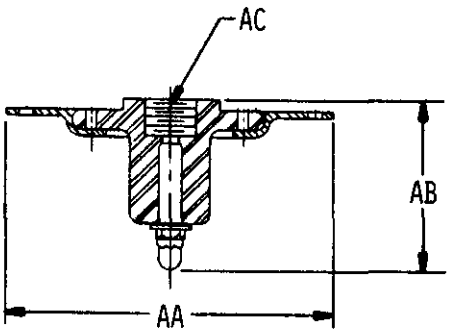


812-01-9

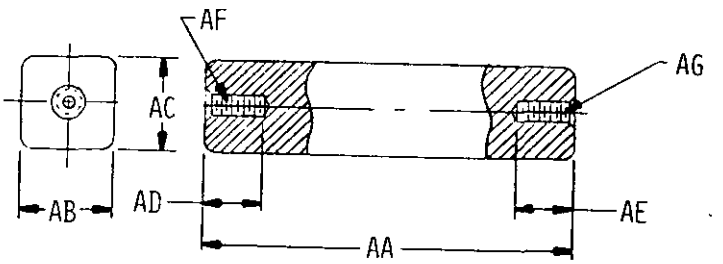


812-01-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

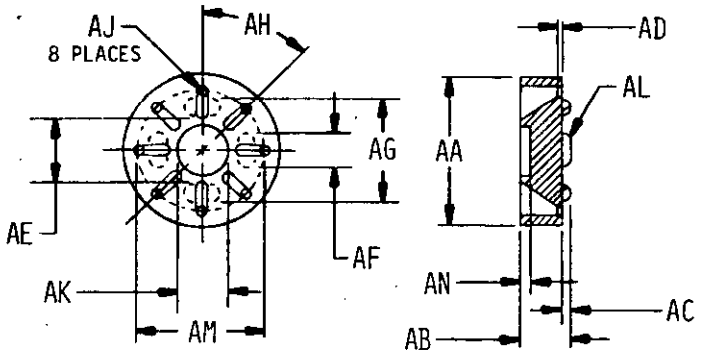

812-01-11

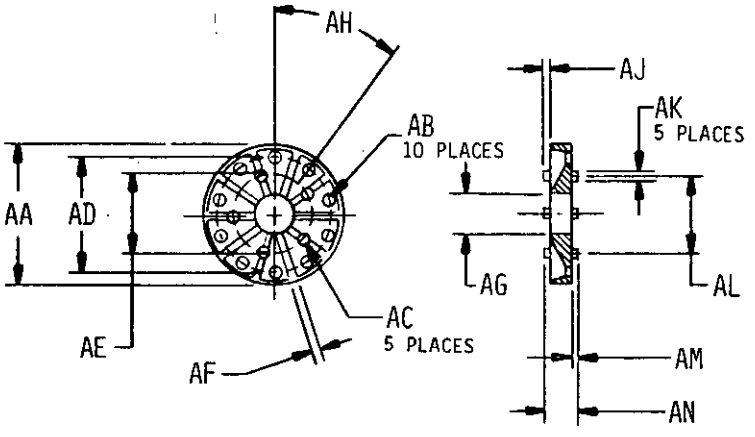

812-01-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	16	1620	34	1740	54	1892	64
0102	16	1622	34	1742	54	1894	64
0103	16	1632	36	1744	54	1902	66
0104	16	1634	36	1750	56	1904	66
0105	16	1642	36	1752	56	1912	66
0107	18	1644	36	1754	56	1914	66
0108	18	1646	36	1756	56	1922	66
0700	16	1648	36	1762	58	1924	66
0800	16	1652	48	1764	58	1932	66
1003	16	1654	48	1768	58	1934	66
1004	16	1656	48	1770	58	1942	68
1005	16	1658	48	1772	58	1944	68
1006	16	1660	48	1774	58	1952	68
1008	16	1664	48	1776	58	1954	68
1009	26	1666	48	1778	58	2002	36
1562	30	1668	48	1780	58	2004	36
1564	30	1670	48	1782	58	2006	36
1566	30	1672	48	1784	58	2008	38
1568	30	1676	50	1802	60	2010	38
1570	30	1678	50	1804	60	2012	38
1572	30	1682	50	1808	60	2014	38
1574	30	1684	50	1810	60	2018	38
1576	30	1686	50	1812	60	2020	38
1578	30	1691	50	1814	60	2022	38
1580	30	1692	50	1816	60	2024	38
1582	30	1697	52	1818	60	2026	38
1584	20	1699	52	1822	60	2028	38
1586	20	1702	52	1824	62	2030	38
1588	20	1704	52	1832	62	2032	40
1590	20	1708	52	1834	62	2034	40
1592	20	1710	52	1842	62	2036	40
1594	20	1712	52	1844	62	2100	20
1596	20	1714	52	1852	62	2102	20
1598	20	1716	52	1854	62	2104	22
1602	34	1722	54	1862	64	2106	22
1604	34	1724	54	1864	64	2108	22
1612	34	1732	54	1872	64	2110	22
1614	34	1734	54	1874	64	2112	22
1616	34	1736	54	1882	64	2114	22
1618	34	1738	54	1884	64	2116	22

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2118	22	5005	46	7301	24		
2300	28	5046	24	7302	24		
4713	56	5048	24	7572	26		
4714	56	5049	24	7573	26		
4715	56	5068	24	7574	26		
4717	46	5069	24	7576	26		
4719	56	5070	24	7577	26		
4722	56	5071	24	7578	26		
4723	56	6267	48	7629	70		
4726	56	6280	42	7630	70		
4844	46	6292	42				
4845	46	6293	42				
4847	44	6300	40				
4849	42	6308	42				
4850	46	6310	44				
4854	46	6369	16				
4855	46	6372	70				
4856	44	6870	68				
4859	42	6873	16				
4861	44	6874	18				
4862	44	6941	18				
4867	46	6942	18				
4869	46	6991	70				
4870	46	6992	70				
4874	44	6993	70				
4875	44	6994	70				
4884	40	6995	70				
4885	42	6996	32				
4886	42	6997	32				
4891	42	6998	32				
4894	40	6999	32				
4897	46	7001	68				
4900	42	7002	68				
4901	40	7003	68				
4902	44	7004	68				
4904	24	7005	68				
4905	24	7021	32				
4906	40	7022	32				
4908	40	7023	32				
4950	28	7024	32				

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Additional Part Marking	70
Additional Requirements	68
Aperture Cards Required	18
Applicable Documents	70
Base Document	16
Cantilever	34
City, State, Zip	16
Company Name/Command	16
Compression	36
Configuration	26
Contract Number/Office Symbol	16
Control Source	16
Control Specification	18
Corona	36
Date	16
Definition of Hermetic Sealing	70
Design and Construction	28
Dielectric Withstanding Voltage at Reduced Barometric Pressure	40
Dielectric Withstanding Voltage at Sea Level	44
Finishes	28
Format	16
Galvanizing	48
Government Design Activity FSCM	16
Illustrations	28
Materials	28
Mounting Hardware	68
Nomenclature	70
Notes	70
Packaging	70
Part Marking	70
Part Number	18
Part Number Cross-Reference	70
Phone Number	16
Porosity	50
Puncture	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Quality Assurance Provisions	60
Radio-Influence Voltage	52
Ratings	20
Requester FSCM	16
Requester's Name	16
Revision of AEDPS Document (Number)	18
Scope	18
Source Table	18
Street/Building	16
Superseded Document	70
System Application	16
Tabulated Characteristics	28
Tensile Strength	54
Thermal Shock	56
Time-Load	58
Torque (Torsion)	60
Units of Measure	18, 26
Voltage, Impulse Flashover	60
Voltage, Impulse Withstand	62
Voltage, Low Frequency Dew Withstand	64
Voltage, Low Frequency Dry Flashover	64
Voltage, Low Frequency Dry Withstand	66
Voltage, Low Frequency Wet Flashover	66
Voltage, Low Frequency Wet Withstand	68
Weight	32
Workmanship	68

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-122 (MI), dated 02 Aug 1978 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-122 (MI), dated 02 Aug 1978 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

U.S. MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander,
U.S. Army Missile R & D Command
ATTN: DRDMI-ESD
Redstone Arsenal, Alabama 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.