MILITARY STANDARD

AUTOMATED ENGINEERING
DOCUMENT PREPARATION SYSTEM

INSULATORS, ELECTRICAL

TO ALL HOLDERS OF DOD-STD-35-122(MI):

1. THE FOLLOWING PAGES OF DOD-STD-35-122(MI) HAVE BEEN REVISED AND SUPERSEDE THE PAGES LISTED:

NEW PAGE	DATE	SUPERSEDED PAGE	DATE
V	14 January 1983	V	2 August 1978
21	2 August 1978	(REPRINTED WITHOUT CHANGE)	
22	14 January 1983	22	2 August 1978
23	14 January 1983	23	2 August 1978
24	2 August 1978	(REPRINTED WITHOUT CHANGE)	
39	2 August 1978	(REPRINTED WITHOUT CHANGE)	
40	14 January 1983	40	2 August 1978
41	14 January 1983	41	2 August 1978
42	2 August 1978	(REPRINTED WITHOUT CHANGE)	
47	2 August 1978	(REPRINTED WITHOUT CHANGE)	
48	14 January 1983	48	2 August 1978
49	14 January 1983	49	2 August 1978
50	14 January 1983	50	2 August 1978
51	14 January 1983	51	2 August 1978
52	14 January 1983	52	2 August 1978
53	14 January 1983	53	2 August 1978
54	14 January 1983	54	2 August 1978
55	14 January 1983	55	2 August 1978
56	14 January 1983	56	2 August 1978
57	14 January 1983	57	2 August 1978
58	14 January 1983	58	2 August 1978
59	14 January 1983	59	2 August 1978
60	14 January 1983	60	2 August 1978
61	14 January 1983	61	2 August 1978
62	14 January 1983	62	2 August 1978
63	14 January 1983	63	2 August 1978
64	14 January 1983	64	2 August 1978
65	14 January 1983	65	2 August 1978
66	14 January 1983	66	2 August 1978
67	14 January 1983	67	2 August 1978
68	14 January 1983	68	2 August 1978
69	14 January 1983	69	2 August 1978

AREA EDS

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

NEW PAGE	DATE	SUPERSEDED PAGE	DATE
70	14 January 1983	70	2 August 1978
71	14 January 1983	71	2 August 1978
72	14 January 1983	72	2 August 1978
73	14 January 1983	73	2 August 1978
74	14 January 1983	74	2 August 1978
75	14 January 1983	75	2 August 1978
76	14 January 1983	76	2 August 1978
77	14 January 1983	77	2 August 1978
78	14 January 1983	78	2 August 1978
79	14 January 1983	79	2 August 1978
80	14 January 1983	80	2 August 1978
81	14 January 1983	81	2 August 1978
82	14 January 1983	82	2 August 1978
83	14 Janaury 1983	83	2 August 1978
85	14 January 1983	85	2 August 1978
86	14 January 1983	86	2 August 1978
87	14 January 1983	87	2 August 1978

2. THE FOLLOWING PAGES HAVE BEEN ADDED:

NEW PAGE	DATE	NEW PAGE	DATE
41a	14 January 1983	104	14 January 1983
41b	14 January 1983	105	14 January 1983
88	14 January 1983	106	14 January 1983
89	14 January 1983	107	14 January 1983
90	14 January 1983	108	14 January 1983
91	14 January 1983	109	14 January 1983
92	14 January 1983	110	14 January 1983
93	14 January 1983	111	14 January 1983
94	14 January 1983	112	14 January 1983
95	14 January 1983	113	14 January 1983
96	14 January 1983	114	14 January 1983
97	14 January 1983	115	14 January 1983
98	14 January 1983	116	14 January 1983
99	14 January 1983	117	14 January 1983
100	14 January 1983	118	14 January 1983
101	14 January 1983	119	14 January 1983
102	14 January 1983	120	14 January 1983
103	14 January 1983		

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2	REFERENCED DOCUMENTS	5
	2.1	Issues of documents	5
	2.2	Other publications	5
	3.	DEFINITIONS	7
	4.	GENERAL REQUIREMENTS	9
	4.1	Introduction	9
	4.2	Specification Requirement Sheet (SRS)	9
	4.3	Configuration	9
	4.3.1	Dimensions	9
	4.3.2	Illustrations	9
	4.4	Units of measure	9
	5.	DETAILED REQUIREMENTS	11
	5.1	Introduction	11
	5.2	MSE Formats	11
	5.3	Referenced documents	11
	5.4	Test matrix	11
	5.5	Tabulation	12
	5.6	Keyword Code Index (KCI) and Standard Paragraphs	15
	5.6.1	Interrelationship of Codes	15
	5.6.2	Automatic MSE Data	15
	5.6.3	DOD-STD-35 Tables	15

TABLES

Table	I.	Title Index	2
	II.	Test matrix	12
	III.	Tabulation candidates	12

APPENDICES

Appendix	A.	Illustrations	85
	B.	Characteristic Code Index	115
		Index	119

Source: https://assistdla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	RATINGS
1588	THE MINIMUM WORKING VOLTAGE RATING SHALL BE 1588 VOLTS, DC.
1584	THE MINIMUM WORKING VOLTAGE RATING SHALL BE 1584 VOLTS, AC.
1586	THE AC VOLTAGE FREQUENCY SHALL BE 1586 HERTZ.
1590	THE MINIMUM RATED TENSILE STRENGTH SHALL BE 1590 POUNDS.
1596	THE MINIMUM RATED TENSILE STRENGTH SHALL BE 1596 POUNDS PER SQUARE INCH.
1592	THE MINIMUM RATED TENSILE STRENGTH SHALL BE 1592 KILOGRAMS.
1594	THE MINIMUM RATED TENSILE STRENGTH SHALL BE 1594 NEWTONS.
1598	THE MINIMUM RATED TENSILE STRENGTH SHALL BE 1598 KILOPASCALS.
2100	THE INSULATOR SHALL BE CAPABLE OF WITHSTANDING A MINIMUM RATED CANTILEVER TORQUE OF 2100 POUND-INCHES.
2102	THE INSULATOR SHALL BE CAPABLE OF WITHSTANDING A MINIMUM RATED CANTILEVER TORQUE OF 2102 NEWTON METERS.

Reprinted without change
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Ratings (cont)	
Minimum rated cantilever strength (cont)	
Load (select one)	
(kilograms)	2104
(pounds)	2106
Minimum rated compression strength (select one)	
(pounds)	2108
(kilograms)	2110
Minimum rated torque (torsion) strength	
Torque (select one)	
(pound-inches)	2112
(newton meters)	2114
Load (select one)	
(kilograms)	2116
(pounds)	2118
Interface thermal impedance (degrees Celsius/Watt)	1918

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2104	THE INSULATOR SHALL BE CAPABLE OF WITHSTANDING A MINIMUM RATED CANTILEVER LOAD OF 2104 KILOGRAMS.
2106	THE INSULATOR SHALL BE CAPABLE OF WITHSTANDING A MINIMUM RATED CANTILEVER LOAD OF 2106 POUNDS.
2108	THE INSULATOR SHALL BE CAPABLE OF WITHSTANDING A MINIMUM RATED COMPRESSIVE LOAD OF 2108 POUNDS.
2110	THE INSULATOR SHALL BE CAPABLE OF WITHSTANDING A MINIMUM RATED COMPRESSIVE LOAD OF 2110 KILOGRAMS.
2112	THE INSULATOR SHALL BE CAPABLE OF WITHSTANDING A MINIMUM RATED TORQUE (TORSION) OF 2112 POUND-INCHES.
2114	THE INSULATOR SHALL BE CAPABLE OF WITHSTANDING A MINIMUM RATED TORQUE (TORSION) OF 2114 NEWTON METERS.
2116	THE INSULATOR SHALL BE CAPABLE OF WITHSTANDING A MINIMUM RATED TORQUE (TORSION) LOAD OF 2116 KILOGRAMS.
2118	THE INSULATOR SHALL BE CAPABLE OF WITHSTANDING A MINIMUM RATED TORQUE (TORSION) LOAD OF 2118 POUNDS.
1918	THE INTERFACE THERMAL IMPEDANCE SHALL BE 1918 DEGREES CELSIUS PER WATT.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Ratings (Cont)	
Temperature Rating	
Maximum operating (degrees Celsius)	5069
Maximum nonoperating (degrees Celsius)	5071
Maximum storage (degrees Celsius)	7302
Maximum service (degrees Celsius)	4905
Minimum operating (degrees Celsius)	5068
Minimum nonoperating (degrees Celsius)	5070
Minimum storage (degrees Celsius)	7301
Minimum service (degrees Celsius)	4904
Nominal operating (degrees Celsius)	5046
Nominal storage (degrees Celsius)	5048
Service (degrees Celsius)	5049

Source: https://assist.dla.mil -- Downloaded: 2020-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2008	THE VOLTAGE AT WHICH CORONA DISAPPEARS COMPLETELY (CORONA EXTINCTION VOLTAGE) SHALL BE NOT LESS THAN 2008 VOLTS.
2010	THE APPARENT CORONA CHARGE SHALL BE NOT GREATER THAN 2010 PICOCOULOMBS AT THE CORONA STARTING VOLTAGE.
2012 2014	THE APPARENT CORONA CHARGE SHALL BE NOT GREATER THAN 2012 PICOCOULOMBS AT 2014 VOLTS.
2018	CORONA. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2018.
2020	CORONA. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ANSIC29.1.
2022	CORONA. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD1868.
2024	THE EQUIPMENT SHALL HAVE A SENSITIVITY CAPABLE OF DETECTING A PULSE LEVEL OF 2024 PICOCOULOMBS OR LARGER.
2026	THE TEST VOLTAGE SHALL BE 2026 VOLTS, DC.
2028	THE TEST VOLTAGE SHALL BE 2028 VOLTS, AC.
2030	THE TEST VOLTAGE SHALL BE 2030 PERCENT OF RATED VOLTAGE

Reprinted without change
Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Corona (CONT)	
Per ASTMD1868. (cont)	
Test voltage frequency (hertz)	2032
Superimposed test voltage (volts RMS)	2034
*Voltage (volts, DC)	2036
Dielectric Constant	
Requirements (select one)	
Per base document except ____	1896
As follows:	1898
Maximum dielectric constant at 60 hertz (value)	1900
Maximum dielectric constant at 1 kilohertz (value)	1906
Maximum dielectric constant at 1 megahertz (value)	1908
Test methods (select one)	
Per base document except ____.	1910
Per ASTMD150.	1916

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2032	THE FREQUENCY OF THE AC VOLTAGE SHALL BE 2032 HERTZ.
2034 2036	THE TEST VOLTAGE SHALL BE 2034 VOLTS RMS SUPERIMPOSED ON A DC VOLTAGE OF 2036 VOLTS.
1896	DIELECTRIC CONSTANT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1896.
1898	DIELECTRIC CONSTANT. THE REQUIREMENT(S) SHALL BE AS FOLLOWS.
1900	THE DIELECTRIC CONSTANT SHALL BE NOT GREATER THAN 1900 AT 60 HERTZ.
1906	THE DIELECTRIC CONSTANT SHALL BE NOT GREATER THAN 1906 AT 1 KILOHERTZ.
1908	THE DIELECTRIC CONSTANT SHALL BE NOT GREATER THAN 1908 AT 1 MEGAHERTZ.
1910	DIELECTRIC CONSTANT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1910.
1916	DIELECTRIC CONSTANT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD150.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Dielectric withstanding voltage at reduced barometric pressure	
Requirements (select one)	
Per base document except ____	4908
No evidence of flashover, mechanical damage, arcing, or insulation breakdown.	4906
Maximum leakage (milliamperes)	4894
Remain within specified tolerance.	4901
Test methods (select one)	
Per base document except ____	4884
Per MIL-STD-202, method 301.	6300

New Page

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4908	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908.
4906	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4894	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4894 MILLIMAPERES.
4901	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4884	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884.
6300	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.

New Page

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Dielectric Withstanding Voltage At Reduced Barometric Pressure (Cont)	
Per MIL-STD-202, Method 301. (Cont)	
*Altitude per Method 105 of MIL-STD-202, test condition (letter)	4886
*Test voltage (select one)	
(volts, dc)	4885
(volts, ac)	4849
Points of voltage application	
Between mutually insulated parts.	6292
Between all insulated parts and ground.	6293
Special preparation per document (doc des)	4859
Duration of voltage application (seconds)	4891
Mounting per document (doc des)	6280
Regulation of test voltage (percent)	6308
Minimum kilovoltampere rating of voltage source (kilovoltamperes)	4900

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4854	TEST VOLTAGE SHALL BE 4854 VOLTS, DC.
4855	TEST VOLTAGE SHALL BE 4855 VOLTS, AC.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4844	BETWEEN MUTUALLY INSULATED PARTS.
4845	BETWEEN ALL INSULATED PARTS AND GROUND.
4850	SPECIAL PREPARATION OR CONDITIONS SHALL BE IN ACCORDANCE WITH 4850.
4867	DURATION OF TEST VOLTAGE APPLICATION SHALL BE 4867 SECOND(S).
5000	MOUNTING SHALL BE IN ACCORDANCE WITH 5000.
4869	REGULATION OF TEST VOLTAGE SHALL BE WITHIN 4869 PERCENT.
4870	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4870 KILOVOLTAMPERE(S).
4717	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4717 AMPERE(S).
4897	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4897 MILLIAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Dielectric withstanding voltage at sea level (cont)	
Per MIL-STD-202, method 301. (cont)	
Method of voltage connection per document (doc des)	6267
Elongation	
Requirements (select one)	
Per base document except ____	1626
As follows:	1628
Maximum (percent)	1630
Minimum (percent)	1636
Test methods	
Per base document except ____	1638
Per ASTMD412.	1640
Galvanizing	
Requirements (select one)	
Per base document except ____	1652

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6267	METHOD OF CONNECTION OF TEST VOLTAGE SHALL BE IN ACCORDANCE WITH 6267.
1626	ELONGATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1626.
1628	ELONGATION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS.
1630	THE ELONGATION SHALL BE NOT GREATER THAN 1630 PERCENT OF THE PRETEST SPECIMEN DIMENSION.
1636	THE ELONGATION SHALL BE NOT LESS THAN 1636 PERCENT OF THE PRETEST SPECIMEN DIMENSION.
1638	ELONGATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1638.
1640	ELONGATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD412.
1652	GALVANIZING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1652.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC CODE	CHAR CODE
Galvanizing (cont)	
Requirements (select one) (cont)	
As follows:	1654
Minimum thickness (select one)	
(inches)	1656
(millimeters)	1658
No evidence of exposed base metal.	1660
Test methods (select one)	
Per base document except ____	1664
Per document (doc des)	1666
Number of dips (quantity)	1668
Duration of dip (select one)	
(seconds)	1670
(minutes)	1672
Hardness	
Requirements (select one)	
Per base document except ____	1650

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1654	GALVANIZING. THE REQUIREMENTS SHALL BE AS FOLLOWS.
1656	THE MINIMUM FINISH THICKNESS SHALL BE 1656 INCH.
1658	THE MINIMUM FINISH THICKNESS SHALL BE 1658 MILLIMETER.
1660	THERE SHALL BE NO EVIDENCE OF EXPOSED BASE METAL.
1664	GALVANIZING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1664.
1666	GALVANIZING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1666.
1668	THERE SHALL BE 1668 DIPS.
1670	THE DURATION OF A DIP SHALL BE 1670 SECONDS.
1672	THE DURATION OF A DIP SHALL BE 1672 MINUTES.
1650	HARDNESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1650.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Hardness (cont)	
Requirements (select one) (cont)	
As follows:	1662
Scale (letter)	1674
Value (number)	1680
Test methods (select one)	
Per base document except ____	1688
Per ASTMD2240.	1690
Porosity	
Requirements (select one)	
Per base document except ____	1676
No evidence of visible dye penetration of the dielectric.	1678
Test methods (select one)	
Per base document except ____	1682
Per ANSIC29.1.	1684
Per ASTMD116, Method (letter)	1686

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1662 HARDNESS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS.

1674 THE 1674 SCALE SHALL APPLY.

1680 THE HARDNESS SHALL BE 1680.

1688 HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1688.

1690 HARDNESS. TESTING SHALL BE PERFORMED WITH ASTMD2240.

1676 POROSITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1676.

1678 POROSITY. THERE SHALL BE NO EVIDENCE OF VISIBLE DYE PENETRATION OF THE DIELECTRIC.

1682 POROSITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH WITH THE BASE DOCUMENT, EXCEPT 1682.

1684 POROSITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE ANSIC29.1.

1686 POROSITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD116, METHOD 1686.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Puncture	
Requirements (select one)	
Per base document except ____	1691
Minimum puncture voltage (kilovolts, AC)	1692
Test methods (select one)	
Per base document except ____	1697
Per ANSIC29.1.	1699
Radio-Influence voltage	
Requirements (select one)	
Per base document except ____	1702
Maximum radio-influence voltage (microvolts)	1704
Test methods (select one)	
Per base document except ____	1708
Per ANSIC29.1.	1710
Test voltage (volts, AC)	1712

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1691	PUNCTURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1691.
1692	PUNCTURE. THE MINIMUM PUNCTURE VOLTAGE SHALL BE 1692 KILOVOLTS, AC.
1697	PUNCTURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1697.
1699	PUNCTURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ANSIC29.1.
1702	RADIO-INFLUENCE VOLTAGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1702.
1704	RADIO-INFLUENCE VOLTAGE. THE MAXIMUM RADIO-INFLUENCE VOLTAGE SHALL BE 1704 MICROVOLTS.
1708	RADIO-INFLUENCE VOLTAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1708
1710	RADIO-INFLUENCE VOLTAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ANSIC29.1.
1712	THE TEST VOLTAGE SHALL BE 1712 VOLTS, AC.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Radio-influence voltage (cont)	
Test voltage (volts, AC) (cont)	
Plus voltage tolerance (volts, AC)	1714
Minus voltage tolerance (volts, AC)	1716
Specific gravity	
Requirements (select one)	
Per base document except ____	1806
Specific gravity (number)	1820
Test methods (select one)	
Per base document except ____	1826
Per ASTMD792	1828
Test temperature (degrees Celsius)	1830
Tolerance (degrees Celsius)	1836
Tensile Strength	
Requirements (select one)	
Per base document except ____	1722
No physical damage.	1724

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1714	THE PLUS VOLTAGE TOLERANCE SHALL BE 1714 VOLTS, AC.
1716	THE MINUS VOLTAGE TOLERANCE SHALL BE 1716 VOLTS, AC.
1806	SPECIFIC GRAVITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1806.
1820	SPECIFIC GRAVITY. THE SPECIFIC GRAVITY SHALL BE 1820.
1826	SPECIFIC GRAVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1826.
1828	SPECIFIC GRAVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD792.
1830	THE TEST TEMPERATURE SHALL BE 1830 DEGREE(S) CELSIUS.
1836	THE TOLERANCE SHALL BE 1836 DEGREE(S) CELSIUS.
1722	TENSILE STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1722.
1724	TENSILE STRENGTH. THERE SHALL BE NO PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currenversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR. CODE
Tensile Strength (cont)	
Test methods (select one)	
Per base document except ____	1732
Per document (doc des)	1734
Test load (select one)	
U.S. (select one)	
(pounds)	1736
(pounds per square inch)	1742
SI (select one)	
(kilograms)	1738
(newtons)	1740
(kilopascals)	1744
Tear Strength	
Requirements (select one)	
Per base document except ____	1694
No physical damage.	1696
Test methods (select one)	
Per base document except ____	1718

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1732	TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1732.
1734	TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1734.
1736	THE TEST LOAD SHALL BE 1736 POUNDS.
1742	THE TEST LOAD SHALL BE 1742 POUNDS PER SQUARE INCH.
1738	THE TEST LOAD SHALL BE 1738 KILOGRAMS.
1740	THE TEST LOAD SHALL BE 1740 NEWTONS.
1744	THE TEST LOAD SHALL BE 1744 KILOPASCALS.
1694	TEAR STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1694.
1696	TEAR STRENGTH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1718	TEAR STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1718.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHARACTERISTIC CODE
Tear Strength (cont)	
Test methods (select one) (cont)	
Per ASTMD624.	1720
Test load (select one)	
U.S.	
(foot pounds per inch)	1726
SI	
(newton meters)	1728
Thermal Conductivity	
Requirements (select one)	
Per base document except ____	1730
Minimum thermal conductivity (select one)	
U.S.	
(BTU-In/Hr-Sq. Ft.-Deg F)	1746
SI	
(Watts/meter kelvin)	1748

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1720 TEAR STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD624.

1726 THE TEST LOAD SHALL BE 1726 FOOT POUNDS PER INCH.

1728 THE TEST LOAD SHALL BE 1728 NEWTON METERS.

1730 THERMAL CONDUCTIVITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1730.

1746 THERMAL CONDUCTIVITY. THE THERMAL CONDUCTIVITY SHALL BE NOT LESS THAN 1746 BRITISH THERMAL UNITS-INCH/HOUR-SQUARE FOOT-DEGR-E FAHRENHEIT.

1748 THERMAL CONDUCTIVITY. THE THERMAL CONDUCTIVITY SHALL BE NOT LESS THAN 1748 WATTS PER METER KELVIN.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Thermal Conductivity (cont)	
Test methods (select one)	
Per base document except ____	1758
Per ASTMC518.	1760
Thermal Shock	
Requirements (select one)	
Per base document except ____	4722
No evidence of physical damage.	4723
Remain within specified tolerance.	4726
Test methods (select one)	
Per base document except ____	4713
Per MIL-STD-202, Method 107.	4714
*Test condition (letter)	4715
Special mounting per (doc des)	4719
Per ANSIC29.1.	1750

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1758	THERMAL CONDUCTIVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1758.
1760	THERMAL CONDUCTIVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMC518.
4722	THERMAL SHOCK, (TEMPERATURE CYCLING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENTS, EXCEPT 4722.
4723	THERMAL SHOCK, (TEMPERATURE CYCLING). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4726	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4713	THERMAL SHOCK, (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4713.
4714	THERMAL SHOCK, (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 107 OF MIL-STD-202.
4715	TEST CONDITION LETTER 4715 SHALL APPLY.
4719	MOUNTING SHALL BE IN ACCORDANCE WITH 4719.
1750	THERMAL SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ANSIC29.1.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Thermal Shock (cont)	
Per ANSIC29.1. (cont)	
Upper Test Temperature (degrees Celsius)	1752
Lower Test temperature (degrees Celsius)	1754
Number of test cycles (quntity)	1756
Time-Load	
Requirements (select one)	
Per base document except ____	1762
Remain within specified tolerances.	1764
Test methods (select one)	
Per base document except ____	1768
Per ANSIC29.1.	1770
Loading duration (select one)	
(seconds)	1772
(minutes)	1774
(hours)	1776
Test torque (select one)	
(pound-inches)	1778

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1752	THE UPPER TEST TEMPERATURE SHALL BE 1752 DEGREES CELSIUS.
1754	THE LOWER TEST TEMPERATURE SHALL BE 1754 DEGREES CELSIUS.
1756	THERE SHALL BE 1756 TEST CYCLES.
1762	TIME-LOAD. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1762.
1764	TIME-LOAD. THE INSULATOR(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCES.
1768	TIME-LOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1768.
1770	TIME-LOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ANSIC29.1.
1772	THE LOADING DURATION SHALL BE 1772 SECONDS.
1774	THE LOADING DURATION SHALL BE 1774 MINUTES.
1776	THE LOADING DURATION SHALL BE 1776 HOURS.
1778	THE TEST TORQUE SHALL BE 1778 POUND-INCHES.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Time-Load (cont)	
Test torque (select one) (cont)	
(newton meters)	1780
Test load (select one)	
(pounds)	1782
(kilograms)	1784
Torque (Torsion)	
Requirements (select one)	
Per base document except ____	1802
No physical damage.	1804
Test methods (select one)	
Per base document except ____	1808
Per document (doc des)	1810
Test torque (select one)	
(pound-inches)	1812
(newton meters)	1814
Test load (select one)	
(pounds)	1816

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1780	THE TEST TORQUE SHALL BE 1780 NEWTON METERS.
1782	THE TEST LOAD SHALL BE 1782 POUNDS.
1784	THE TEST LOAD SHALL BE 1784 KILOGRAMS.
1802	TORQUE (TORSION). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1802.
1804	TORQUE (TORSION). THERE SHALL BE NO PHYSICAL DAMAGE.
1808	TORQUE (TORSION). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1808.
1810	TORQUE (TORSION). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1810.
1812	THE TEST TORQUE SHALL BE 1812 POUND-INCHES.
1814	THE TEST TORQUE SHALL BE 1814 NEWTON METERS.
1816	THE TEST LOAD SHALL BE 1816 POUNDS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Torque (Torsion) (cont)	
Test load (select one) (cont)	
(kilograms)	1818
Voltage, Breakdown	
Requirements (select one)	
Per base document except ____	1766
Minimum breakdown voltage (volts)	1796
Test methods (select one)	
Per base document except ____	1798
Per ASTMD149.	1800
Voltage, Impulse Flashover	
Requirements (select one)	
Per base document except ____	1822
Critical impulse flashover voltage (kilovolts, AC)	1824

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1818	THE TEST LOAD SHALL BE 1818 KILOGRAMS.
1766	VOLTAGE, BREAKDOWN. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1766.
1796	VOLTAGE, BREAKDOWN. THE BREAKDOWN VOLTAGE SHALL BE NOT LESS THAN 1796 VOLTS.
1798	VOLTAGE, BREAKDOWN. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1798.
1800	VOLTAGE, BREAKDOWN. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD149.
1822	VOLTAGE, IMPULSE FLASHOVER. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1822.
1824	VOLTAGE, IMPULSE FLASHOVER. THE CRITICAL IMPULSE FLASHOVER VOLTAGE SHALL BE 1824 KILOVOLTS, AC.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Voltage, Impulse Flashover (cont)	
Test methods (select one)	
Per base document except ____	1832
Per ANSIC29.1.	1834
Voltage, Impulse Withstand	
Requirements (select one)	
Per base document except ____	1842
Minimum impulse withstand voltage (kilovolts, AC)	1844
Test methods (select one)	
Per base document except ____	1852
Per ANSIC29.1.	1854
Voltage, Low Frequency Dew Withstand	
Requirements (select one)	
Per base document except ____	1862
Minimum dew withstand voltage (kilovolts, AC)	1864
Test methods (select one)	
Per base document except ____	1872

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1832	VOLTAGE, IMPULSE FLASHOVER. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1832.
1834	VOLTAGE, IMPULSE FLASHOVER. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ANSIC29.1.
1842	VOLTAGE, IMPULSE WITHSTAND. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1842.
1844	VOLTAGE, IMPULSE WITHSTAND. THE MINIMUM IMPULSE WITHSTAND VOLTAGE SHALL BE 1844 KILOVOLTS, AC.
1852	VOLTAGE, IMPULSE WITHSTAND. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1852.
1854	VOLTAGE, IMPULSE WITHSTAND. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ANSIC29.1.
1862	VOLTAGE, LOW FREQUENCY DEW WITHSTAND. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1862.
1864	VOLTAGE, LOW FREQUENCY DEW WITHSTAND. THE MINIMUM DEW WITHSTAND VOLTAGE SHALL BE 1864 KILOVOLTS, AC.
1872	VOLTAGE, LOW FREQUENCY DEW WITHSTAND. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1872.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Test methods (select one) (cont)	
Per ANSIC29.1.	1874
Voltage, Low Frequency Dry Flashover	
Requirements (select one)	
Per base document except ____	1882
Minimum dry flashover voltage (kilovolts, AC)	1884
Test methods (select one)	
Per base document except ____	1892
Per ANSIC29.1.	1892
Voltage, Low Frequency Dry Withstand	
Requirements (select one)	
Per base document except ____	1902
Minimum dry withstand voltage (kilovolts, AC)	1904
Test methods (select one)	
Per base document except ____	1912
Per ANSIC29.1.	1914

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1874	VOLTAGE, LOW FREQUENCY DEW WITHSTAND. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ANSIC29.1.
1882	VOLTAGE, LOW FREQUENCY DRY FLASHOVER. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1882.
1884	VOLTAGE, LOW FREQUENCY DRY FLASHOVER. THE MINIMUM DRY FLASHOVER VOLTAGE SHALL BE 1884 KILOVOLTS, AC.
1892	VOLTAGE, LOW FREQUENCY DRY FLASHOVER. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1892.
1894	VOLTAGE, LOW FREQUENCY DRY FLASHOVER. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ANSIC29.1.
1902	VOLTAGE, LOW FREQUENCY DRY WITHSTAND. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1902.
1904	VOLTAGE, LOW FREQUENCY DRY WITHSTAND. THE MINIMUM DRY WITHSTAND VOLTAGE SHALL BE 1904 KILOVOLTS, AC.
1912	VOLTAGE LOW FREQUENCY DRY WITHSTAND. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1912.
1914	VOLTAGE, LOW FREQUENCY DRY WITHSTAND. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ANSIC29.1.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Voltage, Low Frequency Wet Flashover	
Requirements (select one)	
Per base document except ____	1922
Minimum wet flashover voltage (kilovolts, AC)	1924
Test methods (select one)	
Per base document except ____	1932
Per ANSIC29.1.	1934
Voltage, Low Frequency Wet Withstand	
Requirements (select one)	
Per base document except ____	1942
Minimum wet withstand voltage (kilovolts, AC)	1944
Test methods (select one)	
Per base document except ____	1952
Per ANSIC29.1.	1954
Volume Resistivity	
Requirements (select one)	
Per base document except ____	1838

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1922	VOLTAGE, LOW FREQUENCY WET FLASHOVER. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1922.
1924	VOLTAGE, LOW FREQUENCY WET FLASHOVER. THE MINIMUM WET FLASHOVER VOLTAGE SHALL BE 1924 KILOVOLTS, AC.
1932	VOLTAGE, LOW FREQUENCY WET FLASHOVER. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1932.
1934	VOLTAGE, LOW FREQUENCY WET FLASHOVER. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ANSIC29.1.
1942	VOLTAGE, LOW FREQUENCY WET WITHSTAND. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1942.
1944	VOLTAGE, LOW FREQUENCY WET WITHSTAND. THE MINIMUM WET WITHSTAND VOLTAGE SHALL BE 1944 KILOVOLTS, AC.
1952	VOLTAGE, LOW FREQUENCY WET WITHSTAND. TESTING SHALL BE PERFORMED IN ACCORDNACE WITH THE BASE DOCUMENT, EXCEPT 1952.
1954	VOLTAGE, LOW FREQUENCY WET WITHSTAND. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ANSIC29.1.
1838	VOLUME RESISTIVITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1838.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Volume Resistivity (cont)	
Requirements (select one) (cont)	
As follows:	1840
Minimum volume resistivity (select one)	
U.S.	
(ohms/inch)	1848
SI	
(ohms/millimeter)	1848
Maximum volume resistivity (select one)	
U.S.	
(ohms/inch)	1850
SI	
(ohms/millimeter)	1856
Minimum volume resistivity after conditioning (select one)	
U.S.	
(ohms/inch)	1858

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1840	VOLUME RESISTIVTY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS.
1846	THE VOLUME RESISTIVITY SHALL BE NOT LESS THAN 1846 OHMS PER INCH.
1848	THE VOLUME RESISTIVITY SHALL BE NOT LESS THAN 1848 OHMS PER MILLIMETER.
1850	THE VOLUME RESISTIVITY SHALL BE NOT GREATER THAN 1850 OHMS PER INCH.
1856	THE VOLUME RESISTIVITY SHALL BE NOT GREATER THAN 1856 OHMS PER MILLIMETER.
1858	THE VOLUME RESISTIVITY SHALL BE NOT LESS THAN 1858 OHMS PER INCH AFTER CONDITIONING.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Volume Resistivity (cont)	
Minimum volume resistivity after conditioning (select one) (cont)	
SI	
(ohms/millimeter)	1860
Maximum volume resistivity after conditioning (select one)	
U.S.	
(ohms/inch)	1866
SI	
(ohms/millimeter)	1868
Test methods (select one)	
Per base document except ____	1870
Per ASTMD257.	1876
Test temperature (deg C)	1878
Tolerance plus or minus (deg C)	1880
Conditioning duration (select one)	
(hours)	1886

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1860 THE VOLUME RESISTIVITY SHALL BE NOT LESS THAN 1860 OHMS PER MILLIMETER AFTER CONDITIONING.

1866 THE VOLUME RESISTIVITY SHALL BE NOT GREATER THAN 1866 OHMS PER INCH AFTER CONDITIONING.

1868 THE VOLUME RESISTIVITY SHALL BE NOT GREATER THAN 1868 OHMS PER MILLIMETER AFTER CONDITIONING.

1870 VOLUME RESISTIVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1870.

1876 VOLUME RESISTIVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD257.

1878 THE TEST TEMPERATURE SHALL BE 1878 DEGREES CELSIUS.

1880 THE TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1880 DEGREES CELSIUS.

1886 THE CONDITIONING DURATION SHALL BE 1886 HOURS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Volume Resistivity (cont)	
Conditioning duration (select one) (cont)	
(days)	1888
Relative humidity (percent)	1890
Mounting Hardware (see table X, DOD-STD-35)	
Workmanship	
(doc des)	6870
Additional Requirements	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005
Part Marking (select one)	
(doc des)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1888	THE CONDITIONING DURATION SHALL BE 1888 DAYS.
1890	THE RELATIVE HUMIDITY SHALL BE 1890 PERCENT.
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
Additional Part Marking	
A___	6991
B___	6992
C___	6993
D___	6994
E___	6995
Definition of Hermetic Sealing	
NOTE: Automatic when codes are used to require hermetic sealing.	

Applicable Documents (See DOD-STD-35)

Quality Assurance Provisions (See DOD-STD-35)

Packaging (See DOD-STD-35)

Notes (See DOD-STD-35)

Nomenclature (See DOD-STD-35)

Superseded Document (See DOD-STD-35)

Part Number Cross-Reference (See DOD-STD-35)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE		STANDARD PARAGRAPH
6991	(A)	6991.
6992	(B)	6992.
6993	(C)	6993.
6994	(D)	6994.
6995	(E)	6995.

DEFINITION OF HERMETIC SEALING. FOR THE PURPOSE OF THIS DOCUMENT, A HERMETICALLY-SEALED ITEM IS ONE IN WHICH THE ELEMENT IS CONTAINED WITHIN A SEALED ENCLOSURE OF CERAMIC, GLASS OR METAL, OR A COMBINATION THEREOF, WHERE SEALING IS ACCOMPLISHED BY MATERIAL FUSION, WELDING, BRAZING OR SOLDERING.

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI
(Project EDS-A327)


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

APPENDIX A


ILLUSTRATIONS

Supersedes page 85 of 2 August 1978

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

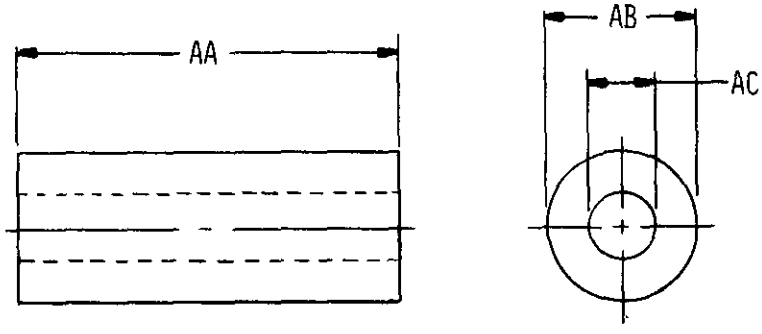


812-01-1

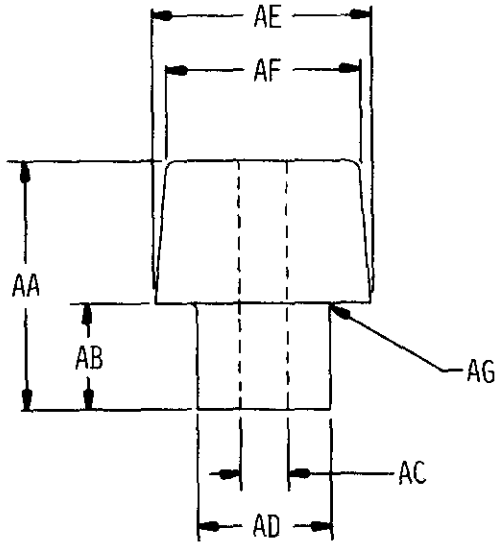


812-01-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

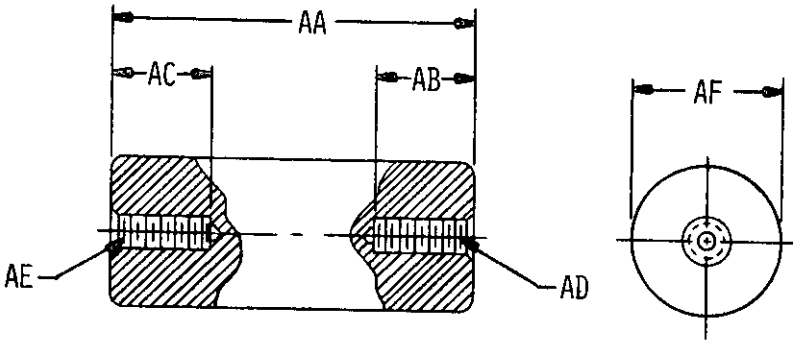


812-01-3

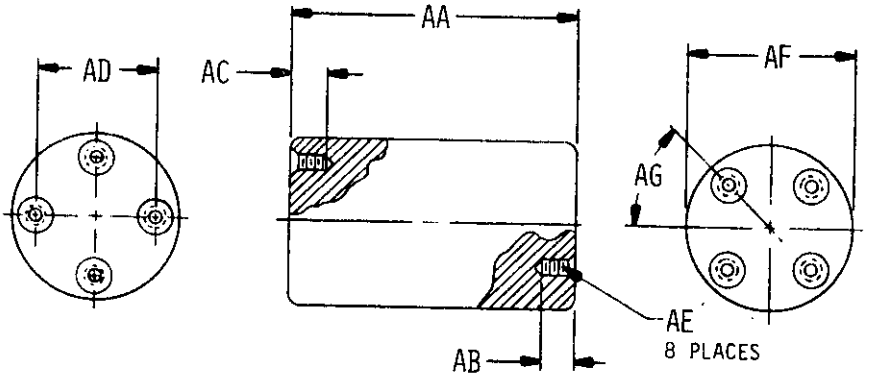


812-01-4

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

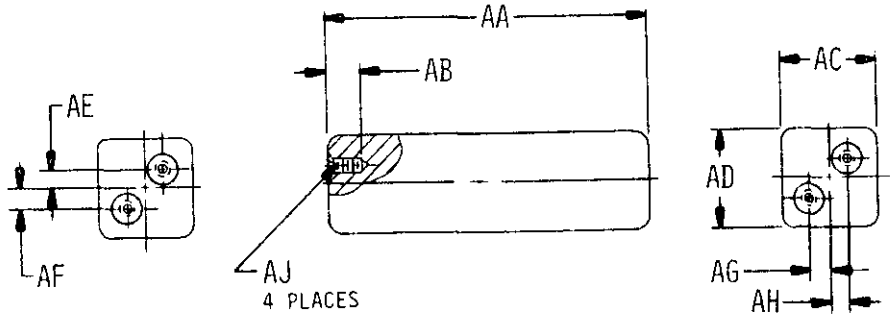


812-01-5

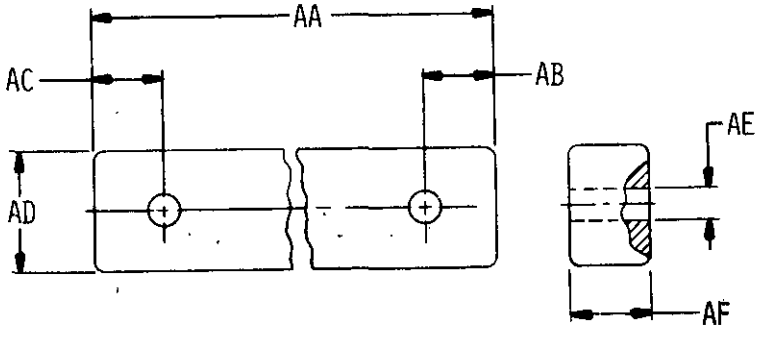


812-01-6

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

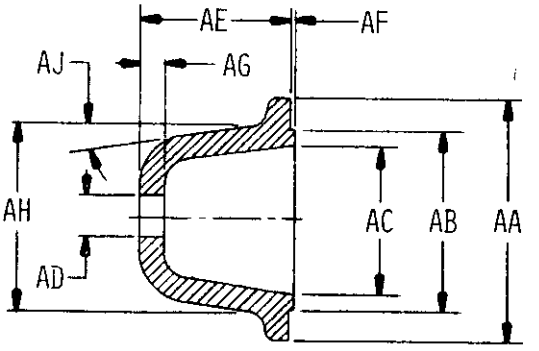


812-01-7

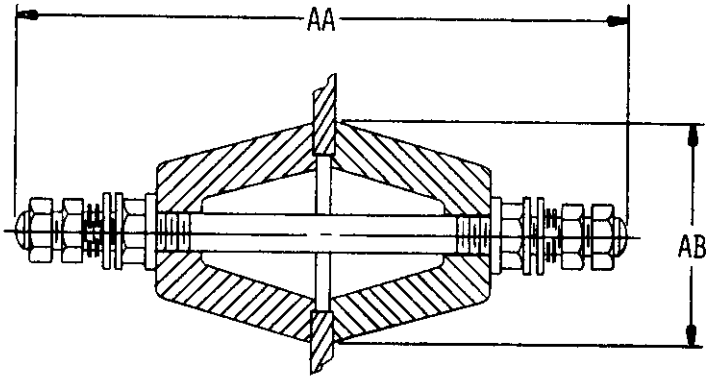

812-01-8

New page


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

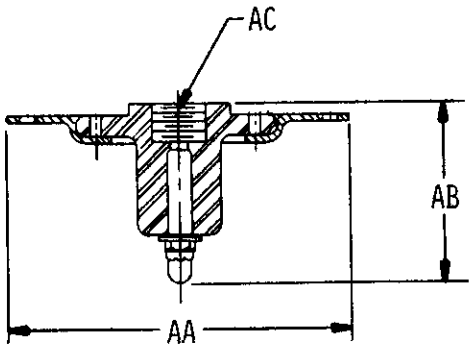


812-01-9

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

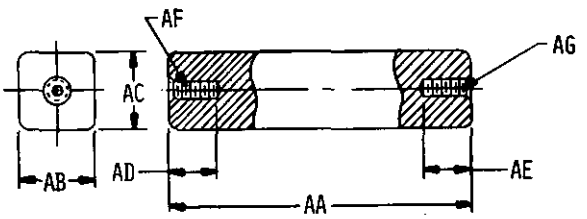


812-01-10

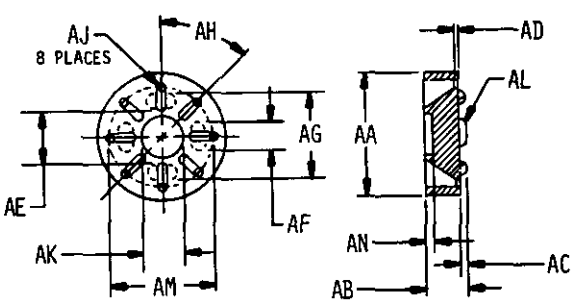


812-01-11


New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

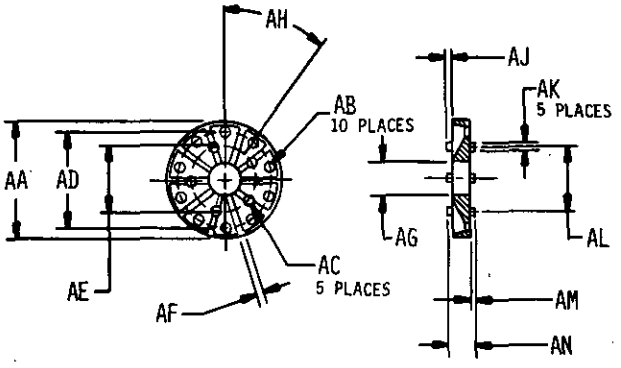

812-01-12

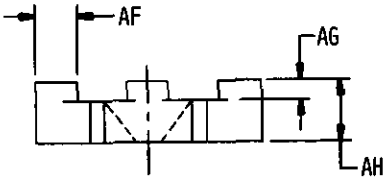


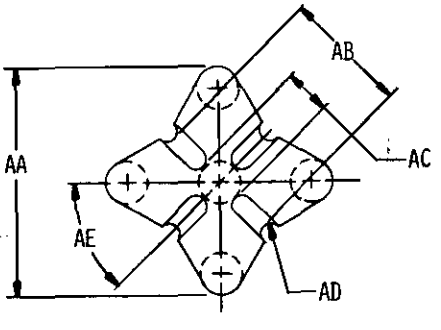


812-01-13

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

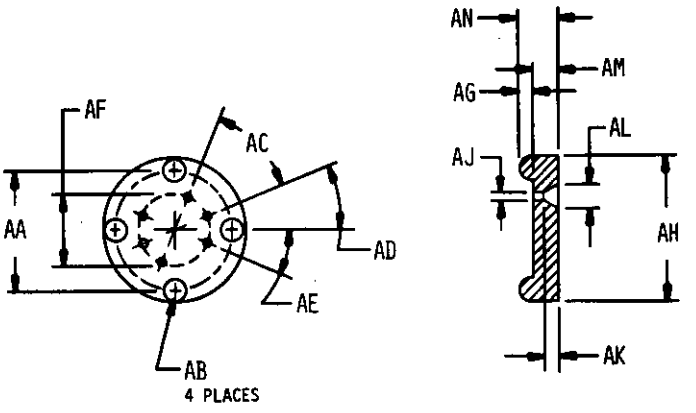


812-01-14

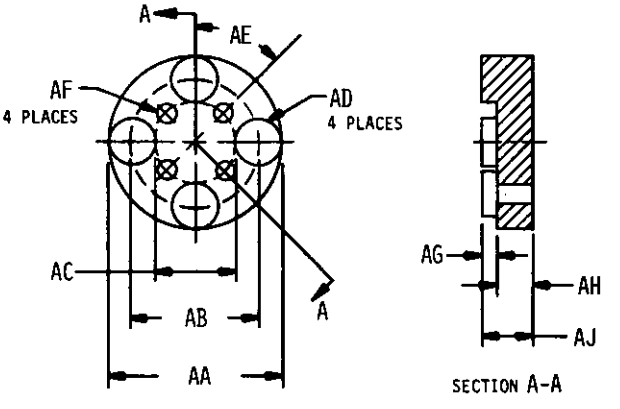


812-01-15

New page

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

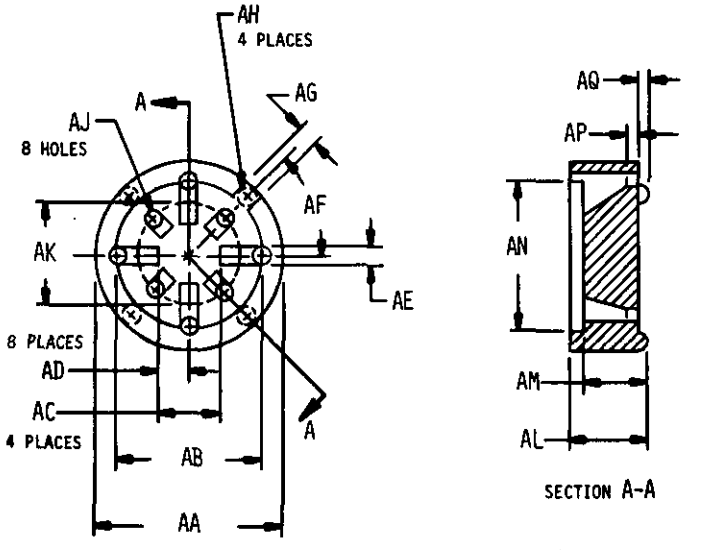


812-01-16

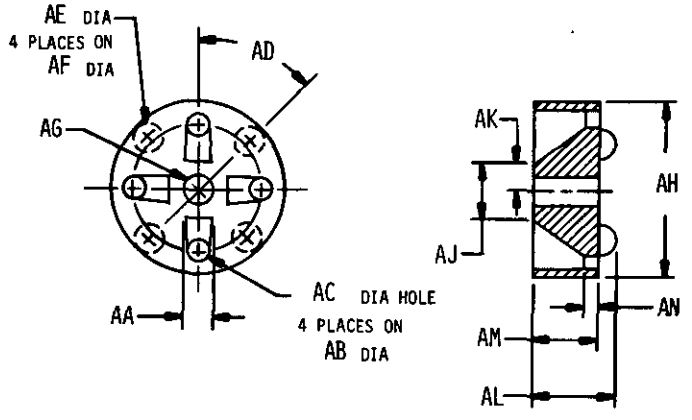


812-01-17

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

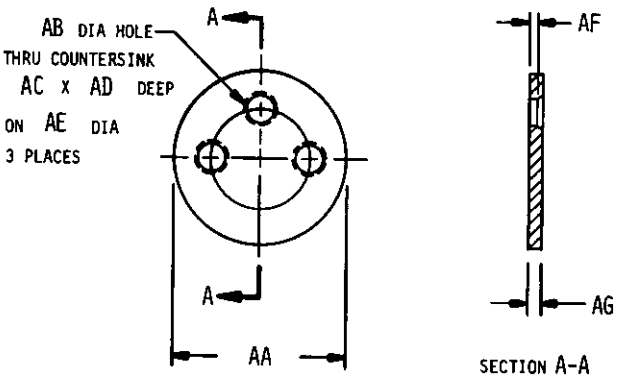


812-01-18

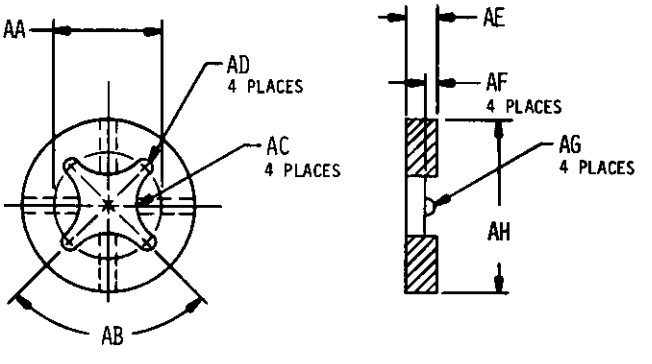


812-01-19

New page

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

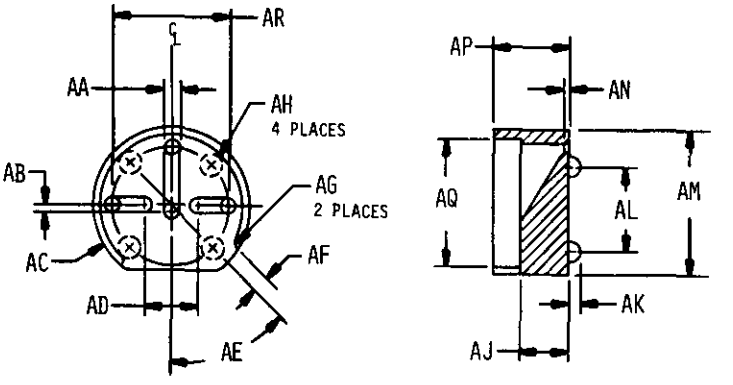


812-01-20

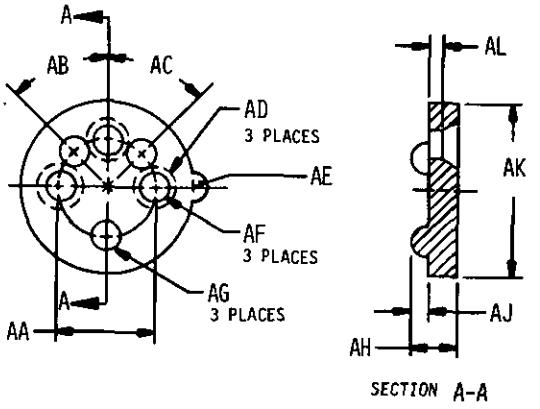


812-01-21

New page

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

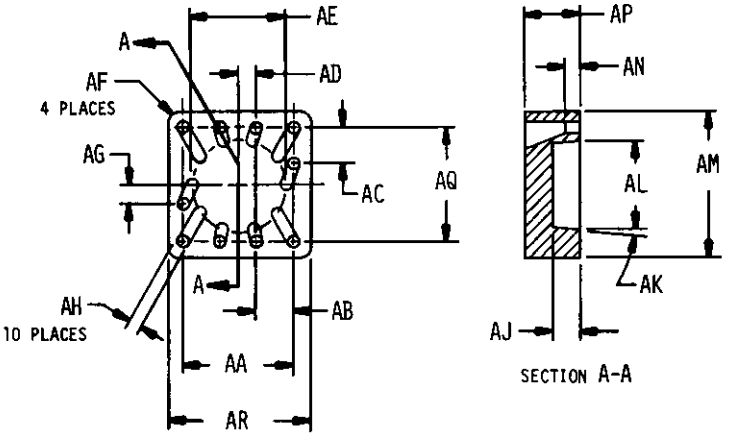


812-01-22

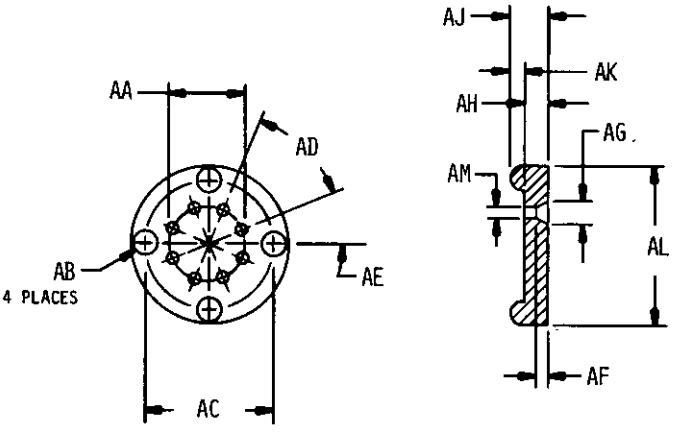


812-01-23

New page

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

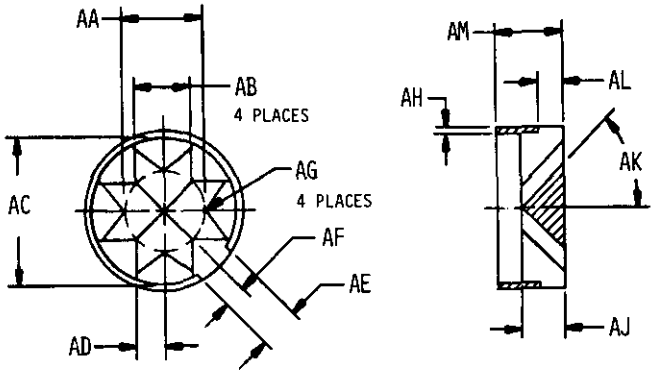


812-01-24

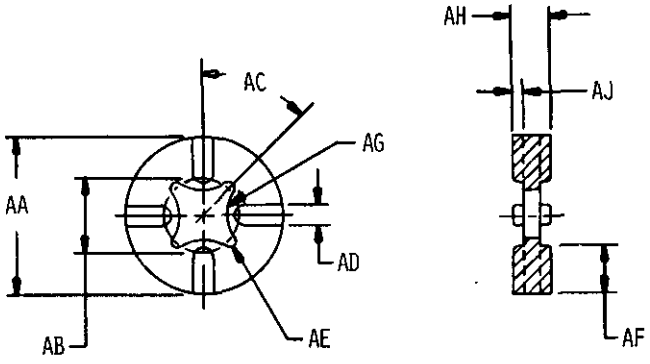


812-01-25

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

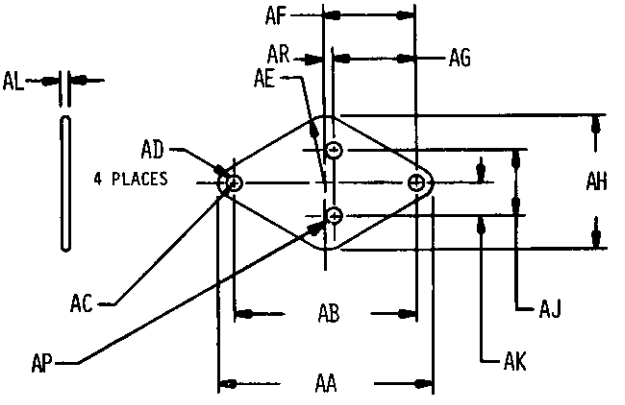


812-01-26

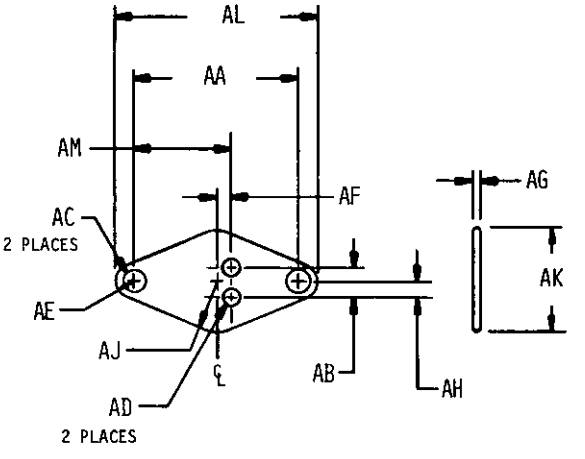


812-01-27

New page

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

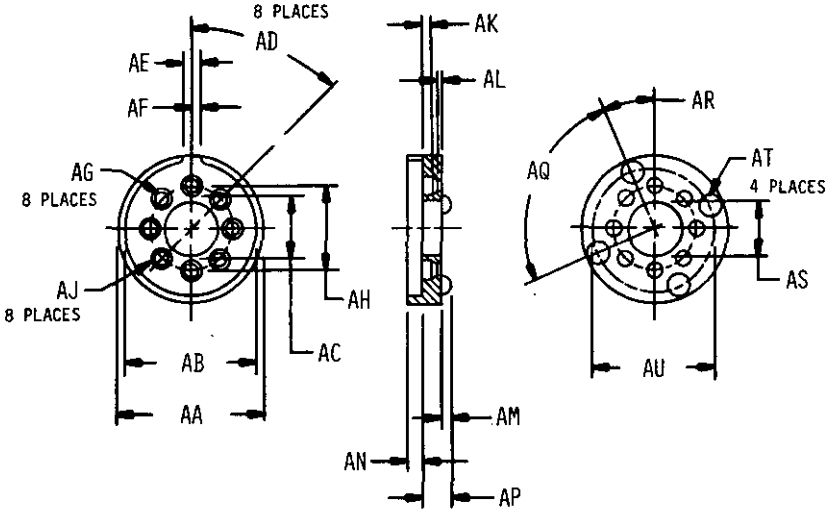


812-01-28

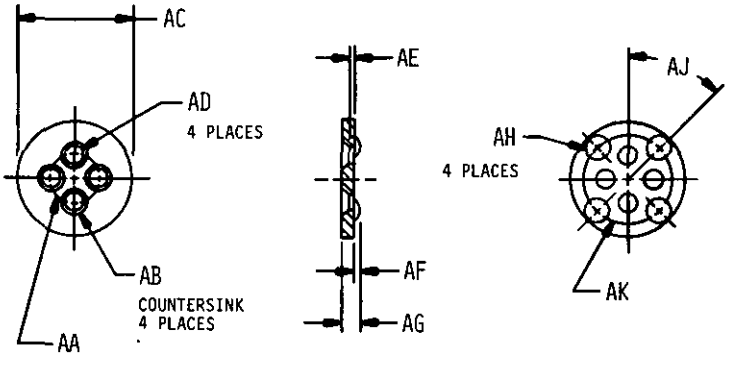


812-01-29

New page


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

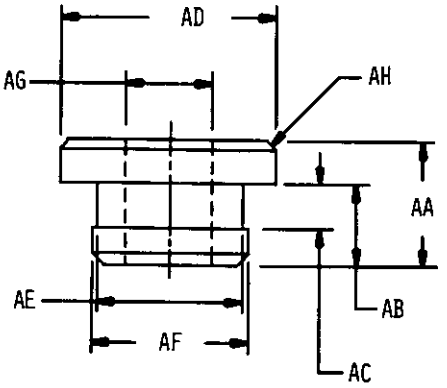

812-01-30

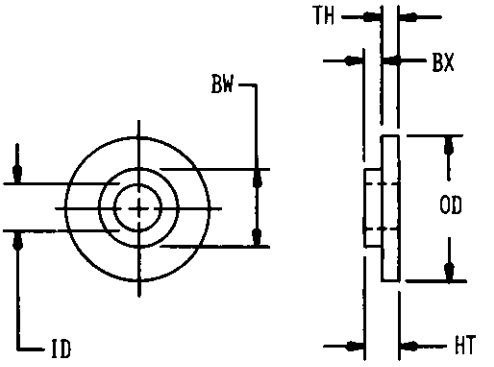


812-01-31

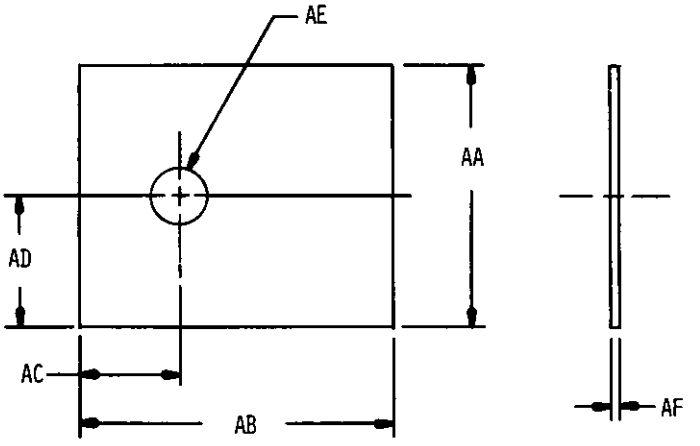

812-01-32

New page


Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

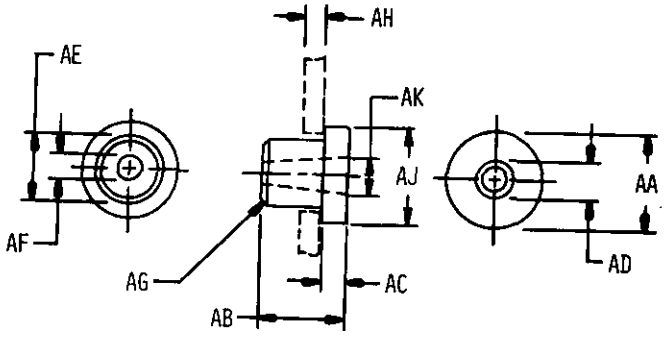

812-01-33

New page


Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

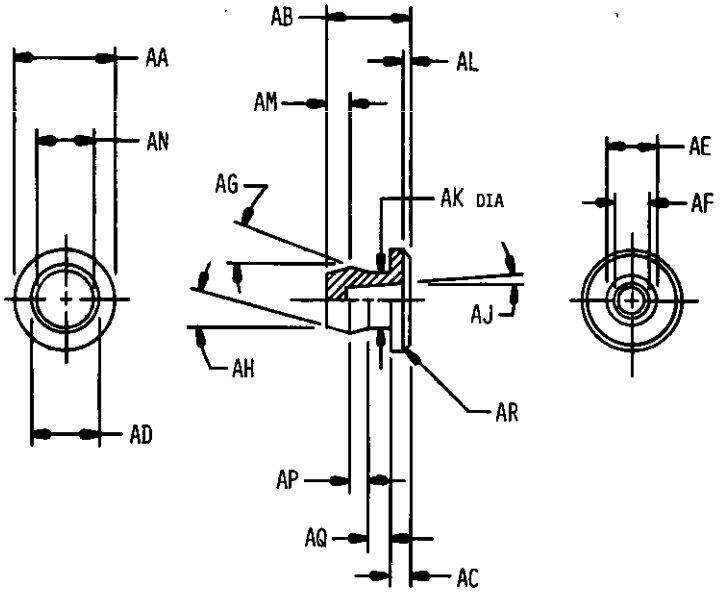


812-01-34

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

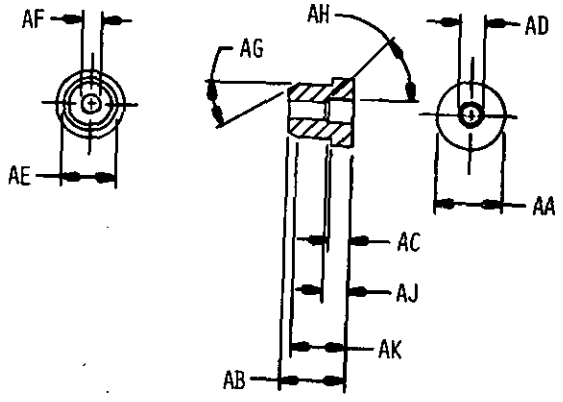


812-01-35

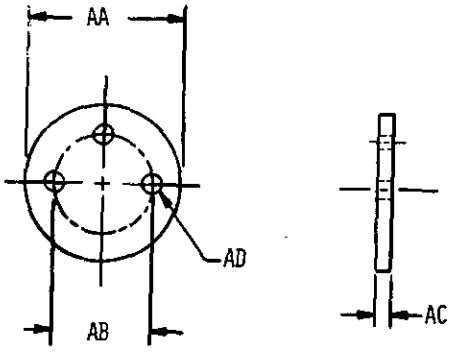


812-01-36

New page


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

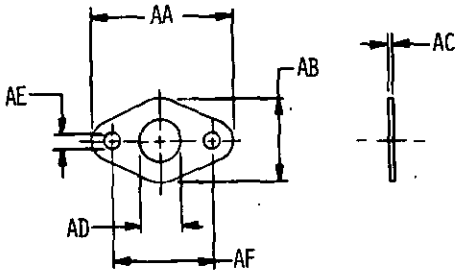

812-01-37

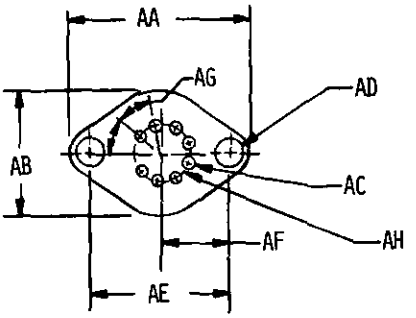


812-01-38

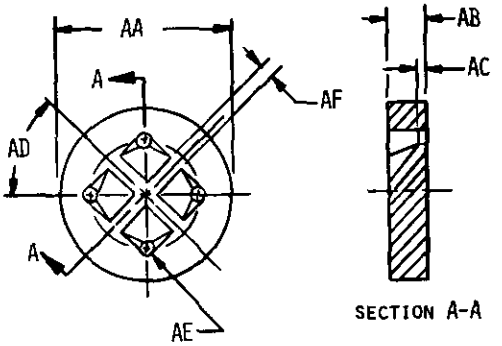

812-01-39

New page


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

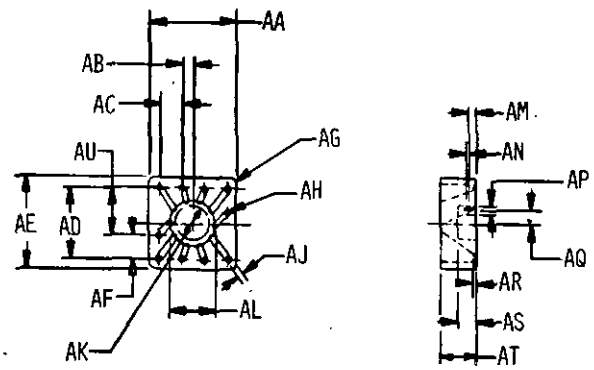

812-01-40

New page


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

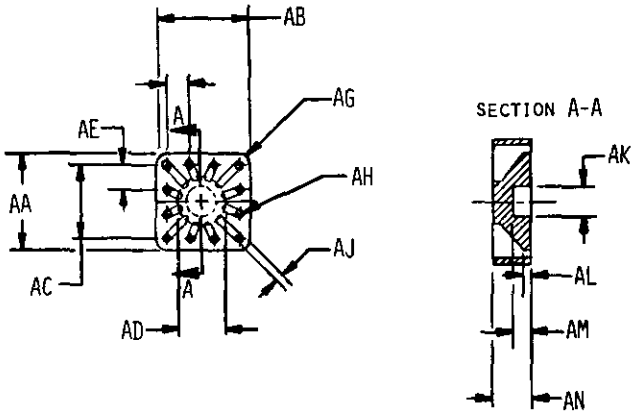


812-01-41


New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.



812-01-43

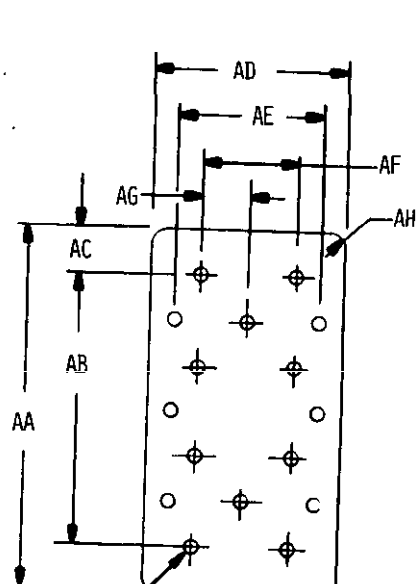


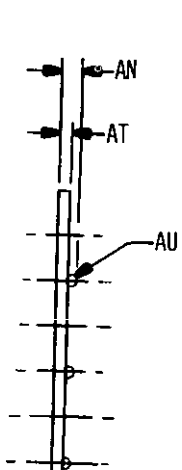


812-01-44

New page

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

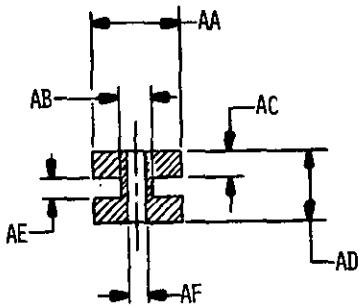


812-01-45

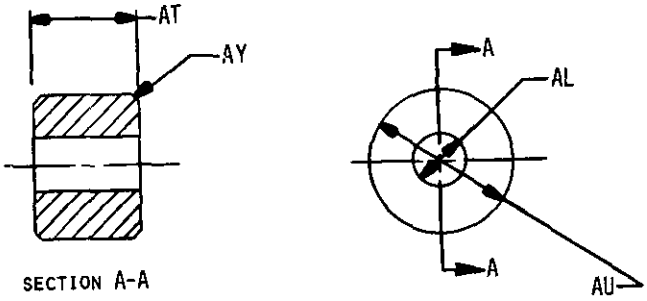


812-01-46

New page


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

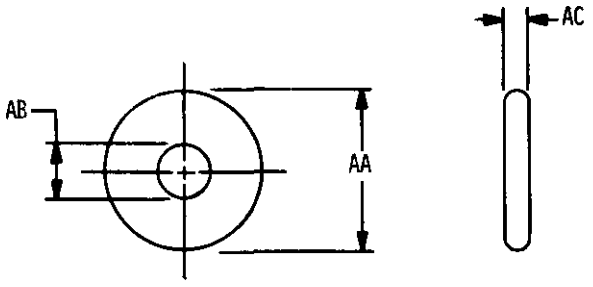

812-01-47

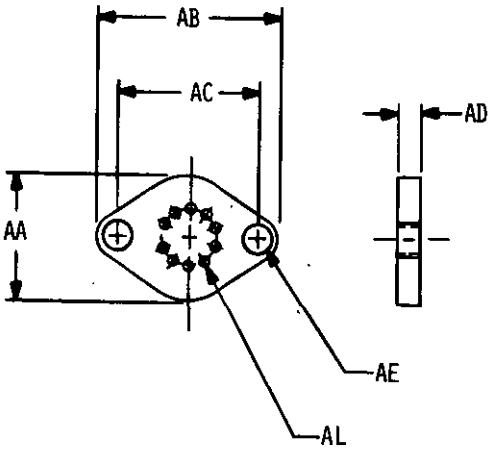


812-01-48

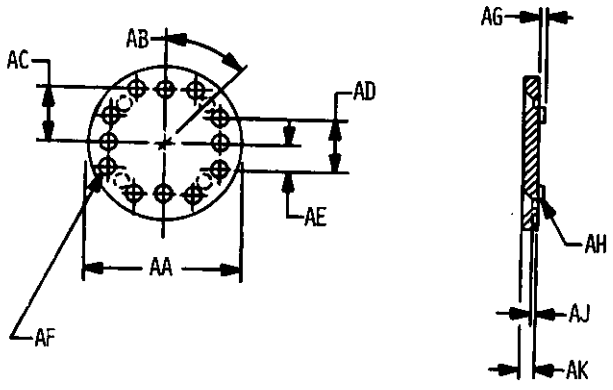


812-01-49

New page


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

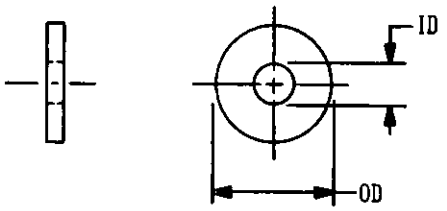

812-01-50

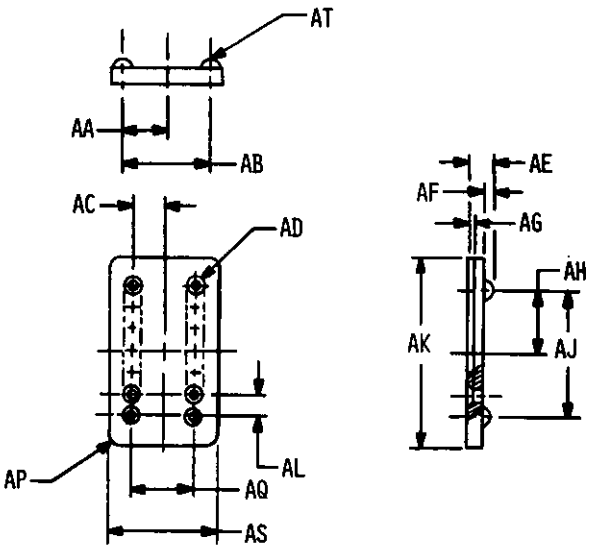


812-01-51

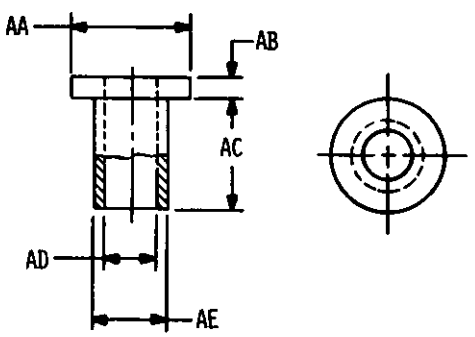

812-01-52

New page


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

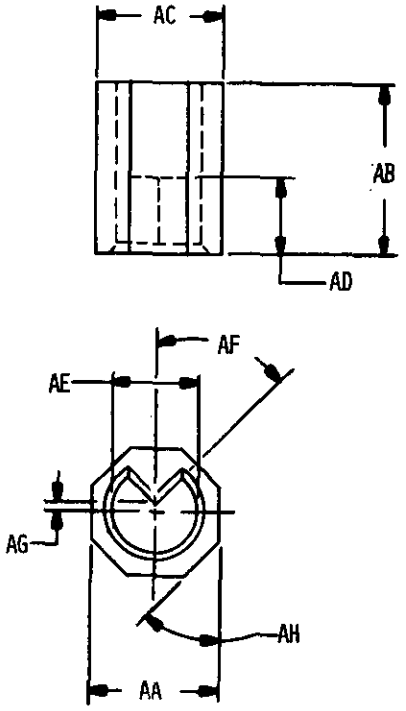

812-02-1

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

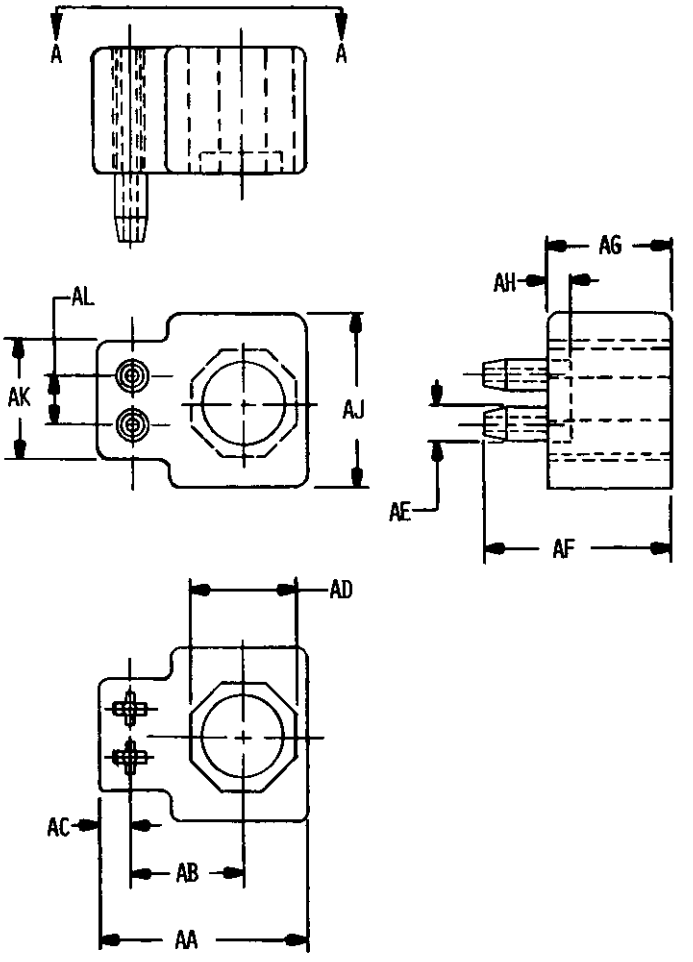

VIEW A-A

812-02-2

New page

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

New Page

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	16	1620	34	1699	54	1782	66
0102	16	1622	34	1702	54	1784	66
0103	16	1626	48	1704	54	1796	68
0104	16	1628	48	1708	54	1798	68
0105	16	1630	48	1710	54	1800	68
0107	18	1632	36	1712	54	1802	66
0108	18	1634	36	1714	56	1804	66
0700	16	1636	48	1716	56	1806	56
0800	16	1638	48	1718	58	1808	66
1003	16	1640	48	1720	60	1810	66
1004	16	1642	36	1722	56	1812	66
1005	16	1644	36	1724	56	1814	66
1006	16	1646	36	1726	60	1816	66
1008	16	1648	36	1728	60	1818	68
1009	26	1650	50	1730	60	1820	56
1562	30	1652	48	1732	58	1822	68
1564	30	1654	50	1734	58	1824	68
1566	30	1656	50	1736	58	1826	56
1568	30	1658	50	1738	58	1828	56
1570	30	1660	50	1740	58	1830	56
1572	30	1662	52	1742	58	1832	70
1574	30	1664	50	1744	58	1834	70
1576	30	1666	50	1746	60	1836	56
1578	30	1668	50	1748	60	1838	74
1580	30	1670	50	1750	62	1840	76
1582	30	1672	50	1752	64	1842	70
1584	20	1674	52	1754	64	1844	70
1586	20	1676	52	1756	64	1846	76
1588	20	1678	52	1758	62	1848	76
1590	20	1680	52	1760	62	1850	76
1592	20	1682	52	1762	64	1852	70
1594	20	1684	52	1764	64	1854	70
1596	20	1686	52	1766	68	1856	76
1598	20	1688	52	1768	64	1858	76
1602	34	1690	52	1770	64	1860	78
1604	34	1691	54	1772	64	1862	70
1612	34	1692	54	1774	64	1864	70
1614	34	1694	58	1776	64	1866	78
1616	34	1696	58	1778	64	1868	78
1618	34	1697	54	1780	66	1870	78

New Page

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1872	70	2020	38	4869	46	6991	82
1874	72	2022	38	4870	46	6992	82
1876	78	2024	38	4874	44	6993	82
1878	78	2026	38	4875	44	6994	82
1880	78	2028	38	4884	41A	6995	82
1882	72	2030	38	4885	42	6996	32
1884	72	2032	40	4886	42	6997	32
1886	78	2034	40	4891	42	6998	32
1888	80	2036	40	4894	41A	6999	32
1890	80	2100	20	4897	46	7001	80
1892	72	2102	20	4900	42	7002	80
1894	72	2104	22	4901	41A	7003	80
1896	40	2106	22	4902	44	7004	80
1898	40	2108	22	4904	24	7005	80
1900	40	2110	22	4905	24	7021	32
1902	72	2112	22	4906	41A	7022	32
1904	72	2114	22	4908	41A	7023	32
1906	40	2116	22	4950	28	7024	32
1908	40	2118	22	5000	46	7301	24
1910	40	2300	28	5046	24	7302	24
1912	72	4713	62	5048	24	7572	26
1914	72	4714	62	5049	24	7573	26
1916	40	4715	62	5068	24	7574	26
1918	22	4717	46	5069	24	7576	26
1922	74	4719	62	5070	24	7577	26
1924	74	4722	62	5071	24	7578	26
1932	74	4723	62	6267	48	7629	80
1934	74	4726	62	6280	42	7630	80
1942	74	4844	46	6292	42		
1944	74	4845	46	6293	42		
1952	74	4847	44	6300	41A		
1954	74	4849	42	6308	42		
2002	36	4850	46	6310	44		
2004	36	4854	46	6369	16		
2006	36	4855	46	6372	80		
2008	38	4856	44	6870	80		
2010	38	4859	42	6873	16		
2012	38	4861	44	6874	18		
2014	38	4862	44	6941	18		
2018	38	4867	46	6942	18		

New Page

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Additional Part Marking	80
Additional Requirements	80
Aperture Cards Required	18
Applicable Documents	80
Base Document	16
Cantilever	34
City, State, Zip	16
Company Name/Command	16
Compression	36
Configuration	26
Contract Number/Office Symbol	16
Control Source	16
Control Specification	18
Corona	36
Date	16
Definition of Hermetic Sealing	80
Design and Construction	28
Dielectric Constant	40
Dielectric Withstanding Voltage at Reduced Barometric Pressure	41a
Dielectric Withstanding Voltage at Sea Level	44
Elongation	48
Finishes	28
Format	16
Galvanizing	48
Government Desing Activity FSCM	16
Hardness	50
Illustrations	28
Materials	28
Mounting Hardware	80
Nomenclature	80
Notes	80
Packaging	80
Part Marking	80
Part Number	18
Part Number Cross-Reference	80
Phone Number	16
Porosity	52
Puncture	54

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Quality Assurance Provisions	80
Radio-Influence Voltage	54
Ratings	20
Requester FSCM	16
Requester's Name	16
Revision of AEDPS Document (Number)	18
Scope	18
Source Table	18
Specific Gravity	56
Streeet/Building	16
Superseded Document	80
System Application	16
Tabulated Characteristics	28
Tear Strength	58
Tensile Strength	56
Thermal Conductivity	60
Thermal Shock	62
Time-Load	64
Torque (Torsion)	66
Units of Measure	18,26
Voltage, Breakdown	68
Voltage, Impulse Flashover	70
Voltage, Impulse Withstand	70
Voltage, Low Frequency Dew Withstand	70
Voltage, Low Frequency Dry Flashover	72
Voltage, Low Frequency Dry Withstand	72
Voltage, Low Frequency Wet Flashover	74
Voltage, Low Frequency Wet Withstand	74
Volume, Resistivity	74
Weight	32
Workmanship	82

*U.S. GOVERNMENT PRINTING OFFICE: 1983-0-605-031/1866

Source: http://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.