DOD-STD-35-12A(MI)
26 February 1979
SUPERSEDING
MIL-STD-35-12(MI)
19 SEPTEMBER 1973

MILITARY STANDARD

METERS

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

FSC EDS

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Meters
Automated Engineering
Document Preparation System

DOD-STD-35-12A(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-12A(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for Meters.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	5
	2.1	Issues of documents	5
	2.2	Other publications	6
	3.	DEFINITIONS	7
	4.	GENERAL REQUIREMENTS	8
	4.1	Introduction	8
	4.2	Specification Requirement Sheet (SRS)	8
	4.3	Configuration	8
	4.3.1	Dimensions	8
	4.3.2	Illustrations	8
	4.4	Units of measure	8
	5.	DETAILED REQUIREMENTS	9
	5.1	Introduction	9
	5.2	MSE Formats	9
	5.3	Referenced documents	9
	5.4	Test matrix	9
	5.5	Tabulation	10
	5.6	Keyword Code Index (KCI) and Standard Paragraphs	13
	5.6.1	Interrelationship of Codes	13
	5.6.2	Automatic MSE Data	13
	5.6.3	DOD-STD-35 Tables	13

TABLES

Table	I.	Title Index	2
	II.	Test matrix	10
	III.	Tabulation candidates	11

APPENDICES

Appendix	A.	Illustrations	164
	B.	Characteristic Code Index	216
		Index	224

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for Meters.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. It is recommended that MIL-STD-1279, Selection and Use of Meters, Electrical Indicating be reviewed prior to using this dash-numbered part book.

The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
METER, ELECTRICAL, DIGITAL INDICATING, PANEL TYPE, SQUARE FLANGE	031008	MIL-M-7793	TIME TOTALIZING 60 AND 400 CPS AC AND 28 V DC
		MS28053	115 VOLT 400 CYCLE
		MS90445	115 VOLT, 60 HZ
METER, ELECTRICAL, DIGITAL INDICATING, PANEL TYPE, ROUND FLANGE	031009	MIL-M-3971	TIME TOTALIZING CAP 10000 HOURS AC OR DC
		MIL-M-7793	TIME TOTALIZING
		MS17324	115 V, 60 CYCLE
		MS28053	115 V, 400 CYCLE
METER, ELECTRICAL, DIGITAL INDICATING, PANEL TYPE, SPECIAL FLANGE	031010	MIL-M-7793	TIME TOTALIZING
		MS17321	MINIATURE, 28 VOLT DC
		MS17322	MINIATURE, 115 VOLT, 400 CYCLE
		MS17325	115 VOLT, 60 OR 400 HERTZ
		MS21341	HERMETICALLY SEALED 28 V DC
		MS27650	HERMETICALLY SEALED 26 V 400 HERTZ
		MS27651	HERMETICALLY SEALED 115 V 400 HERTZ

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
METER, ELECTRICAL, DIGITAL INDICATING, PANEL TYPE, SPECIAL FLANGE	031010 (CONT)	MS90493	20 TO 130 VOLTS DC OR AC TO 500 CYCLES
METER, ELECTRICAL, POINTER INDICATING, EDGEWISE PANEL TYPE, HORIZONTAL	031005	MIL-M-24359	AMMETER DC MA HORIZONTAL
METER, ELECTRICAL, POINTER INDICATING, EDGEWISE PANEL TYPE, VERTICAL	031004	MIL-M-24359	AMMETER DC MA VERTICAL
METER, ELECTRICAL, POINTER INDICATING, PANEL TYPE, RECTANGULAR FLANGE	031001	AN3201 AN3203 MIL-M-10304 MIL-M-16034 MIL-M-16125 MIL-M-19261 MIL-M-23167 MS25025	AMMETER, DC VOLTMETER DC WATERTIGHT SWITCHBOARD AND PORTABLE SWITCHBOARD AND PORTABLE SWITCHBOARD SWITCHBOARD LOADMETER, DC, AIRCRAFT
METER, ELECTRICAL, POINTER INDICATING, PANEL TYPE, ROUND FLANGE	031002	MIL-V-6753 MS24332 MIL-M-10304 MIL-M-23167	VOLTMETERS, AC, 0-150 VOLT, 330 TO 1200 CYCLE 0-150 VOLT AC 330 TO 1200 CY FLUSH MOUNT, RUGGEDIZED AC AND DC FREQUENCY EXPANDED SCALE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
METER, ELECTRICAL, POINTER INDICATING, PANEL TYPE, SPECIAL FLANGE	031003	MIL-I-26525 MS24532	BATTERY GENTR INDICATOR VOLTMETER GEN 28 VOLT DC
METER, ELECTRICAL, VIBRATING REED INDICATING, PANEL TYPE, ROUND FLANGE	031011	MIL-I-8374	AIRCRAFT 400 CYCLE AC

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-I-26525	Indicator, Voltage: Battery-Generator (28 Nominal Volt DC)
MIL-M-3971	Meters, Time Totalizing, Non-Hermetically Sealed, Electrical; General Specification For
MIL-M-7793	Meter, Time Totalizing
MIL-M-10304	Meters, Electrical Indicating, Panel Type, Ruggedized, General Specification For
MIL-M-16034	Meters, Electrical Indicating (Switchboard and Portable Types)
MIL-M-16125	Meters, Electrical, Frequency
MIL-M-19261	Meter, Power Factor 4-½ Inch, Switchboard Type
MIL-M-23167	Meter, Frequency, Expanded Scale Switchboard Type (Naval Shipboard Use)
MIL-M-24359	Meters, Milliammeters, Direct Current Panel Mounting (Edgewise Type)
MIL-V-6753	Voltmeters, 0-150 Volt, 330 To 1200 Cycle, Alternating Current.

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-104	Limit For Electrical Insulation Color
MIL-STD-130	Identification Marking of Military Property

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-810	Environmental Test Methods
MIL-STD-1279	Meters, Electrical Indicating, Selection and Use Of
MIL-STD-1285	Marking of Electrical and Electronic Parts
MIL-STD-1523	Age Control of Age-Sensitive Elastomeric Materials
MS33558	Numeral and Letter, Aircraft Instrument Dial, Standard Form Of

FEDERAL

FED-STD-595	Colors

(Copies of Specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ANSIC39.1	Electrical Analog Indicating Instruments Requirements For

(Application for copies should be addressed to American National Standards Institute (ANSI), 1430 Broadway, New York, N.Y. 10018.)

ASTME380	Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, Pa. 19103.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Meters.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Meters, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Meters.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Meters.

4.3.2 Illustrations. Illustrations applicable to Meters are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has a capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Test matrix. A test matrix is supplied as a guide for selecting documents to specify tests (see table II). The test matrix presents documents most applicable for use to satisfy the statement "TEST PER (DOC DES)". Any document listed in the Title Index may be used to satisfy the statement. However, the selected document from the Title Index must contain the desired test. Government test method documents and approved industry standards such as ASTM test methods may also be used to satisfy the statement "TEST PER (DOC DES)".

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the currentversion before use.

TABLE II. TEST MATRIX.

DOCUMENT	TEST / CODES	External Field Influence 2362	Power Consumption 2562	Temperature Influence 2692	Accuracy 2222	Damping Factor 2252	Response Time 2612	Position Influence 2522	Momentary Overload 2482	Sustained Overload 2652
MIL-M-3971			X		X					
MIL-V-6753			X	X	X	X	X		X	X
MIL-M-10304			X	X	X	X		X	X	X
MIL-M-16034		X	X	X	X	X	X	X	X	X
MIL-M-16125		X	X	X				X		
MIL-M-19261		X		X				X	X	X
MIL-M-23167		X								
MIL-M-24359								X	X	X
MIL-M-26525				X	X					
ANSIC39.1				X	X	X	X	X	X	X

5.5 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table III provides codes for column headings which may be used for meter characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1600	TYPE DES	1602	GRADE DES	1604	CLASS DES
1606	STYLE DES	1608	CMPNT DES	1610	ACCURACY FULL SCALE PERCENT
1612	ACCURACY FREQ SPAN	1574	CUR TYPE AC	1575	CUR TYPE DC
1576	CUR TYPE AC/DC	1647	END-SCALE (DES)	5069	MAX OPER TEMP RTG (DEG C)
5068	MIN OPER TEMP RTG (DEG C)	7591	MIN CUR RTG AMPERES	7592	MIN CUR RTG MA
7594	MAX CUR RTG AMPERES	7595	MAX CUR RTG MA	7597	NOM CUR RTG AMPERES
7598	NOM CUR RTG MA	7631	MIN PWR RTG W	7632	MIN PWR RTG KW
7633	MIN PWR RTG MW	7645	MIN PWR RTG VA	7634	MAX PWR RTG WATTS
7635	MAX PWR RTG KW	7636	MAX PWR RTG MW	7646	MAX PWR RTG VA
7637	NOM PWR RTG WATTS	7638	NOM PWR RTG KW	7639	NOM PWR RTG MW
7647	NOM PWR RTG VA	7600	MIN V RTG VOLTS AC	7601	MIN V RTG VOLTS DC
7602	MIN V RTG VOLTS RMS	7603	MIN V RTG MILLIVOLTS AC	7604	MIN V RTG MILLIVOLTS DC
7605	MIN V RTG MILLIVOLTS RMS	7609	MAX V RTG VOLTS AC	7610	MAX V RTG VOLTS DC

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES. (CONT)

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
7611	MAX V RTG VOLTS RMS	7612	MAX V RTG MILLIVOLTS AC	7613	MAX V RTG MILLIVOLTS DC
7614	MAX V RTG MILLIVOLTS RMS	7618	NOM V RTG VOLTS AC	7619	NOM V RTG VOLTS DC
7620	NOM V RTG VOLTS RMS	7621	NOM V RTG MILLIVOLTS AC	7622	NOM V RTG MILLIVOLTS DC
7623	NOM V RTG MILLIVOLTS RMS	7627	FREQ RTG (HERTZ)	7628	FREQ RTG MEGAHERTZ
7641	FREQ RTG KILOHERTZ	7022	MAX WT PER UNIT OZ	7023	MAX WT PER UNIT POUND
7021	MAX WT PER UNIT GRAMS	7024	MAX WT PER UNIT KG	6996	NOM WT PER UNIT OZ
6997	NOM WT PER UNIT POUND	6998	NOM WT PER UNIT GRAMS	6999	NOM WT PER UNIT KG
1642	MVT SENS OHMS NOM	1643	MVT SENS OHMS PER VOLT MIN	1644	MVT SENS OHMS PER VOLT MAX
1645	MVT SENS OHMS	1646	MVT SENS TOL OHMS		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

5.6 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.6.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.6.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.6.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT	0700
ONE SECTION DOCUMENT	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6874	THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).
0107	
0108	0108. SCOPE. SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.
	PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.
	PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.
6941	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.
6942	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION	
IN ACCORDANCE WITH THE BASE DOCUMENT	
TYPE (DESIGNATION)	1600
GRADE (DESIGNATION)	1602
CLASS (DESIGNATION)	1604
STYLE (DESIGNATION)	1606
COMPONENT (DESIGNATION)	1608
RATINGS	
ACCURACY RATING	
FULL SCALE VALUE (PERCENT)	1610
PERCENT OF FREQUENCY SPAN (PERCENT)	1612
ALTITUDE RATING	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5060
SEA LEVEL TO (METERS)	5061

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1600 TYPE. TYPE 1600 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.

1602 GRADE. GRADE 1602 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.

1604 CLASS. CLASS 1604 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.

1606 STYLE. STYLE 1606 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.

1608 COMPONENT. COMPONENT 1608 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.

ACCURACY RATING.

1610 THE ACCURACY OF THE METER SHALL BE RATED AT 1610 PERCENT OF FULL SCALE VALUE.

1612 THE ACCURACY OF THE METER SHALL BE RATED AT 1612 PERCENT OF THE FREQUENCY SPAN.

ALTITUDE RATING.

5060 THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5060 FEET.

5061 THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5061 METERS.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ALTITUDE RATING (CONT)	
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5062
SEA LEVEL TO (METERS)	5063
TEMPERATURE RATING	
MAXIMUM OPERATING (DEGREES CELSIUS)	5069
MAXIMUM NONOPERATING (DEGREES CELSIUS)	5071
MAXIMUM STORAGE (DEGREES CELSIUS)	7302
MAXIMUM SERVICE (DEGREES CELSIUS)	4905
MAXIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5054
MINIMUM OPERATING (DEGREES CESLIUS)	5068
MINIMUM NONOPERATING (DEGREES CELSIUS)	5070
MINIMUM STORAGE (DEGREES CELSIUS)	7301
MINIMUM SERVICE (DEGREES CELSIUS)	4904
MINIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5052

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE | STANDARD PARAGRAPH

5062 THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5062 FEET.

5063 THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5063 METERS.

TEMPERATURE RATING.

5069 THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.

5071 THE MAXIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5071 DEGREES CELSIUS.

7302 THE MAXIMUM STORAGE TEMPERATURE RATING SHALL BE 7302 DEGREES CELSIUS.

4905 THE MAXIMUM SERVICE TEMPERATURE RATING SHALL BE 4905 DEGREES CELSIUS.

5054 THE MAXIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5054 DEGREES CELSIUS.

5068 THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.

5070 THE MINIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5070 DEGREES CELSIUS.

7301 THE MINIMUM STORAGE TEMPERATURE RATING SHALL BE 7301 DEGREES CELSIUS.

4904 THE MINIMUM SERVICE TEMPERATURE RATING SHALL BE 4904 DEGREES CELSIUS.

5052 THE MINIMUM AMBIENT OPERATING TEMPARATURE RATING SHALL BE 5052 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE RATING (CONT)	
NOMINAL OPERATING (DEGREES CELSIUS)	5046
NOMINAL STORAGE (DEGREES CELSIUS)	5048
CURRENT RATING	
MINIMUM CURRENT (SELECT ONE)	
(AMPERES)	7591
(MILLIAMPERES)	7592
MAXIMUM CURRENT (SELECT ONE)	
(AMPERES)	7594
(MILLIAMPERES)	7595
NOMINAL CURRENT (SELECT ONE)	
(AMPERES)	7597
(MILLIAMPERES)	7598
POWER RATING	
MINIMUM POWER (SELECT ONE)	
(WATTS)	7631
(KILOWATTS)	7632
(MILLIWATTS)	7633
(VOLTAMPERES)	7645

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
5046	THE NOMINAL OPERATING TEMPERATURE RATING SHALL BE 5046 DEGREES CELSIUS.
5048	THE NOMINAL STORAGE TEMPERATURE RATING SHALL BE 5048 DEGREES CELSIUS.
	CURRENT RATING.
7591	THE MINIMUM CURRENT RATING SHALL BE 7591 AMPERE(S).
7592	THE MINIMUM CURRENT RATING SHALL BE 7592 MILLIAMPERE(S).
7594	THE MAXIMUM CURRENT RATING SHALL BE 7594 AMPERE(S).
7595	THE MAXIMUM CURRENT RATING SHALL BE 7595 MILLIAMPERE(S).
7597	THE NOMINAL CURRENT RATING SHALL BE 7597 AMPERE(S).
7598	THE NOMINAL CURRENT RATING SHALL BE 7598 MILLIAMPERE(S).
	POWER RATING.
7631	THE MINIMUM POWER RATING SHALL BE 7631 WATT(S).
7632	THE MINIMUM POWER RATING SHALL BE 7632 KILOWATT(S).
7633	THE MINIMUM POWER RATING SHALL BE 7633 MILLIWATT(S).
7645	THE MINIMUM POWER RATING SHALL BE 7645 VOLTAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
POWER RATING (CONT)	
MAXIMUM POWER (SELECT ONE)	
(WATTS)	7634
(KILOWATTS)	7635
(MILLIWATTS)	7636
(VOLTAMPERES)	7646
NOMINAL POWER (SELECT ONE)	
(WATTS)	7637
(KILOWATTS)	7638
(MILLIWATTS)	7639
(VOLTAMPERES)	7647
VOLTAGE RATING	
MINIMUM VOLTAGE (SELECT ONE)	
VOLTS	
(VOLTS AC)	7600
(VOLTS DC)	7601
(VOLTS RMS)	7602
MILLIVOLTS	
(MILLIVOLTS AC)	7603
(MILLIVOLTS DC)	7604
(MILLIVOLTS RMS)	7605

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE | STANDARD PARAGRAPH

7634 THE MAXIMUM POWER RATING SHALL BE 7634 WATT(S).

7635 THE MAXIMUM POWER RATING SHALL BE 7635 KILOWATT(S).

7636 THE MAXIMUM POWER RATING SHALL BE 7636 MILLIWATT(S).

7646 THE MAXIMUM POWER RATING SHALL BE 7646 VOLTAMPERE(S).

7637 THE NOMINAL POWER RATING SHALL BE 7637 WATT(S).

7638 THE NOMINAL POWER RATING SHALL BE 7638 KILOWATT(S).

7639 THE NOMINAL POWER RATING SHALL BE 7639 MILLIWATT(S).

7647 THE NOMINAL POWER RATING SHALL BE 7647 VOLTAMPERE(S).

VOLTAGE RATING.

7600 THE MINIMUM VOLTAGE RATING SHALL BE 7600 VOLT(S) AC.

7601 THE MINIMUM VOLTAGE RATING SHALL BE 7601 VOLT(S) DC.

7602 THE MINIMUM VOLTAGE RATING SHALL BE 7602 VOLT(S) RMS.

7603 THE MINIMUM VOLTAGE RATING SHALL BE 7603 MILLIVOLT(S) AC.

7604 THE MINIMUM VOLTAGE RATING SHALL BE 7604 MILLIVOLT(S) DC.

7605 THE MINIMUM VOLTAGE RATING SHALL BE 7605 MILLIVOLT(S) RMS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VOLTAGE RATING (CONT)	
MAXIMUM VOLTAGE (SELECT ONE)	
VOLTS	
(VOLTS AC)	7609
(VOLTS DC)	7610
(VOLTS RMS)	7611
MILLIVOLTS	
(MILLIVOLTS AC)	7612
(MILLIVOLTS DC)	7613
(MILLIVOLTS RMS)	7614
NOMINAL VOLTAGE (SELECT ONE)	
VOLTS	
(VOLTS AC)	7618
(VOLTS DC)	7619
(VOLTS RMS)	7620
MILLIVOLTS	
(MILLIVOLTS AC)	7621
(MILLIVOLTS DC)	7622
(MILLIVOLTS RMS)	7623

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7609	THE MAXIMUM VOLTAGE RATING SHALL BE 7609 VOLT(S) AC.
7610	THE MAXIMUM VOLTAGE RATING SHALL BE 7610 VOLT(S) DC.
7611	THE MAXIMUM VOLTAGE RATING SHALL BE 7611 VOLT(S) RMS.
7612	THE MAXIMUM VOLTAGE RATING SHALL BE 7612 MILLIVOLT(S) AC.
7613	THE MAXIMUM VOLTAGE RATING SHALL BE 7613 MILLIVOLT(S) DC.
7614	THE MAXIMUM VOLTAGE RATING SHALL BE 7614 MILLIVOLT(S) RMS.
7618	THE NOMINAL VOLTAGE RATING SHALL BE 7618 VOLT(S) AC.
7619	THE NOMINAL VOLTAGE RATING SHALL BE 7619 VOLT(S) DC.
7620	THE NOMINAL VOLTAGE RATING SHALL BE 7620 VOLT(S) RMS.
7621	THE NOMINAL VOLTAGE RATING SHALL BE 7621 MILLIVOLT(S) AC.
7622	THE NOMINAL VOLTAGE RATING SHALL BE 7622 MILLIVOLT(S) DC.
7623	THE NOMINLA VOLTAGE RATING SHALL BE 7623 MILLIVOLT(S) RMS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FREQUENCY RATING (SELECT ONE)	
(HERTZ)	7627
(MEGAHERTZ)	7628
(KILOHERTZ)	7641
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
*UNITS (SELECT ONE)	
U.S. (SELECT ONE)	
(INCHES)	7572
(FEET)	7673
SI (SELECT ONE)	
(CENTIMETERS)	7576
(MILLIMETERS)	7577
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950

NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	FREQUENCY RATING.
7627	THE FREQUENCY RATING SHALL BE 7627 HERTZ.
7628	THE FREQUENCY RATING SHALL BE 7628 MEGAHERTZ.
7641	THE FREQUENCY RATING SHALL BE 7641 KILOHERTZ.
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7673	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN FEET OR DEGREES.
7576	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN CENTIMETERS OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	
METALS	
DISSIMILAR METALS.	7580
DESIGN AND CONSTRUCTION	
CURRENT TYPE (SELECT ONE)	
AC	1574
DC	1575
AC/DC	1576

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTUNUATION IS NECESSARY.)

7580 METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

DESIGN AND CONSTRUCTION.

CURRENT TYPE.

1574 THE METER SHALL BE THE AC TYPE.

1575 THE METER SHALL BE THE DC TYPE.

1576 THE METER SHALL BE THE AC/DC TYPE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
SCALE (SELECT ONE)	
INDICATOR, DIGITAL, TYPE PER ILLUSTRATION 031-01-4 (LETTER)	1562
NUMBER OF COLUMNS LEFT OF DECIMAL (QUANTITY)	1563
COLOR OF DIGITS (NAME)	1564
COLOR PER MIL-STD-595 (NUMBER)	1577
BACKGROUND COLOR (NAME)	1565
COLOR PER MIL-STD-595 (NUMBER)	1578
NUMBER OF COLUMNS RIGHT OF DECIMAL (QUANTITY)	1566
COLOR OF DIGITS (NAME)	1567
COLOR PER MIL-STD-595 (NUMBER)	1568
BACKGROUND COLOR (NAME)	1597
COLOR PER MIL-STD-595 (NUMBER)	1580
NUMBER OF COLUMNS, IF NO DECIMAL (QUANTITY)	1569
COLOR OF DIGITS (NAME)	1570
COLOR PER MIL-STD-595 (NUMBER)	1581
BACKGROUND COLOR (NAME)	1571
COLOR PER MIL-STD-595 (NUMBER)	1582

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1562	DIGITAL INDICATOR SCALE TYPE. THE DIGITAL INDICATOR SCALE SHALL BE TYPE 1562 OF ILLUSTRATION 031-01-4.
1563	THE NUMBER OF COLUMNS LEFT OF THE DECIMAL POINT SHALL BE 1563.
1564	THE DIGIT(S) COLOR SHALL BE 1564.
1577	THE DIGIT(S) COLOR NUMBER 1577 OF MIL-STD-595 SHALL APPLY.
1565	THE BACKGROUND COLOR SHALL BE 1565.
1578	THE BACKGROUND COLOR NUMBER 1578 OF MIL-STD-595 SHALL APPLY.
1566	THE NUMBER OF COLUMNS RIGHT OF THE DECIMAL POINT SHALL BE 1566.
1567	THE DIGIT(S) COLOR SHALL BE 1567.
1568	THE DIGIT(S) COLOR NUMBER 1568 OF MIL-STD-595 SHALL APPLY.
1597	THE BACKGROUND COLOR SHALL BE 1597.
1580	THE BACKGROUND COLOR NUMBER 1580 OF MIL-STD-595 SHALL APPLY.
1569	THE NUMBER OF COLUMNS, IF THERE IS NO DECIMAL POINT SHALL BE 1569.
1570	THE DIGIT(S) COLOR SHALL BE 1570.
1581	THE DIGIT(S) COLOR NUMBER 1581 OF MIL-STD-595 SHALL APPLY.
1571	THE BACKGROUND COLOR SHALL BE 1571.
1582	THE BACKGROUND COLOR NUMBER 1582 OF MIL-STD-595 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
SCALE (CONT)	
DIGIT HEIGHT	
(INCHES)	1572
TOLERANCE (INCH)	1573
(MILLIMETERS)	1589
TOLERANCE (MILLIMETERS)	1590
CURVED SCALE TYPE	
PER ILLUSTRATION 031-01-6 (LETTER)	1583
PER CURVED SCALE TABLE.	
NOTE: USE ILLUSTRATION 031-01-3 FOR DEFINITIONS.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1572 THE HEIGHT OF THE DIGITS SHALL BE 1572 INCHES.

1573 THE DIGIT HEIGHT TOLERANCE SHALL BE 1573 INCH.

1589 THE HEIGHT OF THE DIGITS SHALL BE 1589 MILLIMETERS.

1590 THE DIGIT HEIGHT TOLERANCE SHALL BE 1590 MILLIMETERS.

CURVED SCALE TYPE.

1583 THE CURVED SCALE METER SHALL BE TYPE 1583 OF ILLUSTRATION 031-01-6.

CURVED SCALE TABLE

ITEM	SCALE A	SCALE B	SCALE C
DEGREES OF ARC	4300	4340	4380
INCHES OF ARC	4301	4341	4381
MILLIMETERS OF ARC	4302	4342	4382
DEGREES TO ZERO	4303	4343	4383
SCALE SPACING TYPE	4304	4344	4384
RADIUS OF LINE A, INCHES	4305	4345	4385
RADIUS OF LINE A, MILLIMETERS	4306	4346	4386
RADIUS OF LINE B, INCHES	4307	4347	4387
RADIUS OF LINE B, MILLIMETERS	4308	4348	4388
RADIUS, BASE DIVISION MARKS	4309	4349	4389
COLOR OF DIVISION MARKING	4310	4350	4390
MAJOR ACCENT LINE, TYPE	4311	4351	4391
NUMBER OF MAJOR ACCENT LINES	4312	4352	4392
HEIGHT OF MAJOR ACCENT LINES	4313	4353	4393
MINOR ACCENT LINES TYPE	4314	4354	4394
NUMBER OF MINOR ACCENT LINES	4315	4355	4395
HEIGHT OF MINOR ACCENT LINES	4316	4356	4396
DIVISION LINES OR DOTS, TYPE	4317	4357	4397

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
PER CURVED SCALE TABLE. (CONT)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

CURVED SCALE TABLE (CONT)

ITEM	SCALE A	SCALE B	SCALE C
NUMBER OF DIVISION LINES	4318	4358	4398
HEIGHT OF DIVISION LINES	4319	4359	4399
RATIO ACCENT TO DIVISION	4320	4360	4400
NUMERALS ABOVE SCALE	4321	4361	4401
NUMERALS BELOW SCALE	4322	4362	4402
RANGES, THIS SCALE	4323	4363	4403
SCALE LETTERING	4324	4364	4404
DEGREES START P LINE	4325	4365	4405
DEGREES END P LINE	4326	4366	4406
COLOR OF P EMPHASIS LINE	4327	4367	4407
DEGREES START OF M SEGMENT	4328	4368	4408
DEGREES END OF M SEGMENT	4329	4369	4409
LETTERING IN TYPE M SEGMENT	4330	4370	4410
COLOR OF TYPE M SEGMENT	4331	4371	4411
COLOR, SEGMENT LETTERS	4332	4372	4412
COLOR SEGMENT BORDER	4333	4373	4413

ITEM	SCALE D	SCALE E	SCALE F
DEGREES OF ARC	4420	4460	4500
INCHES OF ARC	4421	4461	4501
MILLIMETERS OF ARC	4422	4462	4502
DEGREES TO ZERO	4423	4463	4503
SCALE SPACING TYPE	4424	4464	4504
RADIUS OF LINE A, INCHES	4425	4465	4505
RADIUS OF LINE A, MILLIMETERS	4426	4466	4506
RADIUS OF LINE B, INCHES	4427	4467	4507
RADIUS OF LINE B, MILLIMETERS	4428	4468	4508
RADIUS, BASE DIVISION MARKS	4429	4469	4509
COLOR OF DIVISION MARKING	4430	4470	4510
MAJOR ACCENT LINE, TYPE	4431	4471	4511
NUMBER OF MAJOR ACCENT LINES	4432	4472	4512
HEIGHT OF MAJOR ACCENT LINES	4433	4473	4513
MINOR ACCENT LINES TYPE	4434	4474	4514
NUMBER OF MINOR ACCENT LINES	4435	4475	4515
HEIGHT OF MINOR ACCENT LINES	4436	4476	4516
DIVISION LINES OR DOTS, TYPE	4437	4477	4517
NUMBER OF DIVISION LINES	4438	4478	4518

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
PER CURVED SCALE TABLE. (CONT)	
OTHER CURVED SCALE DETAILS AS FOLLOWS:	
A ____	1584
B ____	1585
C ____	1586
D ____	1587
E ____	1588
EDGEWISE SCALE TYPE	
PER ILLUSTRATION 031-01-6 (LETTER)	1579

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

CURVED SCALE TABLE (CONT)

ITEM	SCALE D	SCALE E	SCALE F
HEIGHT OF DIVISION LINES	4439	4479	4519
RATIO ACCENT TO DIVISION	4440	4480	4520
NUMERALS ABOVE SCALE	4441	4481	4521
NUMERALS BELOW SCALE	4442	4482	4522
RANGES, THIS SCALE	4443	4483	4523
SCALE LETTERING	4444	4484	4524
DEGREES START P LINE	4445	4485	4525
DEGREES END P LINE	4446	4486	4526
COLOR OF P EMPHASIS LINE	4447	4487	4527
DEGREES START OF M SEGMENT	4448	4488	4528
DEGREES END OF M SEGMENT	4449	4489	4529
LETTERING IN TYPE M SEGMENT	4450	4490	4530
COLOR OF TYPE M SEGMENT	4451	4491	4531
COLOR, SEGMENT LETTERS	4452	4492	4532
COLOR SEGMENT BORDER	4453	4493	4533

OTHER CURVED SCALE DETAILS AS FOLLOWS:

1584 A. 1584.

1585 B. 1585.

1586 C. 1586.

1587 D. 1587.

1588 E. 1588.

EDGEWISE SCALE TYPE.

1579 THE EDGEWISE SCALE METER SHALL BE TYPE 1579 OF ILLUSTRATION 031-01-6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
EDGEWISE SCALE TYPE (CONT)	
PER EDGEWISE SCALE TABLE.	
NOTE: USE ILLUSTRATION 031-01-5 FOR DEFINITIONS.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

EDGEWISE SCALE TABLE

ITEM	SCALE A	SCALE B	SCALE C
SCALE LENGTH INCHES	4100	4140	4180
SCALE LENGTH MILLIMETERS	4101	4141	4181
ACCENT LINE TYPE	4102	4142	4182
NUMBER OF ACCENT LINES	4103	4143	4183
NUMBER OF DIVISIONS	4104	4144	4184
DIVISION LINE PLACEMENT	4105	4145	4185
DIV LINE LENGTH INCHES	4106	4146	4186
DIV LINE LG MILLIMETERS	4107	4147	4187
ACCENT LINE LENGTH INCHES	4108	4148	4188
ACCENT LINE LG MILLIMETERS	4109	4149	4189
COLOR OF SCALE MARKING	4110	4150	4190
HORIZONTAL OR VERTICAL CTR	4111	4151	4191
ZERO DIST FR A INCHES	4112	4152	4192
ZERO DIST FR A MILLIMETERS	4113	4153	4193
NUMBER OF RANGES ON SCALE	4114	4154	4194
NUMERALS ON SCALE	4115	4155	4195
ARC LINE REQUIRED	4116	4156	4196
SCALE SPACING TYPE	4117	4157	4197
RATIO ACCENT DIVISION LINE	4118	4158	4198
SCALE LETTERING	4119	4159	4199
INCHES TO SEGMENT START	4120	4160	4200
MILLIMETERS TO SEG START	4121	4161	4201
INCHES TO SEGMENT END	4122	4162	4202
MILLIMETERS TO SEG END	4123	4163	4203
COLOR OF SEGMENT	4124	4164	4204
LETTERING IN SEGMENT	4125	4165	4205
COLOR OF LETTERING	4126	4166	4206
COLOR OF BORDER	4127	4167	4207
WIDTH OF SEGMENT INCHES	4128	4168	4208
WIDTH OF SEG MILLIMETERS	4129	4169	4209

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
PER EDGEWISE SCALE TABLE.(CONT)	
OTHER EDGEWISE SCALE DETAILS AS FOLLOWS:	
A ____	1592
B ____	1593
C ____	1594
D ____	1595
E ____	1596
INDICATOR, VIBRATING REED TYPE	
PER ILLUSTRATION 031-01-4 (LETTER)	2000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE

OTHER EDGEWISE SCALE METER DETAILS SHALL BE AS FOLLOWS:

1592 A. 1592.

1593 B. 1593.

1594 C. 1594.

1595 D. 1595.

1596 E. 1596.

INDICATOR (VIBRATING REED TYPE).

2000 THE VIBRATING REED METER INDICATOR SHALL BE TYPE 2000 OF ILLUSTRATION 031-01-4.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
INDICATOR, VIBRATING REED TYPE (CONT)	
PER INDICATING (VIBRATING REED) TABLE	
NOTE: USE INDICATOR, VIBRATING REED TABLE AND ILLUSTRATION 031-01-3 FOR DEFINITIONS.	
OTHER INDICATOR SCALE DETAILS AS FOLLOWS:	
A ____	2001
B ____	2002
C ____	2003
D ____	2004
E ____	2005

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

INDICATOR (VIBRATING REED) TABLE

ITEM	SCALE A	SCALE B
NUMBER OF VIBRATING REEDS	2050	2070
REED INTERVAL (HERTZ)	2051	2071
NUMBER OF DIVISION LINES	2052	2072
DIVISION LINE HEIGHT INCHES	2053	2073
DIVISION LINE HEIGHT MILLIMETERS	2054	2074
PLACEMENT OF DIVISION LINES	2055	2075
NUMBER OF MINOR ACCENT LINES	2056	2076
MINOR ACCENT LINE HEIGHT INCHES	2057	2077
MINOR ACCENT LINE HEIGHT MILLIMETERS	2058	2078
PLACEMENT OF MINOR ACCENT LINES	2059	2079
NUMBER OF MAJOR ACCENT LINES	2060	2080
MAJOR ACCENT LINE HEIGHT INCHES	2061	2081
MAJOR ACCENT LINE HEIGHT MILLIMETERS	2062	2082
PLACEMENT OF MAJOR ACCENT LINES	2063	2083
NUMERALS	2064	2084
CENTER FREQUENCY	2065	2085
COLOR OF INDICATORS	2066	2086
COLOR OF BACKGROUND	2067	2087
COLOR OF LINES	2068	2088

OTHER INDICATOR (VIBRATING REED TYPE) METER DETAILS SHALL BE AS FOLLOWS:

2001 A. 2001.

2002 B. 2002.

2003 C. 2003.

2004 D. 2004.

2005 E. 2005.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
MOVEMENT TYPE (SELECT ONE)	
TAUT BAND.	1633
PIVOT AND JEWEL.	1634
ELECTROMECHANICAL, FOR DIGITAL SCALE.	1635
IRON VANE.	1636
VIBRATING REED.	1637
RECTIFIED AC TAUT BAND.	1638
RECTIFIED AC PIVOT AND JEWEL.	1639
MOVEMENT SENSITIVITY	
NOMINAL (OHMS)	1642
MINIMUM (OHMS PER VOLT)	1643
MAXIMUM (OHMS PER VOLT)	1644
(OHMS)	1645
*TOLERANCE (OHMS)	1646
END SCALE VALUE	
(DESIGNATION)	1647
RESISTORS, EXTERNAL	
PROVIDED.	1690

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	MOVEMENT TYPE.
1633	THE MOVEMENT TYPE SHALL BE TAUT BAND.
1634	THE MOVEMENT TYPE SHALL BE PIVOT AND JEWEL.
1635	THE MOVEMENT TYPE SHALL BE ELECTROMECHANICAL FOR DIGITAL SCALE.
1636	THE MOVEMENT TYPE SHALL BE IRON VANE.
1637	THE MOVEMENT TYPE SHALL BE VIBRATING REED.
1638	THE MOVEMENT TYPE SHALL BE RECTIFIED AC TAUT BAND.
1639	THE MOVEMENT TYPE SHALL BE RECTIFIED AC PIVOT AND JEWEL.
	MOVEMENT SENSITIVITY.
1642	THE MOVEMENT SENSITIVITY SHALL BE 1642 OHMS NOMINAL.
1643	THE MOVEMENT SENSITIVITY SHALL BE 1643 OHMS PER VOLT MINIMUM.
1644	THE MOVEMENT SENSITIVITY SHALL BE 1644 OHMS PER VOLT MAXIMUM.
1645	THE MOVEMENT SENSITIVITY SHALL BE 1645 OHMS.
1646	THE MOVEMENT SENSITIVITY TOLERANCE SHALL BE 1646 OHMS.
1647	END SCALE VALUE. THE END SCALE VALUE SHALL BE 1647.
	RESISTORS, EXTERNAL.
1690	EXTERNAL RESISTORS SHALL BE PROVIDED WITH THE METER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
RESISTORS, EXTERNAL (CONT)	
DOCUMENT (DOC DES)	1691
SHUNTS, EXTERNAL	
PROVIDED.	1692
DOCUMENT (DOC DES)	1693
DIAL	
SHAPE PER ILLUSTRATION 031-01-2 (LETTER)	1700
BACKGROUND COLOR	
COLOR (NAME)	1701
PER (SELECT ONE)	
PER FED-STD-595 (NUMBER)	1702
OTHER DOCUMENT (DOC DES)	1703
MIRRORED STRIP	
SCALE PER ILLUSTRATION 031-01-6 (LETTER)	1704
MINIMUM DISTANCE BEYOND FULL SWING OF POINTER (SELECT ONE)	
(INCHES)	1705
(MILLIMETERS)	1724
(DEGREES)	1706

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1691 EXTERNAL RESISTORS SHALL BE IN ACCORDANCE WITH 1691.

SHUNTS, EXTERNAL.

1692 EXTERNAL SHUNTS SHALL BE PROVIDED WITH THE METERS.

1693 EXTERNAL SHUNTS SHALL BE IN ACCORDANCE WITH 1693.

DIAL.

1700 THE DIAL SHAPE SHALL BE IN ACCORDANCE WITH TYPE 1700 OF ILLUSTRATION 031-01-2.

1701 THE DIAL BACKGROUND COLOR SHALL BE 1701.

1702 THE DIAL BACKGROUND COLOR SHALL BE 1702 IN ACCORDANCE WITH MIL-STD-595.

1703 THE DIAL BACKGROUND COLOR SHALL BE IN ACCORDANCE WITH 1703.

1704 MIRRORED STRIP. THE DIAL SHALL BE PROVIDED WITH MIRRORED STRIP(S) TO REDUCE VIEWING PARALLAX. FOR PURPOSE OF LOCATION, SCALE(S) 1704 OF ILLUSTRATION 031-01-6 SHALL APPLY.

1705 THE MIRRORED STRIP SHALL EXTEND NOT LESS THAN 1705 INCHES BEYOND THE FULL SWING OF THE POINTER.

1724 THE MIRRORED STRIP SHALL EXTEND NOT LESS THAN 1724 MILLIMETERS BEYOND THE FULL SWING OF THE POINTER.

1706 THE MIRRORED STRIP SHALL EXTEND NOT LESS THAN 1706 DEGREES BEYOND THE FULL SWING OF THE POINTER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
DIAL (CONT)	
ILLUMINATION (SELECT ONE)	
REFLECTIVE COATING.	1707
PHOSPHORESCENT COATING.	1708
INTERNAL (SELECT ONE)	
INCANDESCENT.	1710
FLUORESCENT.	1711
NEON.	1712
EXTERNAL (SELECT ONE)	
INCANDESCENT.	1713
FLUORESCENT.	1714
NEON.	1715
MARKING CHARACTERS (SELECT ONE)	
BOLD GOTHIC.	1716
PER MS33558.	1717
OTHER ____	1718

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1707	THE DIAL SHALL BE ILLUMINATED BY REFLECTIVE COATING.
1708	THE DIAL SHALL BE ILLUMINATED BY PHOSPHORESCENT COATING.
1710	THE DIAL SHALL BE ILLUMINATED BY INTERNAL INCANDESCENT LIGHTING.
1711	THE DIAL SHALL BE ILLUMINATED BY INTERNAL FLUORESCENT LIGHTING.
1712	THE DIAL SHALL BE ILLUMINATED BY INTERNAL NEON LIGHTING.
1713	THE DIAL SHALL BE ILLUMINATED BY EXTERNAL INCANDESCENT LIGHTING.
1714	THE DIAL SHALL BE ILLUMINATED BY EXTERNAL FLUORESCENT LIGHTING.
1715	THE DIAL SHALL BE ILLUMINATED BY EXTERNAL NEON LIGHTING.
	MARKING CHARACTERS.
1716	THE CHARACTERS FOR DIAL MARKING SHALL BE BOLD GOTHIC.
1717	THE CHARACTERS FOR DIAL MARKING SHALL BE IN ACCORDANCE WITH MS33558.
1718	THE CHARACTERS FOR DIAL MARKING SHALL BE IN ACCORDANCE WITH 1718.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
DIAL (CONT)	
MARKING COLOR	
COLOR (NAME)	1720
PER FED-STD-595 (NUMBER)	1721
OTHER DOCUMENT (DOC DES)	1722
POINTER	
TYPE (SELECT ONE)	
LANCE.	1740
SPADE.	1742
KNIFE.	1744
OTHER ____	1746
MAXIMUM POINTER INDEX TO SCALE CLEARANCE (SELECT ONE)	
(INCH)	1774
(MILLIMETER)	1772
MINIMUM DEFLECTION (DEGREES)	1775

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	MARKING COLOR.
1720	THE DIAL MARKING COLOR SHALL BE 1720.
1721	THE DIAL MARKING COLOR SHALL BE NUMBER 1721 IN ACCORDANCE WITH FED-STD-595.
1722	THE DIAL MARKING COLOR SHALL BE IN ACCORDANCE WITH 1722.
	POINTER.
1740	THE POINTER TYPE SHALL BE LANCE.
1742	THE POINTER TYPE SHALL BE SPADE.
1744	THE POINTER TYPE SHALL BE KNIFE.
1746	THE POINTER TYPE SHALL BE 1746.
1774	THE MAXIMUM CLEARANCE BETWEEN THE POINTER INDEX AND THE GRADUATED SCALE SHALL BE 1774 INCH.
1772	THE MAXIMUM CLEARANCE BETWEEN THE POINTER INDEX AND THE GRADUATED SCALE SHALL BE 1772 MILLIMETERS.
1775	THE MINIMUM POINTER DEFLECTION SHALL BE 1775 DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
POINTER (CONT)	
COLOR	
(NAME)	1776
PER (SELECT ONE)	
PER FED-STD-595 (NUMBER)	1777
OTHER DOCUMENT (DOC DES)	1778
FLANGE	
COLOR (NAME)	1784
PER (SELECT ONE)	
PER FED-STD-595 (NUMBER)	1785
OTHER DOCUMENT (DOC DES)	1786
BODY	
COLOR (NAME)	1795
PER (SELECT ONE)	
PER FED-STD-595 (NUMBER)	1796
OTHER DOCUMENT (DOC DES)	1797
MOUNTING STYLE (SELECT ONE)	
STUD.	1750

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1776	THE POINTER COLOR SHALL BE 1776.
1777	THE POINTER COLOR SHALL BE IN ACCORDANCE WITH NUMBER 1777 OF FED-STD-595.
1778	THE POINTER COLOR SHALL BE IN ACCORDANCE WITH 1778.
1784	FLANGE. THE FLANGE COLOR SHALL BE 1784.
1785	THE FLANGE COLOR SHALL BE NUMBER 1785 IN ACCORDANCE WITH FED-STD-595.
1786	THE FLANGE COLOR SHALL BE IN ACCORDANCE WITH 1786.
1795	BODY. THE METER BODY COLOR SHALL BE 1795.
1796	THE METER BODY COLOR SHALL BE NUMBER 1796 IN ACCORDANCE WITH FED-STD-595.
1797	THE METER BODY COLOR SHALL BE IN ACCORDANCE WITH 1797.
	MOUNTING STYLE.
1750	THE METER MOUNTING STYLE SHALL BE STUD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
MOUNTING STYLE (CONT)	
SCREW.	1752
CLAMP.	1754
BEZEL.	1756
JAM NUT.	1758
OTHER ____	1760
PANEL THICKNESS (SELECT ONE)	
(INCHES)	1799
(MILLIMETERS)	1794
MOUNTING POSITION (SELECT ONE)	
VERTICAL.	1800
HORIZONTAL.	1801
MOUNTING DETAILS	
CONFIGURATION PER ILLUSTRATION 031-01-8 (LETTER)	1805
DIGITAL RESET BUTTON	1806

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1752	THE METER MOUNTING STYLE SHALL BE SCREW.
1754	THE METER MOUNTING STYLE SHALL BE CLAMP.
1756	THE METER MOUNTING STYLE SHALL BE BEZEL.
1758	THE METER MOUNTING STYLE SHALL BE JAM NUT.
1760	THE METER MOUNTING STYLE SHALL BE 1760.
	PANEL THICKNESS.
1799	METER(S) SHALL BE DESIGNED TO MOUNT ON A PANEL THICKNESS OF 1799 INCHES.
1794	METER(S) SHALL BE DESIGNED TO MOUNT ON A PANEL THICKNESS OF 1794 MILLIMETERS.
	MOUNTING POSITION.
1800	METER(S) SHALL BE DESIGNED AND CALIBRATED TO OPERATE IN A VERTICAL MOUNTING POSITION.
1801	METER(S) SHALL BE DESIGNED AND CALIBRATED TO OPERATE IN A HORIZONTAL MOUNTING POSITION.
1805	MOUNTING DETAILS. THE MOUNTING CONFIGURATION SHALL BE PATTERN 1805 OF ILLUSTRATION 031-01-8.
1806	DIGITAL RESET BUTTON. A RESET BUTTON SHALL BE PROVIDED ON THE FRONT OF THE METER TO RESET THE DIGITS TO ZERO.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
STACKING CAPABILITY, EDGETYPE METERS	1810
TERMINATION	
TYPE PER ILLUSTRATION 031-01-9 (LETTER)	1814
SOLDER TYPE	
MAXIMUM WIRE SIZE (SELECT ONE)	
AWG (NUMBER)	1816
DIAMETER (SELECT ONE)	
(INCH)	1817
(MILLIMETER)	1818
QUICK DISCONNECT TYPE	
(SIZE)	1820
CONNECTOR TYPE	
(DESIGNATION)	1821
PART NUMBER	1822
DOCUMENT (DOC DES)	1823

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1810	STACKING CAPABILITY, EDGETYPE METERS. EDGETYPE METERS SHALL HAVE THE CAPABILITY OF BEING STACKED.
1814	TERMINATION. METERS SHALL BE PROVIDED WITH TERMINATION TYPE 1814 AS SHOWN IN ILLUSTRATION 031-01-9 FOR CONNECTING ELECTRICAL WIRES TO THE METERS. TERMINALS FOR SOLDERED CONNECTIONS SHALL BE HOT-TIN DIPPED OR SOLDER COATED TO FACILITATE SOLDERING. THE TERMINATION SHALL BE CAPABLE OF CARRYING SPECIFIED OVERLOAD CURRENT AND VOLTAGE.
	SOLDER TYPE.
1816	SOLDER TYPE TERMINALS SHALL BE PROVIDED TO ACCOMMODATE A MAXIMUM WIRE SIZE OF 1816 AWG.
1817	SOLDER TYPE TERMINALS SHALL BE PROVIDED TO ACCOMMODATE A MAXIMUM WIRE DIAMETER OF 1817 INCH.
1818	SOLDER TYPE TERMINALS SHALL BE PROVIDED TO ACCOMMODATE A MAXIMUM WIRE DIAMETER OF 1818 MILLIMETERS.
1820	QUICK DISCONNECT TYPE. QUICK DISCONNECT TERMINALS SHALL BE SIZE 1820.
1821	CONNECTOR TYPE. CONNECTORS SHALL BE TYPE 1821.
1822	THE CONNECTOR PART NUMBER SHALL BE 1822.
1823	CONNECTORS SHALL BE IN ACCORDANCE WITH 1823.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
TYPE PER ILLUSTRATION 031-01-9 (LETTER) (CONT)	
WIRE LEAD TYPE	
AWG WIRE SIZE (NUMBER)	1825
WIRE DIAMETER (SELECT ONE)	
(INCH)	1826
(MILLIMETER)	1827
INSULATION (DESIGNATION)	1828
INSULATION DOCUMENT (DOC DES)	1850
LENGTH (SELECT ONE)	
(INCHES)	1852
(MILLIMETERS)	1854
LEAD COLORS	
POSITIVE LEAD COLOR (NAME)	1832
PER MIL-STD-104 (NAME)	1834
NEGATIVE LEAD COLOR (NAME)	1836
PER MIL-STD-104 (NAME)	1838

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	WIRE LEAD TYPE.
1825	WIRE LEAD TERMINAL SHALL ACCOMMODATE A WIRE SIZE OF 1825 AWG.
1826	WIRE LEAD TERMINAL SHALL ACCOMMODATE A WIRE DIAMETER OF 1826 INCH.
1827	WIRE LEAD TERMINAL SHALL ACCOMMODATE A WIRE DIAMETER OF 1827 MILLIMETER.
1828	WIRE LEAD INSULATION SHALL BE 1828.
1850	WIRE LEAD INSULATION SHALL BE IN ACCORDANCE WITH 1850.
1852	WIRE LEAD LENGTH SHALL BE 1852 INCHES.
1854	WIRE LEAD LENGTH SHALL BE 1854 MILLIMETERS.
1832	THE POSITIVE WIRE LEAD COLOR SHALL BE 1832.
1834	THE POSITIVE WIRE LEAD COLOR SHALL BE IN ACCORDANCE WITH MIL-STD-104.
1836	THE NEGATIVE WIRE LEAD COLOR SHALL BE 1836.
1838	THE NEGATIVE WIRE LEAD COLOR SHALL BE IN ACCORDANCE WITH MIL-STD-104.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDES (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
TERMINATION (CONT)	
HARDWARE	
PER TERMINAL HARDWARE TABLE.	1819
BEZEL	
COLOR (NAME)	1840
PER FED-STD-595 (NUMBER)	1842
COVER	
PER ILLUSTRATION 031-01-7 (LETTER)	1844
COLOR (NAME)	1846
PER FED-STD-595 (NUMBER)	1848

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1819 TERMINAL HARDWARE. TERMINAL HARDWARE FURNISHED WITH EACH METER SHALL BE IN ACCORDANCE WITH THE TERMINAL HARDWARE TABLE.

TERMINAL HARDWARE TABLE

ITEM	TYPE	SIZE	LENGTH/THICKNESS	QUANTITY
WASHER	2145	2146	2147	2148
WASHER	2149	2150	2151	2152
TERMINAL	2153	2154	2155	2156
NUT	2157	2158	2159	2160
STUD	2161	2162	2163	2164
2165	2166	2167	2168	2169
2170	2171	2172	2173	2174
2175	2176	2177	2178	2179

BEZEL.

1840 THE BEZEL COLOR SHALL BE 1840.

1842 THE BEZEL COLOR SHALL BE NUMBER 1842 IN ACCORDANCE WITH FED-STD-595.

COVER.

1844 THE COVER SHALL CONFORM TO THE DIAL AND FLANGE DIMENSIONS SPECIFIED HEREIN. THE COVER SHAPE SHALL BE SIMILAR TO TYPE 1844 IN ACCORDANCE WITH ILLUSTRATION 031-01-7.

1846 THE COVER COLOR SHALL BE 1846.

1848 THE COVER COLOR SHALL BE NUMBER 1848 IN ACCORDANCE WITH FED-STD-595.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
WEIGHT/MASS	
MAXIMUM WEIGHT/MASS PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024
NOMINAL WEIGHT/MASS PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	6996
(POUNDS)	6997
SI (SELECT ONE)	
(GRAMS)	6998
(KILOGRAMS)	6999

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).
7021	MAXIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).
6996	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6996 OUNCE(S).
6997	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6997 POUND(S).
6998	NOMINAL MASS PER UNIT. THE MASS PER UNIT SHALL BE 6998 GRAM(S).
6999	NOMINAL MASS PER UNIT. THE MASS PER UNIT SHALL BE 6999 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCURACY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2200
AS FOLLOWS:	2202
FULL SCALE READING TOLERANCE (PERCENT)	2204
ROOM TEMPERATURE (DEGREES CELSIUS)	2206
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2208
FULL SCALE READING TOLERANCE (PERCENT)	2210
LOW TEMPERATURE (DEGREES CELSIUS)	2212
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2214
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2220
PER DOCUMENT (DOC DES)	2222
DAMPING FACTOR	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2240

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2200	ACCURACY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2200.
2202	ACCURACY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2204	THE ACCURACY AT FULL SCALE READING SHALL BE 2204 PERCENT.
2206	THE ROOM TEMPERATURE SHALL BE 2206 DEGREES CELSIUS.
2208	THE ROOM TEMPERATURE TOLERANCE SHALL BE 2208 DEGREES CELSIUS.
2210	THE ACCURACY AT FULL SCALE READING SHALL BE 2210 PERCENT.
2212	THE LOW TEMPERATURE SHALL BE 2212 DEGREES CELSIUS.
2214	THE LOW TEMPERATURE TOLERANCE SHALL BE 2214 DEGREES CELSIUS.
2220	ACCURACY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2220.
2222	ACCURACY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2222.
2240	DAMPING FACTOR. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2240.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DAMPING FACTOR (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	2242
MINIMUM DAMPING FACTOR, RATIO (NUMBER)	2244
MAXIMUM DAMPING FACTOR, RATIO (NUMBER)	2246
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2250
PER DOCUMENT (DOC DES)	2252
MAXIMUM MOMENTARY DEFLECTION (DEGREES)	2254
STEADY DEFLECTION (DEGREES)	2256

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2242	DAMPING FACTOR. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2244	THE DAMPING FACTOR RATIO SHALL BE NOT LESS THAN 2244.
2246	THE DAMPING FACTOR RATIO SHALL BE NOT GREATER THAN 2246.
2250	DAMPING FACTOR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2250.
2252	DAMPING FACTOR. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2252.
2254	THE MOMENTARY DEFLECTION SHALL BE NOT GREATER THAN 2254 DEGREES.
2256	THE STEADY DEFLECTION SHALL BE 2256 DEGREES.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4908
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4906
MAXIMUM LEAKAGE (MILLIAMPERES)	4894
REMAIN WITHIN SPECIFIED TOLERANCE.	4901
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4884
PER MIL-STD-202, METHOD 301.	6300
*ALTITUDE PER METHOD 105 OF MIL-STD-202	
*TEST CONDITION (LETTER)	4886
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4885
(VOLTS, AC)	4849

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4908	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908.
4906	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4894	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4894 MILLIAMPERE(S).
4901	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4884	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884.
6300	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4886	ALTITUDE SHALL BE IN ACCORDANCE WITH TEST CONDITION LETTER 4886 OF METHOD 105 OF MIL-STD-202.
4885	TEST VOLTAGE SHALL BE 4885 VOLTS, DC.
4849	TEST VOLTAGE SHALL BE 4849 VOLTS, AC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATION TIED TOGETHER AND MOUNTING HARDWARE.	6311
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	6312
BETWEEN MUTUALLY INSULATED PARTS.	6292
BETWEEN ALL INSULATED PARTS AND GROUND.	6293
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	6294
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4859
DURATION OF VOLTAGE APPLICATION (SECONDS)	4891
MOUNTING PER DOCUMENT (DOC DES)	6280
REGULATION OF TEST VOLTAGE (PERCENT)	6308
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4900
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4902
(MILLIAMPERES)	6310

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
6311	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
6312	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
6292	BETWEEN MUTUALLY INSULATED PARTS.
6293	BETWEEN ALL INSULATED PARTS AND GROUND.
6294	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
4859	SPECIAL PREPARATION SHALL BE IN ACCORDANCE WITH 4859.
4891	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4891 SECOND(S).
6280	MOUNTING SHALL BE IN ACCORDANCE WITH 6280.
6308	REGULATION OF THE TEST VOLTAGE SHALL BE WITHIN 6308 PERCENT.
4900	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4900 KILOVOLTAMPERE(S).
4902	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4902 AMPERE(S).
6310	THE SURGE CURRENT SHALL BE NOT GREATER THAN 6310 MILLIAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4874
NO EVIDECNE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4856
MAXIMUM LEAKAGE (MILLIAMPERES)	4875
REMAIN WITHIN SPECIFIED TOLERANCE.	4847
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4861
PER MIL-STD-202, METHOD 301.	4862
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4854
(VOLTS, AC)	4855
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	4842
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	4848

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4874 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.

4856 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.

4875 THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4875 MILLIAMPERE(S).

4847 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

4861 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.

4862 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.

4854 TEST VOLTAGE SHALL BE 4854 VOLTS, DC.

4855 TEST VOLTAGE SHALL BE 4855 VOLTS, AC.

POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:

4842 BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.

4848 BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
POINTS OF VOLTAGE APPLICATION: (CONT)	
BETWEEN MUTUALLY INSULATED PARTS.	4844
BETWEEN ALL INSULATED PARTS AND GROUND.	4845
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	4846
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4850
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867
MOUNTING PER DOCUMENT (DOC DES)	5000
REGULATION OF TEST VOLTAGE (PERCENT)	4869
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4870
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4717
(MILLIAMPERES)	4897
METHOD OF VOLTAGE CONNECTION PER DOCUMENT (DOC DES)	6267
ELECTROSTATIC EFFECT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2270

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4844	BETWEEN MUTUALLY INSULATED PARTS.
4845	BETWEEN ALL INSULATED PARTS AND GROUND.
4846	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
4850	SPECIAL PREPARATION OR CONDITIONS SHALL BE IN ACCORDANCE WITH 4850.
4867	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).
5000	MOUNTING SHALL BE IN ACCORDANCE WITH 5000.
4869	REGULATION OF TEST VOLTAGE SHALL BE WITHIN 4869 PERCENT.
4870	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4870 KILOVOLTAMPERE(S).
4717	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4717 AMPERE(S).
4897	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4897 MILLIAMPERE(S).
6267	METHOD OF CONNECTION OF TEST VOLTAGE SHALL BE IN ACCORDANCE WITH 6267.
2270	ELECTROSTATIC EFFECT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2270.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELECTROSTATIC EFFECT (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	2272
POINTER RETURN TO INACTIVE POSITION	
*FULL SCALE DEFLECTION (PERCENT)	2276
*DURATION (MILLISECONDS)	2278
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2280
PER MIL-M-10304.	2282
CONDITIONING TEMPERATURE (DEGREES CELSIUS)	2284
*MAXIMUM HUMIDITY (PERCENT)	2286
*DURATION (HOURS)	2288
EXPLOSION	
REQUIRMEENTS (SELECT ONE)	
PER BASE DOUCMENT EXCEPT ____	2300
AS FOLLOWS:	2302
NO EXPLOSION	2304
METER SHALL BE MECHANICALLY AND ELECTRICALLY OPERATIVE AFTER TEST	2306

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2272	ELECTROSTATIC EFFECT. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2276 2278	THE POINTER SHALL RETURN TO THE INACTIVATED POSITION WITHIN 2276 PERCENT OF THE FULL SCALE DEFLECTION WITHIN 2278 MILLISECONDS.
2280	ELECTROSTATIC EFFECT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2280.
2282	ELECTROSTATIC EFFECT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-M-10304.
2284 2286 2288	THE METER SHALL BE CONDITIONED AT A TEMPERATURE OF 2284 DEGREES CELSIUS AT A RELATIVE HUMIDITY OF NOT GREATER THAN 2286 PERCENT FOR A PERIOD OF 2288 HOUR(S).
2300	EXPLOSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2300.
2302	EXPLOSION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2304	THERE SHALL BE NO EXPLOSION AS A RESULT OF TEST.
2306	METER(S) SHALL BE MECHANICALLY AND ELECTRICALLY OPERATIVE AFTER TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
EXPLOSION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2320
PER MIL-STD-202, METHOD 109.	2322
LOAD (PERCENT OF RATED)	2324
LOAD TYPE (DESIGNATE)	2326
CHAMBER TEMPERATURE (DEGREES CELSIUS)	2328
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2330
TEST VOLTAGE (SELECT ONE)	
(VOLTS DC)	2332
(VOLTS AC)	2334
FREQUENCY (HERTZ)	2336
EXTERNAL FIELD INFLUENCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT ____	2350
MAXIMUM INDICATION CHANGE (PERCENT)	2352
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2360

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2320	EXPLOSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2320.
2322	EXPLOSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 109 OF MIL-STD-202.
2324	THE LOAD SHALL BE 2324 PERCENT OF THE RATED LOAD.
2326	THE LOAD TYPE SHALL BE 2326.
2328	THE CHAMBER TEMPERATURE SHALL BE 2328 DEGREES CELSIUS.
2330	THE CHAMBER TEMPERATURE TOLERANCE SHALL BE 2330 DEGREES CELSIUS.
2332	THE TEST VOLTAGE SHALL BE 2332 VOLTS DC.
2334	THE TEST VOLTAGE SHALL BE 2334 VOLTS AC.
2336	THE TEST VOLTAGE FREQUENCY SHALL BE 2336 HERTZ.
2350	EXTERNAL FIELD INFLUENCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2350.
2352	EXTERNAL FIELD INFLUENCE. THE MAXIMUM INDICATION CHANGE SHALL BE 2352 PERCENT.
2360	EXTERNAL FIELD INFLUENCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2360.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
EXTERNAL FIELD INFLUENCE (CONT)	
TEST METHODS (CONT)	
PER DOCUMENT (DOC DES)	2362
COIL PARAMETERS	
DIAMETERS (SELECT ONE)	
(INCHES)	2364
*FIELD STRENGTH (OERSTEDS)	2366
(MILLIMETERS)	2368
*FIELD STRENGTH (AMPERES PER METER)	2370
NUMBER OF TURNS (QUANTITY)	2372
CURRENT (AMPERES)	2374
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4760
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2362	EXTERNAL FIELD INFLUENCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2362.
2364 2366	THE COIL DIAMETER SHALL BE 2364 INCHES WITH A FIELD STRENGTH OF 2366 OERSTEDS AT THE CENTER OF THE COIL.
2368 2370	THE COIL DIAMETER SHALL BE 2368 MILLIMETERS WITH A FIELD STRENGTH OF 2370 AMPERES PER METER AT THE CENTER OF THE COIL.
2372	THE COIL SHALL CONSIST OF 2372 TURNS.
2374	THE COIL SHALL CARRY A CURRENT OF 2374 AMPERES AT THE ACTUATING FREQUENCY OF THE METER.
4760	FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.
4761	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED, THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FUNGUS (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED.	4762
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4754
PER MIL-STD-810, METHOD 508.	4755
TEST PERIOD (DAYS)	4756
HERMETIC SEAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2400
AS FOLLOWS:	2402
METER SHALL OPERATE SATISFACTORILY.	2404
NO EVIDENCE OF MOISTURE ON METER FACE.	2406
MAXIMUM LEAK RATE (SELECT ONE)	
(MICRON CUBIC FOOT PER HOUR)	2408
(ATM CC/SEC)	2410

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4762	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4754	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.
4755	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.
4756	TEST PERIOD SHALL BE 4756 DAY(S).
2400	HERMETIC SEAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2400.
2402	HERMETIC SEAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2404	THE METER SHALL OPERATE SATISFACTORILY AFTER TEST.
2406	THERE SHALL BE NO EVIDENCE OF MOISTURE ON THE METER FACE.
2408	THE LEAK RATE SHALL BE NOT GREATER THAN 2408 MICRON CUBIC FOOT PER HOUR.
2410	THE LEAK RATE SHALL BE NOT GREATER THAN 2410 ATM CC/SEC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HERMETIC SEAL (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2420
PER MIL-M-7793.	2422
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4798
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	4799
NO DEGRADATION OF PERFORMANCE.	4815
REMAIN WITHIN SPECIFIED TOLERANCE.	4791
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1477
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	4795
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	4805
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	4813

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2420	HERMETIC SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2420.
2422	HERMETIC SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-M-7793.
4798	HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.
4799	HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
4815	THERE SHALL BE NO DEGRADATION OF PERFORMANCE.
4791	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1477	THERE SHALL BE NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DIELECTRIC WITHSTANDING VOLTAGE IS PERFORMED.
4795	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4795 MEGOHM(S) AT HIGH HUMIDITY.
4805	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4805 MEGOHM(S) AFTER DRYING.
4813	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4813 MILLIAMPERE(S) AT HIGH HUMIDITY.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE. (CONT)	
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	4803
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4788
PER MIL-STD-202, METHOD 103.	4853
*TEST CONDITION (LETTER)	4890
POLARIZING VOLTAGE (VOLTS, DC)	4793
DURATION OF POLARIZING VOLTAGE APPLICATION (HOURS)	4790
POINTS OF APPLICATION OF POLARIZING VOLTAGE:	
BETWEEN MUTUALLY INSULATED PARTS.	4969
BETWEEN ALL INSULATED PARTS AND GROUND.	4970
BETWEEN CURRENT CARRYING PARTS AND CASE.	4971
BETWEEN CURRENT CARRYING PARTS AND GROUND.	6202
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	6207
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	6206

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4803	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4803 MILLIAMPERE(S) AFTER DRYING.
4788	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.
4853	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 103 OF MIL-STD-202.
4890	TEST CONDITION LETTER 4890 SHALL APPLY.
4793	MAGNITUDE OF THE POLARIZING VOLTAGE SHALL BE 4793 VOLTS, DC.
4790	DURATION OF APPLICATION OF VOLTAGE SHALL BE 4790 HOUR(S).
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4969	BETWEEN MUTUALLY INSULATED PARTS.
4970	BETWEEN ALL INSULATED PARTS AND GROUND.
4971	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
6202	BETWEEN CURRENT CARRYING PARTS AND GROUND.
6207	DIELECTRIC WITHSTANDING VOLTAGE TEST SHALL BE PERFORMED AT HIGH HUMIDITY.
6206	DIELECTRIC WITHSTANDING VOLTAGE TEST SHALL BE PERFORMED AFTER DRYING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMMERSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4819
NO EVIDENCE OF PHYSICAL DAMAGE.	4820
REMAIN WITHIN SPECIFIED TOLERANCE.	4822
MINIMUM INSULATION RESISTANCE (MEGOHMS)	4825
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4809
PER MIL-STD-202, METHOD 104.	4810
*TEST CONDITION (LETTER)	4811
MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4812
TIME BEFORE MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4814
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1380
AS FOLLOWS:	6359

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4819	IMMERSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4819.
4820	IMMERSION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4822	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4825	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 4825 MEGOHM(S).
4809	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4809.
4810	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 104 OF MIL-STD-202.
4811	TEST CONDITION LETTER 4811 SHALL APPLY.
4812	FINAL MEASUREMENT(S) SHALL BE MADE WITHIN 4812 HOUR(S) AFTER FINAL CYCLE.
4814	MEASUREMENTS SHALL BE NOT MADE UNTIL 4814 HOUR(S) AFTER THE FINAL CYCLE.
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.
6359	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
AS FOLLOWS: (CONT)	
*MINIMUM INSULATION RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387
REMAIN WITHIN SPECIFIED TOLERANCE.	1388
NO EVIDENCE OF PHYSICAL DAMAGE.	1407
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1371
PER MIL-STD-202, METHOD 302.	1511
*CONDITION (SELECT ONE)	
TEST CONDITION (LETTER)	1378
TEST VOLTAGE (VOLTS, DC)	1373
ELECTRIFICATION TIME (SECONDS)	1376

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1386	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 1386 MEGOHM(S).
1384	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHM(S) AT THE FIRST TEST TEMPERATURE.
1387	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHM(S) AT THE SECOND TEST TEMPERATURE.
1388	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1407	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1371	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.
1511	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 302 OF MIL-STD-202.
1378	TEST CONDITION LETTER 1378 SHALL APPLY.
1373	TEST POTENTIAL SHALL BE 1373 VOLTS, DC.
1376	ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
PER MIL-STD-292, METHOD 302. (CONT)	
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	1377
POINTS OF MEASUREMENT:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	1497
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	1498
BETWEEN MUTUALLY INSULATED PARTS.	1522
BETWEEN INSULATED PARTS AND GROUND.	1523
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	1524
SPECIAL PREPARATIONS OR CONDITIONS PER DOCUMENT (DOC DES)	1520
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	1372
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	1381
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1383
LIFE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2440

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1377	THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.
	POINTS OF INSULATION RESISTANCE MEASUREMENT SHALL BE AS FOLLOWS:
1497	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
1498	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
1522	BETWEEN MUTUALLY INSULATED PARTS.
1523	BETWEEN ALL INSULATED PARTS AND GROUND.
1524	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
1520	SPECIAL PREPARATIONS OR CONDITIONS SHALL BE IN ACCORDANCE WITH 1520.
1372	FIRST TEST TEMPERATURE SHALL BE 1372 DEGREES CELSIUS.
1381	SECOND TEST TEMPERATURE SHALL BE 1381 DEGREES CELSIUS.
1383	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1383 DEGREES CELSIUS.
2440	LIFE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2440.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LIFE (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	2442
MINIMUM SERVICE LIFE	
MAXIMUM READOUT (PERCENT)	2444
(HOURS)	2446
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2450
PER MIL-M-7793	2452
NUMBER OF TEST SPECIMENS (QUANTITY)	2454
TEST DURATION (HOURS)	2456
MOISTURE RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1400
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	1396
REMAIN WITHIN SPECIFIED TOLERANCE.	1398
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1394

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2442	LIFE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2444	THE SERVICE LIFE SHALL BE NOT LESS THAN 2444 PERCENT OF THE MAXIMUM READOUT.
2446	THE SERVICE LIFE SHALL BE NOT LESS THAN 2446 HOURS.
2450	LIFE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2450.
2452	LIFE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-M-7793.
2454	THE QUANTITY OF SPECIMEN(S) FOR TEST SHALL BE 2454.
2456	THE DURATION OF TEST SHALL BE 2456 HOURS.
1400	MOISTURE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1400.
1396	MOISTURE RESISTANCE. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
1398	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1394	THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING OR INSULATION BREAKDOWN, WHEN DIELECTRIC WITHSTANDING VOLTAGE IS APPLIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE. (CONT)	
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	1429
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	1404
MINIMUM INSULATION RESISTANCE AT HIGH HUMIIDTY (MEGOHMS)	1432
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	1406
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1391
PER MIL-STD-202, METHOD 106.	1397
POLARIZING VOLTAGE (VOLTS DC)	1395
LOADING VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4981
(VOLTS, AC)	4980
PERCENT OF SAMPLE SUBJECTED TO POLARIZING VOLTAGE (PERCENT)	4991

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1429	CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1429 MILLIAMPERE(S) AT HIGH HUMIDITY.
1404	CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1404 MILLIAMPERE(S) AFTER DRYING.
1432	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1432 MEGOHM(S) AT HIGH HUMIDITY.
1406	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1406 MEGOHM(S) AFTER DRYING.
1391	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1391.
1397	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 106 OF MIL-STD-202.
1395	POLARIZING VOLTAGE SHALL BE 1395 VOLTS, DC.
4981	LOADING VOLTAGE SHALL BE 4981 VOLTS, DC.
4980	LOADING VOLTAGE SHALL BE 4980 VOLTS, AC.
4991	4991 PERCENT OF THE SAMPLE SHALL BE SUBJECTED TO THE POLARIZING VOLTAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 106. (CONT)	
STEP 7A NOT APPLICABLE.	4985
STEP 7B NOT APPLICABLE.	4986
MOUNT PER DOCUMENT (DOC DES)	1449
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	4983
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	4984
MOMENTARY OVERLOAD	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2470
AS FOLLOWS:	2472
NO MECHANICAL OR THERMAL DAMAGE.	2474
MAXIMUM PERMANENT CHANGE (PERCENT)	2476
MAXIMUM DEVIATION FROM RATED ACCURACY (PERCENT)	2478
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2480

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4985	STEP 7A OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
4986	STEP 7B OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
1449	MOUNTING SHALL BE IN ACCORDANCE WITH 1449.
4983	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.
4984	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.
2470	MOMENTARY OVERLOAD. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2470.
2472	MOMENTARY OVERLOAD. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2474	THERE SHALL BE NO MECHANICAL OR THERMAL DAMAGE.
2476	THE PERMANENT CHANGE SHALL BE NOT GREATER THAN 2476 PERCENT.
2478	THE DEVIATION FROM RATED ACCURACY SHALL BE NOT GREATER THAN 2478 PERCENT.
2480	MOMENTARY OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2480.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOMENTARY OVERLOAD (CONT)	
TEST METHODS (CONT)	
PER DOCUMENT (DOC DES)	2482
NUMBER OF CURRENT APPLICATIONS (QUANTITY)	2484
TEST CURRENT EQUAL TO NUMBER OF TIMES OF END SCALE VALUE (QUANTITY)	2486
NUMBER OF TEST CURRENT APPLICATIONS FOR EACH 0.5 SECOND (QUANTITY)	2488
INTERVALS BETWEEN EACH SUCCESSIVE TEST CURRENT APPLICATION (MINUTES)	2490
FINAL CURRENT APPLICATION (SECONDS)	2492
FINAL PERIOD AFTER CURRENT APPLICATION (HOURS)	2494
TEMPERATURE (DEGREES CELSIUS)	2496
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2498
POSITION INFLUENCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2500
MAXIMUM DEVIATION FROM ZERO MARK, PERCENT OF THE FULL SCALE LENGTH (PERCENT)	2504

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2482 MOMENTARY OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2482.

2484 THE NUMBER OF TEST CURRENT APPLICATIONS SHALL BE 2484.

2486 THE CURRENT SHALL BE 2486 TIMES THE END SCALE VALUE.

2488 THE NUMBER OF TEST CURRENT APPLICATIONS FOR EACH 0.5 SECOND SHALL BE 2488.

2490 THE INTERVAL BETWEEN EACH SUCCESSIVE TEST CURRENT APPLICATION SHALL BE 2490 MINUTES.

2492 THE FINAL TEST CURRENT APPLICATION SHALL BE 2492 SECONDS.

2494 THE FINAL PERIOD AFTER TEST CURRENT APPLICATION SHALL BE 2494 HOURS.

2496 THE TEST TEMPERATURE SHALL BE 2496 DEGREES CELSIUS.

2498 THE TEST TEMPERATURE TOLERANCE SHALL BE 2498 DEGREES CELSIUS.

2500 POSITION INFLUENCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2500.

2504 POSITION INFLUENCE. THE DEVIATION FROM THE ZERO MARK SHALL BE NOT GREATER THAN 2504 PERCENT OF THE FULL SCALE LENGTH.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
POSITION INFLUENCE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2520
PER DOCUMENT (DOC DES)	2522
MOUNT METER IN NORMAL POSITION.	2524
COUNTERCLOCKWISE AND CLOCKWISE ROTATION DEGREES FROM NORMAL POSITION (DEGREES)	2526
POSITION POINTER TO ZERO, IF METER IS PROVIDED WITH EXTERNAL ADJUSTER.	2528
POWER CONSUMPTION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2540
AS FOLLOWS:	2542
MAXIMUM POWER CONSUMPTION AT FULL SCALE (SELECT ONE)	
(WATTS)	2544
(AMPERES)	2546
(VOLTS)	2548
(VOLT AMPERES)	2550

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2520	POSITION INFLUENCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2520.
2522	POSITION INFLUENCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2522.
2524	METER(S) SHALL BE MOUNTED IN THE NORMAL POSITION.
2526	METER(S) SHALL BE ROTATED COUNTERCLOCKWISE AND CLOCKWISE 2526 DEGREES FROM THE NORMAL POSITION.
2528	POSITION THE METER POINTER TO ZERO IF THE METER IS PROVIDED WITH AN EXTERNAL ADJUSTER.
2540	POWER CONSUMPTION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2540.
2542	POWER CONSUMPTION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2544	THE POWER CONSUMPTION AT FULL SCALE SHALL BE NOT GREATER THAN 2544 WATTS.
2546	THE POWER CONSUMPTION AT FULL SCALE SHALL BE NOT GREATER THAN 2546 AMPERES.
2548	THE POWER CONSUMPTION AT FULL SCALE SHALL BE NOT GREATER THAN 2548 VOLTS.
2550	THE POWER CONSUMPTION AT FULL SCALE SHALL BE NOT GREATER THAN 2550 VOLT AMPERES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
POWER CONSUMPTION (CONT)	
MAXIMUM POWER CONSUMPTION AT FULL SCALE (CONT)	
(OHMS)	2552
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2560
PER DOCUMENT (DOC DES)	2562
MEASURE POWER LOSS AT END-SCALE VALUE.	2564
RADIOGRAPHIC	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6291
NO INHOMOGENEITIES, FOREIGN PARTICLES, INCORRECT ALIGNMENT, DEFECTS.	6371
*DISPOSITION OF NEGATIVES OR RECORDS (SELECT ONE)	
DELIVERED.	4857
NOT DELIVERED.	4858

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
2552	THE POWER CONSUMPTION AT FULL SCALE SHALL BE NOT GREATER THAN 2552 OHMS.
2560	POWER CONSUMPTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2560.
2562	POWER CONSUMPTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2562.
2564	MEASURE THE POWER LOSS AT THE END-SCALE VALUE.
6291	RADIOGRAPHIC. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6291.
6371	RADIOGRAPHIC. THE EXAMINATION OF THE RADIOGRAPHS OF THE ITEMS SHALL SHOW: NO INHOMOGENEITIES, NO FOREIGN PARTICLES WITHIN THE ENCLOSURE, ALL PARTS CORRECTLY ALIGNED WITH EACH OTHER, NO DEFECTIVE WORKMANSHIP DETAILS, OR ANY OTHER DEFECTS SPECIFIED HEREIN. MANUFACTURERS SHALL PROVIDE A MEANS OF IDENTIFYING ITEMS ON THE NEGATIVES (OR NONFILM RECORDS, IF APPLICABLE).
4857	NEGATIVES (OR NONFILM RECORDS, IF APPLICABLE) SHALL BE DELIVERED WITH EACH SHIPMENT OF ITEMS.
4858	NEGATIVES (OR NONFILM RECORDS, IF APPLICABLE) SHALL BE MADE AVAILABLE FOR EXAMINATION UPON REQUEST.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RADIOGRAPHIC (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6282
PER MIL-STD-202, METHOD 209.	4843
SOURCE-OBJECT DISTANCE (SELECT ONE)	
(METERS)	6286
(INCHES)	6285
VIEWING EQUIPMENT (IDENTIFY) ____	6287
MAGNIFICATION (X-POWER)	6288
DEFECTS SOUGHT (IDENTIFY)____	6289
NONFILM TECHNIQUES ALLOWED.	6284
PENETRAMETER WIRE SIZE (SELECT ONE)	
(AWG)	6283

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6282	RADIOGRAPHIC. RADIOGRAPHIC INSPECTION SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6282.
4843	RADIOGRAPHIC. RADIOGRAPHIC INSPECTION SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 209 OF MIL-STD-202.
6286	THE SOURCE-OBJECT DISTANCE (THE DISTANCE FROM THE FOCAL SPOT OF THE X-RAY TUBE TO THE OBJECT BEING RADIOGRAPHED) SHALL BE 6286 METER(S).
6285	THE SOURCE-OBJECT DISTANCE (THE DISTANCE FROM THE FOCAL SPOT OF THE X-RAY TUBE TO THE OBJECT BEING RADIOGRAPHED) SHALL BE 6285 INCH(S).
6287	THE VIEWING EQUIPMENT SHALL BE 6287.
6288	THE IMAGES SHALL BE VIEWED AT 6288 X-POWER MAGNIFICATION.
6289	THE DEFECTS TO BE SOUGHT SHALL BE 6289.
6284	NONFILM TECHNIQUES MAY BE USED, IF DESIRED. RECORDS SHALL BE MAINTAINED, FOR EXAMINATION OR DELIVERY, AS SPECIFIED.
6283	TO FURTHER INSURE ADEQUATE QUALITY, A RADIOGRAPH OF THE PENETRAMETER SHALL BE INCLUDED ON EACH RADIOGRAPHIC FILM. THE PENETRAMETER SHALL BE MADE FROM A SAMPLE ITEM OF THE SAME TYPE AS THE ITEM BEING INSPECTED (RADIOGRAPHED). THE PENETRAMETER SHOULD UTILIZE AN AWG SIZE 6283 COPPER WIRE ON THE SLIDE OF THE ITEM FARTHEST FROM THE X-RAY FILM.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RADIOGRAPHIC (CONT)	
PENETRAMETER WIRE SIZE (CONT)	
(MILLIMETERS)	5297
RANDOM DROP	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4967
NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.	4968
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4963
PER MIL-STD-202, METHOD 203.	4972
REPEATABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2580
MAXIMUM REPEATABILITY ERROR (PERCENT)	2582

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
5297	TO FURTHER INSURE ADEQUATE QUALITY, A RADIOGRAPH OF THE PENETRAMETER SHALL BE INCLUDED ON EACH RADIOGRAPHIC FILM. THE PENETRAMETER SHALL BE MADE FROM A SAMPLE ITEM OF THE SAME TYPE AS THE ITEM BEING INSPECTED (RADIOGRAPHED). THE PENETRAMETER SHOULD UTILIZE A 5297 MILLIMETER(S) DIAMETER COPPER WIRE ON THE SIDE OF THE ITEM FARTHEST FROM THE X-RAY FILM.
4967	RANDOM DROP. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4967.
4968	RANDOM DROP. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
4963	RANDOM DROP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4963.
4972	RANDOM DROP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 203 OF MIL-STD-202.
2580	REPEATABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2580.
2582	REPEATABILITY. THE REPEATABILITY ERROR SHALL BE NOT GREATER THAN 2582 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
REPEATABILITY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2590
PER MIL-M-10304.	2592
EXCITATION OF METER TO PERCENT OF END-SCALE VALUE (PERCENT)	2594
RESISTANCE TO SOLDERING HEAT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4700
NO EVIDENCE OF PHYSICAL DAMAGE.	4701
REMAIN WITHIN SPECIFIED TOLERANCE.	4718
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4689
PER MIL-STD-202, METHOD 210.	4698
*TEST CONDITION (LETTER)	4691
NUMBER OF TERMINATIONS TESTED (QUANTITY)	4694
DEPTH OF IMMERSION IN SOLDER (SELECT ONE)	
(INCHES)	4692

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2590	REPEATABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2590.
2592	REPEATABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-M-10304.
2594	THE METER SHALL BE EXCITED TO 2594 PERCENT OF THE END SCALE VALUE.
4700	RESISTANCE TO SOLDERING HEAT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4700.
4701	RESISTANCE TO SOLDERING HEAT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4718	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4689	RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4689.
4698	RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 210 OF MIL-STD-202.
4691	TEST CONDITION LETTER 4691 SHALL APPLY.
4694	4694 TERMINATION(S) PER UNIT SHALL BE TESTED.
4692	DEPTH OF IMMERSION IN SOLDER SHALL BE 4692 INCH(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLDERING HEAT (CONT)	
DEPTH OF IMMERSION IN SOLDER (CONT)	
(MILLIMETERS)	4669
IMMERSION IN FLUX PERMITTED.	4671
SPECIAL PREPARATIONS PERMITTED.	4989
COOLING TIME (MINUTES)	4695
RESISTANCE TO SOLVENTS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4834
NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.	4830
MARKING SHALL REMAIN LEGIBLE.	4836
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4829
PER MIL-STD-202, METHOD 215.	4839
SOLVENTS TO BE ADDED (NAME)	4838

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4669	DEPTH OF IMMERSION IN SOLDER SHALL BE 4669 MILLIMETER(S).
4671	IMMERSION OF TERMINATION IN FLUX SHALL BE PERMITTED.
4989	SPECIAL PREPARATION SHALL BE PERMITTED.
4695	COOLING TIME SHALL BE 4695 MINUTES PRIOR TO FINAL EXAMINATION AND MEASUREMENTS.
4834	RESISTANCE TO SOLVENTS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4834.
4830	RESISTANCE TO SOLVENTS. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
4836	MARKING SHALL REMAIN LEGIBLE.
4829	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4829.
4839	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202. THE SPECIMENS SHALL BE DIVIDED INTO GROUPS OF EQUAL NUMBER TO THE EXTENT POSSIBLE.
4838	IN ADDITION TO THE SPECIFIED SOLVENT(S), 4838 SHALL ALSO BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLVENTS (CONT)	
PER MIL-STD-202, METHOD 215. (CONT)	
SOLVENTS TO BE DELETED (SUBPARAGRAPH LETTER)	4835
BRUSHED AREA (SELECT ONE)	
BRUSH MARKING AREA.	4831
ALL OF SPECIMEN TO BE BRUSHED.	6279
RESPONSE TIME	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2600
AS FOLLOWS:	2602
MAXIMUM RESPONSE TIME (SELECT ONE)	
(SECONDS)	2604
(MILLISECONDS)	2606
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2610
PER DOCUMENT (DOC DES)	2612
APPLY STEADY POWER TO REACH END-SCALE DEFLECTION.	2614

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4835	BRUSHING SHALL BE PERFORMED WITH THE SOLVENTS IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202, EXCEPT THAT SOLUTION(S) 4835 SHALL NOT BE USED.
4831	THE MARKING AREA SHALL BE BRUSHED.
6279	THE ENTIRE SURFACE SHALL BE BRUSHED.
2600	RESPONSE TIME. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2600.
2602	RESPONSE TIME. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2604	THE RESPONSE TIME SHALL BE NOT GREATER THAN 2604 SECONDS.
2606	THE RESPONSE TIME SHALL BE NOT GREATER THAN 2606 MILLISECONDS.
2610	RESPONSE TIME. TESTING SHALL BE PERFORMED WITH THE BASE DOCUMENT, EXCEPT 2610.
2612	RESPONSE TIME. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2612.
2614	APPLY STEADY POWER TO METER TO REACH END-SCALE DEFLECTION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4878
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE.	4782
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4770
PER MIL-STD-202, METHOD 101.	4771
*TEST CONDITION (LETTER)	4772
MOUNTING (SELECT ONE)	
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4773
MOUNTING SHALL BE BY NORMAL METHOD.	4765
MOUNTING SHALL BE BY ANY SUITABLE METHOD.	4766
SAND AND DUST	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4958
NO EVIDENCE OF DUST PENETRATION.	4959

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4878	SALT SPRAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.
4782	SALT SPRAY. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
4770	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4770.
4771	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 101 OF MIL-STD-202.
4772	TEST CONDITION LETTER 4772 SHALL APPLY.
4773	MOUNTING SHALL BE IN ACCORDANCE WITH 4773.
4765	MOUNTING SHALL BE BY THE NORMAL METHOD.
4766	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4958	SAND AND DUST. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4958.
4959	SAND AND DUST. THERE SHALL BE NO EVIDENCE OF DUST PENETRATION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SAND AND DUST (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4952
PER MIL-STD-202, METHOD 110.	4960
TEST SPECIMENS SHALL BE OPERATED DURING TEST STEPS (NUMBER)	4872
*DURATION OF OPERATION (HOURS)	6299
SPECIMEN ORIENTATION SHALL BE CHANGED DURING TEST.	1539
SECOND 6-HOUR TEST REQUIRED IMMEDIATELY FOLLOWING TEMPERATURE STABILIZATION IN STEP 2.	4956
SEAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4745
AS FOLLOWS:	6370

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4952	SAND AND DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4952.
4960	SAND AND DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 110 OF MIL-STD-202.
4872	ITEM(S) SHALL BE OPERATED DURING STEP(S) 4872.
6299	DURATION OF OPERATION SHALL BE 6299 HOUR(S).
1539	ORIENTATION SHALL BE CHANGED DURING THE TEST.
4956	THE SECOND 6-HOUR TEST SHALL BE PERFORMED IMMEDIATELY AFTER REACHING TEMPERATURE STABILIZATION IN STEP 2.
4745	SEAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4745.
6370	SEAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
AS FOLLOWS: (CONT)	
SPECIFIED TEST METHOD SENSITIVITY.	4746
NO BUBBLES INDICATIVE OF LEAKAGE.	4748
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4734
PER MIL-STD-202, METHOD 112.	4732
*TEST CONDITION LETTER	
LETTER A.	4737
LIQUID FOR BATH (NAME)	4738
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	4739
LETTER B.	6320
LIQUID FOR BATH (NAME)	6321
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	6322
LETTER C.	6323
*LEAK RATE SENSITIVITY (ATM CC/SEC)	4741

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4746	THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE SPECIFIED TEST METHOD SENSITIVITY.
4748	THERE SHALL BE NO BUBBLES INDICATIVE OF LEAKAGE.
4734	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4734.
4732	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 112 OF MIL-STD-202.
4737	TEST CONDITION LETTER A SHALL APPLY.
4738	LIQUID FOR BUBBLE TEST BATH SHALL BE 4738.
4739	TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 4739 DEGREES CELSIUS.
6320	TEST CONDITION LETTER B SHALL APPLY.
6321	LIQUID FOR BUBBLE TEST BATH SHALL BE 6321.
6322	TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 6322 DEGREES CELSIUS.
6323	TEST CONDITION LETTER C SHALL APPLY.
4741	LEAK SENSITIVITY RATE SHALL BE 4741 ATM CC/SEC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
LETTER C. (CONT)	
*TEST PROCEDURE (SELECT ONE)	
TEST PROCEDURE I.	4740
VACUUM PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	4742
(KILOPASCALS)	4736
TEST PROCEDURE II.	6324
BACKFILL PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	6325
(KILOPASCALS)	6326
NUMBER OF PRESSURE CYCLES (QUANTITY)	4749
TEST PROCEDURE III.	6328
GROSS LEAK TEST CONDITION (LETTER)	4750
TEST PROCEDURE IV.	6329
CHAMBER PRESSURE (SELECT ONE)	
(TORR)	4751
(KILOPASCALS)	4735
DURATION OF REDUCED PRESSURE (MINUTES)	4752

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4740	PROCEDURE NUMBER I SHALL APPLY.
4742	VACUUM PRESSURE SHALL BE 4742 POUNDS PER SQUARE INCH.
4736	VACUUM PRESSURE SHALL BE 4736 KILOPASCALS.
6324	PROCEDURE NUMBER II SHALL APPLY.
6325	BACKFILL PRESSURE SHALL BE 6325 POUNDS PER SQUARE INCH.
6326	BACKFILL PRESSURE SHALL BE 6326 KILOPASCALS.
4749	THERE SHALL BE 4749 PRESSURE CYCLE(S).
6328	PROCEDURE NUMBER III SHALL APPLY.
4750	GROSS LEAK TEST CONDITION LETTER 4750 SHALL APPLY.
6329	PROCEDURE NUMBER IV SHALL APPLY.
4751	CHAMBER PRESSURE SHALL BE 4751 TORR.
4735	CHAMBER PRESSURE SHALL BE 4735 KILOPASCALS.
4752	DURATION AT LOW PRESSURE SHALL BE 4752 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
TEST PROCEDURE IV. (CONT)	
GROSS LEAK TEST CONDITION (LETTER)	6330
LETTER D.	6331
ANY SUITABLE MOUNTING METHOD.	4743
LETTER E.	6332
ANY SUITABLE MOUNTING METHOD.	6333
SHOCK, HIGH IMPACT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1494
NO EVIDENCE OF PHYSICAL DAMAGE.	1495
REMAIN WITHIN SPECIFIED TOLERANCE.	1464
NO DISCONTINUITY DURING TEST.	1451
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1486
PER MIL-STD-202, METHOD 207.	1482
*MOUNTING FIXTURE (SELECT ONE)	
FIGURE NUMBER FROM METHOD 207 OF MIL-STD-202 (NUMBER)	1488

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6330	GROSS LEAK TEST CONDITION LETTER 6330 SHALL APPLY.
6331	TEST CONDITION LETTER D SHALL APPLY.
4743	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
6332	TEST CONDITION LETTER E SHALL APPLY.
6333	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
1494	SHOCK, HIGH IMPACT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1494.
1495	SHOCK, HIGH IMPACT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1464	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1451	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.
1486	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1486.
1482	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 207 OF MIL-STD-202.
1488	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH FIGURE 1488 OF METHOD 207 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, HIGH IMPACT (CONT)	
MOUNTING FIXTURE (CONT)	
ANY SUITABLE MOUNTING FIXTURE.	1478
MOUNTING FIXTURE PER DOCUMENT (DOC DES)	1468
SHOCK, SPECIFIED PULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1508
NO EVIDENCE OF PHYSICAL DAMAGE.	1509
NO DISCONTINUITY DURING TEST.	1471
REMAIN WITHIN SPECIFIED TOLERANCE.	4703
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1502
PER MIL-STD-202, METHOD 213.	1500
*TEST CONDITION (LETTER)	1504
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	4686
NORMAL MOUNTING METHOD.	4685
MOUNT PER DOCUMENT (DOC DES)	4684

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1478	THE MOUNTING FIXTURE SHALL BE ANY SUITABLE MOUNTING FIXTURE.
1468	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH 1468.
1508	SHOCK, SPECIFIED PULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1508.
1509	SHOCK, SPECIFIED PULSE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1471	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.
4703	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1502	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1502.
1500	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 213 OF MIL-STD-202.
1504	TEST CONDITION LETTER 1504 SHALL APPLY.
4686	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4685	MOUNTING SHALL BE BY THE NORMAL METHOD.
4684	MOUNTING SHALL BE IN ACCORDANCE WITH 4684.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SOLDERABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4674
NO EVIDENCE OF PHYSICAL DAMAGE.	4675
MEET EVALUATION CRITERIA SPECIFIED IN METHOD 208 OF MIL-STD-202.	4672
REMAIN WITHIN SPECIFIED TOLERANCE.	4677
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4662
PER MIL-STD-202, METHOD 208.	4683
NUMBER OF TERMINALS TO BE TESTED (QUANTITY)	4666
DEPTH OF IMMERSION (SELECT ONE)	
(INCHES)	4667
(MILLIMETERS)	4663
DISTANCE WRAP WIRE APPLIED FROM BODY (SELECT ONE)	
(INCHES)	4664
(MILLIMETERS)	4665
SPECIAL PREPARATIONS PERMITTED.	6205

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4674	SOLDERABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4674.
4675	SOLDERABILITY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4672	THE RESULTS OF THE SOLDERABILITY TEST SHALL BE IN ACCORDANCE WITH THE ACCEPTANCE CRITERIA OF METHOD 208 OF MIL-STD-202.
4677	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4662	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4662.
4683	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 208 OF MIL-STD-202.
4666	4666 TERMINATION(S) PER UNIT SHALL BE TESTED.
4667	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4667 INCH(S).
4663	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4663 MILLIMETER(S).
4664	THE WRAP WIRE SHALL BE 4664 INCH(S) FROM THE BODY.
4665	THE WRAP WIRE SHALL BE 4665 MILLIMETER(S) FROM THE BODY.
6205	SPECIAL PREPARATION SHALL BE PERMITTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STICKING BELOW ZERO	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2620
THE POINTER SHALL NOT STICK BELOW ZERO.	2624
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2630
PER MIL-M-10304.	2632
ENERGIZE POINTER TO ONE THIRD OF FULL SCALE DEFLECTION AND DEENERGIZE.	2634
ENERGIZE POINTER TO TWO THIRDS OF FULL SCALE DEFLECTION AND DEENERGIZE.	2636
ENERGIZE POINTER TO PERCENT OF FULL SCALE AND DEENERGIZE (PERCENT)	2638
SUSTAINED OVERLOAD	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2640
AS FOLLOWS:	2642

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2620	STICKING BELOW ZERO. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2620.
2624	STICKING BELOW ZERO. THE POINTER SHALL NOT STICK BELOW ZERO.
2630	STICKING BELOW ZERO. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2630.
2632	STICKING BELOW ZERO. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-M-10304.
2634	ENERGIZE METER SO POINTER MOVES TO ONE-THIRD OF THE FULL SCALE VALUE AND DEENERGIZE.
2636	ENERGIZE METER SO POINTER MOVES TO TWO-THIRDS OF THE FULL SCALE VALUE AND DEENERGIZE.
2638	ENERGIZE METER SO POINTER MOVES TO 2638 PERCENT OF THE FULL SCALE VALUE AND DEENERGIZE.
2640	SUSTAINED OVERLOAD. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2640.
2642	SUSTAINED OVERLOAD. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SUSTAINED OVERLOAD (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM ZERO SHIFT	
TEMPORARY (PERCENT)	2644
PERMANENT (PERCENT)	2646
MAXIMUM PERMANENT INDICATION CHANGE (PERCENT)	2648
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2650
PER DOCUMENT (DOC DES)	2652
APPLICATION OF ENERGY	
OVERLOAD PERIOD (HOURS)	2654
GREATER THAN END-SCALE VALUE (PERCENT)	2656
TEMPERATURE (DEGREES CELSIUS)	2658
TOLERANCE (DEGREES CELSIUS)	2660
DETERMINE TEMPORARY AND PERMANENT SHIFT.	2662
DETERMINE PERMANENT INDICATION CHANGE.	2664

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2644	THE TEMPORARY ZERO SHIFT SHALL BE NOT GREATER THAN 2644 PERCENT.
2646	THE PERMANENT ZERO SHIFT SHALL BE NOT GREATER THAN 2646 PERCENT.
2648	THE PERMANENT INDICATION CHANGE SHALL BE NOT GREATER THAN 2648 PERCENT.
2650	SUSTAINED OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2650.
2652	SUSTAINED OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2652.
2654	THE APPLICATION OF ENERGY SHALL BE APPLIED WITH AN OVERLOAD PERIOD OF 2654 HOURS.
2656	THE APPLICATION OF ENERGY SHALL BE GREATER THAN 2656 PERCENT OF THE FULL SCALE VALUE.
2658	THE TEST TEMPERATURE SHALL BE 2658 DEGREES CELSIUS.
2660	THE TEST TEMPERATURE TOLERANCE SHALL BE 2660 DEGREES CELSIUS.
2662	DETERMINE TEMPORARY AND PERMANENT SHIFT AFTER OVERLOAD.
2664	DETERMINE PERMANENT INDICATION CHANGE AFTER OVERLOAD.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE INFLUENCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2670
AS FOLLOWS:	2672
MAXIMUM	
INDICATION CHANGE (PERCENT)	2674
FREQUENCY SPAN (PERCENT)	2676
REFERENCE TEMPERATURE (DEGREES CELSIUS)	2678
MINIMUM SCALE POINTS READ (QUANTITY)	2680
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2690
PER DOCUMENT (DOC DES)	2692
TEST TEMPERATURE	
BELOW REFERENCE (DEGREES CELSIUS)	2694
ABOVE REFERENCE (DEGREES CELSIUS)	2696
COMPUTE THE TEMPERATURE INFLUENCE.	2698

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2670 TEMPERATURE INFLUENCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2670.

2672 TEMPERATURE INFLUENCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2674 THE INDICATION CHANGE SHALL BE NOT GREATER THAN 2674 PERCENT.

2676 THE FREQUENCY SPAN SHALL BE NOT GREATER THAN 2676 PERCENT.

2678 THE REFERENCE TEMPERATURE SHALL BE 2678 DEGREES CELSIUS.

2680 THE NUMBER OF SCALE POINTS READ SHALL BE NOT LESS THAN 2680.

2690 TEMPERATURE INFLUENCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2690.

2692 TEMPERATURE INFLUENCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2692.

2694 THE TEST TEMPERATURE BELOW THE REFERENCE TEMPERATURE SHALL BE 2694 DEGREES CELSIUS.

2696 THE TEST TEMPERATURE ABOVE THE REFERENCE TEMPERATURE SHALL BE 2696 DEGREES CELSIUS.

2698 RECORD THE VALUES AND COMPUTE THE TEMPERATURE INFLUENCE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, HIGH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6228
NO EVIDENCE OF PHYSICAL DAMAGE.	6229
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6217
PER MIL-STD-810, METHOD 501.	6218
*PROCEDURE (ROMAN NUMERAL)	6219
STORAGE TEMPERATURE (DEGREES CELSIUS)	6220
STORAGE DURATION (HOURS)	6221
HIGHEST OPERATING TEMPERATURE (DEGREES CELSIUS)	6222
OPERATION TIME (SELECT ONE)	
(MINUTES)	6224
(HOURS)	6225
TEMPERATURE, LOW	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6318

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6228	TEMPERATURE, HIGH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6228.
6229	TEMPERATURE, HIGH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6217	TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6217.
6218	TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 501 OF MIL-STD-810.
6219	PROCEDURE NUMBER 6219 SHALL APPLY.
6220	STORAGE TEMPERATURE SHALL BE 6220 DEGREES CELSIUS.
6221	STORAGE DURATION SHALL BE 6221 HOUR(S).
6222	HIGHEST OPERATING TEMPERATURE SHALL BE 6222 DEGREES CELSIUS.
6224	OPERATING TIME SHALL BE 6224 MINUTE(S).
6225	OPERATING TIME SHALL BE 6225 HOUR(S).
6318	TEMPERATURE, LOW. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6318.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, LOW (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE.	6319
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6231
PER MIL-STD-810, METHOD 502.	6232
STORAGE TEMPERATURE (DEGREES CELSIUS)	6234
STORAGE DURATION (HOURS)	6235
LOWEST OPERATING TEMPERATURE (DEGREES CELSIUS)	6236
CHAMBER AIR VELOCITY (SELECT ONE)	
(FEET PER SECOND)	6237
(METERS PER SECOND)	6238
OPERATIONS TIME (SELECT ONE)	
(MINUTES)	6315
(HOURS)	6316
TEMPERATURE SHOCK	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6214

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6319	TEMPERATURE, LOW. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6231	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6231.
6232	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 502 OF MIL-STD-810.
6234	STORAGE TEMPERATURE SHALL BE 6234 DEGREES CELSIUS.
6235	STORAGE DURATION SHALL BE 6235 HOUR(S).
6236	LOWEST OPERATING TEMPERATURE SHALL BE 6236 DEGREES CELSIUS.
6237	CHAMBER AIR VELOCITY SHALL BE 6237 FEET PER SECOND.
6238	CHAMBER AIR VELOCITY SHALL BE 6238 METERS PER SECOND.
6315	OPERATING TIME SHALL BE 6315 MINUTE(S).
6316	OPERATING TIME SHALL BE 6316 HOUR(S).
6214	TEMPERATURE SHOCK. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6214.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE SHOCK (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE.	6215
REMAIN WITHIN SPECIFIED TOLERANCE.	4726
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6212
PER MIL-STD-810, METHOD 503.	4710
TERMINAL STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1410
PER MIL-STD-202, METHOD 211.	1375
*TEST CONDITIONS	
TEST CONDITION A, APPLIED FORCE (SELECT ONE)	
(POUNDS)	1411
(NEWTONS)	1419
TEST CONDITION B, BENDS (NUMBER)	1412

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6215	TEMPERATURE SHOCK. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4726	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
6212	TEMPERATURE SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6212.
4710	TEMPERATURE SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 503 OF MIL-STD-810.
1410	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1410.
1375	TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 211 OF MIL-STD-202.
1411	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1411 POUND(S).
1419	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1419 NEWTON(S).
1412	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION B. THERE SHALL BE 1412 BEND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL STRENGTH (CONT)	
TEST CONDITIONS (CONT)	
TEST CONDITION C, LOAD (SELECT ONE)	
(POUNDS)	1413
(KILOGRAMS)	1420
TEST CONDITION D.	1414
TEST CONDITION E, TORQUE (SELECT ONE)	
(POUND-INCHES)	1416
(NEWTON METERS)	1421
THERMAL SHOCK, (TEMPERATURE CYCLING)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4722
NO EVIDENCE OF PHYSICAL DAMAGE.	4723
REMAIN WITHIN SPECIFIED TOLERANCE.	4726
TEST METHODS (SELEC ONE)	
PER BASE DOCUMENT EXCEPT ____	4713

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1413	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1413 POUND(S).
1420	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1420 KILOGRAM(S).
1414	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION D.
1416	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1416 POUND-INCH(S).
1421	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1421 NEWTON METER(S).
4722	THERMAL SHOCK, (TEMPERATURE CYCLING). THE REQUIREMENT(S) SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4722.
4723	THERMAL SHOCK, (TEMPERATURE CYCLING). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4726	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4713	THERMAL SHOCK, (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4713.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THERMAL SHOCK, (TEMPERATURE CYCLING) (CONT)	
TEST METHODS (CONT)	
PER MIL-STD-202, METHOD 107.	4714
*TEST CONDITION (LETTER)	4715
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4719
VIBRATION, HIGH FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1455
NO EVIDENCE OF PHYSICAL DAMAGE.	1456
NO DISCONTINUITY DURING TEST.	1473
REMAIN WITHIN SPECIFIED TOLERANCE.	1469
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1446
PER MIL-STD-202, METHOD 204.	1447
*TEST CONDITION (LETTER)	1448
PERCENT RATED LOAD APPLIED (PERCENT)	6200
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4709

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
4714	THERMAL SHOCK, (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 107 OF MIL-STD-202.
4715	TEST CONDITION LETTER 4715 SHALL APPLY.
4719	MOUNTING SHALL BE IN ACCORDANCE WITH 4719.
1455	VIBRATION, HIGH FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1455.
1456	VIBRATION, HIGH FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1473	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1469	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1446	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1446.
1447	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 204 OF MIL-STD-202.
1448	TEST CONDITION LETTER 1448 SHALL APPLY.
6200	THE LOAD SHALL BE 6200 PERCENT OF THE RATED LOAD.
4709	MOUNTING SHALL BE BY ANY SUITABLE METHOD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY (CONT)	
METHOD OF MOUNTING (CONT)	
NORMAL MOUNTING MEANS.	4708
MOUNT PER DOCUMENT (DOC DES)	4707
METHOD OF DETERMINING MECHANICAL RESONANCE (SELECT ONE)	
VISUALLY BY MEANS OF A STROBOTAC.	1533
VIBRATION, LOW FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1475
NO EVIDENCE OF PHYSICAL DAMAGE.	1476
REMAIN WITHIN SPECIFIED TOLERANCE.	1480
NO DISCONTINUITY DURING TEST.	1490
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1466
PER MIL-STD-202, METHOD 201.	1467
DURATION OF VIBRATION PER AXIS (HOURS)	1470
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4731

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4708	MOUNTING SHALL BE BY THE NORMAL METHOD.
4707	MOUNTING SHALL BE IN ACCORDANCE WITH 4707.
1533	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE VISUALLY BY MEANS OF A STROBOTAC.
1475	VIBRATION, LOW FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1475.
1476	VIBRATION, LOW FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1480	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1490	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1466	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1466.
1467	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 201 OF MIL-STD-202.
1470	DURATION OF TEST SHALL BE 1470 HOUR(S) PER AXIS.
4731	MOUNTING SHALL BE BY ANY SUITABLE METHOD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY (CONT)	
METHOD OF MOUNTING (CONT)	
NORMAL MOUNTING METHOD.	4730
MOUNT PER DOCUMENT (DOC DES)	4729
DIRECTION OF MOTION	
PARALLEL TO LONGITUDINAL AXIS.	1535
PERPENDICULAR TO LONGITUDINAL AXIS.	1536
ON THE CENTERLINE OF MOST SENSITIVE AXIS.	4979
90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.	4978
THREE MUTUALLY PERPENDICULAR DIRECTIONS.	1537
VIBRATION, RANDOM	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1435
NO EVIDENCE OF PHYSICAL DAMAGE.	1436
REMAIN WITHIN SPECIFIED TOLERANCE.	1538

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4730	MOUNTING SHALL BE BY THE NORMAL METHOD.
4729	MOUNTING SHALL BE IN ACCORDANCE WITH 4729.
1535	THE DIRECTION OF MOTION SHALL BE PARALLEL TO THE LONGITUDINAL AXIS.
1536	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE LONGITUDINAL AXIS.
4979	THE DIRECTION OF MOTION SHALL BE ON THE CENTERLINE OF THE MOST SENSITIVE AXIS.
4978	THE DIRECTION OF MOTION SHALL BE 90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.
1537	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR DIRECTIONS.
1435	VIBRATION, RANDOM. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2435.
1436	VIBRATION, RANDOM. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1538	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1426
PER MIL-STD-202, METHOD 214.	1427
*TEST CONDITION (ROMAN NUMERAL AND LETTER)	1428
*DURATION OF APPLICATION (SELECT ONE)	
(MINUTES)	1438
(HOURS)	1431
MONITORING INSTRUMENTATION OF EXCITATION (SELECT ONE)	
ANY SUITABLE SYSTEM.	1452
CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.	1453
CALIBRATED OSCILLOSCOPE.	1459
NUMBER OF VIBRATION MONITORING TEST POINTS (QUANTITY)	1430
LOCATION OF MONITORING POINTS (SELECT ONE)	
ANY SUITABLE LOCATION.	1439

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1426	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1426.
1427	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 214 OF MIL-STD-202.
1428	TEST CONDITION NUMBER AND LETTER 1428 SHALL APPLY.
1438	THE DURATION OF THE TEST SHALL BE 1438 MINUTE(S).
1431	THE DURATION OF THE TEST SHALL BE 1431 HOUR(S).
1452	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE ANY SUITABLE INSTRUMENTATION SYSTEM.
1453	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED AC TP DC CONVERTER AND STRIP CHART RECORDER.
1459	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED OSCILLOSCOPE.
1430	THERE SHALL BE 1430 VIBRATION MONITORING POINT(S).
1439	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE ANY SUITABLE LOCATION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
LOCATION OF MONITORING POINTS (CONT)	
AS CLOSE AS PRACTICAL TO TEST SPECIMEN.	1462
PERCENT OF RATED LOAD APPLIED (PERCENT)	4678
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4977
NORMAL MOUNTING METHOD.	4976
MOUNT PER DOCUMENT (DOC DES)	4975
WINDOW IMPACT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2750
NO EVIDENCE OF CHIPPING, CRACKING, OR CRAZING.	2754
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2760
PER MIL-M-10304.	2762
DROP WEIGHT (SELECT ONE)	
(OUNCES)	2764
(GRAMS)	2766

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1462	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE AS CLOSE AS PRACTICAL TO THE TEST SPECIMEN(S).
4678	THE LOAD SHALL BE 4678 PERCENT OF THE RATED LOAD.
4977	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4976	MOUNTING SHALL BE BY THE NORMAL METHOD.
4975	MOUNTING SHALL BE IN ACCORDANCE WITH 4975.
2750	WINDOW IMPACT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2750.
2754	WINDOW IMPACT. THERE SHALL BE NO EVIDENCE OF CHIPPING, CRACKING OR CRAZING.
2760	WINDOW IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2760.
2762	WINDOW IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-M-10304.
2764	THE DROP WEIGHT SHALL BE 2764 OUNCES.
2766	THE DROP WEIGHT SHALL BE 2766 GRAMS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WINDOW IMPACT (CONT)	
PER MIL-M-10304. (CONT)	
DROP HEIGHT (SELECT ONE)	
(INCHES)	2768
(MILLIMETERS)	2770
ZERO ADJUSTMENT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2800
AS FOLLOWS:	2802
NO DAMAGE WHEN ADJUSTER IS ROTATED 360 DEGREES.	2804
MINIMUM RANGE OF ADJUSTMENT (SELECT ONE)	
(DEGREES)	2806
(PERCENT OF SCALE LENGTH)	2808
LOCATION OF ADJUSTMENT MECHANISM (SELECT ONE)	
FRONT.	2810
REAR.	2812

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2768	THE DROP WEIGHT HEIGHT SHALL BE 2768 INCHES.
2770	THE DROP WEIGHT HEIGHT SHALL BE 2770 MILLMETERS.
2800	ZERO ADJUSTMENT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2800.
2802	ZERO ADJUSTMENT. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2804	THERE SHALL BE NO DAMAGE TO THE METER MECHANISM WHEN THE ADJUSTER IS ROTATED 360 DEGREES.
2806	THE RANGE OF ADJUSTMENT SHALL BE NOT LESS THAN 2806 DEGREES.
2808	THE RANGE OF ADJUSTMENT SHALL BE NOT LESS THAN 2808 PERCENT OF SCALE LENGTH.
2810	THE ADJUSTMENT MECHANISM SHALL BE LOCATED AT THE FRONT OR THE METER.
2812	THE ADJUSTMENT MECHANISM SHALL BE LOCATED AT THE REAR OF THE METER.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ZERO ADJUSTMENT (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2820
PER DOCUMENT (DOC DES)	2822
ACTUATE ADJUSTMENT MECHANISM.	2824
STORAGE CONDITIONS	
(YEARS)	1529
CERTIFY MAXIMUM CURE DATE TO DELIVERY (QUARTERS)	4942
CERTIFY MINIMUM SHELF LIFE AFTER DELIVERY (QUARTERS)	4943
CERTIFY MAXIMUM MANUFACTURE DATE TO DELIVERY (QUARTERS)	4944
AGE LIMITATION PER MIL-STD-1523.	5209
PERFORMANCE CHARACTERISTICS (SEE TABLE XII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE XII IS USED.	
MOUNTING HARDWARE (SEE TVBLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
2820	ZERO ADJUSTMENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2820.
2822	ZERO ADJUSTMENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2822.
2824	ACTUATE THE ADJUSTMENT MECAHNISM TO TEST FOR ZERO ADJUSTMENT.
	STORAGE CONDITIONS.
1529	ITEMS SHALL WITHSTAND 1529 YEARS OF STORAGE WHEN PROPERLY PRESERVED, PACKAGED AND MECHANICALLY PROTECTED WITHOUT REQUIRING MAJOR REPAIR.
4942	MANUFACTURER SHALL CERTIFY THAT THE CURE DATE SHALL BE NOT GREATER THAN 4942 QUARTERS PRIOR TO DELIVERY DATE.
4943	MANUFACTURER SHALL VERTIFY THAT THERE SHALL BE NOT LESS THAN 4943 QUARTERS QUARTERS OF SHELF LIFE AFTER DELIVERY.
4944	MANUFACTURER SHALL CERTIFY THAT THE DATE OF MANUFACTURE SHALL BE NOT GREATER THAN 4944 QUARTERS PRIOR TO DATE OF DELIVERY.
5209	AGE LIMITATIONS OF THE FINISHED PRODUCT SHALL BE IN ACCORDANCE WITH MIL-STD-1523.

PERFORMANCE CHARACTERISTICS. PERFORMANCE CHARACTERISTICS SHALL BE AS SHOWN IN THE PERFORMANCE CHARACTERISTICS TABLE.

MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI


(Project EDS-A279)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.


APPENDIX A

ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

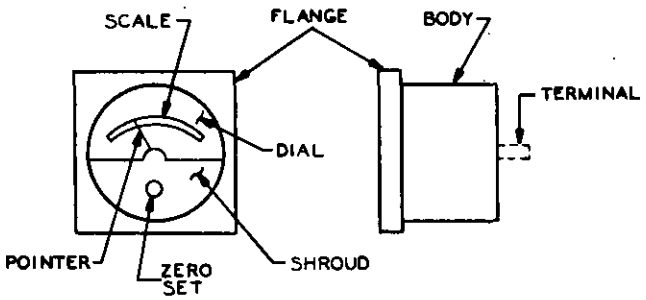


031-01-1

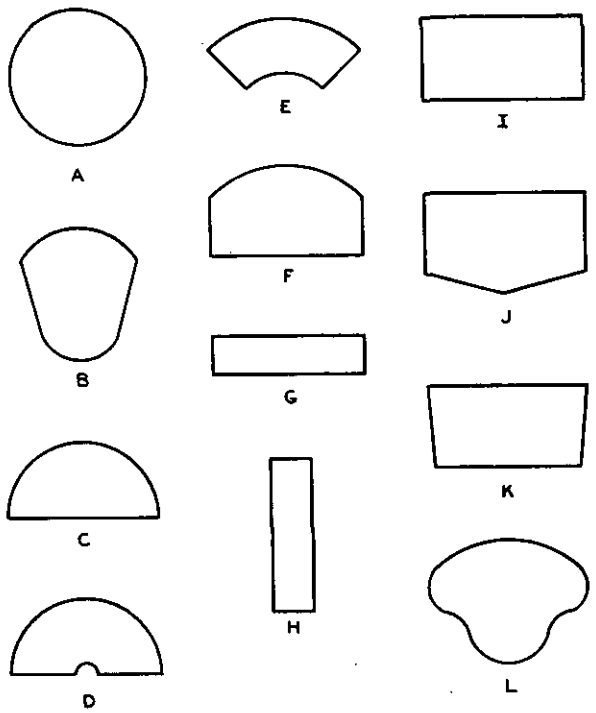

031-01-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

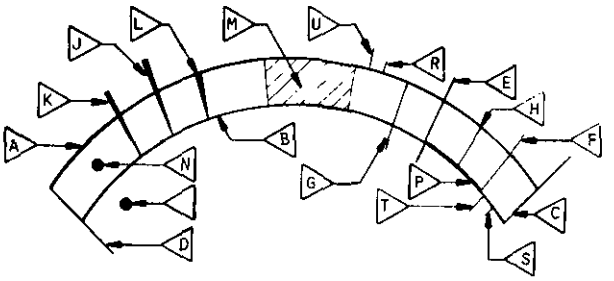

A MAJOR ARC LINE OF SPECIFIED RADIUS

B MINOR ARC LINE OF SPECIFIED RADIUS

C MAJOR ACCENT LINE ABOVE DIVISION ARC

D MAJOR ACCENT LINE BELOW DIVISION ARC

E MAJOR ACCENT LINE ABOVE AND BELOW DIVISION ARC

F MINOR ACCENT LINE ABOVE DIVISION ARC

G MINOR ACCENT LINE BELOW DIVISION ARC

H DIVISION LINE

J MAJOR ACCENT LINE

K MINOR ACCENT LINE

L DIVISION LINE

M SEGMENT (MAY HAVE BORDER, COLOR, CONTAIN LETTERING OR BORDER ONLY)

N DIVISION DOT BETWEEN ARCS

O DIVISION DOT BELOW ARC

P EMPHASIS LINE (MAYBE DIFFERENT COLOR)

Q *MIRROR*


R MINOR ACCENT LINE ON MAJOR ARC LINE

S MINOR ACCENT LINE ON MINOR ARC LINE


T MAJOR ACCENT LINE ON MINOR ARC LINE

U MAJOR ACCENT LINE ON MAJOR ARC LINE

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

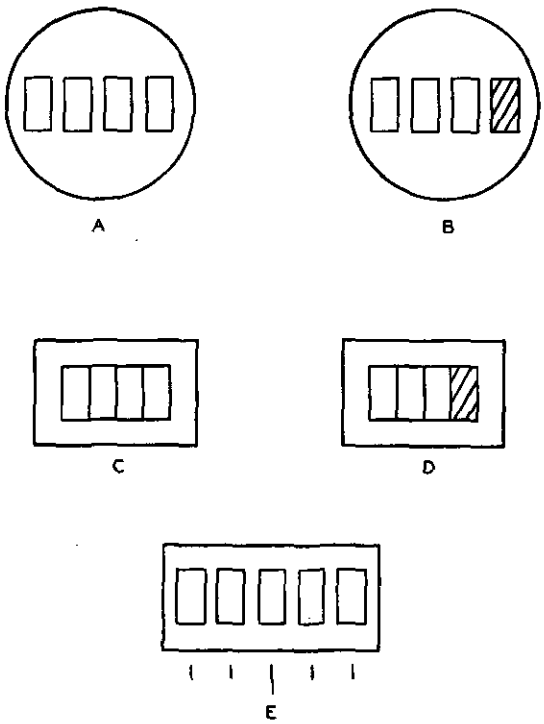


031-01-4



A ACCENT LINE RIGHT OF CENTER
B DIVISION LINE LEFT OF CENTER
C ACCENT LINE LEFT OF CENTER
D DIVISION LINE RIGHT OF CENTER
E ACCENT LINE ACROSS CENTER
F DIVISION LINE ACROSS CENTER
G CENTER LINE
H SEGMENT


031-01-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

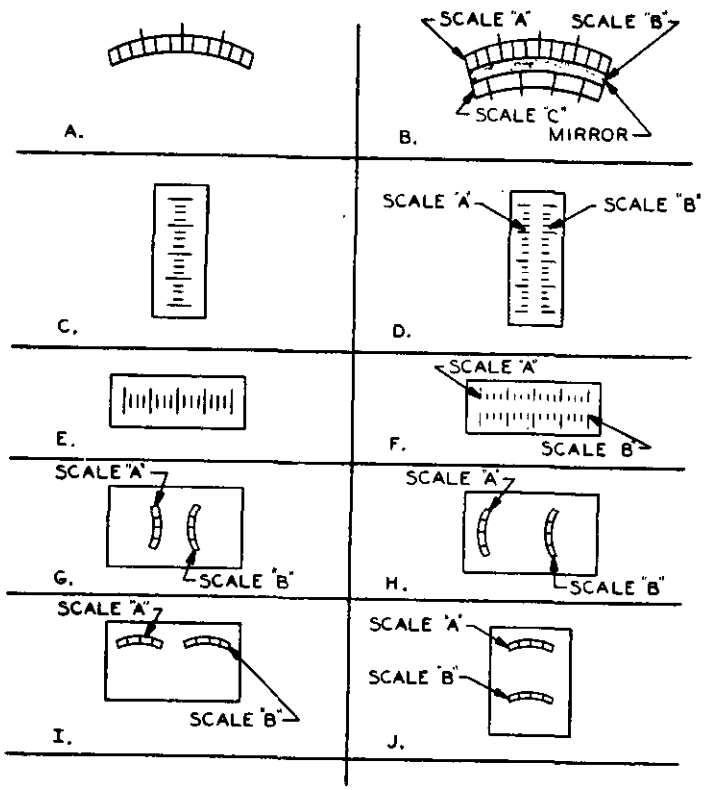


031-01-E

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

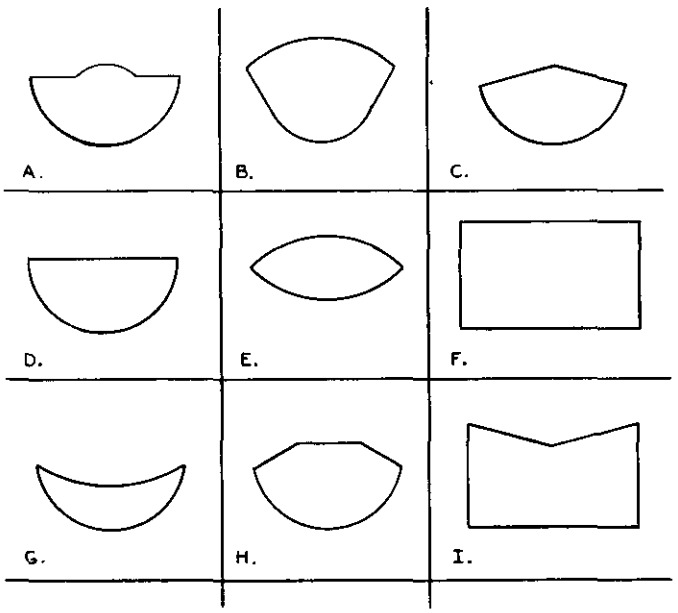


031-01-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

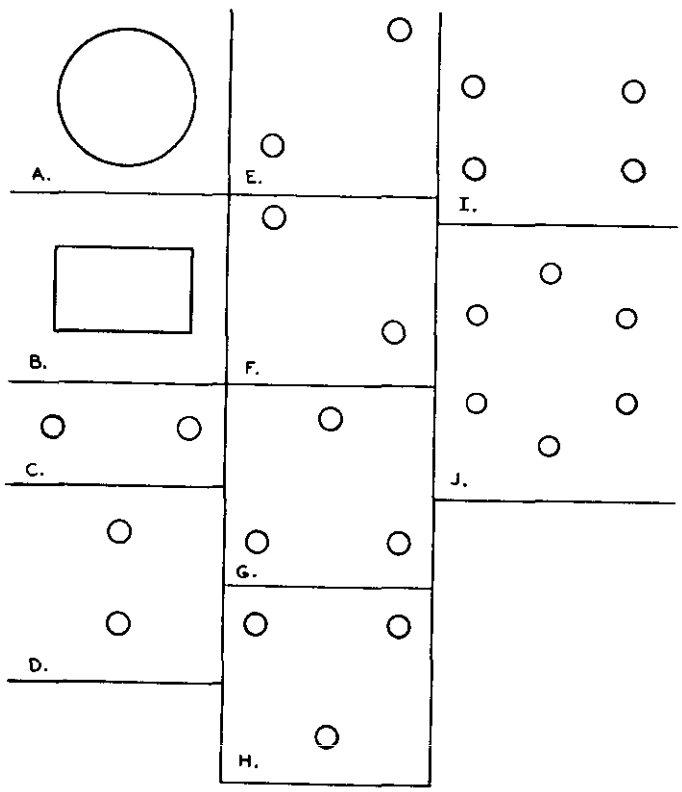


031-01-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

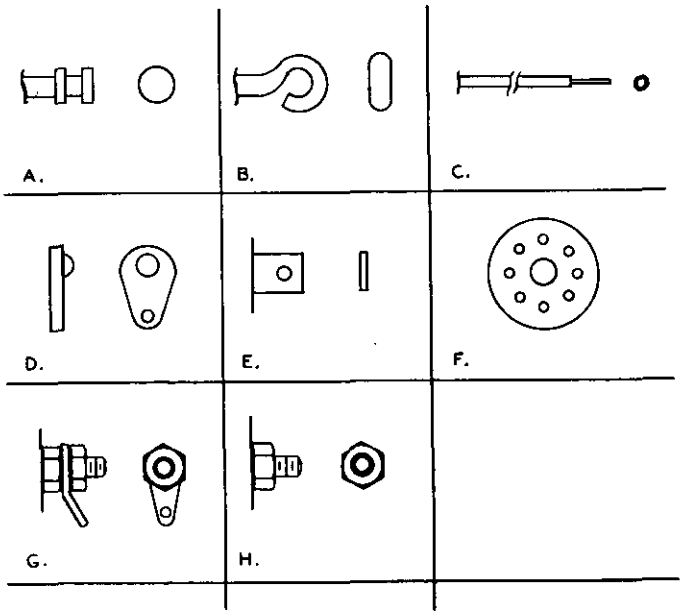


031-01-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

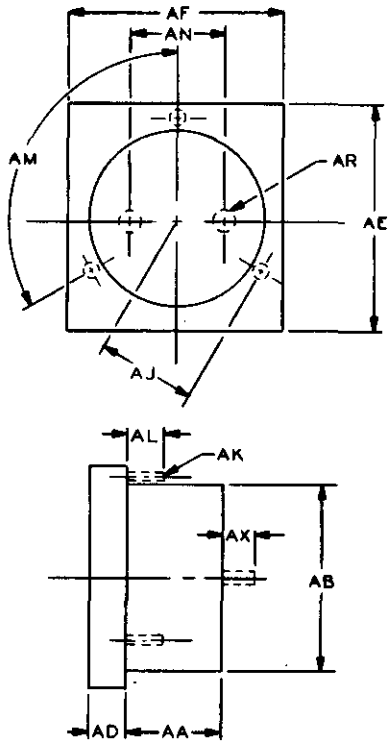



031-02-1

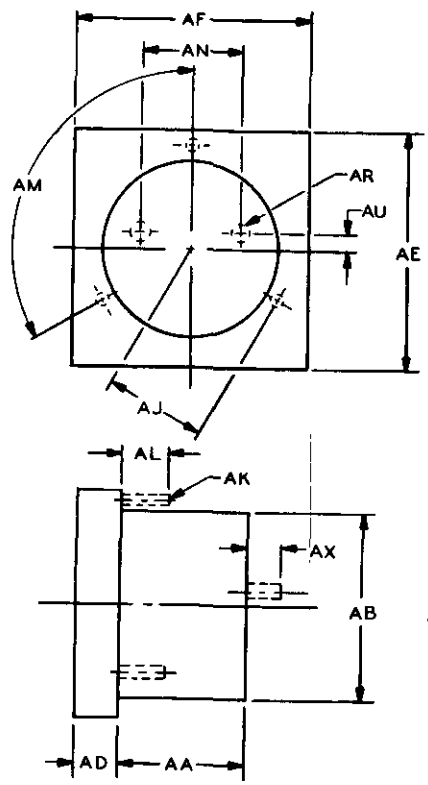


031-02-2


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

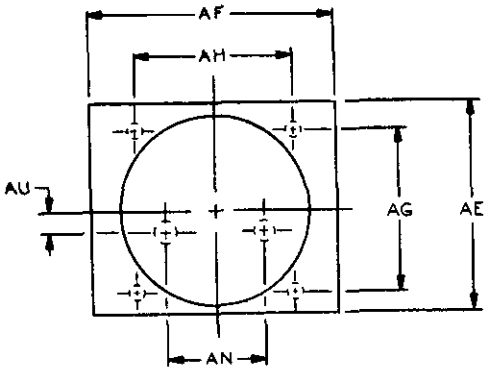




031-02-3

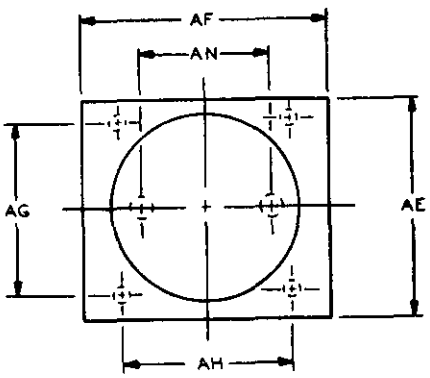





031-02-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

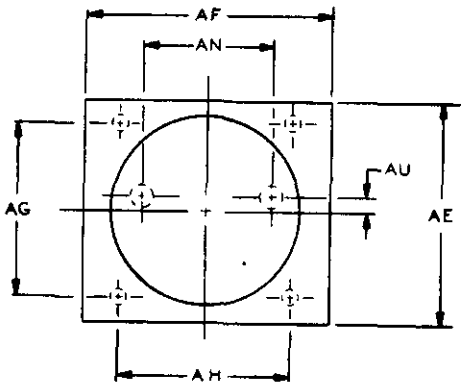




031-02-5

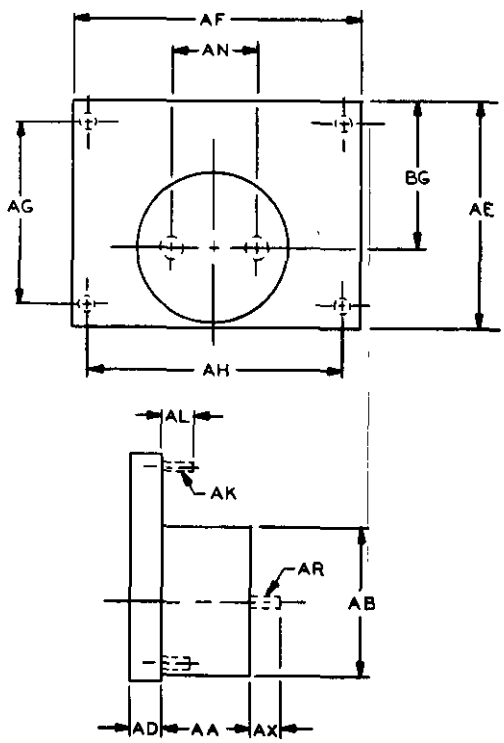


031-02-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

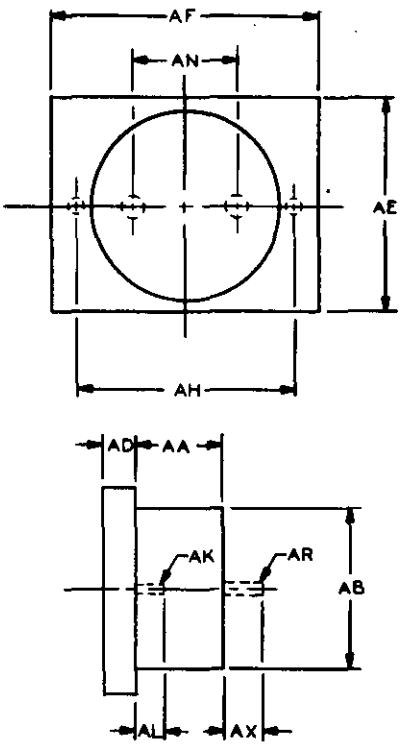


031-02-7

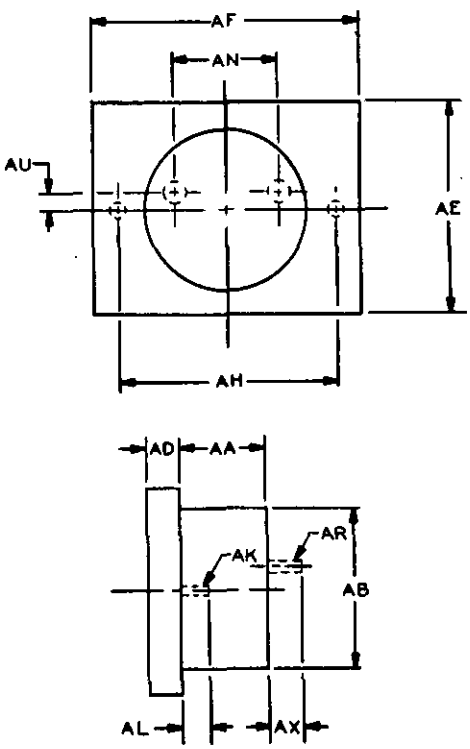


031-02-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

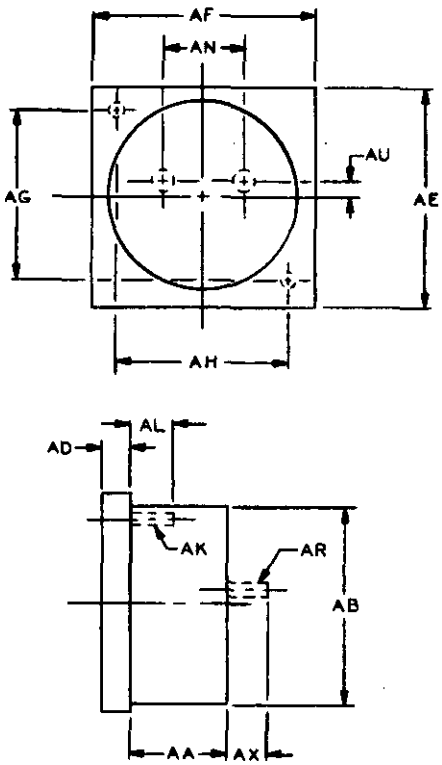


031-02-9

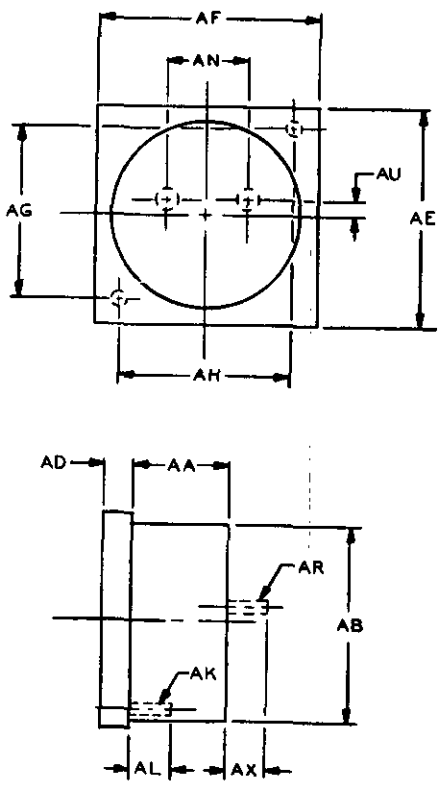



031-02-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

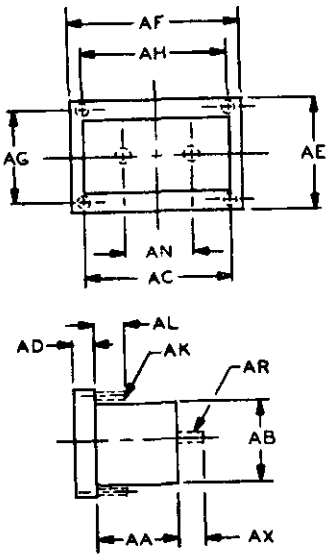


031-02-11

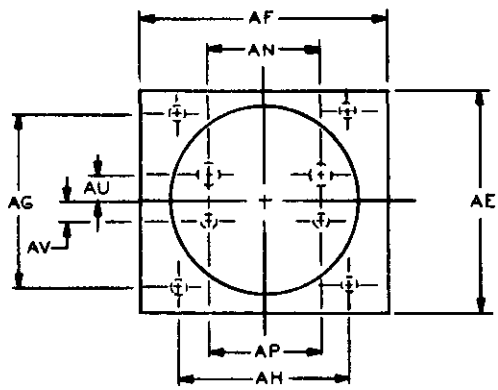




031-03-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

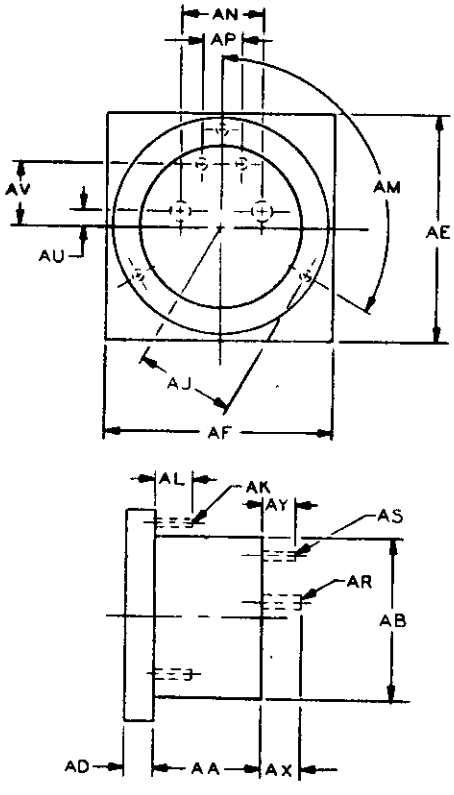


031-03-2

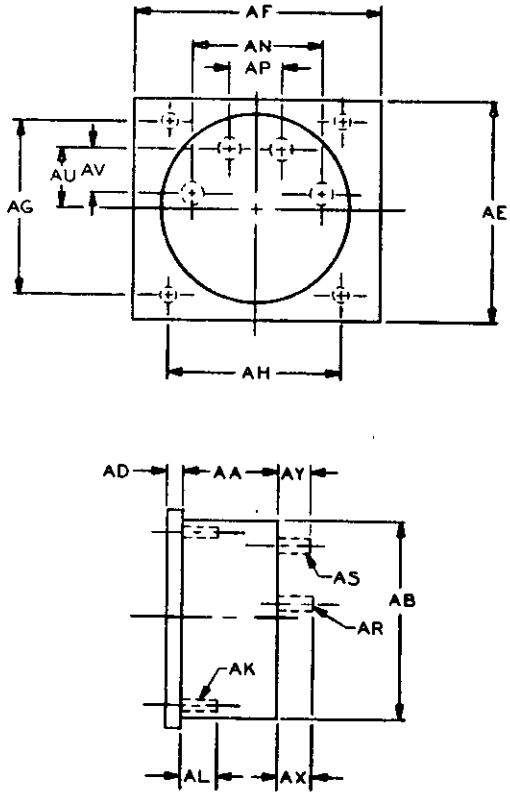


031-03-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

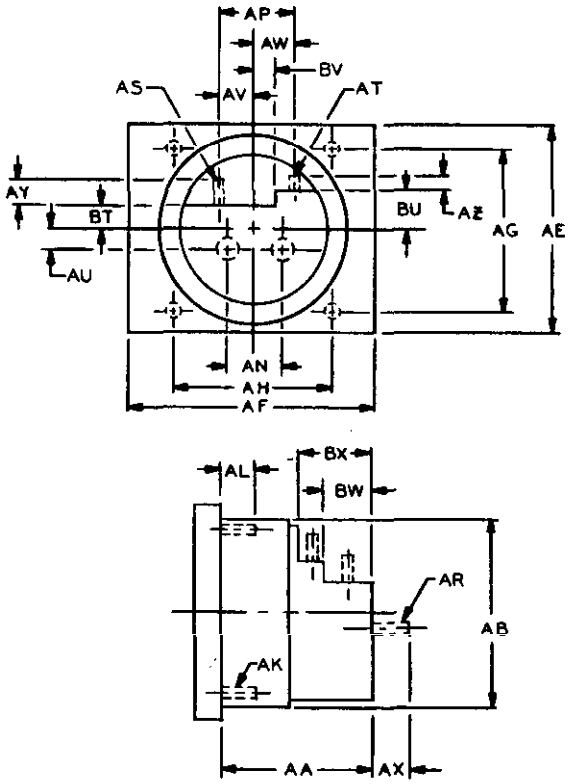


031-03-4

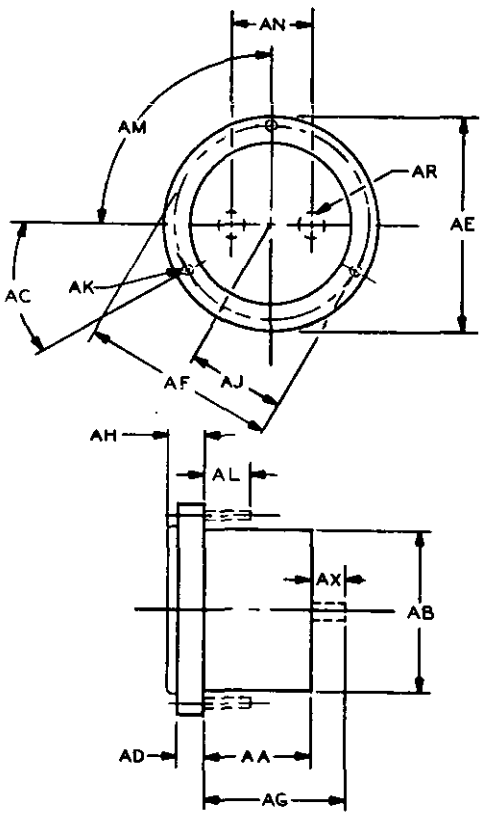


031-04-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

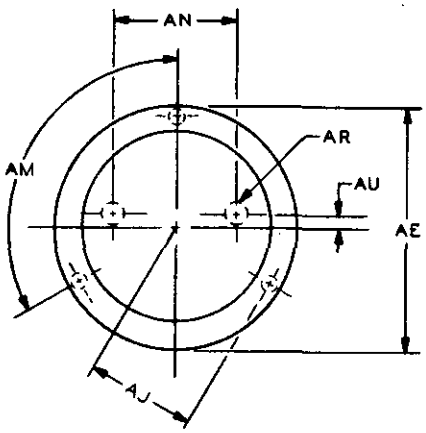



031-04-2

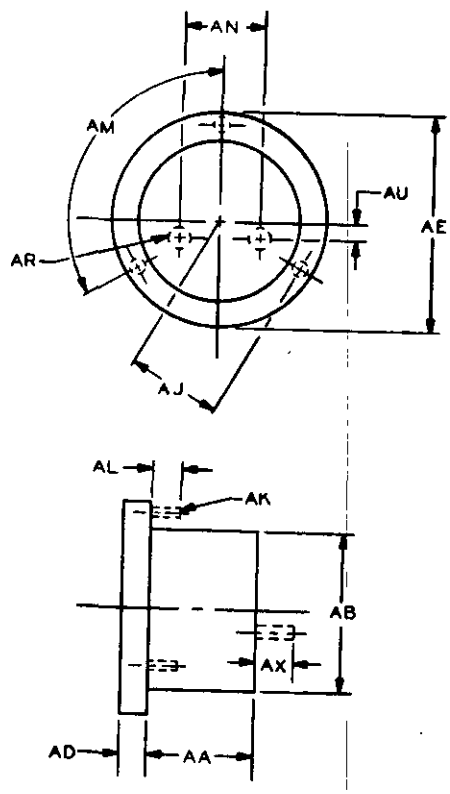


031-04-3


Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

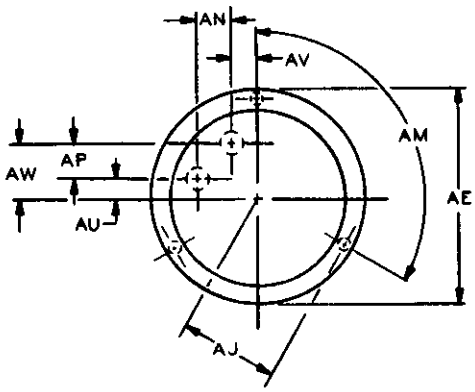




031-04-4

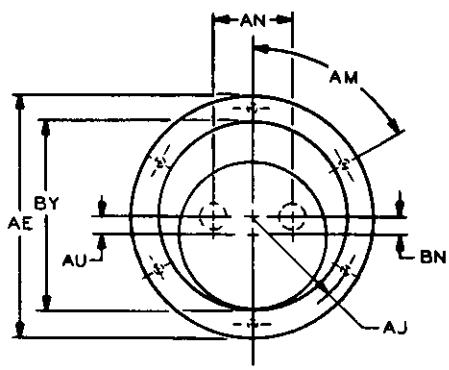


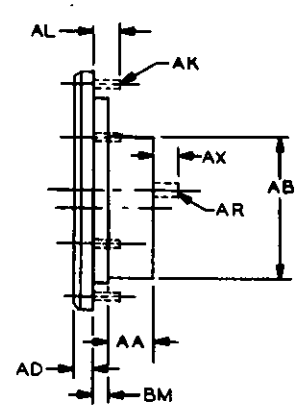


031-04-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

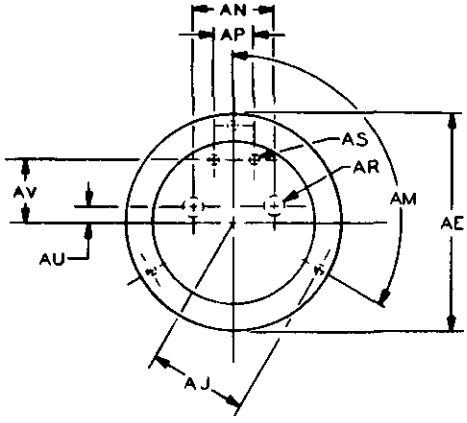




031-05-1

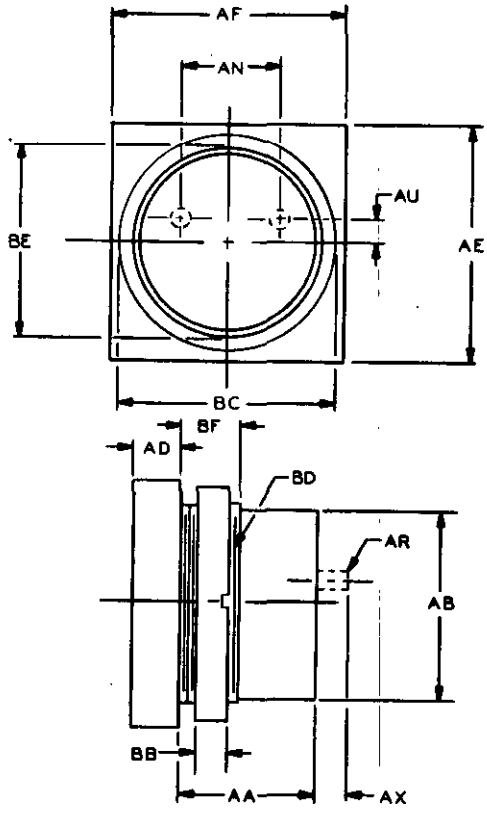


031-06-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

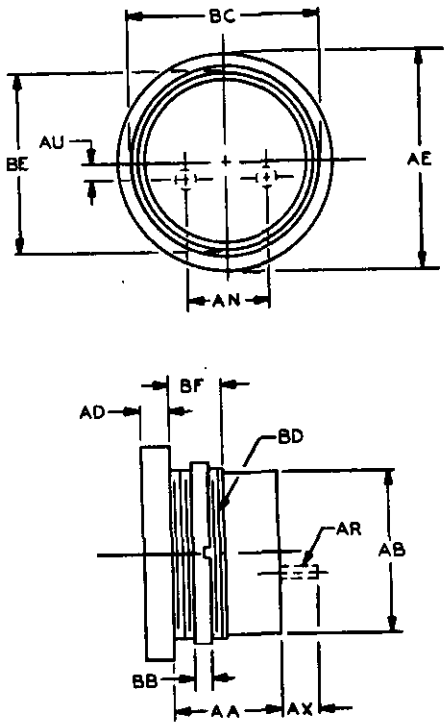


031-06-2

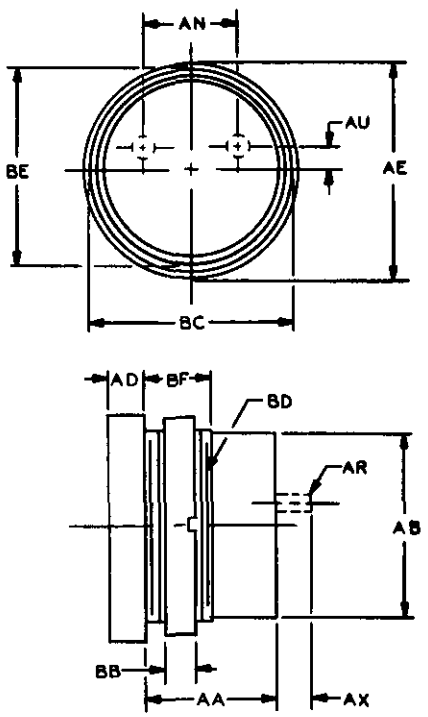


031-06-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

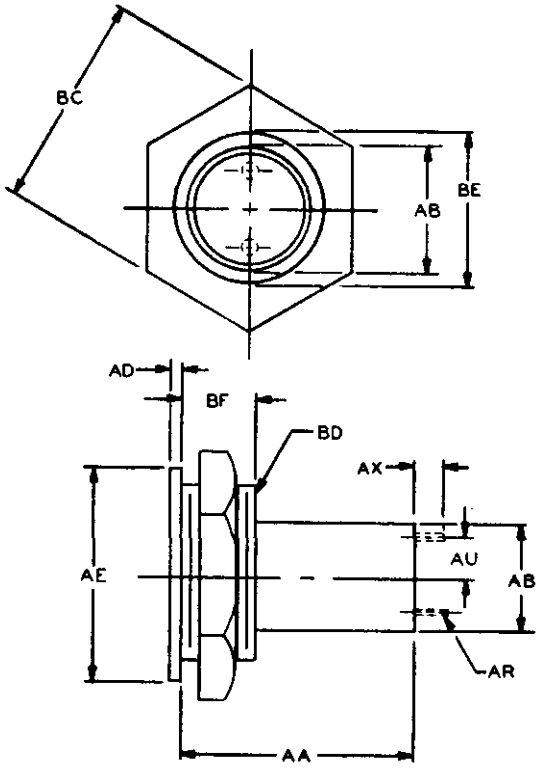


031-06-4

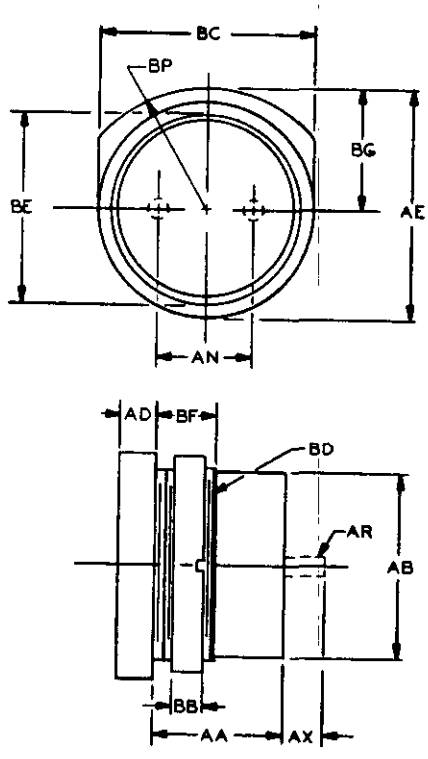


031-07-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

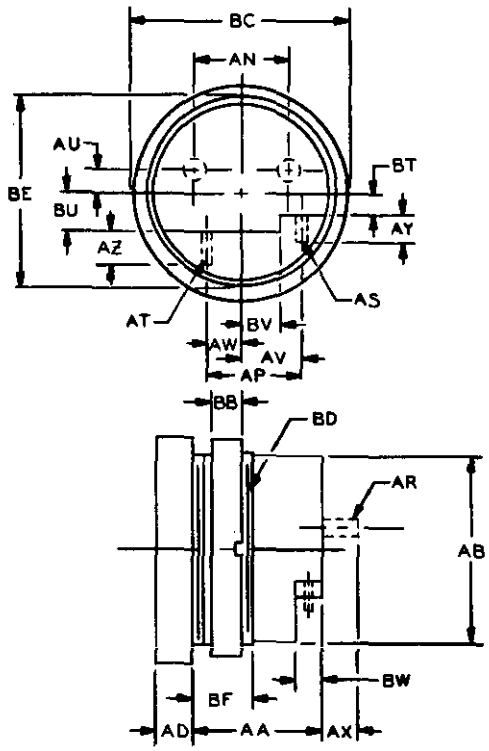


031-08-1

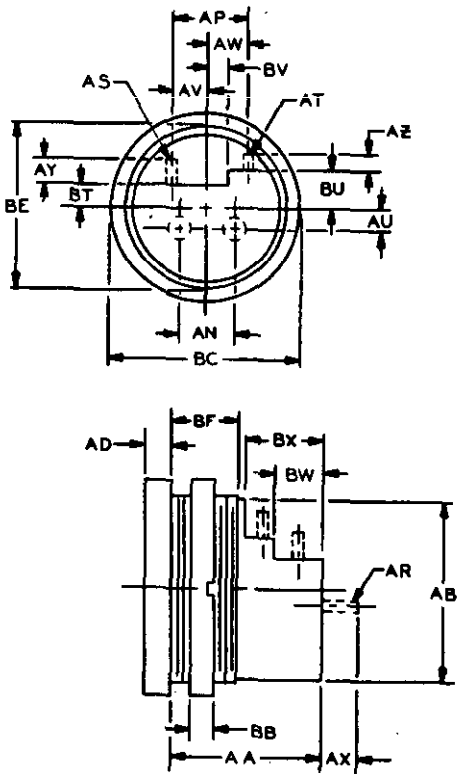


031-08-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

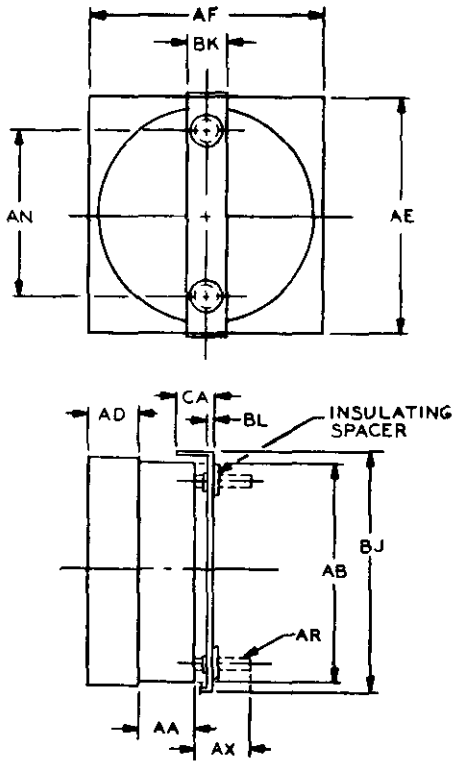


031-09-1

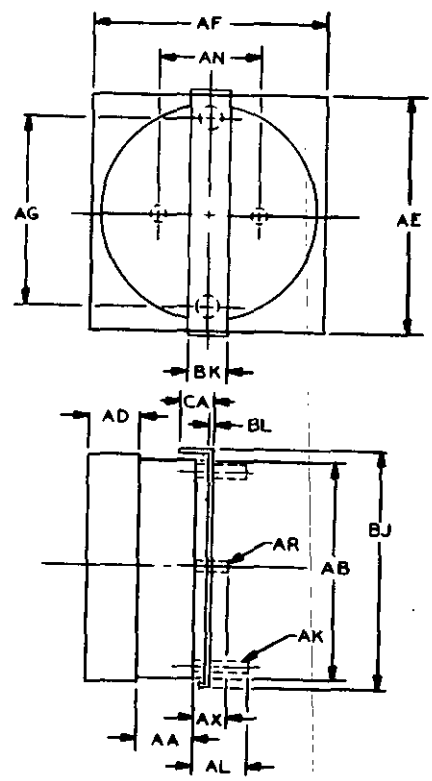


031-09-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

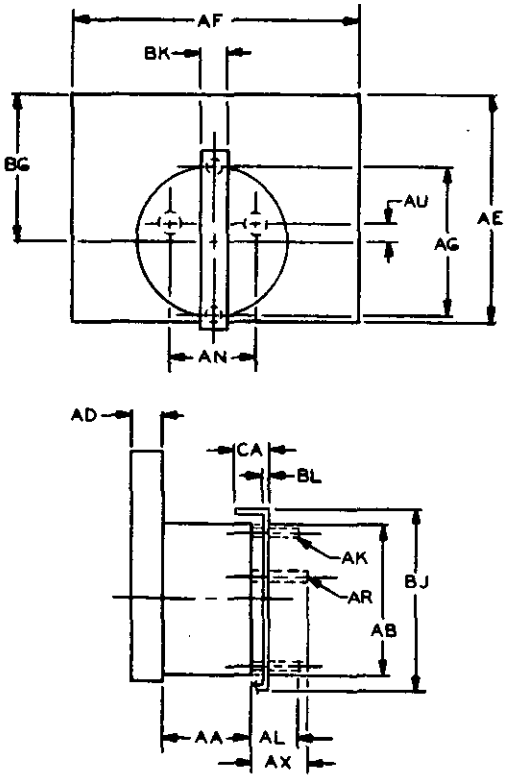


031-09-3

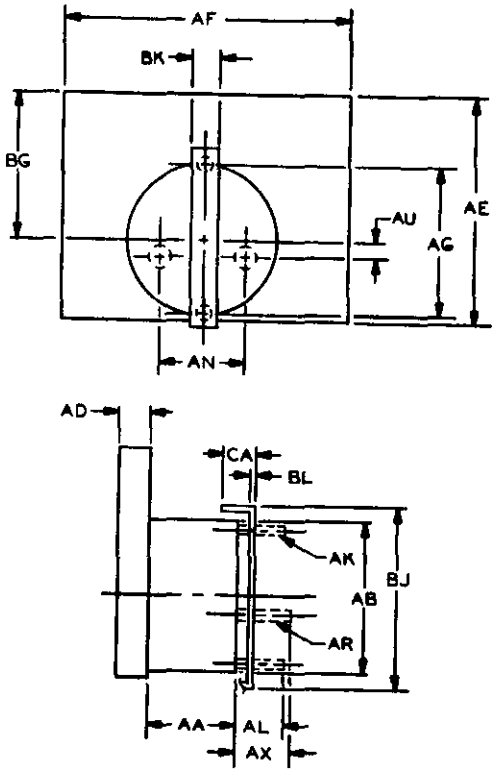


031-09-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

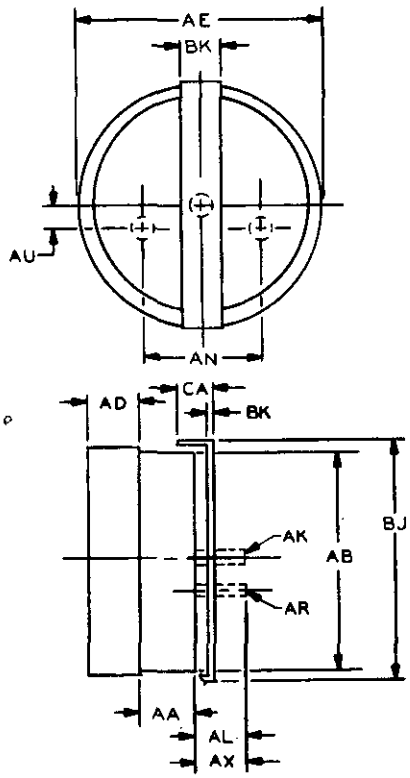


031-10-1

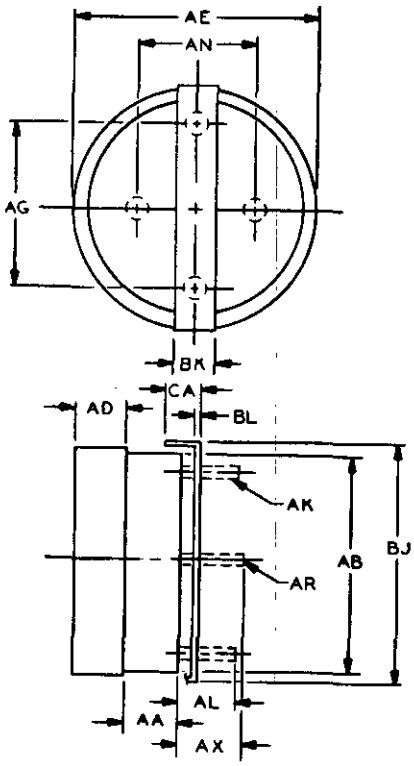


031-10-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

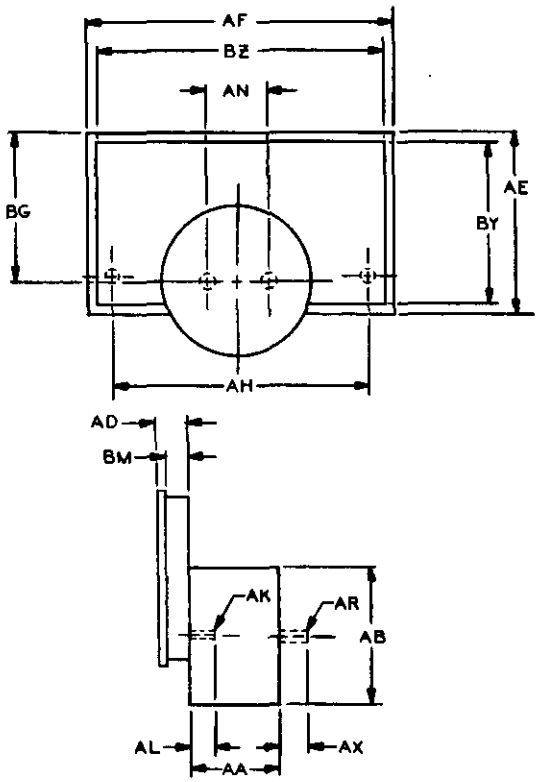


031-11-1

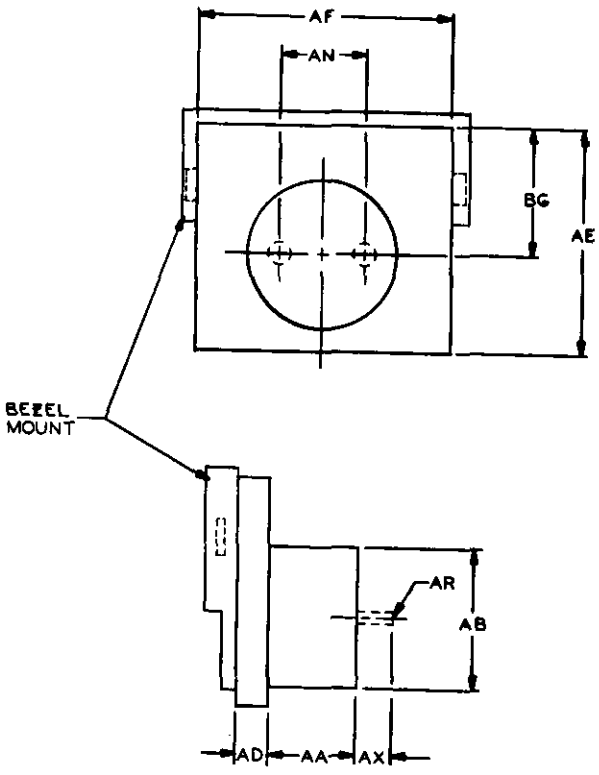


031-12-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

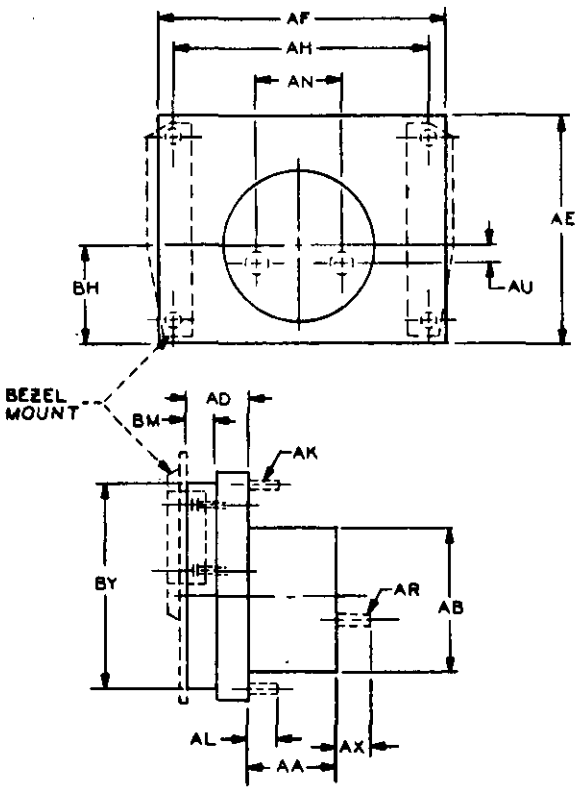


Ø31-12-2

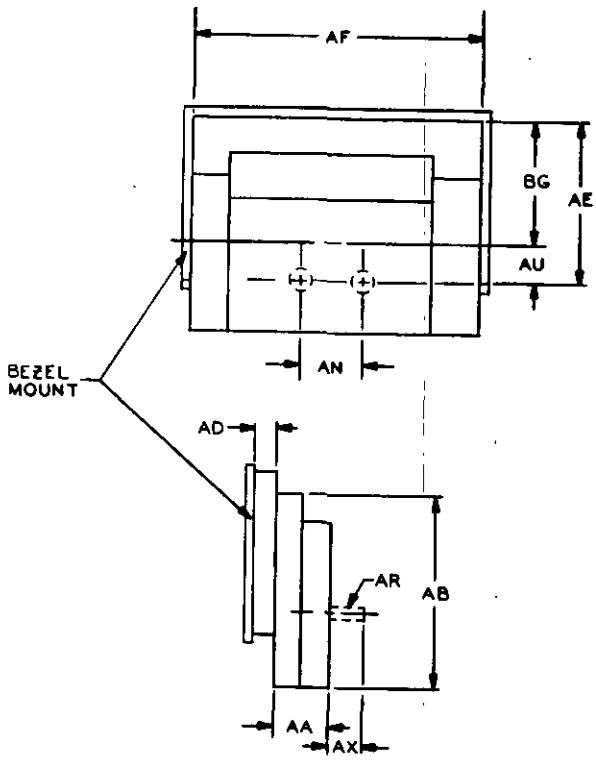


Ø31-12-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

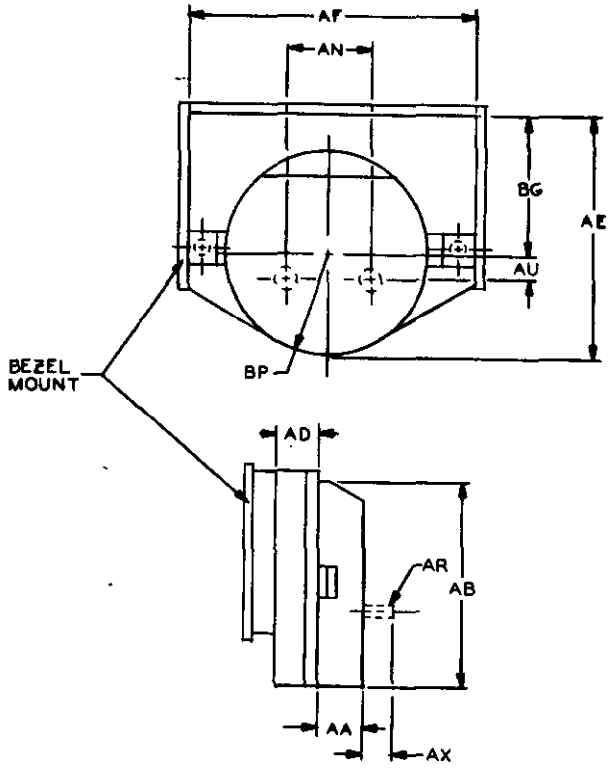


031-13-1

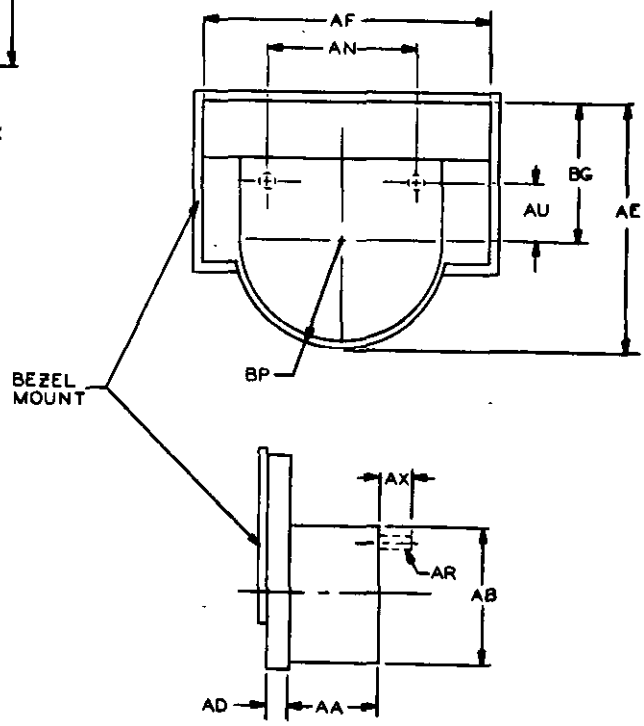


031-13-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

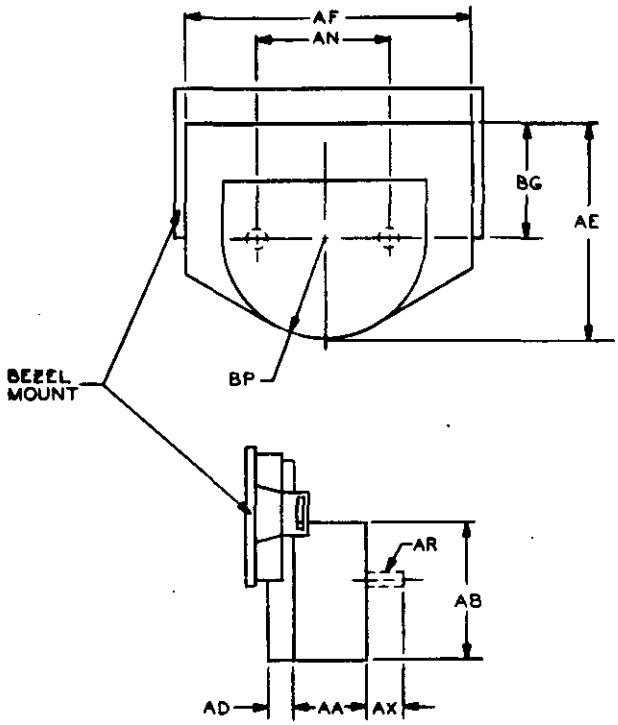



031-13-3

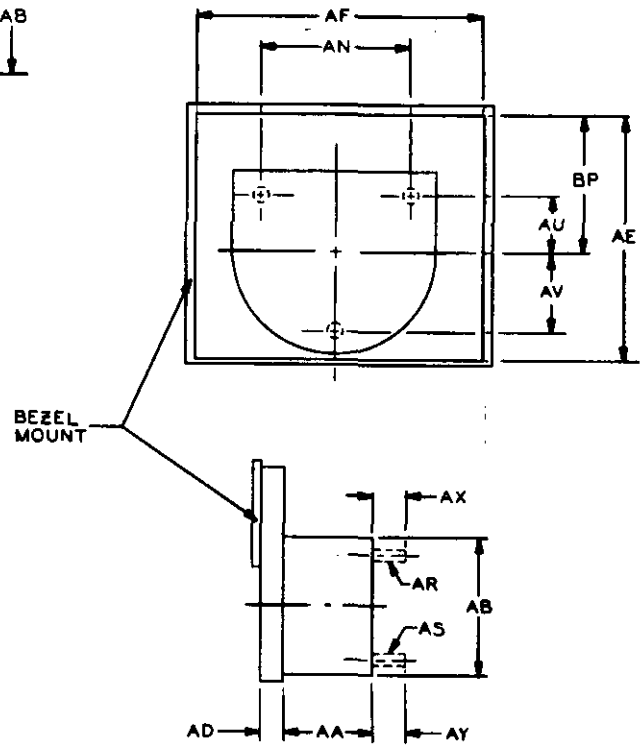


031-13-4


Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

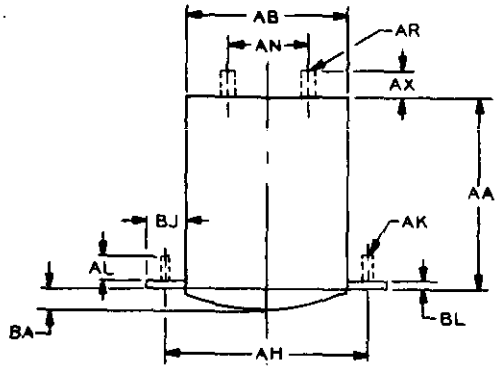




Ø31-14-1

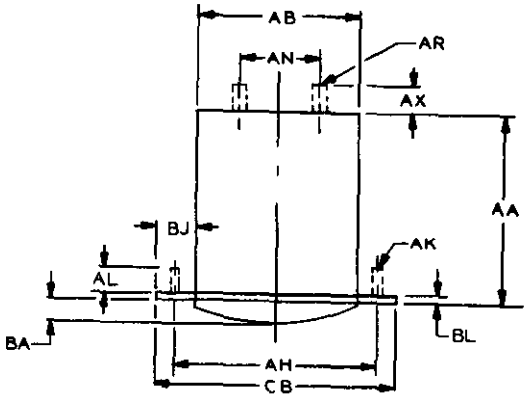




Ø31-14-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

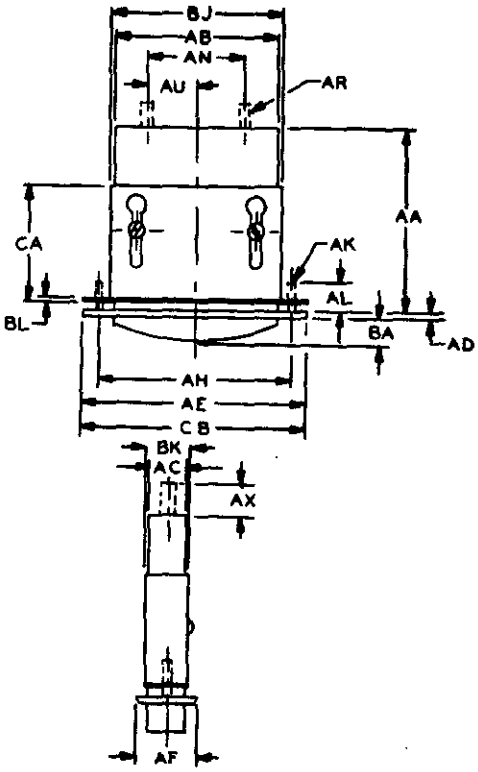



031-14-3

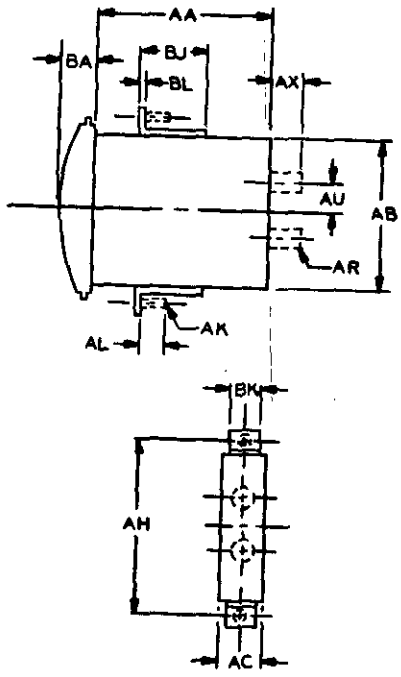


031-14-4


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

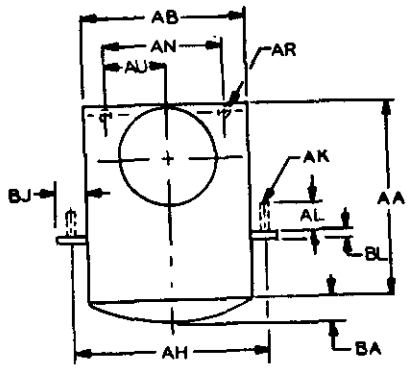




Ø31-14-5

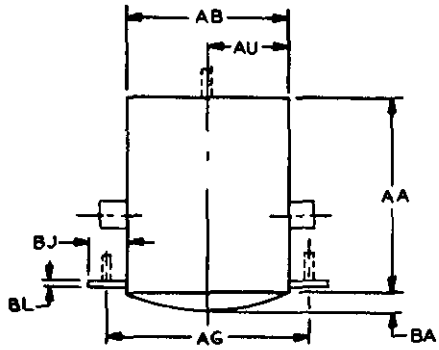


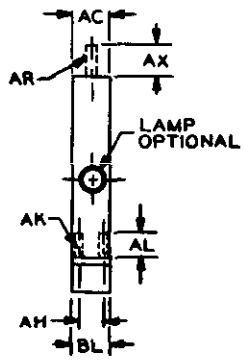


Ø31-15-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

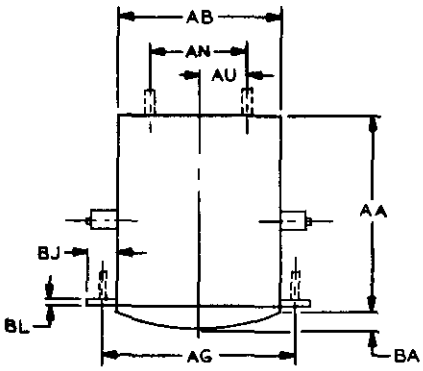





Ø31-15-2

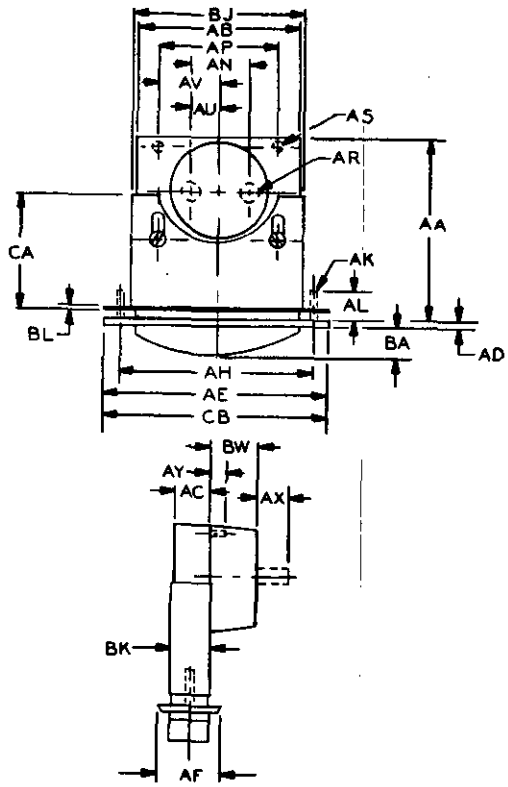


Ø31-15-3


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

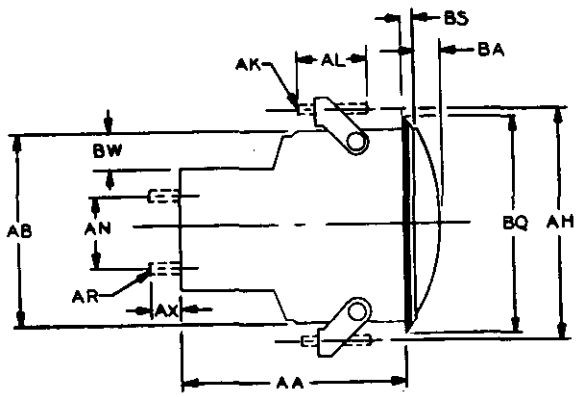




Ø31-16-1

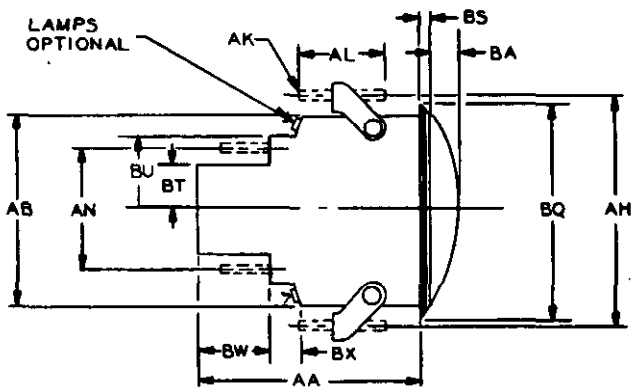

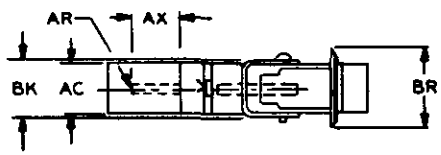



Ø31-17-1

Source: https://assist.dla.mil -- Downloaded: 20261O-26T07:23Z
Check the source to verify that this is the currentversion before use.

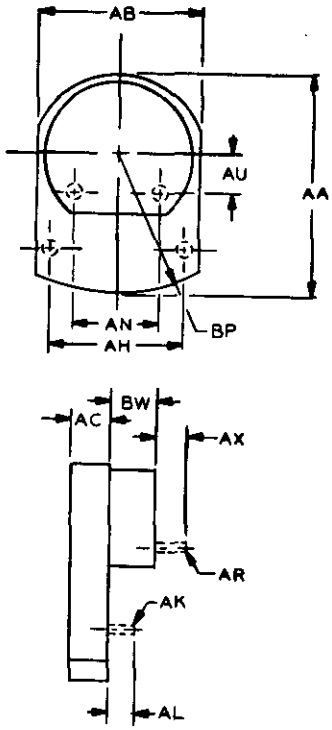


031-18-1

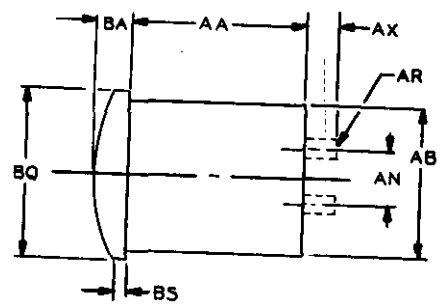





031-18-2


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.




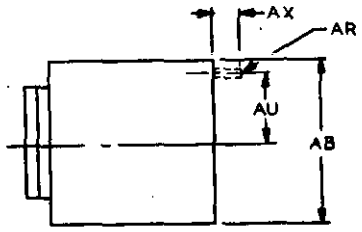

031-18-3









031-19-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

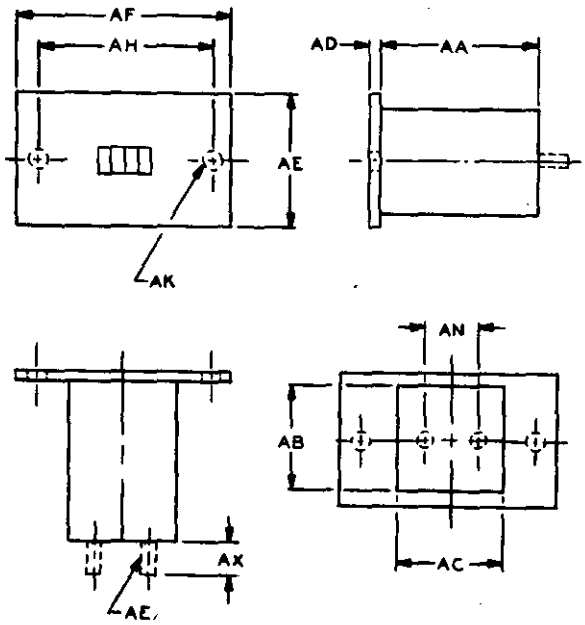


031-20-1

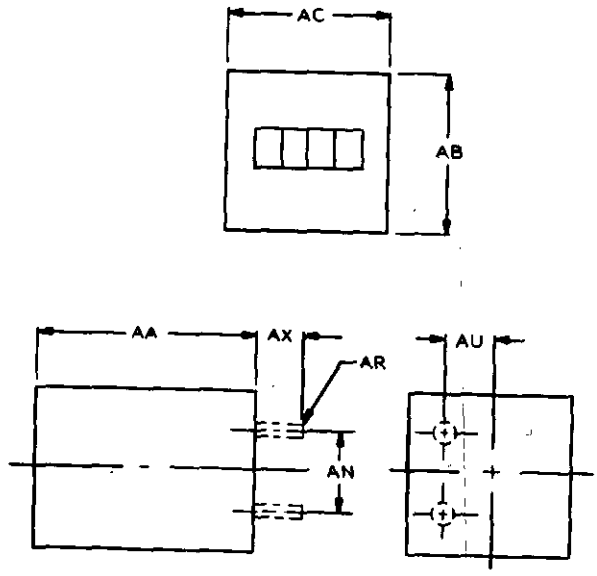


031-21-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

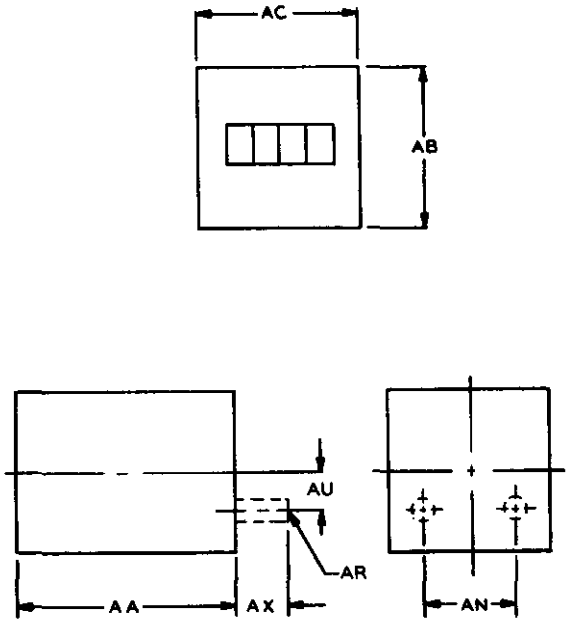


Ø31-21-2

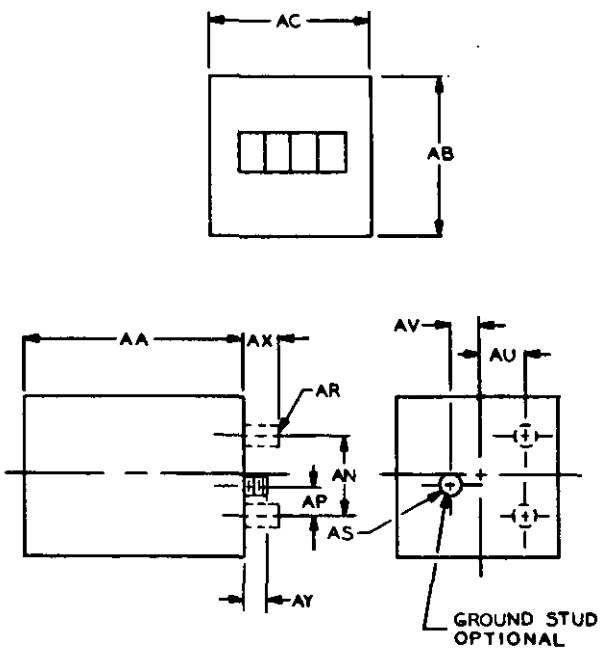


Ø31-21-3

Source: https://assist.dla.mil -- Downloaded: 2026Ø1Ø-26T07:23Z
Check the source to verify that this is the current version before use.

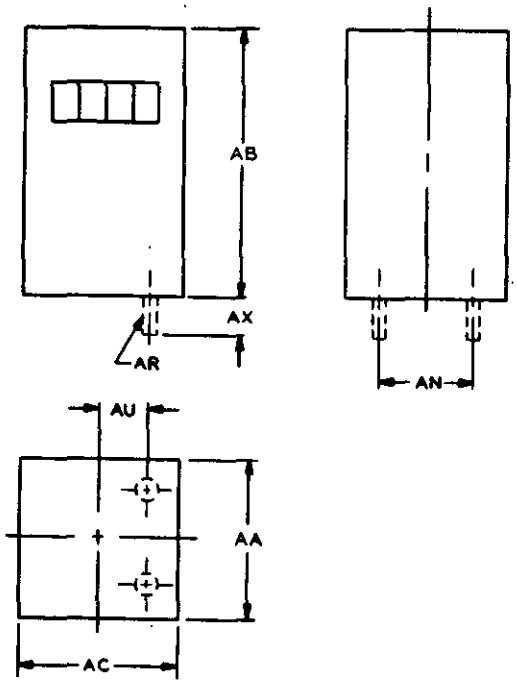


031-21-4

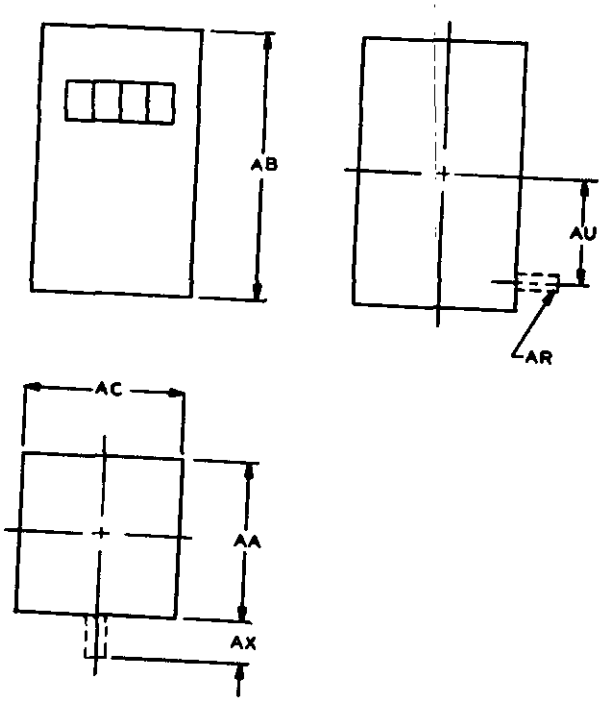


031-21-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

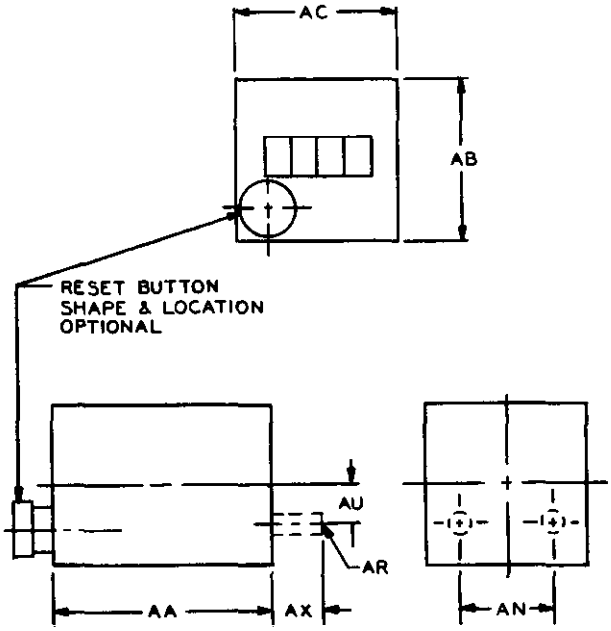


031-22-1

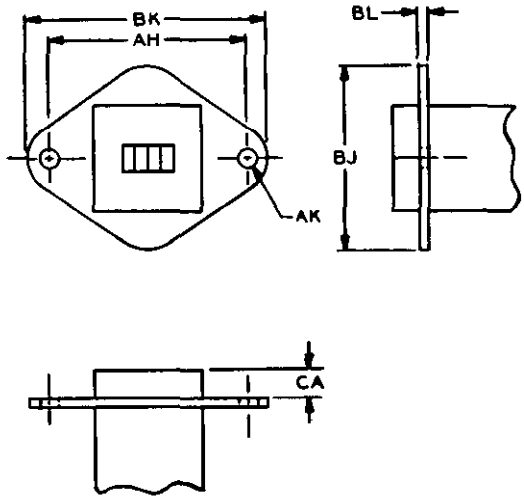


031-23-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

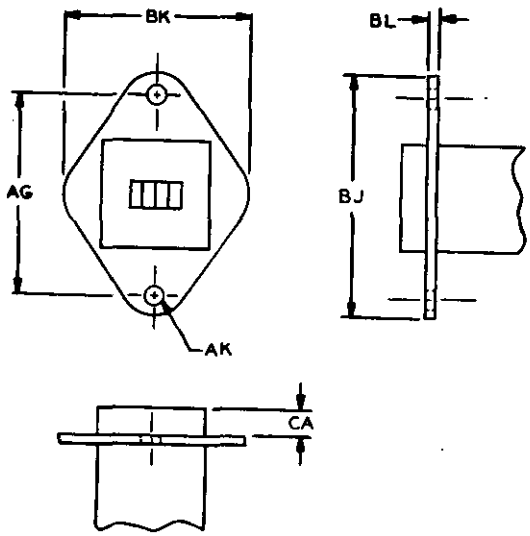


Ø31-23-2

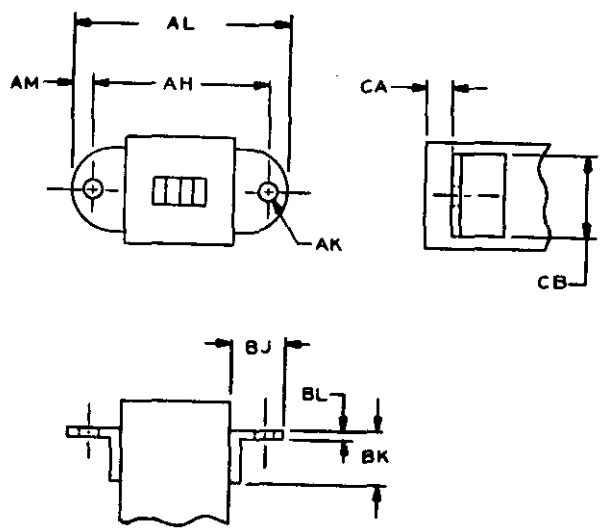


Ø31-23-3

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

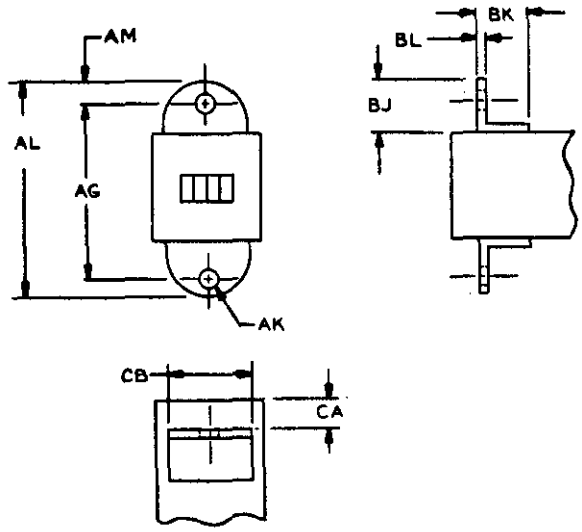


031-23-4

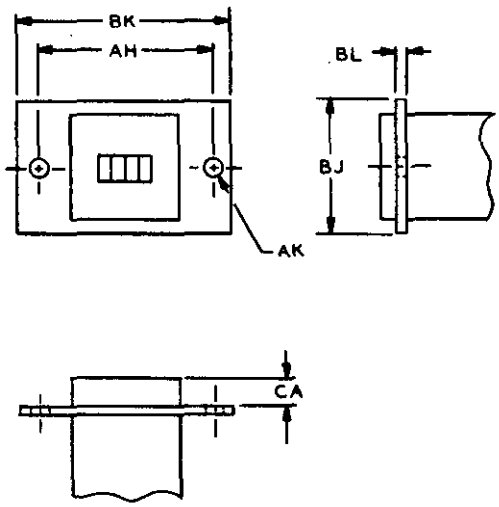


031-23-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

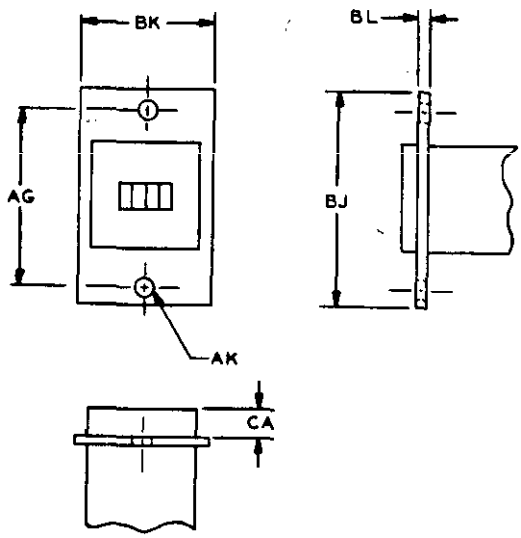


031-23-6

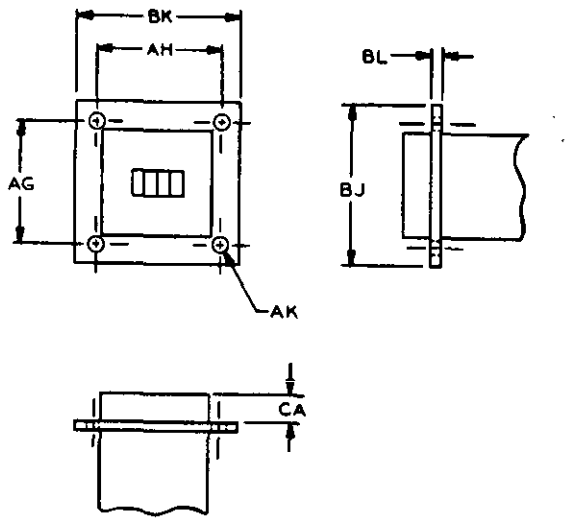


031-23-7

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

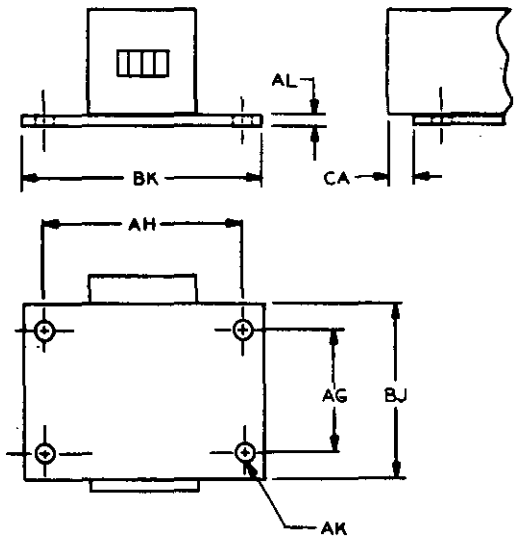


031-23-8

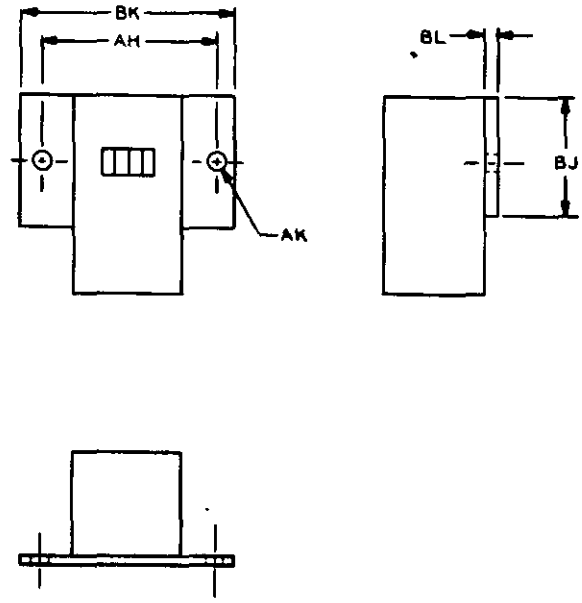


031-23-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

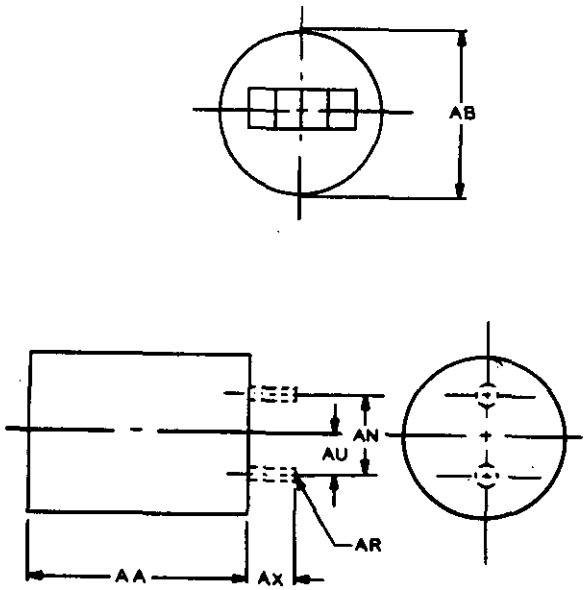


031-24-1

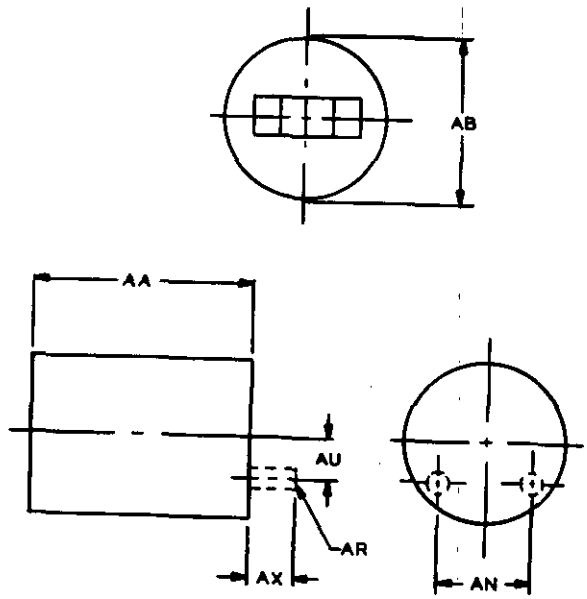


031-24-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

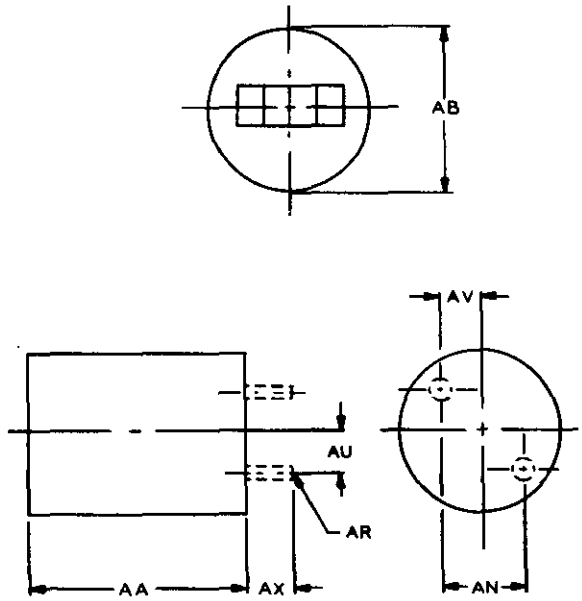


Ø31-24-3

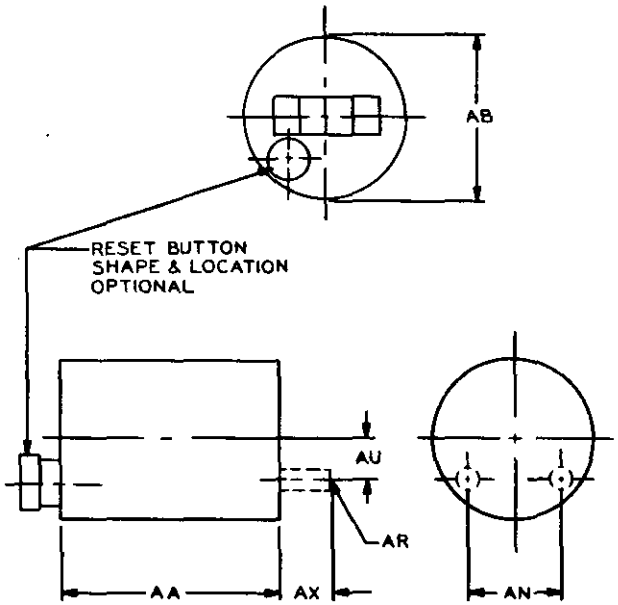


Ø31-25-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

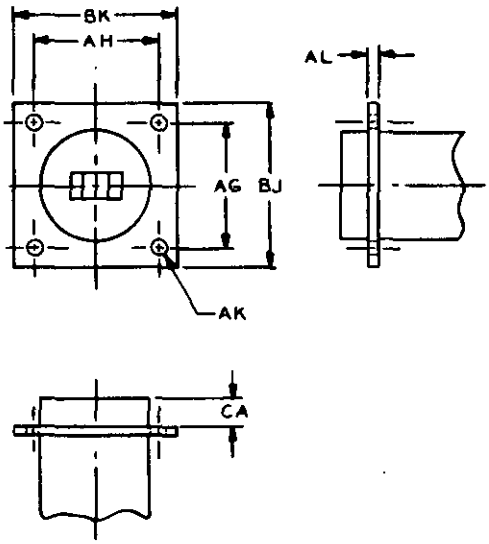


031-26-1

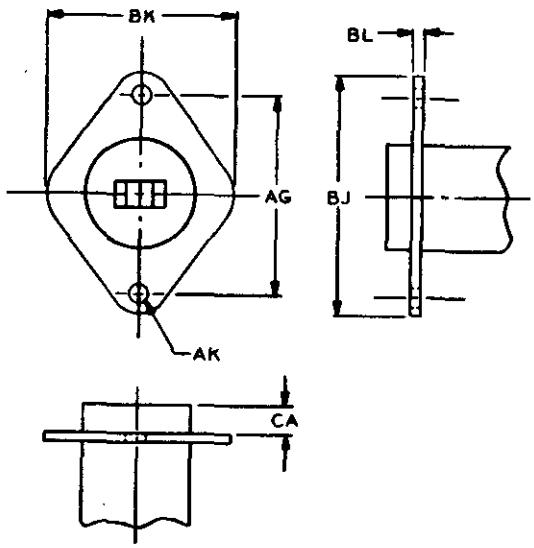


031-26-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

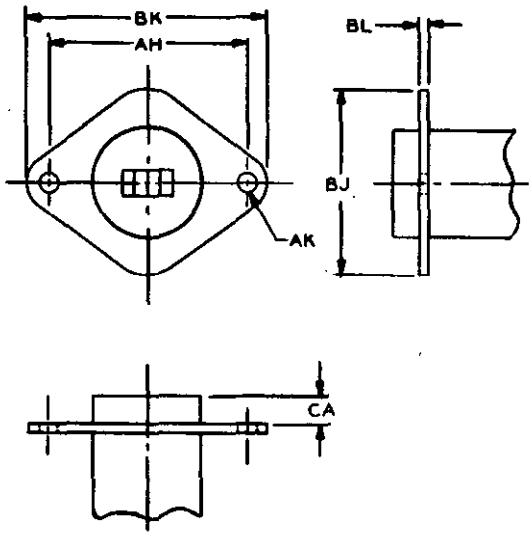


031-26-3

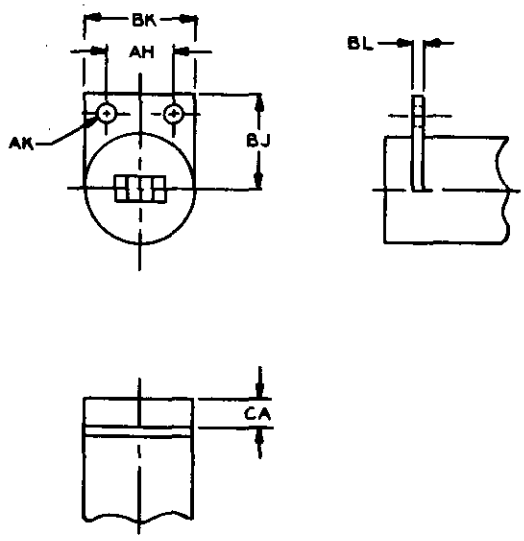


031-26-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

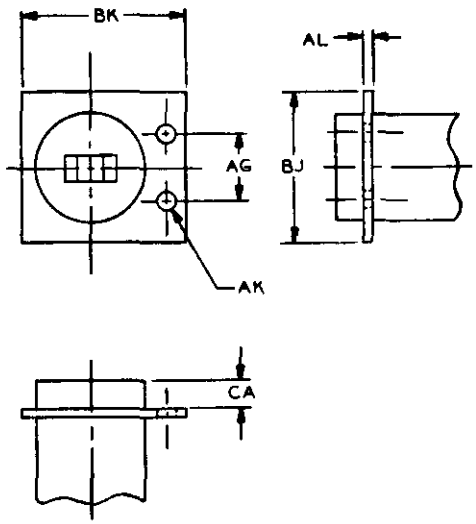


Ø31-26-5

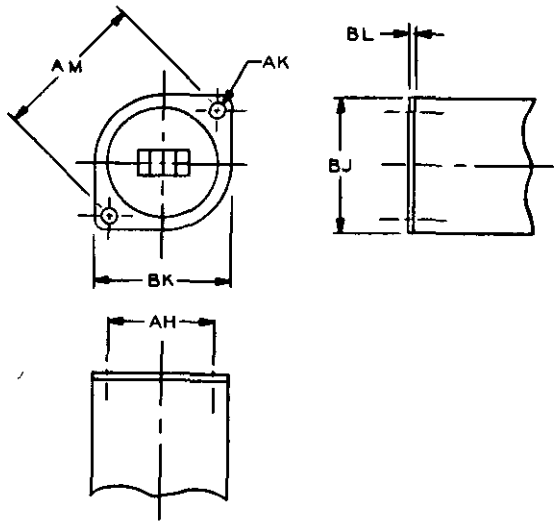


Ø31-26-6


Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

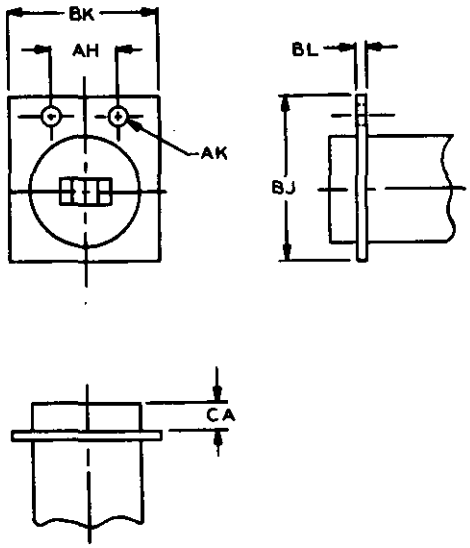

031-26-7

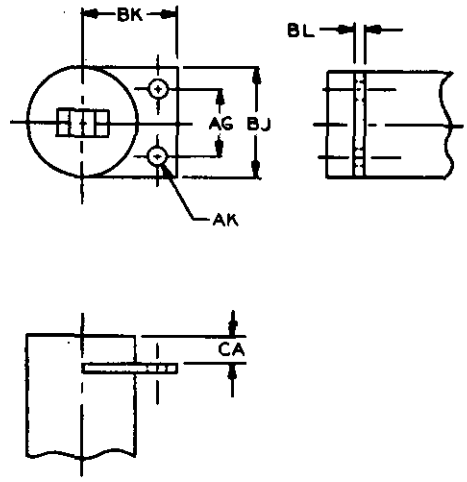


031-26-8

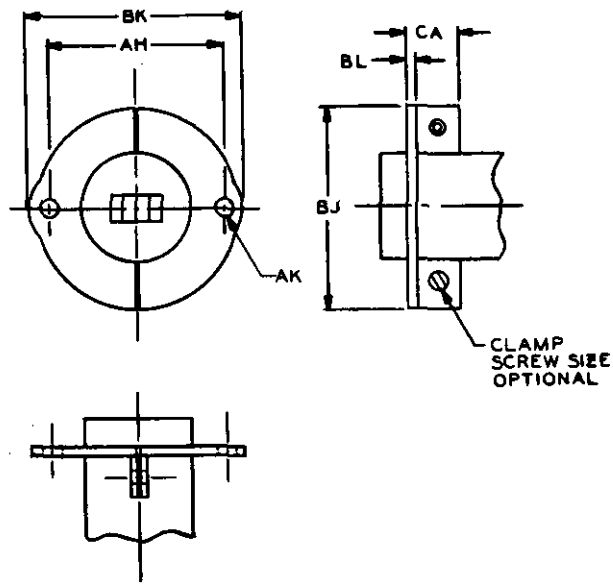


031-26-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

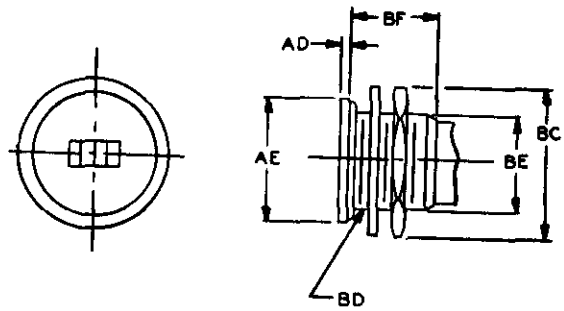


031-26-10

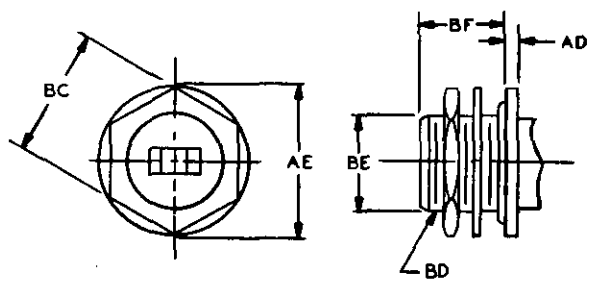

031-26-11

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

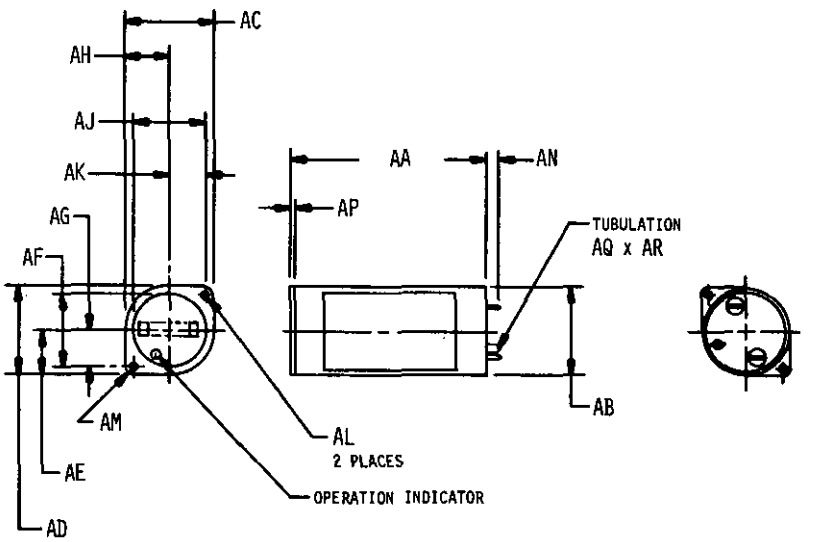

031-26-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	14	1411	142	1477	86	1574	30
0102	14	1412	142	1478	128	1575	30
0103	14	1413	144	1480	148	1576	30
0104	14	1414	144	1482	126	1577	32
0105	14	1416	144	1486	126	1578	32
0107	16	1419	142	1488	126	1579	38
0108	16	1420	144	1490	148	1580	32
0700	14	1421	144	1494	126	1581	32
0800	14	1426	152	1495	126	1582	32
1003	14	1427	152	1497	94	1583	34
1004	14	1428	152	1498	94	1584	38
1005	14	1429	98	1500	128	1585	38
1006	14	1430	152	1502	128	1586	38
1008	14	1431	152	1504	128	1587	38
1009	28	1432	98	1508	128	1588	38
1371	92	1435	150	1509	128	1589	34
1372	94	1436	150	1511	92	1590	34
1373	92	1438	152	1520	94	1592	42
1375	142	1439	152	1522	94	1593	42
1376	92	1446	146	1523	94	1594	42
1377	94	1447	146	1524	94	1595	42
1378	92	1448	146	1529	158	1596	42
1380	90	1449	100	1533	148	1597	32
1381	94	1451	126	1535	150	1600	18
1383	94	1452	152	1536	150	1602	18
1384	92	1453	152	1537	150	1604	18
1386	92	1455	146	1538	150	1606	18
1387	92	1456	146	1539	120	1608	18
1388	92	1459	152	1562	32	1610	18
1391	98	1462	154	1563	32	1612	18
1394	96	1464	126	1564	32	1633	46
1395	98	1466	148	1565	32	1634	46
1396	96	1467	148	1566	32	1635	46
1397	98	1468	128	1567	32	1636	46
1398	96	1469	146	1568	32	1637	46
1400	96	1470	148	1569	32	1638	46
1404	98	1471	128	1570	32	1639	46
1406	98	1473	146	1571	32	1642	46
1407	92	1475	148	1572	34	1643	46
1410	142	1476	148	1573	34	1644	46

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1645	46	1774	52	1850	60	2082	45
1646	46	1775	52	1852	60	2083	45
1647	46	1776	54	1854	60	2084	45
1690	46	1777	54	2000	42	2085	45
1691	48	1778	54	2001	44	2086	45
1692	48	1784	54	2002	44	2087	45
1693	48	1785	54	2003	44	2088	45
1700	48	1786	54	2004	44	2145	63
1701	48	1794	56	2005	44	2146	63
1702	48	1795	54	2050	45	2147	63
1703	48	1796	54	2051	45	2148	63
1704	48	1797	54	2052	45	2149	63
1705	48	1799	56	2053	45	2150	63
1706	48	1800	56	2054	45	2151	63
1707	50	1801	56	2055	45	2152	63
1708	50	1805	56	2056	45	2153	63
1710	50	1806	56	2057	45	2154	63
1711	50	1810	58	2058	45	2155	63
1712	50	1814	58	2059	45	2156	63
1713	50	1816	58	2060	45	2157	63
1714	50	1817	58	2061	45	2158	63
1715	50	1818	58	2062	45	2159	63
1716	50	1819	62	2063	45	2160	63
1717	50	1820	58	2064	45	2161	63
1718	50	1821	58	2065	45	2162	63
1720	52	1822	58	2066	45	2163	63
1721	52	1823	58	2067	45	2164	63
1722	52	1825	60	2068	45	2166	63
1724	48	1826	60	2070	45	2167	63
1740	52	1827	60	2071	45	2168	63
1742	52	1828	60	2072	45	2169	63
1744	52	1832	60	2073	45	2171	63
1746	52	1834	60	2074	45	2172	63
1750	54	1836	60	2075	45	2173	63
1752	56	1838	60	2076	45	2174	63
1754	56	1840	62	2077	45	2176	63
1756	56	1842	62	2078	45	2177	63
1758	56	1844	62	2079	45	2178	63
1760	56	1846	62	2080	45	2179	63
1772	52	1848	62	2081	45	2200	66

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2202	66	2352	80	2500	102	2648	134
2204	66	2360	80	2504	102	2650	134
2206	66	2362	82	2520	104	2652	134
2208	66	2364	82	2522	104	2654	134
2210	66	2366	82	2524	104	2656	134
2212	66	2368	82	2526	104	2658	134
2214	66	2370	82	2528	104	2660	134
2220	66	2372	82	2540	104	2662	134
2222	66	2374	82	2542	104	2664	134
2240	66	2400	84	2544	104	2670	136
2242	68	2402	84	2546	104	2672	136
2244	68	2404	84	2548	104	2674	136
2246	68	2406	84	2550	104	2676	136
2250	68	2408	84	2552	106	2678	136
2252	68	2410	84	2560	106	2680	136
2254	68	2420	86	2562	106	2690	136
2256	68	2422	86	2564	106	2692	136
2270	76	2440	94	2580	110	2694	136
2272	78	2442	96	2582	110	2696	136
2276	78	2444	96	2590	112	2698	136
2278	78	2446	96	2592	112	2750	154
2280	78	2450	96	2594	112	2754	154
2282	78	2452	96	2600	116	2760	154
2284	78	2454	96	2602	116	2762	154
2286	78	2456	96	2604	116	2764	154
2288	78	2470	100	2606	116	2766	154
2300	78	2472	100	2610	116	2768	156
2302	78	2474	100	2612	116	2770	156
2304	78	2476	100	2614	116	2800	156
2306	78	2478	100	2620	132	2802	156
2320	80	2480	100	2624	132	2804	156
2322	80	2482	102	2630	132	2806	156
2324	80	2484	102	2632	132	2808	156
2326	80	2486	102	2634	132	2810	156
2328	80	2488	102	2636	132	2812	156
2330	80	2490	102	2638	132	2820	158
2332	80	2492	102	2640	132	2822	158
2334	80	2494	102	2642	132	2824	158
2336	80	2496	102	2644	134	4100	41
2350	80	2498	102	2646	134	4101	41

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4102	41	4152	41	4202	41	4332	37
4103	41	4153	41	4203	41	4333	37
4104	41	4154	41	4204	41	4340	35
4105	41	4155	41	4205	41	4341	35
4106	41	4156	41	4206	41	4342	35
4107	41	4157	41	4207	41	4343	35
4108	41	4158	41	4208	41	4344	35
4109	41	4159	41	4209	41	4345	35
4110	41	4160	41	4300	35	4346	35
4111	41	4161	41	4301	35	4347	35
4112	41	4162	41	4302	35	4348	35
4113	41	4163	41	4303	35	4349	35
4114	41	4164	41	4304	35	4350	35
4115	41	4165	41	4305	35	4351	35
4116	41	4166	41	4306	35	4352	35
4117	41	4167	41	4307	35	4353	35
4118	41	4168	41	4308	35	4354	35
4119	41	4169	41	4309	35	4355	35
4120	41	4180	41	4310	35	4356	35
4121	41	4181	41	4311	35	4357	35
4122	41	4182	41	4312	35	4358	37
4123	41	4183	41	4313	35	4359	37
4124	41	4184	41	4314	35	4360	37
4125	41	4185	41	4315	35	4361	37
4126	41	4186	41	4316	35	4362	37
4127	41	4187	41	4317	35	4363	37
4128	41	4188	41	4318	37	4364	37
4129	41	4189	41	4319	37	4365	37
4140	41	4190	41	4320	37	4366	37
4141	41	4191	41	4321	37	4367	37
4142	41	4192	41	4322	37	4368	37
4143	41	4193	41	4323	37	4369	37
4144	41	4194	41	4324	37	4370	37
4145	41	4195	41	4325	37	4371	37
4146	41	4196	41	4326	37	4372	37
4147	41	4197	41	4327	37	4373	37
4148	41	4198	41	4328	37	4380	35
4149	41	4199	41	4329	37	4381	35
4150	41	4200	41	4330	37	4382	35
4151	41	4201	41	4331	37	4383	35

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4384	35	4430	37	4476	37	4522	39
4385	35	4431	37	4477	37	4523	39
4386	35	4432	37	4478	37	4524	39
4387	35	4433	37	4479	39	4525	39
4388	35	4434	37	4480	39	4526	39
4389	35	4435	37	4481	39	4527	39
4390	35	4436	37	4482	39	4528	39
4391	35	4437	37	4483	39	4529	39
4392	35	4438	37	4484	39	4530	39
4393	35	4439	39	4485	39	4531	39
4394	35	4440	39	4486	39	4532	39
4395	35	4441	39	4487	39	4533	39
4396	35	4442	39	4488	39	4662	130
4397	35	4443	39	4489	39	4663	130
4398	37	4444	39	4490	39	4664	130
4399	37	4445	39	4491	39	4665	130
4400	37	4446	39	4492	39	4666	130
4401	37	4447	39	4493	39	4667	130
4402	37	4448	39	4500	37	4669	114
4403	37	4449	39	4501	37	4671	114
4404	37	4450	39	4502	37	4672	130
4405	37	4451	39	4503	37	4674	130
4406	37	4452	39	4504	37	4675	130
4407	37	4453	39	4505	37	4677	130
4408	37	4460	37	4506	37	4678	154
4409	37	4461	37	4507	37	4683	130
4410	37	4462	37	4508	37	4684	128
4411	37	4463	37	4509	37	4685	128
4412	37	4464	37	4510	37	4686	128
4413	37	4465	37	4511	37	4689	112
4420	37	4466	37	4512	37	4691	112
4421	37	4467	37	4513	37	4692	112
4422	37	4468	37	4514	37	4694	112
4423	37	4469	37	4515	37	4695	114
4424	37	4470	37	4516	37	4698	112
4425	37	4471	37	4517	37	4700	112
4426	37	4472	37	4518	37	4701	112
4427	37	4473	37	4519	39	4703	128
4428	37	4474	37	4520	39	4707	148
4429	37	4475	37	4521	39	4708	148

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4709	146	4770	118	4849	70	4960	120
4710	142	4771	118	4850	76	4963	110
4713	144	4772	118	4853	88	4967	110
4714	146	4773	118	4854	74	4968	110
4715	146	4782	118	4855	74	4969	88
4717	76	4788	88	4856	74	4970	88
4718	112	4790	88	4857	106	4971	88
4719	146	4791	86	4858	106	4972	110
4722	144	4793	88	4859	72	4975	154
4723	144	4795	86	4861	74	4976	154
4726	142	4798	86	4862	74	4977	154
4729	150	4799	86	4867	76	4978	150
4730	150	4803	88	4869	76	4979	150
4731	148	4805	86	4870	76	4980	98
4732	122	4809	90	4872	120	4981	98
4734	122	4810	90	4874	74	4983	100
4735	124	4811	90	4875	74	4984	100
4736	124	4812	90	4878	118	4985	100
4737	122	4813	86	4884	70	4986	100
4738	122	4814	90	4885	70	4989	114
4739	122	4815	86	4886	70	4991	98
4740	124	4819	90	4890	88	5000	76
4741	122	4820	90	4891	72	5046	22
4742	124	4822	90	4894	70	5048	22
4743	126	4825	90	4897	76	5052	20
4745	120	4829	114	4900	72	5054	20
4746	122	4830	114	4901	70	5060	18
4748	122	4831	116	4902	72	5061	18
4749	124	4834	114	4904	20	5062	20
4750	124	4835	116	4905	20	5063	20
4751	124	4836	114	4906	70	5068	20
4752	124	4838	114	4908	70	5069	20
4754	84	4839	114	4942	158	5070	20
4755	84	4842	74	4943	158	5071	20
4756	84	4843	108	4944	158	5209	158
4760	82	4844	76	4950	28	5297	110
4761	82	4845	76	4952	120	6200	146
4762	84	4846	76	4956	120	6202	88
4765	118	4847	74	4958	118	6205	130
4766	118	4848	74	4959	118	6206	88

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
6207	88	6311	72	7003	160	7630	160
6212	142	6312	72	7004	160	7631	22
6214	140	6315	140	7005	160	7632	22
6215	142	6316	140	7021	64	7633	22
6217	138	6318	138	7022	64	7634	24
6218	138	6319	140	7023	64	7635	24
6219	138	6320	122	7024	64	7636	24
6220	138	6321	122	7301	20	7637	24
6221	138	6322	122	7302	20	7638	24
6222	138	6323	122	7572	28	7639	24
6224	138	6324	124	7576	28	7641	28
6225	138	6325	124	7577	28	7645	22
6228	138	6326	124	7580	30	7646	24
6229	138	6328	124	7591	22	7647	24
6231	140	6329	124	7592	22	7673	28
6232	140	6330	126	7594	22		
6234	140	6331	126	7595	22		
6235	140	6332	126	7597	22		
6236	140	6333	126	7598	22		
6237	140	6359	90	7600	24		
6238	140	6369	14	7601	24		
6267	76	6370	120	7602	24		
6279	116	6371	106	7603	24		
6280	72	6372	160	7604	24		
6282	108	6870	160	7605	24		
6283	108	6873	14	7609	26		
6284	108	6874	16	7610	26		
6285	108	6941	16	7611	26		
6286	108	6942	16	7612	26		
6287	108	6991	160	7613	26		
6288	108	6992	160	7614	26		
6289	108	6993	160	7618	26		
6291	106	6994	160	7619	26		
6292	72	6995	160	7620	26		
6293	72	6996	64	7621	26		
6294	72	6997	64	7622	26		
6299	120	6998	64	7623	26		
6300	70	6999	64	7627	28		
6308	72	7001	160	7628	28		
6310	72	7002	160	7629	160		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Accuracy	66
Accuracy Rating	18
Additional Part Marking	160
Additional Requirements	160
Altitude Rating	18
Aperture Cards Required	16
Applicable Documents	162
Base Document	14
Bezel	62
Body	54
City, State, Zip	14
Class	18
Classification	18
Company Name/Command	14
Component	18
Configuration	28
Connector Type	58
Contract Number/Office Symbol	14
Control, Source	14
Control, Specification	16
Cover	62
Current Rating	22
Current Type	30
Curved Scale Type	34
Damping Factor	66
Date	14
Design and Construction	30
Dial	48
Dielectric Withstanding Voltage at Reduced Barometric Pressure	70
Dielectric Withstanding Voltage at Sea Level	74
Digital Reset Button	56
Edgewise Scale Type	38
Electrostatic Effect	76
End Scale Value	46
Explosion	78
External Field Influence	80
Finishes	30
Flange	54
Format	14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Frequency Rating	28
Fungus	82
Government Design Activity FSCM	14
Grade	18
Hardware	62
Hermetic Seal	84
Humidity	86
Illustrations	28
Immersion	90
Indicator, Vibrating Reed Type	42
Insulation Resistance	90
Life	94
Marking Characters	50
Marking Color	52
Materials	30
Metals	30
Mirrored Strip	48
Moisture Resistance	96
Momentary Overload	100
Mounting Details	56
Mounting Hardware	158
Mounting Position	56
Mounting Style	54
Movement Sensitivity	46
Movement Type	46
Nomenclature	162
Notes	162
Packaging	162
Panel Thickness	56
Part Marking	160
Part Number	16
Part Number Cross-Reference	162
Performance Characteristics	158
Phone Number	14
Pointer	52
Position Influence	102
Power Consumption	104
Power Rating	22

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Quality Assurance Provisions	162
Quick Disconnect Type	58
Radiographic	106
Random Drop	110
Ratings	18
Repeatability	110
Requester FSCM	14
Requester's Name	14
Resistors, External	46
Resistance to Soldering Heat	112
Resistance to Solvents	114
Response Time	116
Revision of AEDPS Document (Number)	16
Salt Spray	118
Sand and Dust	118
Scale	32
Scope	16
Seal	120
Shock, High Impact	126
Shock, Specified Pulse	128
Shunts, External	48
Solderability	130
Solder Type	58
Source Table	16
Stacking Capability, Edgetype Meters	58
Sticking Below Zero	132
Storage Conditions	158
Street/Building	14
Style	18
Superseded Document	162
Sustained Overload	132
System Application	14
Tabulated Characteristics	30
Temperature Influence	136
Temperature, High	138
Temperature, Low	138
Temperature Rating	20
Temperature Shock	140
Terminal Strength	142
Termination	58
Thermal Shock, (Temperature Cycling)	144
Type	18

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Units of Measure	16, 28
Vibration, High Frequency	146
Vibration, Low Frequency	148
Vibration, Random	150
Voltage Rating	24
Weight/Mass	64
Window Impact	154
Wire Lead Type	60
Workmanship	160
Zero Adjustment	156

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-12A(MI), dated 26 February 1979 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-12A(MI), dated 26 February 1979 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST HELP DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

DOD-STD-35-12A(M1)

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

Replaces edition of 1 Jan 72 which may be used.

S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DoD-316

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

US Army Missile Research and Development Command
ATTN: DRDMI-ESD
Redstone Arsenal, AL 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.