DOD-STD-35-133(MI)
22 SEPTEMBER 1978

MILITARY STANDARD

SHIELDING, RFI, EMI

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

FSC EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

RFI and EMI Shielding
Automated Engineering
Document Preparation System

DOD-STD-35-133(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-133(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for RFI and EMI Shielding.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	3
	2.1	Issues of documents	3
	2.2	Other publications	3
	3.	DEFINITIONS	5
	4.	GENERAL REQUIREMENTS	7
	4.1	Introduction	7
	4.2	Specification Requirement Sheet (SRS)	7
	4.3	Configuration	7
	4.3.1	Dimensions	7
	4.3.2	Illustrations	7
	4.4	Units of measure	7
	5.	DETAILED REQUIREMENTS	9
	5.1	Introduction	9
	5.2	MSE Formats	9
	5.3	Referenced documents	9
	5.4	Tabulation	9
	5.5	Keyword Code Index (KCI) and Standard Paragraphs	11
	5.5.1	*Interrelationship of Codes*	11
	5.5.2	Automatic MSE Data	11
	5.5.3	DOD-STD-35 Tables	11

TABLES

Table	I.	Title Index	2
	II.	Tabulation candidates	10

APPENDIX

Appendix	A.	Illustrations	57
	B	Characteristic Code Index	59
		Index	63

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for RFI and EMI Shielding.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
SHIELD, EMI	817001	MIL-G-47197	PRESSURE SEAL
SHIELD, EMI, GASKET	817002	MIL-S-47235	MAGNETIC
SHIELD, EMI, GASKET, WIRE MESH	817003	MIL-G-46873	METALLIC, CYLINDRICAL
		MIL-W-47056	KNITTED, STEEL
SHIELD, EMI, STRIP	817004	MIL-S-47235	MAGNETIC

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-G-46873	Gasketing, Metallic Mesh, Cylindrical
MIL-W-47056	Wire, Mesh, Knitted, Steel, Copper-Clad, Tin Coated
MIL-G-47197	Gasket, Shielding, Electronic Oriented Wires Embedded in Silicone Rubber, Pressure Seal
MIL-S-47235	Shielding, Magnetic, Foil, Sheet

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-1285	Marking of Electrical and Electronic Parts
MIL-STD-130	Identification Marking of U.S. Military Property

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTMA342	Permeability of Feebly Magnetic Materials
ASTMA712	Electrical Resistivity of Soft Magnetic Alloys

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

ASTMC177	Thermal Conductivity of Materials by Means of the Guarded Hot Plate
ASTMD412	Tension Testing of Vulcanized Rubber
ASTMD991	Volume Resistivity of Electrically Conductive and Antistatic Elastomers
ASTMD2240	Indentation Hardness of Rubber and Plastics by Means of a Durometer
ASTME10	Method of Test for Brinell Hardness of Metallic Materials
ASTME18	Rockwell Hardness and Rockwell Superficial Hardness of Metallic Materials
ASTME380	Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, Pa. 19103.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to RFI and EMI Shielding.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for RFI and EMI Shielding, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to RFI and EMI Shielding.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to RFI and EMI Shielding.

4.3.2 Illustrations. Illustrations applicable to RFI and EMI Shielding are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table II provides codes for column headings which may be used for RFI and EMI Shielding characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE II. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1624	WIDTH INCH	1626	WIDTH MILLIMETER	1628	THICKNESS INCH
1630	THICKNESS MILLIMETER	1632	DIAMETER INCH	1634	DIAMETER MILLIMETER
1636	LENGTH INCH	1638	LENGTH FEET	1640	LENGTH MILLIMETER
1642	LENGTH METER				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

5.5 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.5.1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.5.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.5.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT.	0700
ONE SECTION DOCUMENT.	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S):
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6874 THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

0107

0108 0108.

SCOPE.

SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

6941 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.

6942 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE RATING	
MAXIMUM SERVICE (DEGREES CELSIUS)	4905
MINIMUM SERVICE (DEGREES CELSIUS)	4904
FORM (SELECT ONE)	
FLAT SHEET.	1600
GASKET.	1602
ROD.	1604
TUBE.	1606
O-RING.	1608
EXTRUSION.	1610
OTHER ____	1612
COLOR (SELECT ONE)	
SILVER.	1614
SILVER-TAN.	1616
BLACK.	1618
STEEL.	1620
OTHER ____	1622

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	TEMPERATURE RATING.
4905	THE MAXIMUM SERVICE TEMPERATURE RATING SHALL BE 4905 DEGREES CELSIUS.
4904	THE MINIMUM SERVICE TEMPERATURE RATING SHALL BE 4904 DEGREES CELSIUS.
1600	FORM. THE SHIELDING MATERIAL SHALL BE IN THE FORM OF A FLAT SHEET.
1602	FORM. THE SHIELDING MATERIAL SHALL BE IN THE FORM OF A GASKET.
1604	FORM. THE SHIELDING MATERIAL SHALL BE IN THE FORM OF A ROD.
1606	FORM. THE SHIELDING MATERIAL SHALL BE IN THE FORM OF A TUBE.
1608	FORM. THE SHIELDING MATERIAL SHALL BE IN THE FORM OF AN O-RING.
1610	FORM. THE SHIELDING MATERIAL SHALL BE IN THE FORM OF AN EXTRUSION.
1612	FORM. THE SHIELDING MATERIAL SHALL BE IN THE FORM OF 1612.
1614	COLOR. THE COLOR SHALL BE SILVER.
1616	COLOR. THE COLOR SHALL BE SILVER-TAN.
1618	COLOR. THE COLOR SHALL BE BLACK.
1620	COLOR. THE COLOR SHALL BE STEEL.
1622	COLOR. THE COLOR SHALL BE 1622.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WIDTH (SELECT ONE)	
(INCHES)	1624
(MILLIMETERS)	1626
THICKNESS (SELECT ONE)	
(INCHES)	1628
(MILLIMETERS)	1630
DIAMETER (SELECT ONE)	
(INCHES)	1632
(MILLIMETERS)	1634
LENGTH (SELECT ONE)	
U.S. (SELECT ONE)	
(INCHES)	1636
(FEET)	1638
SI (SELECT ONE)	
(MILLIMETERS)	1640
(METERS)	1642
CARRIERS	
(QUANTITY)	1644
ENDS	
(QUANTITY)	1646

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1624	WIDTH. THE WIDTH SHALL BE 1624 INCH(S).
1626	WIDTH. THE WIDTH SHALL BE 1626 MILLIMETER(S).
1628	THICKNESS. THE THICKNESS SHALL BE 1628 INCH(S).
1630	THICKNESS. THE THICKNESS SHALL BE 1630 MILLIMETER(S).
1632	DIAMETER. THE DIAMETER SHALL BE 1632 INCH(S).
1634	DIAMETER. THE DIAMETER SHALL BE 1634 MILLIMETER(S).
1636	LENGTH. THE LENGTH SHALL BE 1636 INCH(S).
1638	LENGTH. THE LENGTH SHALL BE 1638 FEET.
1640	LENGTH. THE LENGTH SHALL BE 1640 MILLIMETER(S).
1642	LENGTH. THE LENGTH SHALL BE 1642 METER(S).
1644	CARRIERS. THERE SHALL BE 1644 CARRIER(S).
1646	ENDS. THERE SHALL BE 1646 ENDS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SPECIFIC GRAVITY	
(NUMBER)	1648
DENSITY	
(GRAMS PER CUBIC CENTIMETER)	1654
MELTING POINT	
(DEGREES CELSIUS)	1656
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
DIMENSION TABLE, (SEE TABLE III, DOD-STD-35)	
*UNITS (SELECT ONE)	
U.S. (SELECT ONE)	
(INCHES)	7572
(FEET)	7573
(YARDS)	7574
SI (SELECT ONE)	
(CENTIMETERS)	7576
(MILLIMETERS)	7577
(METERS)	7578

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1648	SPECIFIC GRAVITY. THE SPECIFIC GRAVITY SHALL BE 1648.
1654	DENSITY. THE DENSITY SHALL BE 1654 GRAMS PER CUBIC CENTIMETER.
1656	MELTING POINT. THE MELTING POINT SHALL BE 1656 DEGREES CELSIUS.
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7573	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN FEET OR DEGREES.
7574	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN YARDS OR DEGREES.
7576	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN CENTIMETERS OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
7578	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN METERS OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ILLUSTRATIONS	
(NUMBER)	4950
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.	
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	
COMPOSITION	
COMPOSITION, FORMULATION OR MIXTURE.	6375
*INGREDIENT TABLE, (SEE TABLE XI, DOD-STD-35)	
DESIGN AND CONSTRUCTION	
NUMBER OF OPENINGS (SELECT ONE)	
(INCHES)	1936
(MILLIMETERS)	1938

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.

MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

6375	COMPOSITION. THE COMPOSITION, FORMULATION OR MIXTURE (AS APPLICABLE) SHALL BE AS SPECIFIED HEREIN. THE INGREDIENT QUANTITIES SHALL BE SHOWN IN INTERNATIONAL (SI) SYSTEM OF UNITS SUCH AS GRAMS, LITERS, ETC., OR U.S. STANDARDS SUCH AS PINTS, QUARTS OR GALLONS, AS SPECIFIED IN THE TABLE.

DESIGN AND CONSTRUCTION.

NUMBER OF OPENINGS.

1936	THERE SHALL BE 1936 OPENINGS PER INCH(S).
1938	THERE SHALL BE 1938 OPENINGS PER MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
MESH OPENING	
(PERCENT)	1940
WEIGHT	
NOMINAL WEIGHT PER UNIT LENGTH (SELECT ONE)	
U.S. (SELECT ONE)	
PER FOOT (SELECT ONE)	
(OUNCES)	7047
(POUNDS)	7049
PER 100 FEET (POUNDS)	7055
PER 1000 FEET (POUNDS)	7060
SI (SELECT ONE)	
PER METER (SELECT ONE)	
(GRAMS)	6927
(KILOGRAMS)	7344
PER KILOMETER (KILOGRAMS)	7405

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	MESH OPENING.
1940	THE MESH SHALL BE 1940 PERCENT OPEN.
7047	NOMINAL WEIGHT PER FOOT. THE WEIGHT PER FOOT SHALL BE 7047 OUNCE(S).
7049	NOMINAL WEIGHT PER FOOT. THE WEIGHT PER FOOT SHALL BE 7049 POUND(S).
7055	NOMINAL WEIGHT PER 100 FEET. THE WEIGHT PER 100 FEET SHALL BE 7055 POUND(S).
7060	NOMINAL WEIGHT PER 1000 FEET. THE WEIGHT PER 1000 FEET SHALL BE 7060 POUND(S).
6927	NOMINAL WEIGHT PER METER. THE WEIGHT PER METER SHALL BE 6927 GRAM(S).
7344	NOMINAL WEIGHT PER METER. THE WEIGHT PER METER SHALL BE 7344 KILOGRAM(S).
7405	NOMINAL WEIGHT PER KILOMETER. THE WEIGHT PER KILOMETER SHALL BE 7405 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
WEIGHT (CONT)	
MAXIMUM WEIGHT PER UNIT LENGTH (SELECT ONE)	
U.S. (SELECT ONE)	
PER FOOT (SELECT ONE)	
(OUNCES)	7050
(POUNDS)	7051
PER 100 FEET (POUNDS)	7056
PER 1000 FEET (POUNDS)	7347
SI (SELECT ONE)	
PER METER (SELECT ONE)	
(GRAMS)	7400
(KILOGRAMS)	7401
PER KILOMETER (KILOGRAMS)	7407

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7050	MAXIMUM WEIGHT PER FOOT. THE WEIGHT PER FOOT SHALL BE NOT GREATER THAN 7050 OUNCE(S).
7051	MAXIMUM WEIGHT PER FOOT. THE WEIGHT PER FOOT SHALL BE NOT GREATER THAN 7051 POUND(S).
7056	MAXIMUM WEIGHT PER 100 FEET. THE WEIGHT PER 100 FEET SHALL BE NOT GREATER THAN 7056 POUND(S).
7347	MAXIMUM WEIGHT PER 1000 FEET. THE WEIGHT PER 1000 FEET SHALL BE NOT GREATER THAN 7347 POUND(S).
7400	MAXIMUM WEIGHT PER METER. THE WEIGHT PER METER SHALL BE NOT GREATER THAN 7400 GRAM(S).
7401	MAXIMUM WEIGHT PER METER. THE WEIGHT PER METER SHALL BE NOT GREATER THAN 7401 KILOGRAM(S).
7407	MAXIMUM WEIGHT PER KILOMETER. THE WEIGHT PER KILOMETER SHALL BE NOT GREATER THAN 7407 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
WEIGHT (CONT)	
MINIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	6943
(POUNDS)	6944
SI (SELECT ONE)	
(GRAMS)	6945
(KILOGRAMS)	6946
ATTENUATION RATIO	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1700
AS FOLLOWS:	1702
MINIMUM ATTENUATION (RATIO)	1706
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1708
PER MIL-S-47235.	1710

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6943	MINIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT LESS THAN 6943 OUNCE(S).
6944	MINIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT LESS THAN 6944 POUND(S).
6945	MINIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT LESS THAN 6945 GRAM(S).
6946	MINIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT LESS THAN 6946 KILOGRAM(S).
1700	ATTENUATION RATIO. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1700.
1702	ATTENUATION RATIO. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1706	THE ATTENUATION RATIO SHALL BE NOT LESS THAN 1706.
1708	ATTENUATION RATIO. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1708.
1710	ATTENUATION RATIO. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-47235.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ATTENUATION RATIO (CONT)	
PER MIL-S-47235. (CONT)	
FLUX FIELD (SELECT ONE)	
(HERTZ)	1712
(KILOHERTZ)	1714
BREAKING STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1716
AS FOLLOWS:	1718
MINIMUM BREAKING STRENGTH (SELECT ONE)	
(POUNDS)	1720
(KILOGRAMS)	1722
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1724
PER MIL-W-47056.	1726
ELECTRICAL CONDUCTIVITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1728

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1712	THE FLUX FIELD SHALL BE 1712 HERTZ.
1714	THE FLUX FIELD SHALL BE 1714 KILOHERTZ.
1716	BREAKING STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1716.
1718	BREAKING STRENGTH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1720	THE BREAKING STRENGTH SHALL BE NOT LESS THAN 1720 POUND(S).
1722	THE BREAKING STRENGTH SHALL BE NOT LESS THAN 1722 KILOGRAM(S).
1724	BREAKING STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1724.
1726	BREAKING STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-W-47056.
1728	ELECTRICAL CONDUCTIVITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1728.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELECTRICAL CONDUCTIVITY (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	1730
MINIMUM CONDUCTIVITY (SELECT ONE)	
U.S. (OHMS PER SQUARE INCH)	1732
SI (SELECT ONE)	
(SIEMENS PER SQUARE METER)	1734
(SIEMENS PER SQUARE MILLIMETER)	1736
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1738
PER MIL-G-47197.	1740
NUMBER OF TEST SPECIMENS (QUANTITY)	1742
SPECIMEN LENGTH (SELECT ONE)	
(INCHES)	1744
(MILLIMETERS)	1746
LOAD (SELECT ONE)	
(POUNDS)	1748
(KILOGRAMS)	1750

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1730 ELECTRICAL CONDUCTIVITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

1732 THE CONDUCTIVITY SHALL BE NOT LESS THAN 1732 OHMS PER SQUARE INCH.

1734 THE CONDUCTIVITY SHALL BE NOT LESS THAN 1734 SIEMENS PER SQUARE METER.

1736 THE CONDUCTIVITY SHALL BE NOT LESS THAN 1736 SIEMENS PER SQUARE MILLIMETER.

1738 ELECTRICAL CONDUCTIVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1738.

1740 ELECTRICAL CONDUCTIVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-G-47197.

1742 THERE SHALL BE 1742 TEST SPECIMEN(S).

1744 THE SPECIMEN LENGTH SHALL BE 1744 INCH(S).

1746 THE SPECIMEN LENGTH SHALL BE 1746 MILLIMETER(S).

1748 THE TEST LOAD SHALL BE 1748 POUND(S).

1750 THE TEST LOAD SHALL BE 1750 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELECTRICAL RESISTIVITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1662
AS FOLLOWS:	1657
MAXIMUM ELECTRICAL RESISTIVITY (SELECT ONE)	
(OHMS PER CIRCULAR MIL PER FOOT OF LENGTH)	1658
(OHMS PER SQUARE MILLIMETER PER METER)	1660
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1659
PER ASTMA712.	1661
ELONGATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1752
AS FOLLOWS:	1754
MINIMUM ELONGATION (PERCENT)	1756

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1662	ELECTRICAL RESISTIVITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1662.
1657	ELECTRICAL RESISTIVITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1658	THE ELECTRICAL RESISTIVITY SHALL BE NOT GREATER THAN 1658 OHMS PER CIRCULAR MIL PER FOOT OF LENGTH.
1660	THE ELECTRICAL RESISTIVITY SHALL BE NOT GREATER THAN 1660 OHMS PER SQUARE MILLIMETER PER METER.
1659	ELECTRICAL RESISTIVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1659.
1661	ELECTRICAL RESISTIVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMA712.
1752	ELONGATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1752.
1754	ELONGATION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1756	THE ELONGATION SHALL BE NOT LESS THAN 1756 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELONGATION (CONT)	
AS FOLLOWS: (CONT)	
NECKING (PERCENT)	1758
LOAD (SELECT ONE)	
(POUNDS)	1760
(KILOGRAMS)	1762
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1764
PER MIL-W-47056.	1766
PER ASTMD412.	1768
FLEXIBILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1800
AS FOLLOWS:	1802
NO EVIDENCE OF PHYSICAL DAMAGE.	1804
TENSILE STRENGTH SHALL NOT BE ADVERSELY AFFECTED.	1806

Source: https://assist.dla.mil -- Downloaded: 20260-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1758	THE NECKING SHALL BE NOT LESS THAN 1758 PERCENT.
1760	THE LOAD SHALL BE 1760 POUND(S).
1762	THE LOAD SHALL BE 1762 KILOGRAM(S).
1764	ELONGATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1764.
1766	ELONGATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-W-47056.
1768	ELONGATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD412.
1800	FLEXIBILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1800.
1802	FLEXIBILITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1804	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1806	THE TENSILE STRENGTH SHALL NOT BE ADVERSELY AFFECTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLEXIBILITY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1808
PER MIL-W-47056.	1810
MINIMUM BENDS THROUGH AN ANGLE OF 180 DEGREES OVER SPECIFIED RADIUS (QUANTITY)	1812
RADIUS (SELECT ONE)	
(INCHES)	1814
(MILLIMETERS)	1816
MAXIMUM BEND RATE (BENDS PER MINUTE)	1818
HARDNESS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1820
AS FOLLOWS:	1822

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1808	FLEXIBILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1808.
1810	FLEXIBILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-W-47056.
1812	THE NUMBER OF BENDS THROUGH AN ANGLE OF 180 DEGREES OVER SPECIFIED RADIUS SHALL BE NOT LESS THAN 1812.
1814	THE RADIUS SHALL BE 1814 INCH(S).
1816	THE RADIUS SHALL BE 1816 MILLIMETER(S).
1818	THE BEND RATE SHALL BE NOT GREATER THAN 1818 BENDS PER MINUTE.
1820	HARDNESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1820.
1822	HARDNESS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HARDNESS (CONT)	
AS FOLLOWS: (CONT)	
ANNEALED CONDITION (SELECT ONE)	
DUROMETER (VALUE)	1824
ROCKWELL (VALUE)	1826
*SCALE (LETTER)	1828
BRINELL (VALUE)	1830
MILL CONDITION (SELECT ONE)	
DUROMETER (VALUE)	1832
ROCKWELL (VALUE)	1834
*SCALE (LETTER)	1836
BRINELL (VALUE)	1838
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1840
ASTME10, BRINELL.	1842
ASTME18, ROCKWELL.	1844
ASTMD2240, DUROMETER.	1846

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1824	THE ANNEALED CONDITION DUROMETER SHALL BE 1824.
1826 1828	THE ANNEALED CONDITION ROCKWELL HARDNESS SHALL BE 1826 OF THE 1828 SCALE.
1830	THE ANNEALED CONDITION BRINELL HARDNESS SHALL BE 1830.
1832	THE MILL CONDITION DUROMETER SHALL BE 1832.
1834 1836	THE MILL CONDITION ROCKWELL HARDNESS SHALL BE 1834 ON THE 1836 SCALE.
1838	THE MILL CONDITION BRINELL HARDNESS SHALL BE 1838.
1840	HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1840.
1842	HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTME10.
1844	HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTME18.
1846	HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD2240.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSERTION LOSS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2000
AS FOLLOWS:	2001
MINIMUM INSERTION LOSS (DECIBELS)	2003
MAXIMUM INSERTION LOSS (DECIBELS)	2005
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2007
PER MIL-G-46873.	2010
FIRST FREQUENCY (SELECT ONE)	
(MEGAHERTZ)	2012
(KILOHERTZ)	2014
SECOND FREQUENCY (SELECT ONE)	
(MEGAHERTZ)	2016
(KILOHERTZ)	2018
THIRD FREQUENCY (SELECT ONE)	
(MEGAHERTZ)	2020
(KILOHERTZ)	2022

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2000	INSERTION LOSS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2000.
2001	INSERTION LOSS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2003	THE INSERTION LOSS SHALL BE NOT LESS THAN 2003 DECIBEL(S).
2005	THE INSERTION LOSS SHALL BE NOT GREATER THAN 2005 DECIBEL(S).
2007	INSERTION LOSS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2007.
2010	INSERTION LOSS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-G-46873.
2012	THE FIRST FREQUENCY SHALL BE 2012 MEGAHERTZ.
2014	THE FIRST FREQUENCY SHALL BE 2014 KILOHERTZ.
2016	THE SECOND FREQUENCY SHALL BE 2016 MEGAHERTZ.
2018	THE SECOND FREQUENCY SHALL BE 2018 KILOHERTZ.
2020	THE THIRD FREQUENCY SHALL BE 2020 MEGAHERTZ.
2022	THE THIRD FREQUENCY SHALL BE 2022 KILOHERTZ.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PERMEABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1848
AS FOLLOWS:	1850
MAXIMUM PERMEABILITY (GAUSS/OERSTED)	1852
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1854
PER ASTMA342.	1856
SALT SPRAY/FOG	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6356
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE.	6357
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6353
PER ASTMB117.	6354
EXPOSURE PERIOD (HOURS)	4783

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1848	PERMEABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1848.
1850	PERMEABILITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1852	THE PERMEABILITY SHALL BE NOT GREATER THAN 1852 GAUSS PER OERSTED.
1854	PERMEABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1854.
1856	PERMEABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMA342.
6356	SALT SPRAY/FOG. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6356.
6357	SALT SPRAY/FOG. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
6353	SALT SPRAY/FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6353.
6354	SALT SPRAY/FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMB117.
4783	DURATION OF TEST SHALL BE 4783 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TENSILE STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1900
AS FOLLOWS:	1902
MINIMUM TENSILE STRENGTH (SELECT ONE)	
(POUNDS PER SQUARE INCH)	1904
(KILOPASCALS)	1906
MINIMUM PULL STRENGTH (SELECT ONE)	
(POUNDS)	1908
(NEWTONS)	1910
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1912
PER MIL-W-47056.	1914
PER ASTMD412.	1916
THERMAL CONDUCTIVITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1641

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1900	TENSILE STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1900.
1902	TENSILE STRENGTH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1904	THE TENSILE STRENGTH SHALL BE NOT LESS THAN 1904 POUND(S) PER SQUARE INCH.
1906	THE TENSILE STRENGTH SHALL BE NOT LESS THAN 1906 KILOPASCAL(S).
1908	THE PULL STRENGTH SHALL BE NOT LESS THAN 1908 POUND(S).
1910	THE PULL STRENGTH SHALL BE NOT LESS THAN 1910 NEWTON(S).
1912	TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1912.
1914	TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-W-47056.
1916	TENSILE STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD412.
1641	THERMAL CONDUCTIVITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1641.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THERMAL CONDUCTIVITY (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	1649
MAXIMUM THERMAL CONDUCTIVITY (SELECT ONE)	
(BRITISH THERMAL UNITS PER HOUR PER SQUARE FOOT PER DEGREE FAHRENHEIT PER INCH)	1650
(WATTS PER METER KELVIN)	1652
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1651
PER ASTMC177.	1653
VOLUME RESISTIVITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1918
AS FOLLOWS:	1920

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1649	THERMAL CONDUCTIVITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1650	THE THERMAL CONDUCTIVITY SHALL BE NOT GREATER THAN 1650 BRITISH THERMAL UNITS PER HOUR PER SQUARE FOOT PER DEGREE FAHRENHEIT PER INCH.
1652	THE THERMAL CONDUCTIVITY SHALL BE NOT GREATER THAN 1652 WATTS PER METER KELVIN.
1651	THERMAL CONDUCTIVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1651.
1653	THERMAL CONDUCTIVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMC177.
1918	VOLUME RESISTIVITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1918.
1920	VOLUME RESISTIVITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VOLUME RESISTIVITY (CONT)	
AS FOLLOWS: (CONT)	
VOLUME RESISTIVITY (SELECT ONE)	
MINIMUM (OHM CENTIMETER)	1924
MAXIMUM (OHM CENTIMETER)	1926
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1932
PER ASTMD991.	1934
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1924	THE VOLUME RESISTIVITY SHALL BE NOT LESS THAN 1924 OHM CENTIMETER.
1926	THE VOLUME RESISTIVITY SHALL BE NOT GREATER THAN 1926 OHM CENTIMETER.
1932	VOLUME RESISTIVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1932.
1934	VOLUME RESISTIVITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD991.
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI


(Project EDS-A238)

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T07:25Z
Check the source to verify that this is the current version before use.


APPENDIX A

ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

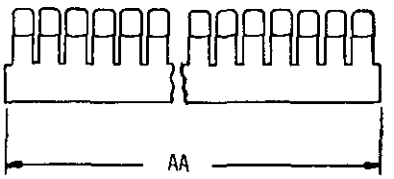

817-01-1

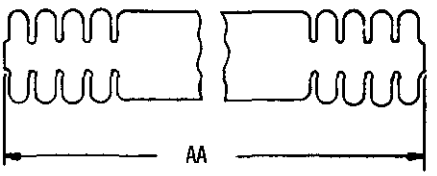

817-01-2

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	12	1648	20	1756	34	1908	46
0102	12	1649	48	1758	36	1910	46
0103	12	1651	48	1760	36	1912	46
0104	12	1652	48	1762	36	1914	46
0105	12	1653	48	1764	36	1916	46
0107	14	1654	20	1766	36	1918	48
0108	14	1656	20	1768	36	1920	48
0700	12	1657	34	1800	36	1924	50
0800	12	1658	34	1802	36	1926	50
1003	12	1659	34	1804	36	1932	50
1004	12	1660	34	1806	36	1934	50
1005	12	1661	34	1808	38	1936	22
1006	12	1662	34	1810	38	1938	22
1008	12	1700	28	1812	38	1940	24
1009	20	1702	28	1814	38	1950	48
1600	16	1706	28	1816	38	2000	42
1602	16	1708	28	1818	38	2001	42
1604	16	1710	28	1820	38	2003	42
1606	16	1712	30	1822	38	2005	42
1608	16	1714	30	1824	40	2007	42
1610	16	1716	30	1826	40	2010	42
1612	16	1718	30	1828	40	2012	42
1614	16	1720	30	1830	40	2014	42
1616	16	1722	30	1832	40	2016	42
1618	16	1724	30	1834	40	2018	42
1620	16	1726	30	1836	40	2020	42
1622	16	1728	30	1838	40	2022	42
1624	18	1730	32	1840	40	4783	44
1626	18	1732	32	1842	40	4904	16
1628	18	1734	32	1844	40	4905	16
1630	18	1736	32	1846	40	4950	22
1632	18	1738	32	1848	44	6353	44
1634	18	1740	32	1850	44	6354	44
1636	18	1742	32	1852	44	6356	44
1638	18	1744	32	1854	44	6357	44
1640	18	1746	32	1856	44	6369	12
1641	46	1748	32	1900	46	6372	52
1642	18	1750	32	1902	46	6375	22
1644	18	1752	34	1904	46	6870	50
1646	18	1754	34	1906	46	6873	12

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
6874	14						
6927	24						
6941	14						
6942	14						
6943	28						
6944	28						
6945	28						
6946	28						
6991	52						
6992	52						
6993	52						
6994	52						
6995	52						
7001	50						
7002	50						
7003	50						
7004	50						
7005	50						
7047	24						
7049	24						
7050	26						
7051	26						
7055	24						
7056	26						
7060	24						
7344	24						
7347	26						
7400	26						
7401	26						
7405	24						
7407	26						
7572	20						
7573	20						
7574	20						
7576	20						
7577	20						
7578	20						
7629	52						
7630	52						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Additional Part Marking	52
Additional Requirements	50
Aperture Cards Required	14
Applicable Documents	54
Attenuation Ratio	28
Base Document	12
Breaking Strength	30
Carriers	18
City, State, Zip	12
Color	16
Company Name/Command	12
Composition	22
Configuration	20
Contract Number/Office Symbol	12
Control	12
Date	12
Density	20
Design and Construction	22
Diameter	18
Electrical Conductivity	30
Electrical Resistivity	34
Elongation	34
Ends	18
Finishes	22
Flexibility	36
Form	16
Format	12
Government Design Activity FSCM	12
Hardness	38
Illustrations	22
Insertion Loss	42
Length	18
Materials	22
Melting Point	20

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Mesh Opening	24
Mounting Hardware	50
Nomenclature	54
Notes	54
Number of Openings	22
Packaging	54
Part Marking	52
Part Number	14
Part Number Cross-Reference	54
Permeability	44
Phone Number	12
Quality Assurance Provisions	54
Requester FSCM	12
Requester's Name	12
Revision of AEDPS Document (Number)	14
Salt Spray/Fog	44
Scope	14
Source Table	14
Specific Gravity	20
Street/Building	12
Superseded Document	54
System Application	12
Tabulated Characteristics	22
Temperature Rating	16
Tensile Strength	46
Thermal Conductivity	46
Thickness	18
Units of Measure	14
Volume Resistivity	48
Weight	24
Width	18
Workmanship	50

☆U.S. GOVERNMENT PRINTING OFFICE: 1980-603-121/593

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-133(MI), dated 22 Sep 1978 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

The digital copy of DOD-STD-35-133(MI), dated 22 Sep 1978 does not include the foldout pages for the Specification Requirement Sheet (SRS). Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these pages.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
DOD-STD-35-133

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander,
U.S. Army Missile R & D Command,
ATTN: DRDMI-ESD,
Redstone Arsenal, Alabama 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.