DOD-STD-35-138(MI)
5 January 1979
SUPERSEDING
SECTION 3
MIL-STD-35-6A(MI)
28 AUGUST 1973

MILITARY STANDARD

SWITCHES, SENSITIVE

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

FSC EDS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL
DEVELOPMENT AND READINESS COMMAND
ALEXANDRIA, VA 22333

Switches, Sensitive
Automated Engineering
Document Preparation System

DOD-STD-35-138(MI)

1. This Military Standard is approved for use by DARCOM, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN : DRDMI-ESD, Redstone Arsenal, Alabama 35809, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-138(MI) is to provide Instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for sensitive switches.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of DOD-STD-35D. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	3
	2.1	Issues of documents	3
	2.2	Other publications	4
	3.	DEFINITIONS	5
	4.	GENERAL REQUIREMENTS	7
	4.1	Introduction	7
	4.2	Specification Requirement Sheet (SRS)	7
	4.3	Configuration	7
	4.3.1	Dimensions	7
	4.3.2	Illustrations	7
	4.4	Units of measure	7
	5.	DETAILED REQUIREMENTS	9
	5.1	Introduction	9
	5.2	MSE Formats	9
	5.3	Referenced documents	9
	5.4	Test matrix	9
	5.5	Tabulation	10
	5.6	Keyword Code Index (KCI) and Standard Paragraphs	15
	5.6.1	Interrelationship of Codes	15
	5.6.2	Automatic MSE Data	15
	5.6.3	DOD-STD-35 Tables	15

TABLES

Table	I.	Title Index	2
	II.	Test matrix	10
	III.	Tabulation candidates	11

APPENDICES

Appendix	A.	Illustrations	191
	B.	Characteristic Code Index	221
		Index	231

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for sensitive switches.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item S edifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. It is recommended that MIL-STD-1132 Selection and Use of Switches and /associated Hardware be reviewed prior to using this dash-numbered part book.

The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:25Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
SWITCH, SENSITIVE	Ø14366	MIL-S-8805	GENERAL SPECIFICATION
		MIL-S-13484	AUTOMOTIVE 30 VDC MAX
		MIL-S-13625	AUTOMOTIVE 28 VDC MAX BEAM SELECTING
		MIL-S-22614	FIRE CONTROL EQUIPMENT
		MIL-S-24317	MULTISTATION
		MIL-S-83504	DUAL IN-LINE PACKAGE
		MS39058	24 VDC WATERPROOF
ACTUATOR, SENSITIVE SWITCH	Ø14378	MIL-S-8805	GENERAL SPECIFICATION

Source: https://assist.dla.mil -- Downloaded: 2026Ø1-26T07:25Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue In effect on date of invitation for bids *or* request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-S-901	Shock Tests (High Impact) Shipboard Machinery, Equipment and Systems, Requirements For
MIL-S-8805	Switches and Switch Assemblies, Sensitive, and Push (Snap Action), General Specification For
MIL-E-13856	Electrical Components for Automotive Vehicles; Waterproofness Tests
MIL-S-24317	Switch, Multistation, Pushbutton, (Illuminated and Non-Illuminated), General Specification For

STANDARDS

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-167-1	Mechanical Vibrations of Shipboard Equipment (Type I - Environmental and Type II - Internally Excited)
MIL-STD-202	Test Methods for Electronic and Electrical Parts
MIL-STD-461	Electromagnetic Interference Characteristics, , Requirements for Equipment
MIL-STD-462	Electromagnetic Interference Characteristics, Measurement Of

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

MIL-STD-810	Environmental Test Methods for Aerospace and Ground Equipment
MIL-STD-1285	Marking of Electrical and Electronic Parts

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASTMD1868	Standard Method for Detection and Measurement of Discharge (Corona) Pulses in Evaluation of Insulation Systems
ASTME380	Metric Practice Guide

(Application for copies should be addressed to the American Society foresting and Materials, 1916 Race St., Philadelphia, Pa. li103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Switches, Sensitive.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for Switches, Sensitive, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Switches, Sensitive.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions described in DOD-STD-35 are applicable to Switches, Sensitive.

4.3.2 Illustrations. Illustrations applicable to Switches, Sensitive are contained in Appendix A to this document.

4.4 Units of measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used, Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction, This section provides Instructions for completion of . the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Test matrix. A test matrix is supplied as a guide for selecting documents to specify tests (see table II). The test matrix presents documents most applicable for use to satisfy the statement "TEST PER (DOC DES)" Any document listed in the Title Index may be used to satisfy the statement. However, the selected document from the Title Index must contain the desired test. Government test method documents and approved industry standards such as ASTM test methods may also be used to satisfy the statement "TEST PER (DOC DES)".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE II. TEST MATRIX.

DOCUMENT	CODE	1738	1792	1914	3612	2346	2302	2393	3182	2438	3700	3702
	TEST	Circuit Configuration	Coincidence of Operating and Release Points (Simultaneity)	Endurance, Electrical	Endurance, Mechanical	Operating Characteristics	Overload	Short Circuit	Strength of Actuating Means	Strength of Mounting Means	Temperature, High	Temperature, Low
MIL-S-8805		X	X	X	X	X	X	X	X	X		X
MIL-S-13484						X					X	X
MIL-S-13625											X	X
MIL-S-22614						X						
MIL-S-24317		X	X	X	X		X		X			
MIL-S-83504		X				X			X			

5.5 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table III provides codes for column headings which may be used for sensitive switch characteristics. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
2502	MAKE AND BREAK RESISTIVE DC LOAD VOLTS	2526	MAKE AND BREAK INDUCTIVE DC LOAD VOLTS	2574	MAKE AND BREAK LAMP DC LOAD VOLTS
2503	MAKE AND BREAK RESISTIVE DC LOAD AMPERES	2527	MAKE AND BREAK INDUCTIVE DC LOAD AMPERES	2575	MAKE AND BREAK LAMP DC LOAD AMPERES
2504	MAKE AND BREAK RESISTIVE AC LOAD VOLTS	2528	MAKE AND BREAK INDUCTIVE AC LOAD VOLTS	2576	MAKE AND BREAK LAMP AC LOAD VOLTS
2505	MAKE AND BREAK RESISTIVE AC LOAD FREQUENCY HERTZ	2529	MAKE AND BREAK INDUCTIVE AC LOAD FREQUENCY HERTZ	2577	MAKE AND BREAK LAMP AC LOAD FREQUENCY HERTZ
2506	MAKE AND BREAK RESISTIVE AC LOAD AMPERES	2530	MAKE AND BREAK INDUCTIVE AC LOAD AMPERES	2578	MAKE AND BREAK LAMP AC LOAD AMPERES
2550	MAKE AND BREAK MOTOR LOAD DC VOLTS	2601	MAKE AND BREAK DRY CKT DC VOLTS	2551	MAKE AND BREAK MOTOR LOAD DC AMPERES
2602	MAKE AND BREAK DRY CKT DC AMPERES	2552	MAKE AND BREAK MOTOR LOAD AC VOLTS	2603	MAKE AND BREAK DRY CKT AC VOLTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES. (CONT)

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
2553	MAKE AND BREAK MOTOR LOAD AC VOLTAGE FREQUENCY HERTZ	2604	MAKE AND BREAK DRY CKT AC VOLTAGE FREQUENCY HERTZ	2554	MAKE AND BREAK MOTOR LOAD AC AMPERES
2605	MAKE AND BREAK DRY CKT AC AMPERES	2701	CURRENT CARRYING RESISTIVE DC LOAD VOLTS	2725	CURRENT CARRYING INDUCTIVE DC LOAD VOLTS
2773	CURRENT CARRYING LAMP DC LOAD VOLTS	2702	CURRENT CARRYING RESISTIVE DC LOAD AMPERES	2726	CURRENT CARRYING INDUCTIVE DC LOAD AMPERES
2774	CURRENT CARRYING LAMP DC LOAD AMPERES	2703	CURRENT CARRYING RESISTIVE AC LOAD VOLTS	2727	CURRENT CARRYING INDUCTIVE AC LOAD VOLTS
2775	CURRENT CARRYING LAMP AC LOAD VOLTS	2704	CURRENT CARRYING RESISTIVE AC LOAD FREQUENCY HERTZ	2728	CURRENT CARRYING INDUCTIVE AC LOAD FREQUENCY HERTZ
2776	CURRENT CARRYING LAMP AC LOAD FREQUENCY HERTZ	2705	CURRENT CARRYING RESISTIVE AC LOAD AMPERES	2729	CURRENT CARRYING INDUCTIVE AC LOAD AMPERES
2777	CURRENT CARRYING LAMP AC LOAD AMPERES	2749	CURRENT CARRYING MOTOR LOAD DC VOLTS	2801	CURRENT CARRYING DRY CKT DC VOLTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES. (CONT)

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
2750	CURRENT CARRYING MOTOR LOAD DC AMPERES	2802	CURRENT CARRYING DRY CKT DC AMPERES	2751	CURRENT CARRYING MOTOR LOAD AC VOLTS
2803	CURRENT CARRYING DRY CKT AC VOLTS	2752	CURRENT CARRYING MOTOR LOAD AC VOLTAGE FREQUENCY HERTZ	2804	CURRENT CARRYING DRY CKT AC VOLTAGE FREQUENCY HERTZ
2753	CURRENT CARRYING MOTOR LOAD AC AMPERES	2805	CURRENT CARRYING DRY CKT AC AMPERES	2010	CONTACT ARRANGE-MENT (POLE)
2012	CONTACT ARRANGE-MENT (THROW)	2328	MINIMUM OPERATING FORCE NEWTONS	2332	MINIMUM OPERATING FORCE OUNCES
2334	MINIMUM OPERATING FORCE POUNDS	2336	MAXIMUM OPERATING FORCE NEWTONS	2340	MAXIMUM OPERATING FORCE OUNCES
2342	MAXIMUM OPERATING FORCE POUNDS	3100	MINIMUM RELEASE FORCE OUNCES	3102	MINIMUM RELEASE FORCE POUNDS
3104	MINIMUM RELEASE FORCE NEWTONS	3106	MAXIMUM PRETRAVEL INCH	3108	MAXIMUM PRETRAVEL MILLIMETER
3110	MINIMUM OVERTRAVEL INCH	3112	MINIMUM OVERTRAVEL MILLIMETER		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

5.6 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and its associated code. Enter, on the SRS, the code and the characteristic value required. After the part unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are In DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.6,1 Interrelationship of codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The paragraph, of which the code is a part, is shown by the standard paragraph adjacent to the code on a right-hand page. When a characteristic value entered with a code becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact entry as supplied with the code, except for "X" entries.

5.6.2 Automatic MSE data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without having to make additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.6.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in Appendix A of DOD-STD-35. Most of the tables are in preprinted form and should be reproduced, applicable data entered, and attached to the SRS for submittal. Refer to DOD-STD-35 for a general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

I 1

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*DATE	1003
*REQUESTER FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1O05
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT	0700
ONE SECTION DOCUMENT	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM (S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE : REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE : THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE : AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
Use	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6874 THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OF CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

0107

0108 0108.

SCOPE.

SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

6941 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.

6942 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE RATING	
MAXIMUM OPERATING (DEGREES CELSIUS)	5069
MAXIMUM NONOPERATING (DEGREES CELSIUS)	5071
MAXIMUM SERVICE (DEGREES CELSIUS)	4905
MAXIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5054
MINIMUM OPERATING (DEGREES CELSIUS)	5068
MINIMUM NONOPERATING (DEGREES CELSIUS)	5070
MINIMUM SERVICE (DEGREES CELSIUS)	4904
MINIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5052
NOMINAL OPERATING (DEGREES CELSIUS)	5046
POWER RATING	
MINIMUM POWER (SELECT ONE)	
(WATTS)	7631
(KILOWATTS)	7632
(MILLIWATTS)	7633
(VOLTAMPERES)	7645

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	TEMPERATURE RATING
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
5071	THE MAXIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5071 DEGREES CELSIUS,
4905	THE MAXIMUM SERVICE TEMPERATURE RATING SHALL BE 4905 DEGREES CELSIUS.
5054	THE MAXIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5054 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
5070	THE MINIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5070 DEGREES CELSIUS.
4904	THE MINIMUM SERVICE TEMPERATURE RATING SHALL BE 4904 DEGREES CELSIUS,
5052	THE MINIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5052 DEGREES CELSIUS.
5046	THE NOMINAL OPERATING TEMPERATURE RATING SHALL BE 5046 DEGREES CELSIUS.
	POWER RATING.
7631	THE MINIMUM POWER RATING SHALL BE 7631 WATT(S).
7632	THE MINIMUM POWER RATING SHALL BE 7632 KILOWATT(S).
7633	THE MINIMUM POWER RATING SHALL BE 7633 MILLIWATT(S)
7645	THE MINIMUM POWER RATING SHALL BE 7645 VOLTAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ALTITUDE RATING	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5060
SEA LEVEL TO (METERS)	5061
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5062
SEA LEVEL TO (METERS)	5063

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ALTITUDE RATING.
5060	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5060 FEET.
5061	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5061 METERS.
5062	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5062 FEET.
5063	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5063 METERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RATED LOADS	
CURRENT CARRYING CAPACITY	
NOTE : SEE RATED LOAD TABLE.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

RATED LOAD (CURRENT CARRYING CAPACITY). THE RATED LOAD (CURRENT CARRYING CAPACITY) OF THE ITEM(S) SHALL BE IN ACCORDANCE WITH THE RATED LOAD TABLE (CURRENT CARRYING CAPACITY).

RATED LOAD TABLE (CURRENT CARRYING CAPACITY)

LOAD TYPE	DC		AC			PRESSURE
	VOLTS	AMPERES	VOLTS RMS	FREQ. HERTZ	AMPERES	MILLIMETERS OF MERCURY
RESISTIVE	2701	2702	2703	2704	2705	2706
RESISTIVE	2707	2708	2709	2710	271I	2712
RESISTIVE	2713	2714	2715	2716	2717	2718
RESISTIVE	2719	2720	272%	2722	2723	2724
INDUCTIVE	2725	2726	2727	2728	2729	2730
INDUCTIVE	2731	2732	2733	2734	2735	2736
INDUCTIVE	2737	2738	2739	2740	2741	2742
INDUCTIVE	2743	2744	2745	2746	2747	2748
MOTOR	2749	2750	2751	2752	2753	2754
MOTOR	2755	2756	2757	2758	2759	2760
MOTOR	2761	2762	2763	2764	2765	2766
MOTOR	2767	2768	2769	2770	2771	2772
LAMP	2773	2774	2775	2776	2777	2778
LAMP	2779	2780	2781	2782	2783	2784
LAMP	2785	2786	2787	2788	2789	2790
LAMP	2791	2792	2793	2794	2795	2796
LOW-LEVEL (DRY CKT)	2801	2802	2803	2804	2805	2806
LOW-LEVEL (DRY CKT)	2807	2808	2809	2810	2811	2812
LOW-LEVEL (DRY CKT)	2813	2814	2815	2816	2817	2818
LOW-LEVEL (DRY CKT)	2819	2820	2821	2822	2823	2824
2825	2826	2827	2828	2829	2830	2831
2832	2833	2834	2835	2836	2837	2838
2839	2840	2841	2842	2843	2844	2845
2846	2847	2848	2849	2850	2851	2852

NOTE A: 2853.
NOTE B: 2854.
NOTE C: 2855.
NOTE D: 2856.
NOTE E: 2857.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RATED LOADS (CONT)	
MAKE AND BREAK CAPACITY	
NOTE : SEE RATED LOAD TABLE.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

RATED LOAD (MAKE AND BREAK CAPACITY). THE RATED LOAD (MAKE AND BREAK CAPACITY) OF THE ITEM(S) SHALL BE IN ACCORDANCE WITH THE RATED LOAD TABLE (MAKE AND BREAK CAPACITY).

RATED LOAD TABLE (MAKE AND BREAK CAPACITY)

	DC		AC			PRESSURE
			VOLTS	FREQ.		MILLIMETERS
LOAD TYPE	VOLTS	AMPERES	RMS	HERTZ	AMPERES	OF MERCURY
RESISTIVE	2502	2503	2504	2505	2506	2501
RESISTIVE	2508	2509	2510	2511	2512	2507
RESISTIVE	2514	2515	2516	2517	2518	2513
RESISTIVE	2520	25211	2522	2523	2524	2519
INDUCTIVE	2526	2527	2528	2529	2530	2525
INDUCTIVE	2532	2533	2534	2535	2536	2531
INDUCTIVE	2538	2539	2540	2541	2542	2537
INDUCTIVE	2544	2545	2546	2547	2548	2543
MOTOR	2550	2551	2552	2553	2554	2549
MOTOR	2556	2557	2558	2559	2560	2555
MOTOR	2562	2563	2564	2565	2566	2561
MOTOR	2568	2569	2570	2571	2572	2567
LAMP	2574	2575	2576	2577	2578	2573
LAMP	2580	2581	2582	2583	2584	2579
LAMP	2586	2587	2588	2589	2590	2585
LAMP	2592	2593	2594	2595	2596	2591
LOW-LEVEL (DRY CKT)	2601	2602	2603	2604	2605	2606
LOW-LEVEL (DRY CKT)	2607	2608	2609	2610	2611	2612
LOW-LEVEL (DRY CKT)	2613	2614	2615	2616	2617	2618
LOW-LEVEL (DRY CKT)	2619	2620	2621	2622	2623	2624
2625	2626	2627	2628	2629	2630	263%
2632	2633	2634	2635	2636	2637	2638
2639	2640	2641	2642	2643	2644	2645
2646	2647	2648	2649	2650	2651	2652

NOTE A: 2653.
NOTE B: 2654.
NOTE C: 2655.
NOTE D: 2656.
NOTE E: 2657.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION	
ENCLOSURE DESIGN (DESIGNATION)	1562
TEMPERATURE CHARACTERISTIC (DESIGNATION)	1564
SHOCK TYPE (DESIGNATION)	1566
VIBRATION GRADE (DESIGNATION)	1570
INDICATION CHARACTERISTIC (DESIGNATION)	1572
TYPE (DESIGNATION)	1574
CLASS (DESIGNATION)	1576
ARRANGEMENT (DESIGNATION)	1578
GRADE (DESIGNATION)	1580
OTHER ____	1582

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	Classification
1562	THE ENCLOSURE DESIGN SHALL BE 1562 IN ACCORDANCE WITH THE BASE DOCUMENT.
1564	THE TEMPERATURE CHARACTERISTIC SHALL BE 1564 IN ACCORDANCE WITH THE BASE DOCUMENT.
1566	THE SHOCK TYPE SHALL BE 1566 IN ACCORDANCE WITH THE BASE DOCUMENT.
1570	THE VIBRATION GRADE SHALL BE 1570 IN ACCORDANCE WITH THE BASE DOCUMENT.
1572	THE INDICATION CHARACTERISTIC SHALL BE 1572 IN ACCORDANCE WITH THE BASE DOCUMENT.
1574	THE TYPE SHALL BE 1574 IN ACCORDANCE WITH THE BASE DOCUMENT.
1576	THE CLASS SHALL BE 11576 IN ACCORDANCE WITH THE BASE DOCUMENT.
1578	THE ARRANGEMENT SHALL BE 1578 IN ACCORDANCE WITH THE BASE DOCUMENT.
1580	THE GRADE SHALL BE 1580 IN ACCORDANCE WITH THE BASE DOCUMENT.
1582	THE CLASSIFICATION SHALL BE 1582 IN ACCORDANCE WITH THE BASE DOCUMENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
*UNITS (SELECT ONE)	
U.S.	
INCHES.	7572
SI (SELECT ONE)	
CENTIMETERS.	7576
MILLIMETERS.	7577
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE Dimensions	
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7576	ALL Dimensions UNLESS OTHERWISE SPECIFIED, SHALL BE IN CENTIMETERS OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MATERIALS (SEE TABLES VI AND VII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DOD-STD-35)	
NOTE : AUTOMATIC WHEN TABLE IX IS USED.	
METALS	
DISSIMILAR METALS.	7580
DESIGN AND CONSTRUCTION	
ENCLOSURE (SELECT ONE)	
ENVIRONMENTALLY SEALED.	1583
HERMETICALLY SEALED.	1584
UNSEALED.	1585
DUST TIGHT.	1586

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE : THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	F i n i s h FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLE FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.
	DESIGN AND CONSTRUCTION.
1583	ENCLOSURE. THE ITEM(S) ENCLOSURE SHALL BE ENVIRONMENTALLY SEALED*
1584	ENCLOSURE. THE ITEM(S) ENCLOSURE SHALL BE HERMETICALLY SEALED.
1585	ENCLOSURE.. THE ITEM(S) ENCLOSURE SHALL BE UNSEALED.
1586	ENCLOSURE THE ITEM(S) ENCLOSURE SHALL BE DUST TIGHT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
ENCLOSURE (CONT)	
Watertight	1587
RESILIENT.	1588
EXPLOSION PROOF.	1589
OPEN.	1590
OTHER ____	1565
TYPE OF OPERATION (SELECT ONE)	
Momentary	1591
MAINTAINED.	1592
ROTARY.	1593
PUSH-PULL.	1594
PUSH.	1595
LATCHING-MANUAL RESET.	1596
OTHER ____	3568

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1587	ENCLOSURE. THE ITEM(S) ENCLOSURE SHALL BE WATERTIGHT.
1588	ENCLOSURE. THE ITEM(S) ENCLOSURE SHALL BE RESILIENT.
1589	ENCLOSURE. THE ITEM(S) ENCLOSURE SHALL BE EXPLOSION PROOF.
1590	ENCLOSURE. THE ITEM(S) ENCLOSURE SHALL BE OPEN.
1565	ENCLOSURE. THE ITEM(S) ENCLOSURE SHALL BE 1565.
1591.	TYPE OF OPERATION. THE OPERATION OF THE ITEM(S) SHALL BE MOMENTARY.
1592	TYPE OF OPERATION. THE OPERATION OF THE ITEM(S) SHALL BE MAINTAINED.
1593	TYPE OF OPERATION. THE OPERATION OF THE ITEM(S) SHALL BE ROTARY.
1594	TYPE OF OPERATION. THE OPERATION OF THE ITEM(S) SHALL BE PUSH-PULL.
1595	TYPE OF OPERATION. THE OPERATION OF THE ITEM(S) SHALL BE PUSH.
1596	TYPE OF OPERATION. THE OPERATION OF THE ITEM(S) SHALL BE LATCHING-MANUAL RESET.
1568	TYPE OF OPERATION. THE OPERATION OF THE ITEM(S) SHALL BE 1568.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
PLUNGER TYPE (SELECT ONE)	
PIN.	1598
BUTTON.	1599
ACTUATOR LEVER TYPE (SELECT ONE)	
STRAIGHT LEAF SPRING.	1600
FORMED LEAF SPRING.	1601
SADDLE LEAF SPRING.	1602
ROLLER LEAF SPRING.	1603
ROLLER SADDLE LEAF SPRING.	1604
STRAIGHT HINGED LEAF.	1605
FORMED HINGED LEAF.	1606
ROLLER HINGED LEAF.	1607
ROLLER.	1608
ROLLER WIRE.	1609

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1598	PLUNGER TYPE. THE ITEM(S) SHALL HAVE A PIN TYPE PLUNGER.
1599	PLUNGER TYPE. THE ITEM(S) SHALL HAVE A BUTTON TYPE PLUNGER.
1600	ACTUATOR LEVER TYPE. THE ITEM(S) SHALL HAVE A STRAIGHT LEAF SPRING ACTUATOR LEVER.
1601	ACTUATOR LEVER TYPE. THE ITEM(S) SHALL HAVE A FORMED LEAF SPRING ACTUATOR LEVER.
1602	ACTUATOR LEVER TYPE. THE ITEM(S) SHALL HAVE A SADDLE LEAF SPRING ACTUATOR LEVER.
1603	ACTUATOR LEVER TYPE. THE ITEM(S) SHALL HAVE A ROLLER LEAF SPRING ACTUATOR LEVER.
1604	ACTUATOR LEVER TYPE. THE ITEM(S) SHALL HAVE A ROLLER SADDLE LEAF SPRING ACTUATOR LEVER.
1605	ACTUATOR LEVER TYPE, THE ITEM(S) SHALL HAVE A STRAIGHT HINGED LEAF ACTUATOR LEVER.
1606	ACTUATOR LEVER TYPE. THE ITEM(S) SHALL HAVE A FORMED HINGED LEAF ACTUATOR LEVER.
1607	ACTUATOR LEVER TYPE. THE ITEM(S) SHALL HAVE A ROLLER HINGED LEAF ACTUATOR LEVER.
1608	ACTUATOR LEVER TYPE. THE ITEM(S) SHALL HAVE A ROLLER ACTUATOR LEVER.
1609	ACTUATOR LEVER TYPE. THE ITEM(S) SHALL HAVE A ROLLER WIRE ACTUATOR LEVER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
ACTUATOR LEVER TYPE (CONT)	
STRAIGHT WIRE.	1611
PUSHBUTTON.	1612
TOGGLE.	1613
OTHER ____	1610
TERMINALS	
CONFIGURATION TABLE	
TERMINAL HARDWARE ____	1614
ADDITIONAL TERMINAL REQUIREMENTS ____	3031

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1611 ACTUATOR LEVER TYPE. THE ITEM(S) SHALL HAVE A STRAIGHT WIRE ACTUATOR LEVER.

1612 ACTUATOR LEVER TYPE. THE ITEM(S) SHALL HAVE A PUSHBUTTON ACTUATOR LEVER.

1613 ACTUATOR LEVER TYPE. THE ITEM(S) SHALL HAVE A TOGGLE ACTUATOR LEVER.

1610 ACTUATOR LEVER TYPE. THE ITEM(S) SHALL HAVE A 1610 ACTUATOR LEVER.

TERMINALS.

THE SWITCH TERMINALS SHALL BE AS SPECIFIED IN THE TERMINAL CONFIGURATION TABLE.

TERMINAL CONFIGURATION TABLE

ITEM	SIZE	LENGTH/THICKNESS	QTY
SCREW LUG	3000	3001	3002
WIRE LEAD, SIDE EXIT	3003	3004	3005
WIRE LEAD, BOTTOM EXIT	3006	3007	3008
SINGLE TURRET	3009	3010	3011
DOUBLE TURRET	30112	3013	3014
J-HOOK	3015	3016	3017
SOLDER EYE	3018	3019	3020
SOLDER LUG	3021	3022	3023
SLIP-ON LUG	3024	3025	3026
CONNECTOR	3027	3028	3029

1614 TERMINAL HARDWARE SHALL BE 1614.

3031 ADDITIONAL TERMINAL REQUIREMENTS SHALL BE 3031.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
CONTACT ARRANGEMENT	
CIRCUIT (NUMBER)	2000
FORM (DESIGNATION)	2002
OTHER ARRANGEMENTS (SELECT ONE)	
SPST.	2004
SPDT.	2006
DPDT.	2008
POLE (NUMBER)	2010
*THROW (NUMBER)	2012
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CONTACT ARRANGEMENT. THE CONTACT ARRANGEMENT SHALL BE AS FOLLOWS:
2000	2000 CIRCUIT.
2002	FORM 2002.
2004	SINGLE POLES SINGLE THROW.
2006	SINGLE POLE, DOUBLE THROW.
2008	DOUBLE POLE, DOUBLE THROW.
2010 2012	2010 POLE, 2012 THROW.
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).
7021	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
WEIGHT (CONT)	
NOMINAL WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	6996
(POUNDS)	6997
SI (SELECT ONE)	
(GRAMS)	6998
(KILOGRAMS)	6999
ACCELERATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6272
NO EVIDENCE OF PHYSICAL DAMAGE.	6273
REMAIN WITHIN SPECIFIED TOLERANCE,	6277
NO DISCONTINUITY.	7345
NO LAMP IN TEST CIRCUIT SHALL LIGHT.	1547

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6996	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6996 OUNCE(S).
6997	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6997 POUND(S).
6998	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6998 GRAM(S).
6999	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6999 KILOGRAM(S).
6272	ACCELERATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6272.
6273	ACCELERATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6277	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
7345	THERE SHALL BE NO ELECTRICAL DISCONTINUITY DURING THE TEST.
1547	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6250
PER MIL-STD-202, METHOD 2120	6251
*TEST CONDITION LETTER (SELECT ONE)	
TEST CONDITIION LETTER A.	6226
*LEVEL (SELECT oNE)	
20 G'S.	4863
50 G'S.	4864
100 G'S.	4865
TEST CONDITION LETTER B.	6233
*LEVEL (SELECT ONE)	
10,000 G'S.	4868
20,000 G'S,	4892
DIRECTION (SELECT ONE)	
ONE DIRECTION.	1557
BOTH DIRECTIONS.	1558
TEST CONDITION LETTER Co	6239
*LEVEL (G'S.)	4893

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6250	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6250.
6251	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 212 OF MIL-STD-202.
6226	TEST CONDITION LETTER A SHALL APPLY.
4863	THE TEST LEVEL SHALL BE 20 G'S.
4864	THE TEST LEVEL SHALL BE 50 G'S.
4865	THE TEST LEVEL SHALL BE 1OO G'S.
6233	TEST CONDITION LETTER B SHALL APPLY.
4868	THE TEST LEVEL SHALL BE 10,000 G'S.
4892	THE TEST LEVEL SHALL BE 20,000 G'S.
1557	THE SPECIMEN SHALL BE ACCELERATED IN ONE DIRECTION ONLY.
1558	THE SPECIMEN SHALL BE ACCELERATED IN BOTH DIRECTIONS.
6239	TEST CONDITION LETTER C SHALL APPLY.
4893	THE TEST LEVEL SHALL BE 4893 G'S.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATION (CONT)	
PER MIL-STD-202, METHOD 212. (CONT)	
MOUNTING (SELECT ONE)	
MOUNT BY ANY SUITABLE METHOD.	6263
MOUNT BY NORMAL METHOD.	6264
MOUNT PER DOCUMENT (DOC DES)	6265
PERCENT RATED LOAD APPLIED (PERCENT)	6210
MONITOR PER METHOD 310 OF MIL-STD-202	
*TEST CIRCUIT (LETTER)	1548
*TEST CONDTION (LETTER)	1549
CAPACITANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1668
AS FOLLOWS:	1662
MAXIMUM CAPACITANCE ACROSS OPEN CONTACTS (PICOFARADS)	1666
MAXIMUM CAPACITANCE FROM OPEN CONTACTS TO GROUND (PICOFARADS)	1672

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6263	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
6264	MOUNTING SHALL BE BY THE NORMAL METHOD.
6265	MOUNTING SHALL BE IN ACCORDANCE WITH 6265.
6210	THE ELECTRICAL LOAD SHALL BE 6210 PERCENT OF THE RATED LOAD.
1548	MONITORING DURING THE TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1548 SHALL APPLY.
1549	TEST CONDITION LETTER 11549 IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202 SHALL APPLY.
1668	CAPACITANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1668.
1662	CAPACITANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1666	THE CAPACITANCE ACROSS THE OPEN CONTACTS SHALL BE NOT GREATER THAN 1666 PICOFARAD(S).
1672	THE CAPACITANCE FROM THE OPEN CONTACT(S) TO GROUND SHALL BE NOT GREATER THAN 1672 PICOFARAD(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CAPACITANCE (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM CAPACITANCE BETWEEN ADJACENT CLOSED CONTACTS (PICOFARADS)	1678
MAXIMUM CAPACITANCE (PICOFARADS)	1670
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1660
PER MIL-STD-202, METHOD 305.	1682
TEST FREQUENCY (SELECT ONE)	
(HERTZ)	1663
(KILOHERTZ)	1684
(MEGAHERTZ)	1688
MAGNITUDE OF POLARIZING VOLTAGE (VOLTS, DC)	1664
PLUS VOLTAGE TOLERANCE (VOLTS, DC)	1690
MINUS VOLTAGE TOLERANCE (VOLTS, DC)	1692
MEASUREMENT ACCURACY (SELECT ONE)	
(PERCENT)	1665
(PICOFARADS)	1694

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1678	THE CAPACITANCE BETWEEN ADJACENT CLOSED CONTACTS SHALL BE NOT GREATER THAN 1678 PICOFARAD(S).
11670	CAPACITANCE SHALL BE NOT GREATER THAN 1670 PICOFARAD(S).
11660	CAPACITANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1660.
1682	CAPACITANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-202, METHOD 305.
1663	THE TEST FREQUENCY SHALL BE 1663 HERTZ.
1684	THE TEST FREQUENCY SHALL BE 1684 KILOHERTZ.
1688	THE TEST FREQUENCY SHALL BE 1688 MEGAHERTZ.
1664	THE MAGNITUDE OF THE POLARIZING VOLTAGE SHALL BE 1664 VOLTS, DC.
1690	THE PLUS VOLTAGE TOLERANCE SHALL BE 1690 VOLTS, DC.
1692	THE MINUS VOLTAGE TOLERANCE SHALL BE 1692 VOLTS, DC.
1665	THE ACCURACY OF THE MEASUREMENT SHALL BE 1665 PERCENT.
1694	THE ACCURACY OF THE MEASUREMENT SHALL BE 1694 PICOFARAD(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CAPACITANCE (CONT)	
PER MIL-STD-202, METHOD 305. (CONT)	
POINTS OF MEASUREMENT	
BETWEEN OPEN CONTACTS.	1696
BETWEEN ADJACENT CLOSED CONTACTS.	1698
OTHER ____	1708
CIRCUIT CONFIGURATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1730
THE SWITCH CIRCUIT SHALL CONFORM TO THE SPECIFIED CONFIGURATION.	1732
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1736
PER DOCUMENT (DOC DES)	1738
AS FOLLOWS:	1740
SWITCHES SHALL BE TESTED TO DETERMINE CONFORMANCE TO THE SPECIFIED CIRCUITRY USING SUITABLE TEST CIRCUITS.	1742

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	THE POINTS OF MEASUREMENT SHALL BE AS FOLLOWS:
1696	BETWEEN OPEN CONTACTS.
1698	BETWEEN ADJACENT CLOSED CONTACTS.
1708	1708.
1730	CIRCUIT CONFIGURATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1730.
1732	CIRCUIT CONFIGURATION. THE SWITCH CIRCUIT SHALL CONFORM TO THE SPECIFIED CONFIGURATION.
1736	CIRCUIT CONFIGURATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 11736.
1738	CIRCUIT CONFIGURATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1738.
11740	CIRCUIT CONFIGURATION. TESTING SHALL BE PERFORMED AS FOLLOWS:
1742	SWITCHES SHALL BE TESTED TO DETERMINE CONFORMANCE TO THE SPECIFIED CIRCUITRY USING SUITABLE TEST CIRCUITS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CIRCUIT CONFIGURATION (CONT)	
AS FOLLOWS: (CONT)	
THE TEST CIRCUIT SHALL NOT EMPLOY CURRENT LEVELS THAT CAN ADVERSELY AFFECT SWITCHING CAPABILITIES.	1744
LOAD _____	1746
COINCIDENCE OF OPERATING AND RELEASE POINTS (SIMULTANEITY)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1782
AS FOLLOWS:	1784
ALL CONTACTS TRANSFER WITHIN (MILLISECONDS)	1786
ALL CONTACTS TRANSFER WITHIN (INCH OF ACTUATOR TRAVEL)	3200
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1790
PER DOCUMENT (DOC DES)	1792

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1744	THE TEST CIRCUIT SHALL NOT EMPLOY CURRENT LEVELS THAT CAN ADVERSELY AFFECT SWITCHING CAPABILITIES.
1746	THE LOAD SHALL BE 1746.
1782	COINCIDENCE OF OPERATING AND RELEASE POINTS (SIMULTANEITY). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1782.
1784	COINCIDENCE OF OPERATING AND RELEASE POINTS (SIMULTANEITY). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1786	ALL CONTACTS SHALL TRANSFER WITHIN 1786 MILLISECOND(S).
3200	ALL CONTACTS SHALL TRANSFER WITHIN 3200 INCH OF ACTUATOR TRAVEL.
1790	COINCIDENCE OF OPERATING AND-RELEASE POINTS (SIMULTANEITY). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1790.
1792	COINCIDENCE OF OPERATING AND RELEASE POINTS (SIMULTANEITY). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1792.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
COINCIDENCE OF OPERATING AND RELEASE POINTS (SIMULTANEITY) (CONT)	
PER DOCUMENT (CONT)	
ACTUATOR OPERATION RATE	
LINEAR MOVEMENT (SELECT ONE)	
(INCHES PER SECOND)	3202
(MILLIMETERS PER SECOND)	3204
(DEGREES PER SECOND)	3206
CONTACT BOUNCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3210
AS FOLLOWS:	3212
MAXIMUM CONTACT BOUNCE (SELECT ONE)	
(MILLISECONDS)	3214
(MICROSECONDS)	3216
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3220

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

3202 THE ACTUATOR ACTUATION RATE SHALL BE 3202 INCH(S) PER SECOND.

3204 THE ACTUATOR ACTUATION RATE SHALL BE 3204 MILLIMETERS PER SECOND.

3206 THE ACTUATOR ACTUATION RATE SHALL BE 3206 DEGREES PER SECOND.

3210 CONTACT BOUNCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3210.

3212 CONTACT BOUNCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

3214 CONTACT BOUNCE SHALL BE NOT GREATER THAN 3214 MILLISECOND(S).

3216 CONTACT BOUNCE SHALL BE NOT GREATER THAN 3216 MICROSECOND(S).

3220 CONTACT BOUNCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3220.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT BOUNCE (CONT)	
TEST METHODS (CONT)	
PER MIL-S-8805.	3222
LOAD VOLTAGE (SELECT ONE)	
(VOLTS AC)	3224
(VOLTS DC)	3226
LOAD CURRENT (SELECT ONE)	
(AMPERES)	3228
(MILLIAMPERES)	3230
ACTUATOR ACTUATION RATE (INCHES PER SECOND)	3232
CONTACT RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1800
AS FOLLOWS:	1802
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	1804
(MILLIOHMS)	1704

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3222	CONTACT BOUNCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-8805.
3224	THE LOAD VOLTAGE SHALL BE 3224 VOLTS, AC.
3226	THE LOAD VOLTAGE SHALL BE 3226 VOLTS, DC.
3228	THE LOAD CURRENT SHALL BE 3228 AMPERE(S).
3230	THE LOAD CURRENT SHALL BE 3230 MILLIAMPERES.
3232	THE ACTUATOR ACTUATION RATE SHALL BE 3232 INCH(S) PER SECOND.
1800	CONTACT RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1800.
1802	CONTACT RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1804	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1804 OHM(S).
1704	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1704 MILLIOHM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT RESISTANCE (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM VOLTAGE DROP (SELECT ONE)	
(VOLTS)	1806
(MILLIVOLTS)	1808
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1810
PER MIL-STD-202, METHOD 3070	1812
TEST CURRENT (SELECT ONE)	
MAXIMUM RATED CURRENT.	1814
(AMPERES)	1816
(MILLIAMPERES)	1818
MAXIMUM OPEN-CIRCUIT TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	1820
(MILLIVOLTS, DC)	1822
(VOLTS, AC)	1824
(MILLIVOLTS, AC)	1826

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1806 THE VOLTAGE DROP SHALL BE NOT GREATER THAN 1806 VOLT(S).

1808 THE VOLTAGE DROP SHALL BE NOT GREATER THAN 1808 MILLIVOLT(S).

1810 CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1810.

1812 CONTACT RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-202, METHOD 3070

1814 THE TEST CURRENT SHALL BE THE MAXIMUM RATED CURRENT FOR THE CONTACTS.

1816 THE TEST CURRENT SHALL BE 1816 AMPERE(S).

1818 THE TEST CURRENT SHALL BE 1818 MILLIAMPERE(S).

1820 THE OPEN-CIRCUIT TEST VOLTAGE SHALL BE NOT GREATER THAN 1820 VOLTS, DC.

1822 THE OPEN-CIRCUIT TEST VOLTAGE SHALL BE NOT GREATER THAN 1822 MILLIVOLTS, DC.

1824 THE OPEN-CIRCUIT TEST VOLTAGE SHALL BE NOT GREATER THAN 1824 VOLTS, AC.

1826 THE OPEN-CIRCUIT TEST VOLTAGE SHALL BE NOT GREATER THAN 1826 MILLIVOLTS, AC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTACT RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 3070 (CONT)	
NUMBER OF ACTIVATIONS PRIOR TO MEASUREMENT (QUANTITY)	1828
NUMBER OF TEST ACTIVATIONS (QUANTITY)	1830
NUMBER OF MEASUREMENTS PER ACTIVATION (QUANTITY)	1832
MAXIMUM MEASUREMENT ERROR (PERCENT)	1834
METHOD OF CONNECTION ____	1836
CORONA AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1840
AS FOLLOWS:	1880
NO EVIDENCE OF CORONA.	1882
MINIMUM CORONA STARTING VOLTAGE (VOLTS)	1884
MINIMUM CORONA EXTINCTION VOLTAGE (VOLTS)	1881
MAXIMUM APPARENT CORONA CHARGE AT CORONA STARTING VOLTAGE (PICOCOULOMBS)	1883
MAXIMUM CORONA CHARGE (PICOCOULOMBS)	1885
*TEST VOLTAGE (VOLTS)	1887

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1828 THERE SHALL BE 1828 ACTIVATION(S) PRIOR TO MEASUREMENT.

1830 THERE SHALL BE 1830 TEST ACTIVATION(S).

1832 THERE SHALL BE 1832 MEASUREMENT(S) PER ACTIVATION.

1834 THE MEASUREMENT ERROR SHALL BE NOT GREATER THAN 1834 PERCENT.

1836 THE METHOD OF CONNECTION SHALL BE 1836.

1840 CORONA AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1840.

1880 CORONA AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

1882 THERE SHALL BE NO EVIDENCE OF CORONA.

1884 THE VOLTAGE AT WHICH CORONA IS CONTINUOUS (CORONA STARTING VOLTAGE) SHALL BE NOT LESS THAN 1884 VOLT(S).

1881 THE VOLTAGE AT WHICH CORONA DISAPPEARS COMPLETELY (CORONA EXTINCTION VOLTAGE) SHALL BE NOT LESS THAN 1881 VOLT(S).

1883 THE APPARENT CORONA CHARGE SHALL BE NOT GREATER THAN 1883 PICOCOULOMB(S) AT THE CORONA STARTING VOLTAGE.

1885 THE APPARENT CORONA CHARGE SHALL BE NOT GREATER THAN 1885
1887 PICOCOULOMB(S) AT 1887 VOLT(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CORONA AT REDUCED BAROMETRIC PRESSURE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1856
PER DOCUMENT (DOC DES)	1886
ALTITUDE PER METHOD 105, MIL-STD-202, TEST CONDITION (LETTER)	1860
TEST VOLTAGE (SELECT ONE)	
(VOLTS, AC)	1888
FREQUENCY (HERTZ)	1890
(VOLTS, DC)	1892
CORONA AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1686
AS FOLLOWS:	1842
NO EVIDENCE OF CORONA.	1844
MINIMUM CORONA STARTING VOLTAGE (VOLTS)	1846
MINIMUM CORONA EXTINCTION VOLTAGE (VOLTS)	1848
MAXIMUM APPARENT CORONA CHARGE AT CORONA STARTING VOLTAGE (PICOCOULOMBS)	1850

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1856	CORONA AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1856.
1886	CORONA AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1886.
1860	ALTITUDE SHALL BE IN ACCORDANCE WITH METHOD 105 OF MIL-STD-202, TEST CONDITION 1860.
1888	THE TEST VOLTAGE SHALL BE 11888 VOLTS, AC.
1890	THE AC VOLTAGE FREQUENCY SHALL BE 11890 HERTZ.
1892	THE TEST VOLTAGE SHALL BE 1892 VOLTS, DC.
1686	CORONA AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1686.
1842	CORONA AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1844	THERE SHALL BE NO EVIDENCE OF CORONA.
1846	THE VOLTAGE AT WHICH CORONA IS CONTINUOUS (CORONA STARTING VOLTAGE) SHALL BE NOT LESS THAN 1846 VOLT(S).
1848	THE VOLTAGE AT WHICH CORONA DISAPPEARS COMPLETELY (CORONA EXTINCTION VOLTAGE) SHALL BE NOT LESS THAN 1848 VOLT(S).
1850	THE APPARENT CORONA CHARGE SHALL BE NOT GREATER THAN 1850 PICOCOULOMB(S) AT THE CORONA STARTING VOLTAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CORONA AT SEA LEVEL (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM CORONA CHARGE (PICOCOULOMBS)	1852
*TEST VOLTAGE (VOLTS)	1854
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1683
PER DOCUMENT (DOC DES)	1858
TEST VOLTAGE (SELECT ONE)	
(VOLTS, AC)	1862
FREQUENCY (HERTZ)	1864
(VOLTS, DC)	1866
PER ASTMD1868.	1868
MINIMUM EQUIPMENT SENSITIVITY (PICOCOULOMBS)	1870
TEST VOLTAGE (SELECT ONE)	
(VOLTS, AC)	1874
(PERCENT OF RATED)	1876
(VOLTS, DC)	1872

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1852 1854	THE APPARENT CORONA CHARGE SHALL BE NOT GREATER THAN 1852 PICOCOULOMB(S) AT 1854 VOLT(S).
1683	CORONA AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1683.
1858	CORONA AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1858.
1862	THE TEST VOLTAGE SHALL BE 1862 VOLTS, AC.
1864	THE AC VOLTAGE FREQUENCY SHALL BE 1864 HERTZ.
1866	THE TEST VOLTAGE SHALL BE 11866 VOLTS, DC.
1868	CORONA AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ASTMD1868.
1870	THE EQUIPMENT SHALL HAVE A SENSITIVITY CAPABLE OF DETECTING A PULSE LEVEL OF 1870 PICOCOULOMB(S) OR LARGER.
1874	THE TEST VOLTAGE SHALL BE 1874 VOLTS, AC.
1876	THE TEST VOLTAGE SHALL BE 1876 PERCENT OF RATED VOLTAGE.
1872	THE TEST VOLTAGE SHALL BE 1872 VOLTS, DC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CORONA AT SEA LEVEL (CONT)	
PER ASTMD1868. (CONT)	
TEST VOLTAGE FREQUENCY (HERTZ)	1877
SUPERIMPOSED TEST VOLTAGE (VOLTS RMS)	1878
*VOLTAGE (VOLTS, DC)	1879
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4908
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION Breakdown	4906
MAXIMUM LEAKAGE (MILLIAMPERES)	4894
REMAIN WITHIN SPECIFIED TOLERANCE.	4901
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4884
PER MIL-STD-2029 METHOD 301.	6300

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1877 THE FREQUENCY OF THE AC VOLTAGE SHALL BE 1877 HERTZ.

1878 THE TEST VOLTAGE SHALL BE 1878 VOLTS RMS SUPERIMPOSED ON
1879 A DC VOLTAGE OF 1879 VOLTS.

4908 DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908.

4906 DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.

4894 THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4894 MILLIAMPERE(S).

49011 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

4884 DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884.

6300 DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
*ALTITuDE PER METHOD 105 OF MIL-STB-202	
*TEST CONDITION (LETTER)	4886
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4885
(VOLTS, AC)	4849
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	6311
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	6312
BETWEEN MUTUALLY INSULATED PARTS.	6292
BETWEEN ALL INSULATED PARTS AND GROUND.	6293
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	6294
OTHER ____	3240
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4859

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4886	ALTITUDE SHALL BE IN ACCORDANCE WITH TEST CONDITION LETTER 4886 OF METHOD 105 OF MIL-STD-202.
4885	TEST VOLTAGE SHALL BE 4885 VOLTS, DC.
4849	TEST VOLTAGE SHALL BE 4849 VOLTS, AC.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
6311	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
6312	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
6292	BETWEEN MUTUALLY INSULATED PARTS.
6293	BETWEEN ALL INSULATED PARTS AND GROUND.
6294	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
3240	3240.
4859	SPECIAL PREPARATION SHALL BE IN ACCORDANCE WITH 4859.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE (CONT)	
PER MIL-STD-202, METHOD 301. (CONT)	
DURATION OF VOLTAGE APPLICATION (SECONDS)	4891
MOU TING PER DOCUMENT (DOC DES)	6280
REGULATION OF TEST VOLTAGE (PERCENT)	6308
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4900
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4902
(MILLIAMPERES)	6310
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4874
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4856

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4891 DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4891 SECOND(S).

6280 MOUNTING SHALL BE IN ACCORDANCE WITH 6280.

6308 REGULATION OF THE TEST VOLTAGE SHALL BE WITHIN 6308 PERCENT.

4900 THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4900 KILOVOLTAMPERE (S).

4902 THE SURGE CURRENT SHALL BE NOT GREATER THAN 4902 AMPERE(S).

6310 THE SURGE CURRENT SHALL BE NOT GREATER THAN 6310 MILLIAMPERE(S).

4874 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.

4856 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE" NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWNO

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN. (CONT)	
MAXIMUM LEAKAGE (MILLIAMPERES)	4875
REMAIN WITHIN SPECIFIED TOLERANCE.	4847
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4861
PER MIL-STD-202, METHOD 301.	4862
*TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4854
(VOLTS, AC)	4855
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	4842
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	4848
BETWEEN MUTUALLY INSULATED PARTS.	4844

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4875 THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4875 MILLIAMPERE(S).

4847 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

4861 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.

4862 DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.

4854 TEST VOLTAGE SHALL BE 4854 VOLTS, DC.

4855 TEST VOLTAGE SHALL BE 4855 VOLTS, AC.

POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:

4842 BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.

4848 BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.

4844 BETWEEN MUTUALLY INSULATED PARTS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL (CONT)	
POINTS OF VOLTAGE APPLICATION: (CONT)	
BETWEEN ALL INSULATED PARTS AND GROUND.	4845
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	4846
OTHER _____	3242
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4850
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867
MOUNTING PER DOCUMENT (DOC DES)	5000
REGULATION OF TEST VOLTAGE (PERCENT)	4869
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4870
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4717
(MILLIAMPERES)	4897
METHOD OF VOLTAGE CONNECTION PER DOCUMENT (DOC DES)	6267

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4845 BETWEEN ALL INSULATED PARTS AND GROUND.

4846 BETWEEN CURRENT CARRYING PARTS AND THE CASE.

3242 3242,

4850 SPECIAL PREPARATION OR CONDITIONS SHALL BE IN ACCORDANCE WITH 4850.

4867 DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).

5000 MOUNTING SHALL BE IN ACCORDANCE WITH 50000

4869 REGULATION OF TEST VOLTAGE SHALL BE WITHIN 4869 PERCENT.

4870 THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4870 KILOVOLTAMPERE (S).

4717 THE SURGE CURRENT SHALL BE NOT GREATER THAN 4717 AMPERE(S).

4897 THE SURGE CURRENT SHALL BE NOT GREATER THAN 4897 Milliampere

6267 METHOD OF CONNECTION OF TEST VOLTAGE SHALL BE IN ACCORDANCE WITH 6267.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ELECTROMAGNETIC INTERFERENCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3810
PER MIL-STD-461 LIMITS.	3812
NO ELECTRICAL OR MECHANICAL MALFUNCTION-	3814
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3820
PER MIL-STD-461, APPENDIX METHOD (DESIGNATION)	3822
PER MIL-STD-462, TEST METHODS	3824
CE (NUMBER)	3826
RE (NUMBER)	3828
CS (NUMBER)	3830
RS (NUMBER)	3332
CRE (NUMBER)	3834

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3810	ELECTROMAGNETIC INTERFERENCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT ~~3810.~~
3812	ELECTROMAGNETIC INTERFERENCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE LIMITS PER MIL-STD-461.
3814	THERE SHALL BE NO ELECTRICAL OR MECHANICAL MALFUNCTION.
3820	ELECTROMAGNETIC INTERFERENCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT ~~38200~~
3822	ELECTROMAGNETIC INTERFERENCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE MIL-STD-461 APPENDIX. METHOD 3822 SHALL APPLY.
3824	ELECTROMAGNETIC INTERFERENCE- TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-462. THE FOLLOWING METHOD(S) SHALL APPLY:
3826	METHOD CE 3826.
3828	METHOD RE 38280
3830	METHOD CS 3830.
3832	METHOD RS 3832.
3834	METHOD CRE 3834.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE, ELECTRICAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1900
AS FOLLOWS:	1902
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(MILLIOHMS)	1906
(OHMS)	1904
REMAIN ELECTRICALLY AND MECHANICALLY OPERATIVE	3244
NO EVIDENCE OF MALFUNCTION.	1910
REMAIN WITHIN SPECIFIED Tolerances	1908
MAXIMUM TEMPERATURE RISE (DEGREES CELSIUS)	3246
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1912
PER DOCUMENT (DOC DES)	1914

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1900	ENDURANCE, ELECTRICAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 19000
1902	ENDURANCE, ELECTRICAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1906	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1906 MILLIOHM(S).
1904	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1904 OHM(S).
3244	THE ITEM(S) SHALL REMAIN ELECTRICALLY AND MECHANICALLY OPERATIVE.
1910	THERE SHALL BE NO EVIDENCE OF MALFUNCTION.
1908	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED Tolerance
3246	THE TEMPERATURE RISE SHALL BE NOT GREATER THAN 3246 DEGREES CELSIUS.
1912	ENDURANCE? ELECTRICAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1912.
1914	ENDURANCE? ELECTRICAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1914.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE, ELECTRICAL (CONT)	
PER DOCUMENT (CONT)	
OPERATIONAL CYCLES (QUANTITY)	1916
APPLIED VOLTAGE (SELECT ONE)	
(VOLTS, AC)	1918
(VOLTS, DC)	1920
LOAD (PERCENT OF RATED LOAD)	1922
LOAD (TYPE)	1924
TEST CYCLE RATE (CYCLES PER MINUTE)	1926
ENDURANCE, MECHANICAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3600
AS FOLLOWS:	3602
REMAIN WITHIN SPECIFIED TOLERANCES*	3604
NO EVIDENCE OF MALFUNCTION,	3606
NO EVIDENCE OF DAMAGE.	3608
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	3250
(MILLIOHMS)	3252

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1916	THERE SHALL BE 1916 OPERATING CYCLES.
1918	THE APPLIED VOLTAGE SHALL BE 1918 VOLTS, AC.
1920	THE APPLIED VOLTAGE SHALL BE 1920 VOLTS, DC.
1922	THE LOAD SHALL BE 1922 PERCENT OF THE RATED LOAD.
1924	THE LOAD TYPE SHALL BE 1924.
1926	THE TEST CYCLE RATE SHALL BE 1926 CYCLES PER MINUTE.
3600	ENDURANCE, MECHANICAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3600.
3602	ENDURANCE? Mechanical THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3604	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S)*
3606	THERE SHALL BE NO EVIDENCE OF MALFUNCTION.
3608	THERE SHALL BE NO EVIDENCE OF DAMAGE.
3250	CONTACT RESISTANCE SHALL BE NOT GREATER THAN 3250 OHM(S).
3252	CONTACT RESISTANCE SHALL BE NOT GREATER THAN 3252 MILLIOHM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ENDURANCE, MECHANICAL (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3610
PER DOCUMENT (DOC DES)	3612
OPERATING CYCLES (QUANTITY)	3614
TEST CYCLE RATE (CYCLES PER MINUTE)	3616
TEST TEMPERATURE (DEGREES CELSIUS)	3254
CONTACT MONITORING ____	3256
EXPLOSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1680
AS FOLLOWS:	1928
REMAIN ELECTRICALLY AND MECHANICALLY OPERATIVE.	1930
NO EXPLOSION WITHIN SWITCH OR CHAMBER.	1932
NO EXPLOSION IN CHAMBER WHETHER OR NOT EXPLOSION OCCURS IN SWITCH.	1934

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
EXPLOSION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1674
PER MIL-STD-202, METHOD 109.	1936
LOAD (PERCENT OF RATED LOAD)	1938
LOAD (TYPE)	1940
CHAMBER TEMPERATURE (DEGREES CELSIUS)	1676
PLUS TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1942
MINUS TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1944
TEST VOLTAGE (SELECT ONE)	
(VOLTS AC)	1946
FREQUENCY (HERTZ)	1948
(VOLTS DC)	1950
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4760

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3610	ENDURANCE, MECHANICAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3610.
3612	ENDURANCE, Mechanical TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3612.
3614	THERE SHALL BE 3614 OPERATING CYCLES.
3616	THE TEST CYCLE RATE SHALL BE 3616 CYCLES PER MINUTE,
3254	THE TEST TEMPERATURE SHALL BE 3254 DEGREES CELSIUS.
3256	CONTACT MONITORING SHALL BE 3256.
1680	Explosion THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1680.
1928	Explosion THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1930	SWITCHES SHALL BE ELECTRICALLY AND MECHANICALLY OPERATIVE AFTER TEST.
1932	THERE SHALL BE NO EXPLOSION WITHIN THE SWITCH OR CHAMBER.
1934	THERE SHALL BE NO EXPLOSION IN THE CHAMBER WHETHER OR NOT EXPLOSION OCCURS IN THE SWITCH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FUNGUS (CONT)	
REQUIREMENTS (CONT)	
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761
NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED.	4762
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4754
PER MIL-STD-810, METHOD 508.	4755
TEST PERIOD (DAYS)	4756
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _	4798
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	4799

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1674	EXPLOSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1674.
1936	Explosion TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-202, METHOD 109.
1938	THE LOAD SHALL BE 1938 PERCENT OF THE RATED LOAD.
1940	THE LOAD TYPE SHALL BE 1940.
1676	THE CHAMBER TEMPERATURE SHALL BE 1676 DEGREES CELSIUS.
1942	THE PLUS TEMPERATURE TOLERANCE SHALL BE 1942 DEGREES CELSIUS.
1944	THE MINUS TEMPERATURE TOLERANCE SHALL BE 1944 DEGREES CELSIUS.
1946	THE TEST VOLTAGE SHALL BE 1946 VOLTS AC.
1948	THE AC VOLTAGE FREQUENCY SHALL BE 1948 HERTZ.
1950	THE TEST VOLTAGE SHALL BE 1950 VOLTS DC.
4760	FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4761	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED, THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4762	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4754	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.
4755	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.
4756	TEST PERIOD SHALL BE 4756 DAY(S).
4798	HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.
4799	HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE. (CONT)	
NO DEGRADATION OF Performance	4815
REMAIN WITHIN SPECIFIED TOLERANCE.	4791
NO EVIDENCE OF ARCINGS FLASHOVERS OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1477
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	4795
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	4805
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	4813
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	4803
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4788
PER MIL-STD-202, METHOD 103.	4853

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4815	THERE SHALL BE NO DEGRADATION OF PERFORMANCE*
4791	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1477	THERE SHALL BE NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DIELECTRIC WITHSTANDING VOLTAGE IS PERFORMED.
4795	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4795 MEGOHM(S) AT HIGH HUMIDITY.
4805	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4805 MEGOHM(S) AFTER DRYING.
4813	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4813 MILLIAMPERE(S) AT HIGH HUMIDITY.
4803	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4803 MILLLIAMPERE(S) AFTER DRYING.
4788	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.
4853	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 103 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
PER MIL-STD-202, METHOD 103. (CONT)	
*TEST CONDITION (LETTER)	4890
POLARIZING VOLTAGE (VOLTS, DC)	4793
DURATION OF POLARIZING VOLTAGE APPLICATION (HOURS)	4790
POINTS OF APPLICATION OF POLARIZING VOLTAGE:	
BETWEEN MUTUALLY INSULATED PARTS.	4969
BETWEEN ALL INSULATED PARTS AND GROUND.	4970
BETWEEN CURRENT CARRYING PARTS AND CASE.	4971
BETWEEN CURRENT CARRYING PARTS AND GROUND.	6202
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	6207
PER FORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	6206
I C I N G	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3260
AS FOLLOWS:	3262

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4890 TEST CONDITION LETTER 4890 SHALL APPLY.

4793 MAGNITUDE OF THE POLARIZING VOLTAGE SHALL BE 4793 VOLTS, DC.

4790 DURATION OF APPLICATION OF VOLTAGE SHALL BE 4790 HOUR(S).

POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:

4969 BETWEEN MUTUALLY INSULATED PARTS.

4970 BETWEEN ALL INSULATED PARTS AND GROUND.

4971 BETWEEN CURRENT CARRYING PARTS AND THE CASE.

6202 BETWEEN CURRENT CARRYING PARTS AND GROUND.

6207 DIELECTRIC WITHSTANDING VOLTAGE TEST SHALL BE PERFORMED AT HIGH HUMIDITY.

6206 DIELECTRIC WITHSTANDING VOLTAGE TEST SHALL BE PERFORMED AFTER DRYING.

3260 ICING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3260.

3262 ICING. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ICING (CONT)	
AS FOLLOWS: (CONT)	
REMAIN MECHANICALLY AND ELECTRICALLY OPERATIVE.	3264
MAXIMUM DURATION BETWEEN RELEASE OF ACTUATOR AND OPENING OF NORMALLY OPEN CONTACTS (SECONDS)	3266
MAXIMUM DURATION BETWEEN RELEASE OF ACTUATOR AND CLOSING OF NORMALLY CLOSED CONTACTS (SECONDS)	3268
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3270
PER MIL-S-8805.	3272
NUMBER OF OPERATION CYCLES (QUANTITY)	3274
IMMERSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4819
NO EVIDENCE OF PHYSICAL DAMAGE.	4820

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3264	THE ITEM(S) SHALL REMAIN ELECTRICALLY AND MECHANICALLY OPERATIVE.
3266	THE DURATION BETWEEN RELEASE OF ACTUATOR AND OPENING OF NORMALLY OPEN CONTACTS SHALL BE NOT GREATER THAN 3266 SECOND(S).
3268	THE DURATION BETWEEN RELEASE OF ACTUATOR AND CLOSING OF NORMALLY CLOSED CONTACTS SHALL BE NOT GREATER THAN 3268 S e c o n d
3270	ICINGo TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3270.
3272	ICING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-8805.
3274	THERE SHALL BE 3274 CYCLE(S) OF OPERATION.
4819	IMMERSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT. EXCEPT 4819.
4820	IMMERSION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMMERSION (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
REMAIN WITHIN SPECIFIED TOLERANCE.	4822
MINIMUM INSULATION RESISTANCE (MEGOHMS)	4825
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4809
PER MIL-STD-202, METHOD 104.	4810
*TEST CONDITION (LETTER)	4811
MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4812
TIME BEFORE MEASUREMENTS AFTER FINAL CYCLE (HOURS)	4814
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1380
AS FOLLOWS:	6359

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4822	ITEM(S) SHALL REMAIN WITHIN SPECIFIED Tolerance
4825	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 4825 MEGOHM(S).
4809	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4809.
4810	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 104 OF MIL-STD-202.
4811	TEST CONDITION LETTER 4811 SHALL APPLY.
4812	FINAL MEASUREMENT(S) SHALL BE MADE WITHIN 4812 HOUR(S) AFTER FINAL CYCLE.
4814	MEASUREMENTS SHALL BE NOT MADE UNTIL 4814 HOUR(S) AFTER THE FINAL CYCLE.
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.
6359	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS: .

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
AS FOLLOWS: (CONT)	
*MINIMUM INSUJLATION RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387
REMAIN WITHIN SPECIFIED TOLERANCE.	1388
NO EVIDENCE OF PHYSICAL DAMAGE.	1407
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	**1371**
PER MIL-STD-202, METHOD 3020	**1511**
*CONDITION (SELECT ONE)	
TEST CONDITION (LETTER)	1378
TEST VOLTAGE (VOLTS, DC)	1373
ELECTRIFICATION TIME (SECONDS)	1376

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1386 INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 11386 MEGOHM(S).

1384 INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHM(S) AT THE FIRST TEST Temperature

1387 INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHM(S) AT THE SECOND TEST Temperature

1388 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

1407 THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

1371 INSULATION RESISTANCE* TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.

1511 INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 302 OF MIL-STD-202.

1378 TEST CONDITION LETTER 1378 SHALL APPLY.

1373 TEST POTENTIAL SHALL BE 1373 VOLTS, DC.

1376 ELECTRIFICATION DURATION SHALL BE 1376 Seconds

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INSULATION RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 3020 (CONT)	
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	1377
POINTS OF MEASUREMENT:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	1497
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	1498
BETWEEN MUTUALLY INSULATED PARTS.	1522
BETWEEN INSULATED PARTS AND GROUND.	1523
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	1524
SPECIAL PREPARATIONS OR CONDITIONS PER DOCUMENT (DOC DES)	1520
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	1372
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	1381
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1383

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1377	THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.
	POINTS OF MEASUREMENT SHALL BE AS FOLLOWS:
1497	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
1498	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
1522	BETWEEN MUTUALLY INSULATED PARTS.
1523	BETWEEN ALL INSULATED PARTS AND GROUND.
1524	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
1520	SPECIAL PREPARATIONS OR CONDITIONS SHALL BE IN ACCORDANCE WITH 1520.
1372	FIRST TEST TEMPERATURE SHALL BE 1372 DEGREES CELSIUS.
1381	SECOND TEST TEMPERATURE SHALL BE 1381 DEGREES CELSIUS.
1383	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1383 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INTERMEDIATE CURRENT SWITCHING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1952
AS FOLLOWS:	1954
REMAIN WITHIN SPECIFIED TOLERANCES.	1956
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	1958
(MILLIOHMS)	1960
MAXIMUM CONTACT VOLTAGE DROP (SELECT ONE)	
(VOLTS)	1962
(MILLIVOLTS)	1964
OPEN OR CLOSE IN PROPER SEQUENCE.	3280
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1966
PER MIL-STD-202, METHOD 312.	1968

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1952	INTERMEDIATE CURRENT SWITCHING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT ~~1952.~~
1954	INTERMEDIATE CURRENT Switching THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1956	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S). ---.
1958	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN ~~&958~~ OHM(S).
1960	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN ~~1960~~ MILLIOHM(S).
1962	THE VOLTAGE DROP ACROSS CLOSED CONTACTS SHALL BE NOT GREATER THAN 11962 VOLT(S).
1964	THE VOLTAGE DROP ACROSS CLOSED CONTACTS SHALL BE NOT GREATER THAN 1964 MILLIVOLT(S).
3280	THE ITEM(S) SHALL OPEN OR CLOSE IN PROPER SEQUENCE.
1966	INTERMEDIATE CURRENT SWITCHING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1966.
1968	INTERMEDIATE CURRENT SWITCHING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 312 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INTERMEDIATE CURRENT SWITCHING (CONT)	
PER MIL-STD-202, METHOD 312. (CONT)	
MINIMUM VOLTAGE ACROSS OPEN CONTACT (SELECT ONE)	
PERCENT OF APPLIED LOAD VOLTAGE' (PERCENT)	1970
(VOLTS, AC)	1972
(VOLTS, DC)	1974
NUMBER OF OPERATIONS (QUANTITY)	1976
CYCLING RATE (CYCLES PER MINUTE)	1978
PLUS CYCLING RATE TOLERANCE (CYCLES PER MINUTE)	1980
MINUS CYCLING RATE TOLERANCE (CYCLES PER MINUTE)	1982
CYCLE "ON" AND "OFF" DURATION	
"ON" (PERCENT OF CYCLE)	1984
"OFF" (PERCENT OF CYCLE)	1986
MONITORING OF CONTACTS FOR STICKING IS NOT APPLICABLE	1988

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1970	THE VOLTAGE ACROSS THE OPEN CONTACTS SHALL BE NOT LESS THAN 1970 PERCENT OF THE APPLIED LOAD VOLTAGE.
1972	THE VOLTAGE ACROSS THE OPEN CONTACTS SHALL BE NOT LESS THAN 1972 VOLTS, AC.
1974	THE VOLTAGE ACROSS THE OPEN CONTACTS SHALL BE NOT LESS THAN 1974 VOLTS, DC.
1976	THERE SHALL BE 1976 OPERATIONS.
1978	THE CYCLING RATE SHALL BE 1978 CYCLE(S) PER MINUTE.
1980	THE PLUS CYCLING RATE TOLERANCE SHALL BE 1980 CYCLE(S) PER MINUTE.
1982	THE MINUS CYCLING RATE TOLERANCE SHALL BE 1982 CYCLE(S) PER MINUTE.
	THE CYCLE 'ON' AND 'OFF' DURATION(S) SHALL BE AS FOLLOWS:
1984	'ON' 1984 PERCENT OF THE CYCLE.
1986	'OFF' 1986 PERCENT OF THE CYCLE.
1988	MONITORING OF CONTACTS FOR STICKING IS NOT APPLICABLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INTERMEDIATE CURRENT SWITCHING (CONT)	
PER MIL-STD-202, METHOD 312. (CONT)	
FINAL HALF OF CYCLES ARE TO BE TESTED AT ROOM TEMPERATURE.	1990
MAXIMUM AMBIENT TEMPERATURE (DEGREES CELSIUS)	1992
LIFE, LOW LEVEL SWITCHING AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2180
AS FOLLOWS:	2182
"MISSES ALLOWED (QUANTITY)	2184
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	2186
(MILLIOHMS)	2188
MAXIMUM VOLTAGE DROP (SELECT ONE)	
(VOLTS)	2190
(MILLIVOLTS)	2192
REMAIN WITHIN SPECIFIED TOLERANCES.	2194

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1990	THE FINAL HALF OF THE CYCLES SHALL BE TESTED AT ROOM TEMPERATURE.
1992	THE AMBIENT TEMPERATURE SHALL BE NOT GREATER THAN 11992 DEGREES CELSIUS.
2180	LIFE, LOW LEVEL SWITCHING AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2180.
2182	LIFE, LOW LEVEL SWITCHING AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2184	THERE SHALL BE 2184 'MISS(S)' ALLOWED.
2186	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2186 OHM(S).
2188	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2188 MILLIOHM(S).
2190	THE CLOSED CONTACTS VOLTAGE DROP SHALL BE NOT GREATER THAN 2190 VOLT(S).
2192	THE CLOSED CONTACTS VOLTAGE DROP SHALL BE NOT GREATER THAN 2192 MILLIVOLT(S).
2194	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LIFE, LOW LEVEL SWITCHING AT REDUCED BAROMETRIC PRESSURE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2200
PER MIL-STD-202, METHOD 311.	2202
*ALTITUDE PER METHOD 105 ,MIL-STD-202, TEST CONDITION (LETTER)	2204
MAXIMUM LOAD CURRENT (SELECT ONE)	
(MILLIAMPERES)	2208
(AMPERES)	2206
MAXIMUM LOAD VOLTAGE (SELECT ONE)	
(VOLTS, DC)	2210
(MILLIVOLTS, DC)	2212
(VOLTS, AC)	2214
(MILLIVOLTS, AC)	2216
CONTACTS SHALL BE MONITORED FOR STICKING.	2218

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2200	~~LIFE, LOW LEVEL SWITCHING AT REDUCED BAROMETRIC' PRESSURE.~~ TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT? EXCEPT 2200.
2202	~~LIFE~~, LOW LEVEL SWITCHING AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 311 OF MIL-STD-202.
2204	ALTITUDE SHALL BE IN ACCORDANCE WITH METHOD 105 OF MIL-STD-202, TEST CONDITION 2204.
2208	THE LOAD CURRENT SHALL BE NOT GREATER THAN 2208 MILLIAMPERE(S).
2206	THE LOAD CURRENT SHALL BE NOT GREATER THAN 2206 AMPERE(S).
2210	THE LOAD VOLTAGE SHALL BE NOT GREATER THAN 2210 VOLT(S), DC.
2212	THE LOAD VOLTAGE SHALL BE NOT GREATER THAN 2212 MILLIVOLTS, DC.
2214	THE LOAD VOLTAGE SHALL BE NOT GREATER THAN 2214 VOLT(S), AC.
2216	THE LOAD VOLTAGE SHALL BE NOT GREATER THAN 2216 MILLIVOLTS, AC.
2218	CONTACTS SHALL BE MONITORED FOR STICKING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LIFE, LOW LEVEL SWITCHING AT REDUCED BAROMETRIC PRESSURE (CONT)	
PER MIL-STD-202, METHOD 311. (CONT)	
TEST CYCLES (QUANTITY)	2220
TEST CYCLE RATE (CYCLES PER MINUTE)	2222
PLUS CYCLE RATE TOLERANCE (CYCLES PER MINUTE)	2224
MINUS RATE TOLERANCE (CYCLES PER MINUTE)	2226
TEST TEMPERATURE (DEGREES CELSIUS)	3282
LIFE, LOW LEVEL SWITCHING AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2230
AS FOLLOWS:	2232
"MISSES" ALLOWED (QUANTITY)	2234
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	2236
(MILLIOHMS)	2238

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2220 THERE SHALL BE 2220 TEST CYCLES.

2222 THE TEST CYCLE RATE SHALL BE 2222 CYCLES PER MINUTE.

2224 THE PLUS CYCLE RATE TOLERANCE SHALL BE 2224 CYCLES PER MINUTE.

2226 THE MINUS CYCLE RATE TOLERANCE SHALL BE 2226 CYCLES PER MINUTE.

3282 THE TEST TEMPERATURE SHALL BE 3282 DEGREES CELSIUS.

2230 LIFE, LOW LEVEL SWITCHING AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2230,

2232 LIFE, LOW LEVEL SWITCHING AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2234 THERE SHALL BE 2234 'MISS(S)' ALLOWED.

2236 THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2236 OHM(S).

2238 THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2238 MILLIOHM(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LIFE, LOW LEVEL SWITCHING AT SEA LEVEL (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM VOLTAGE DROP (SELECT ONE)	
(VOLTS)	2240
(MILLIVOLTS)	2242
REMAIN WITHIN SPECIFIED TOLERANCES.	2244
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2250
PER MIL-STD-202, METHOD 311.	2252
MAXIMUM LOAD CURRENT (SELECT ONE)	
(AMPERES)	2254
(MILLIAMPERES)	2256
MAXIMUM LOAD VOLTAGE (SELECT ONE)	
(VOLTS, DC)	2258
(MILLIVOLTS, DC)	2260
(VOLTS, AC)	2262
(MILLIVOLTS, AC)	2264

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2240	THE CLOSED CONTACTS VOLTAGE DROP SHALL BE NOT GREATER THAN 2240 VOLT(S).
2242	THE CLOSED CONTACTS VOLTAGE DROP SHALL BE NOT GREATER THAN 2242 MILLIVOLT(S).
2244	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).
2250	LIFE, LOW LEVEL SWITCHING AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2250.
2252	LIFE, LOW LEVEL SWITCHING AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 311 OF MIL-STD-202.
2254	THE LOAD CURRENT SHALL BE NOT GREATER THAN 2254 AMPERE(S).
2256	THE LOAD CURRENT SHALL BE NOT GREATER THAN 2256 MILLIAMPERE(S).
2258	THE LOAD VOLTAGE SHALL BE NOT GREATER THAN 2258 VOLT(S), DC.
2260	THE LOAD VOLTAGE SHALL BE NOT GREATER THAN 2260 MILLIVOLT(S)? DC.
2262	THE LOAD VOLTAGE SHALL BE NOT GREATER THAN 2262 VOLT(S) AC,
2264	THE LOAD VOLTAGE SHALL BE NOT GREATER THAN 2264 MILLIVOLT(S), AC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LIFE, LOW LEVEL SWITCHING AT SEA LEVEL (CONT)	
PER MIL-STD-202, METHOD 311. (CONT)	
CONTACTS SHALL BE MONITORED FOR STICKING.	2266
TEST CYCLES (QUANTITY)	2268
TEST CYCLE RATE (CYCLES PER MINUTE)	2270
PLUS CYCLE RATE TOLERANCE (CYCLES PER MINUTE)	2272
MINUS RATE TOLERANCE (CYCLES PER MINUTE)	2274
TEST TEMPERATURE (DEGREES CELSIUS)	3284
MOISTURE RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1400
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	1396
REMAIN WITHIN SPECIFIED TOLERANCE.	1398
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1394
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	1429

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2266	CONTACTS SHALL BE MONITORED FOR STICKING.
2268	THERE SHALL BE 2268 TEST CYCLES.
2270	THE TEST CYCLE RATE SHALL BE 2270 CYCLES PER MINUTE.
2272	THE PLUS CYCLE RATE TOLERANCE SHALL BE 2272 CYCLES PER MINUTE.
2274	THE MINUS CYCLE RATE TOLERANCE SHALL BE 2274 CYCLES PER MINUTE.
3284	THE TEST TEMPERATURE SHALL BE 3284 DEGREES CELSIUS.
1400	MOISTURE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1400.
1396	MOISTURE RESISTANCE. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
1398	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1394	THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING OR INSULATION BREAKDOWN, WHEN DIELECTRIC WITHSTANDING VOLTAGE IS APPLIED.
1429	CURRENT LEAKAGE SHALL BE NOT GREATER THAN 3429 MILLIAMPERE(S) AT HIGH HUMIDITY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE. (CONT)	
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	1404
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	1432
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	1406
MAXIMUM CONTACT RESISTANCE (MILLIOHMS)	2276
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1391
PER MIL-STD-202, METHOD 106.	1397
POLARIZING VOLTAGE (VOLTS, DC)	1395
LOAD VOLTAGE (SELECT ONE)	
(VOLTS, DC)	4981
(VOLTS, AC)	4980
PERCENT OF SAMPLE SUBJECTED TO POLARIZING VOLTAGE (PERCENT)	4991

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1404	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1404 MILLIAMPERE(S) AFTER DRYING.
1432	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1432 MEGOHM(S) AT HIGH HUMIDITY.
1406	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1406 MEGOHM(S) AFTER DRYING.
2276	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2276 MILLIOHM(S).
1391	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1391.
1397	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 106 OF MIL-STD-202.
1395	POLARIZING VOLTAGE SHALL BE 1395 VOLTS, DC.
4981	LOADING VOLTAGE SHALL BE 4981 VOLTS, DC.
4980	LOADING VOLTAGE SHALL BE 4980 VOLTS, AC.
4991	4991 PERCENT OF THE SAMPLE SHALL BE SUBJECTED TO THE POLARIZING VOLTAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
PER MIL-STD-202, METHOD 106. (CONT)	
STEP 7A NOT APPLICABLE.	4985
STEP 7B NOT APPLICABLE-	4986
MOUNT PER DOCUMENT (DOC DES)	1449
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	4983
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	4984
OPERATING CHARACTERISTICS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2320
AS FOLLOWS:	2322
ACTUATING/OPERATING FORCE	
MINIMUM (SELECT ONE)	
(NEWTONS)	2328
(OUNCES)	2332
(POUNDS)	2334

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4985	STEP 7A OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
4986	STEP 7B OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
1449	MOUNTING SHALL BE IN ACCORDANCE WITH 1449.
4983	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.
4984	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.
2320	OPERATING CHARACTERISTICS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2320.
2322	OPERATING CHARACTERISTICS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2328	THE ACTUATING/OPERATING FORCE SHALL BE NOT LESS THAN 2328 NEWTON(S).
2332	THE ACTUATING/OPERATING FORCE SHALL BE NOT LESS THAN 2332 OUNCE(S),
2334	THE ACTUATING/OPERATING FORCE SHALL BE NOT LESS THAN 2334 POUND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OPERATING CHARACTERISTICS (CONT)	
ACTUATING/OPERATING FORCE (CONT)	
MAXIMUM (SELECT ONE)	
(NEWTONS)	2336
(POUNDS)	2342
(OUNCES)	2340
MINIMUM RELEASE FORCE (SELECT ONE)	
(OUNCES)	3100
(POUNDS)	3102
(NEWTONS)	3104
MAXIMUM PRETRAVEL (SELECT ONE)	
(INCH)	3106
(MILLIMETERS)	3108
MINIMUM OVERTRAVEL (SELECT ONE)	
(INCH)	**3110**
(MILLIMETERS)	**3112**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2336	THE ACTUATING/OPERATING FORCE SHALL BE NOT GREATER THAN 2336 NEWTON(S).
2342	THE ACTUATING/OPERATING FORCE SHALL BE NOT GREATER THAN 2342 POUND(S),
2340	THE ACTUATING/OPERATING FORCE SHALL BE NOT GREATER THAN 2340 OUNCE(S).
3100	THE RELEASE FORCE SHALL BE NOT LESS THAN 3100 OUNCE(S).
3102	THE RELEASE FORCE SHALL BE NOT LESS THAN 3102 POUND(S).
3104	THE RELEASE FORCE SHALL BE NOT LESS THAN 3104 NEWTON(S).
3106	PRETRAVEL SHALL BE NOT GREATER THAN 3106 INCH.
3108	PRETRAVEL SHALL BE NOT GREATER THAN 3108 MILLIMETER(S)-
3110	OVERTRAVEL SHALL BE NOT LESS THAN 3110 INCH.
3112	OVERTRAVEL SHALL BE NOT LESS THAN 3112 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OPERATING CHARACTERISTICS -(CONT)	
AS FOLLOWS: (CONT)	
MOVEMENT DIFFERENTIAL	
MAXIMUM (SELECT ONE)	
(INCH)	3114
(MILLIMETERS)	3116
MINIMUM (SELECT ONE)	
(INCH)	3118
(MILLIMETERS)	3120
PLUNGER TRAVEL (SELECT ONE)	
(INCH)	3122
(MILLIMETERS)	3124
FULL OVERTRAVEL FORCE (SELECT ONE)	
(POUNDS)	3126
(NEWTONS)	3128
OPERATING POSITION (SELECT ONE)	
(INCHES)	3130
(MILLIMETERS)	3132

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3114	MOVEMENT DIFFERENTIAL SHALL BE NOT GREATER THAN 3114 INCH.
3116	MOVEMENT DIFFERENTIAL SHALL BE NOT GREATER THAN 3116 MILLIMETER(S),
3118	MOVEMENT DIFFERENTIAL SHALL BE NOT LESS THAN 3118 INCH,
3120	MOVEMENT DIFFERENTIAL SHALL BE NOT LESS THAN 3120 MILLIMETER(S).
3122	PLUNGER TRAVEL SHALL BE 3122 INCH.
3124	PLUNGER TRAVEL SHALL BE 3124 MILLIMETER(S).
3126	FULL OVERTRAVEL FORCE SHALL BE 3126 POUND(S).
3128	FULL OVERTRAVEL FORCE SHALL BE 3128 NEWTON(S).
3130	THE OPERATING POSITION SHALL BE 3130 INCH(S).
3132	THE OPERATING POSITION SHALL BE 3132 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OPERATING CHARACTERISTICS (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2344
PER DOCUMENT (DOC DES)	2346
LOW TEMPERATURE TEST TEMPERATURE (DEGREES CELSIUS)	2348
LOW TEMPERATURE TEST DURATION (HOURS)	2350
ROOM TEMPERATURE TEST TEMPERATURE (DEGREES CELSIUS)	2352
OVERLOAD	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2280
AS FOLLOWS:	2282
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	2284
(MILLIOHMS)	2286

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2344	OPERATING Characteristics TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2344.
2346	OPERATING Characteristics TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 23460
2348	THE LOW TEMPERATURE TEST TEMPERATURE SHALL BE 2348 DEGREES CELSIUS.
2350	THE LOW TEMPERATURE TEST DURATION SHALL BE 2350 HOUR(S).
2352	THE ROOM TEMPERATURE TEST TEMPERATURE SHALL BE 2352 DEGREES CELSIUS.
2280	OVERLOAD. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2280-
2282	OVERLOAD. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2284	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2284 OHM(S).
2286	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2286 MILLIOHM(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OVERLOAD (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM VOLTAGE DROP ACROSS CLOSED CONTACTS (SELECT ONE)	
(VOLTS)	2288
(MILLIVOLTS)	2290
PERCENT OF APPLIED LOAD VOLTAGE (PERCENT)	2292
MINIMUM VOLTAGE ACROSS OPEN CONTACTS	
(PERCENT OF APPLIED LOAD VOLTAGE)	2294
REMAIN MECHANICALLY AND ELECTRICALLY OPERATIVE.	2296
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2300
PER DOCUMENT (DOC DES)	2302
NUMBER OF OPERATIONS (QUANTITY)	2304

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2288	THE VOLTAGE DROP ACROSS CLOSED CONTACTS SHALL BE NOT GREATER THAN 2288 VOLT(S).
2290	THE VOLTAGE DROP ACROSS CLOSED CONTACTS SHALL BE NOT GREATER THAN 2290 MILLIVOLT(S),
2292	THE VOLTAGE DROP ACROSS CLOSED CONTACTS SHALL BE NOT GREATER THAN 2292 PERCENT OF THE APPLIED LOAD VOLTAGE.
2294	THE VOLTAGE ACROSS THE OPEN CONTACTS SHALL BE NOT LESS THAN 2294 PERCENT OF THE APPLIED LOAD VOLTAGE.
2296	THE ITEM(S) SHALL REMAIN MECHANICALLY AND ELECTRICALLY OPERATIVE.
2300	OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2300.
2302	OVERLOAD. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2302.
2304	THERE SHALL BE 2304 OPERATIONS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OVERLOAD (CONT)	
PER DOCUMENT (CONT)	
OVERLOAD CURRENT (SELECT ONE)	
(AMPERES)	2306
(PERCENT OF RATED LOAD)	2308
CYCLING RATE (CYCLES PER MINUTE)	2310
PLUS CYCLING RATE TOLERANCE (CYCLES PER MINUTE)	2312
MINUS CYCLING RATE TOLERANCE (CYCLES PER MINUTE)	2314
DUTY CYCLE	
ON (PERCENT)	2316
OFF (PERCENT)	2318
RESISTANCE TO SOLDERING HEAT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4700
NO EVIDENCE OF PHYSICAL DAMAGE.	4701

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2306 THE OVERLOAD CURRENT SHALL BE 2306 AMPERE(S).

2308 THE OVERLOAD CURRENT SHALL BE 2308 PERCENT OF THE RATED LOAD.

2310 THE CYCLING RATE SHALL BE 2310 CYCLES PER MINUTE.

2312 THE PLUS CYCLING RATE TOLERANCE SHALL BE 2312 CYCLES PER MINUTE.

2314 THE MINUS CYCLING RATE TOLERANCE SHALL BE 2314 CYCLES PER MINUTE.

THE DUTY CYCLE SHALL BE AS FOLLOWS:

2316 'ON' 2316 PERCENT OF CYCLE.

2318 'OFF' 2318 PERCENT OF CYCLE.

4700 RESISTANCE TO SOLDERING HEAT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 47000

4701 RESISTANCE TO SOLDERING HEAT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLDERING HEAT (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	3140
(MILLIOHMS)	3142
REMAIN WITHIN SPECIFIED TOLERANCE.	4718
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4689
PER MIL-STD-202, METHOD 210.	4698
*TEST CONDITION (LETTER)	4691
NUMBER OF TERMINATIONS TESTED (QUANTITY)	4694
DEPTH OF IMMERSION IN SOLDER (SELECT ONE)	
(INCHES)	4692
(MILLIMETERS)	4669
IMMERSION IN FLUX PERMITTED.	4671
SPECIAL PREPARATIONS PERMITTED.	4989
COOLING TIME (MINUTES)	4695
IMMERSION DURATION (SELECT ONE)	
(SECONDS)	3144
(MINUTES)	3146

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

3140 CONTACT RESISTANCE SHALL BE NOT GREATER THAN 3140 OHM(S).

3142 CONTACT RESISTANCE SHALL BE NOT GREATER THAN 3142 MILLIOHM(S).

4718 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

4689 RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 46890

4698 RESISTANCE TO SOLDERING HEAT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 210 OF MIL-STD-202.

4691 TEST CONDITON LETTER 46911 SHALL APPLY.

4694 4694 TERMINATION(S) PER UNIT SHALL BE TESTED.

4692 DEPTH OF IMMERSION IN SOLDER SHALL "BE 4692 INCH(S).

4669 DEPTH OF IMMERSION IN SOLDER SHALL BE 4669 Millimeter

4671 IMMERSION OF TERMINATIONS IN FLUX SHALL BE Permitted

4989 SPECIAL PREPARATION SHALL BE PERMITTED.

4695 COOLING TIME SHALL BE 4695 MINUTES PRIOR TO FINAL EXAMINATION AND MEASUREMENTS.

3144 THE IMMERSION DURATION SHALL BE 3144 SECONDS.

31146 THE IMMERSION DURATION SHALL BE 3146 MINUTE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RESISTANCE TO SOLVENTS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4834
NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.	4830
MARKING SHALL REMAIN LEGIBLE.	4836
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4829
PER MIL-STD-202, METHOD 215.	4839
SOLVENTS TO BE ADDED (NAME)	4838
SOLVENTS TO BE DELETED (SUBPARAGRAPH LETTER)	4835
BRUSH (SELECT ONE)	
BRUSH MARKING AREA.	4831
ALL OF SPECIMEN TO BE BRUSHED.	6279

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4834	RESISTANCE TO SOLVENTS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT ~~4834.~~
4830	RESISTANCE TO SOLVENTS. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
4836	MARKING SHALL REMAIN LEGIBLE.
4829	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT ~~4829.~~
4839	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202. THE SPECIMENS SHALL BE DIVIDED INTO GROUPS OF EQUAL NUMBER TO THE EXTENT POSSIBLE.
4838	IN ADDITION TO THE SPECIFIED SOLVENT(S), 4838 SHALL ALSO BE USED.
4835	BRUSHING SHALL BE PERFORMED WITH THE SOLVENTS IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202, EXCEPT THAT SOLUTION(S) 4835 SHALL NOT BE USED.
4831	THE MARKING AREA SHALL BE BRUSHED.
6279	THE ENTIRE SURFACE SHALL BE BRUSHED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4878
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE-	4782
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4770
PER MIL-STD-202, METHOD 101.	4771
*TEST CONDITION (LETTER)	4772
MOUNTING (SELECT ONE)	
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4773
MOUNTING SHALL BE BY NORMAL METHOD.	4765
MOUNTING SHALL BE BY ANY SUITABLE METHOD.	4766
NUMBER OF OPERATING CYCLES (QUANTITY)	3150
SAND AND DUST	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4958

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4878	SALT SPRAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.
4782	SALT SPRAY. THERE SHALL BE NO EVIDENCE OF CORROSION? PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
4770	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4770.
4771	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 101 OF MIL-STD-202.
4772	TEST CONDITION LETTER 4772 SHALL APPLY.
4773	MOUNTING SHALL BE IN ACCORDANCE WITH 4773
4765	MOUNTING SHALL BE BY THE NORMAL METHOD.
4766	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
3150	THERE SHALL BE 3150 OPERATING CYCLES.
4958	SAND AND DUST THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4958.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SAND AND DUST (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF DUST Penetration	4959
NO EVIDENCE OF MECHANICAL OR ELECTRICAL DAMAGE.	2358
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4952
PER MIL-STD-202, METHOD 110.	4960
TEST SPECIMENS SHALL BE OPERATED DURING TEST STEPS (NUMBER)	4872
*DURATION OF OPERATION (HOURS)	6299
SPECIMEN ORIENTATION SHALL BE CHANGED DURING TEST.	1539
SECOND 6-HOUR TEST REQUIRED IMMEDIATELY FOLLOWING TEMPERATURE STABILIZATION IN STEP 2.	4956
NUMBER OF OPERATING CYCLES (QUANTITY)	3152
OPERATING CYCLE RATE (CYCLES PER MINUTE)	3154

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4959	SAND AND DUST. THERE SHALL BE NO EVIDENCE OF DUST PENETRATION.
2358	THERE SHALL BE NO EVIDENCE OF MECHANICAL OR ELECTRICAL DAMAGE.
4952	SAND AND DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4952.
4960	SAND AND DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 110 OF MIL-STD-202.
4872	ITEM(S) SHALL BE OPERATED DURING STEP(S) 4872.
6299	DURATION OF OPERATION SHALL BE 6299 HOUR(S).
1539	ORIENTATION SHALL BE CHANGED DURING THE TEST.
4956	THE SECOND 6-HOUR TEST SHALL BE PERFORMED IMMEDIATELY AFTER REACHING TEMPERATURE STABILIZATION IN STEP 20
3152	THERE SHALL BE 3152 OPERATING CYCLES.
3154	THE OPERATING CYCLE RATE SHALL BE 3154 CYCLES PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4745
AS FOLLOWS:	6370
SPECIFIED TEST METHOD SENSITIVITY-	4746
NO BUBBLES INDICATIVE OF LEAKAGE.	4748
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4734
PER MIL-STD-202, METHOD 112.	4732
*TEST CONDITION LETTER	
LETTER A.	4737
LIQUID FOR BATH (NAME)	4738
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	4739
LETTER B.	6320
LIQUID FOR BATH (NAME)	6321
MINIMUM BATH TEMPERATURE (DEGREES CELSIUS)	6322

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4745	SEAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4745.
6370	SEAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
4746	THE REQUIREMENTS SHALL BE IN ACCORDANCE WITH THE SPECIFIED TEST METHOD Sensitivity
4748	THERE SHALL BE NO BUBBLES INDICATIVE OF LEAKAGE.
4734	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4734.
4732	SEAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 112 OF MIL-STD-202.
4737	TEST CONDITION LETTER A SHALL APPLY.
4738	LIQUID FOR BUBBLE BATH SHALL BE 4738.
4739	TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 4739 DEGREES CELSIUS.
6320	TEST CONDITION LETTER B SHALL APPLY.
6321	LIQUID FOR BUBBLE TEST BATH SHALL BE 632110
6322	TEMPERATURE OF THE BUBBLE TEST BATH LIQUID SHALL BE NOT LESS THAN 6322 DEGREES CELSIUS*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
TEST CONDITION LETTER (CONT)	
LETTER C.	6323
*LEAK RATE SENSITIVITY (ATM CC/SEC)	4741
*TEST PROCEDURE (SELECT ONE)	
TEST PROCEDURE I.	4740
VACUUM PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	4742
(KILOPASCALS)	4736
TEST PROCEDURE II.	6324
BACKFILL PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	6325
(KILOPASCALS)	6326
NUMBER OF PRESSURE CYCLES (QUANTITY)	4749
TEST PROCEDURE III.	6328
GROSS LEAK TEST CONDITION (LETTER)	4750

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6323	TEST CONDITION LETTER C SHALL APPLY.
4741	LEAK SENSITIVITY RATE SHALL BE 4741 ATM CC/SEC.
4740	PROCEDURE NUMBER I SHALL APPLY.
4742	VACUUM PRESSURE SHALL BE 4742 POUNDS PER SQUARE INCH.
4736	VACUUM PRESSURE SHALL BE 4736 KILOPASCALS.
6324	PROCEDURE NUMBER II SHALL APPLY.
6325	BACKFILL PRESSURE SHALL BE 6325 POUNDS PER SQUARE INCH.
6326	BACKFILL PRESSURE SHALL BE 6326 KILOPASCALS.
4749	THERE SHALL BE 4749 PRESSURE CYCLE(S).
6328	PROCEDURE NUMBER 111 SHALL APPLY.
4750	GROSS LEAK TEST CONDITION LETTER 4750 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SEAL (CONT)	
TEST PROCEDURE (CONT)	
TEST PROCEDURE IV.	6329
CHAMBER PRESSURE (SELECT ONE)	
(TORR)	4751
(KILOPASCALS)	4735
DURATION OF REDUCED PRESSURE (MINUTES)	4752
GROSS LEAK TEST CONDITION (LETTER)	6330
LETTER D.	6331
ANY SUITABLE MOUNTING FIXTURE.	4743
LETTER E.	6332
ANY SUITABLE MOUNTING FIXTURE.	6333
SHOCK, HIGH IMPACT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1494
NO EVIDENCE OF PHYSICAL DAMAGE.	1495

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6329	PROCEDURE NUMBER IV SHALL APPLY.
4751	CHAMBER PRESSURE SHALL BE ~~4751~~ TORR.
4735	CHAMBER PRESSURE SHALL BE 4735 KILOPASCALS.
4752	DURATION AT LOW PRESSURE SHALL BE ~~4752~~ MINUTE(S).
6330	GROSS LEAK TEST CONDITION LETTER ~~6330~~ SHALL APPLY.
6331	TEST CONDITION LETTER D SHALL APPLY.
4743	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
6332	TEST CONDITION LETTER E SHALL APPLY.
6333	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
1494	SHOCK, HIGH IMPACT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT? EXCEPT ~~1494.~~
1495	SHOCK, HIGH IMPACT. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, HIGH IMPACT (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
REMAIN WITHIN SPECIFIED TOLERANCE.	1464
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TEST.	1451
MAXIMUM DISCONTINUITY (SELECT ONE)	
(MICROSECONDS)	2368
(MILLISECONDS)	2370
NO LAMP IN TEST CIRCUIT SHALL LIGHT.	1550
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1486
PER MIL-STD-202, METHOD 207.	1482
*MOUNTING FIXTURE (SELECT ONE)	
FIGURE NUMBER FROM METHOD 207 OF MIL-STD-202 (NUMBER)	1488
ANY SUITABLE MOUNTING FIXTURE,	1478
MOUNTING FIXTURE PER DOCUMENT (DOC DES)	1468

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD-PARAGRAPH
1464	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1451	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.
2368	DISCONTINUITY SHALL BE NOT GREATER THAN 2368 MICROSECOND(S).
2370	DISCONTINUITY SHALL BE NOT GREATER THAN 2370 MILLISECOND(S).
1550	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.
1486	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1486.
1482	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 207 OF MIL-STD-202.
1488	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH FIGURE 1488 OF METHOD 207 OF MIL-STD-202.
1478	THE MOUNTING FIXTURE SHALL BE ANY SUITABLE MOUNTING FIXTURE.
1468	THE MOUNTING FIXTURE SHALL BE IN ACCORDANCE WITH 1468.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, HIGH IMPACT (CONT)	
PER MIL-STD-202, METHOD 207. (CONT)	
MONITOR CONTACT CHATTER PER METHOD 310 OF MIL-STD-202.	
*TEST ClRCUIT (LETTER)	1487
*TEST CONDITION (LETTER)	1479
PERCENT RATED LOAD APPLIED (PERCENT)	6203
PER MIL-S-901.	4132
EQUIPMENT GRADE (LETTER)	4133
EQUIPMENT CLASSIFICATION (SELECT ONE)	
DECK MOUNTED.	4135
SHELL MOUNTED.	4136
HULL MOUNTED.	4134
SUBSIDIARY COMPONENT.	4138
SUBASSEMBLIES.	4139
PRINCIPAL UNIT.	4137
TEST CLASSIFICATION	
Lightweight	4143

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1487	MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1487 SHALL APPLY.
1479	TEST CONDITION LETTER 1479 OF METHOD 310 OF MIL-STD-202 SHALL APPLY.
6203	THE ELECTRICAL LOAD SHALL BE 6203 PERCENT OF THE RATED LOAD.
4132	SHOCK, HIGH IMPACT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-901.
4133	THE EQUIPMENT GRADE SHALL BE 4133.
4135	THE EQUIPMENT CLASSIFICATION SHALL BE DECK MOUNTED.
4136	THE EQUIPMENT CLASSIFICATION SHALL BE SHELL MOUNTED.
4134	THE EQUIPMENT CLASSIFICATION SHALL BE HULL MOUNTED.
4138	THE EQUIPMENT CLASSIFICATION SHALL BE SUBSIDIARY COMPONENT.
4139	THE EQUIPMENT CLASSIFICATION SHALL BE SUBASSEMBLIES.
4137	THE EQUIPMENT CLASSIFICATION SHALL BE PRINCIPAL UNIT.
4143	THE TEST CLASSIFICATION SHALL BE LIGHTWEIGHT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, HIGH IMPACT (CONT)	
PER MIL-S-901. (CONT)	
TEST TYPE (LETTER)	4146
METHOD OF MOUNTING (FIXTURE)	4147
EQUIPMENT CLASS (NUMERAL)	4142
SHOCK, SPECIFIED PULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1508
NO EVIDENCE OF PHYSICAL DAMAGE.	1509
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TEST.	1471
MAXIMUM DISCONTINUITY (SELECT ONE)	
(MICROSECONDS)	2374
(MILLISECONDS)	2376
NO LAMP IN TEST CIRCUIT SHALL LIGHT.	1551
REMAIN WITHIN SPECIFIED TOLERANCE.	4703

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4146	THE TEST TYPE SHALL BE 4146.
4147	THE METHOD OF MOUNTING SHALL BE IN ACCORDANCE WITH FIXTURE 4147.
4142	THE EQUIPMENT CLASS SHALL BE 4142.
1508	SHOCK, SPECIFIED PULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT. EXCEPT 1508.
1509	SHOCK, SPECIFIED PULSE. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1471	THERE SHALL BE NO DISCONTINUITY DURING THE TEST.
2374	DISCONTINUITY SHALL BE NOT GREATER THAN 2374 MICROSECOND(S).
2376	DISCONTINUITY SHALL BE NOT GREATER THAN 2376 MILLISECOND(S).
1551	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.
4703	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK, SPECIFIED PULSE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1502
PER MIL-STD-202, METHOD 213.	1500
*TEST CONDITION (LETTER)	1504
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	4686
NORMAL MOUNTING METHOD.	4685
MOUNT PER DOCUMENT (DOC DES)	4684
MONITOR CONTACT CHATTER PER METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1503
*TEST CONDITION (LETTER)	1499
PERCENT RATED LOAD APPLIED (PERCENT)	6204
SHORT CIRCUIT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2384

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1502	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1502.
1500	SHOCK, SPECIFIED PULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 213 OF MIL-STD-202.
1504	TEST CONDITION LETTER 1504 SHALL APPLY.
4686	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4685	MOUNTING SHALL BE BY THE NORMAL METHOD.
4684	MOUNTING SHALL BE IN ACCORDANCE WITH 46840
1503	MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT 1503 SHALL APPLY.
1499	TEST CONDITION LETTER 3499 OF METHOD OF MIL-STD-202 SHALL APPLY.
6204	THE ELECTRICAL LOAD SHALL BE 6204 PERCENT OF THE RATED LOAD.
2384	SHORT CIRCUIT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2384.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHORT CIRCUIT (CONT)	
REQUIREMENTS (CONT)	
AS FOLLOWS:	2386
THERE SHALL BE NO WELDING OR STICKING OF CONTACTS.	2388
REMAIN MECHANICALLY AND ELECTRICALLY OPERATIVE AFTER TEST.	2390
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2391
PER DOCUMENT (DOC DES)	2392
MAXIMUM APPLIED TEST CURRENT (AMPERES)	2393
OPEN CIRCUIT TEST VOLTAGE (VOLTS)	2394
FREQUENCY (HERTZ)	2395
LOAD (TYPE)	2396
TEST CYCLES (QUANTITY)	2397
METHOD (SELECT ONE)	
10	3158
II.	3160

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2386	SHORT CIRCUIT. THE REQUIREMENTS) SHALL BE AS FOLLOWS:
2388	THERE SHALL BE NO WELDING OR STICKING OF CONTACTS.
2390	THE SWITCH SHALL BE MECHANICALLY AND ELECTRICALLY OPERATIVE AFTER TESTING.
2391	SHORT CIRCUIT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2391.
2392	SHORT CIRCUIT. TESTING SHALL BE PERFORMED IN ACCORDANCE 2392.
2393	THE APPLIED TEST CURRENT SHALL BE NOT GREATER THAN 2393 AMPERE(s).
2394	THE OPEN CIRCUIT TEST VOLTAGE SHALL BE 2394 VOLT(S).
2395	THE FREQUENCY SHALL BE 2395 HERTZ.
2396	THE LOAD TYPE SHALL BE 2396.
2397	THE NUMBER OF TEST CYCLES SHALL BE 2397.
3158	METHOD I SHALL APPLY.
3160	METHOD II SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SOLDERABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4674
NO EVIDENCE OF PHYSICAL DAMAGE.	4675
MEET EVALUATION CRITERIA SPECIFIED IN METHOD 208 OF MIL-STD-202,	4672
REMAIN WITHIN SPECIFIED TOLERANCES	4677
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4662
PER MIL-STD-202, METHOD 208.	4683
NUMBER OF TERMINALS TO BE TESTED (QUANTITY)	4666
DEPTH OF IMMERSION (SELECT ONE)	
(INCHES)	4667
(MILLIMETERS)	4663
DISTANCE WRAP WIRE APPLIED FROM BODY (SELECT ONE)	
(INCHES)	4664
(MILLIMETERS)	4665
SPECIAL PREPARATIONS PERMITTED.	6205

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4674	SOLDERABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4674.
4675	SOLDERABILITY. THERE SHALL BE NO EVIDENCE OF PHYSICAL" DAMAGE.
4672	THE RESULTS OF THE SOLDERABILITY TEST SHALL BE IN ACCORDANCE WITH THE ACCEPTANCE CRITERIA OF METHOD 208 OF MIL-STD-202.
4677	ITEM(S) SHALL REMAIN WITHIN SPECIFIED Tolerance
4662	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4662.
4683	SOLDERABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 208 OF MIL-STD-202.
4666	4666 TERMINATION(S) PER UNIT SHALL BE TESTED.
4667	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4667 INCH(S).
4663	TERMINATION(S) SHALL BE IMMERSED IN SOLDER TO A DEPTH OF 4663 MILLIMETER(S).
4664	THE WRAP WIRE SHALL BE 4664 INCH(S) FROM THE BODY.
4665	THE WRAP WIRE SHALL BE 4665 MILLIMETER(S) FROM THE BODY.
6205	SPECIAL PREPARATION SHALL BE PERMITTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STOPS STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2400
AS FOLLOWS:	2402
NO EVIDENCE OF PHYSICAL DAMAGE.	2404
NO SLIPPAGE OF MOVING PARTS.	2406
NO EVIDENCE OF MALFUNCTION.	2408
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2410
PER MIL-S-24317.	2412
TEST TORQUE (SELECT ONE)	
(POUND-INCHES)	2414
(NEWTON METERS)	2416
DURATION OF TEST TORQUE (SELECT ONE)	
(SECONDS)	2418
(MINUTES)	2420
TEST FORCE (SELECT ONE)	
(POUNDS)	2422
(NEWTONS)	2424

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2400 STOPS STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2400.

2402 STOPS STRENGTH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2404 THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

2406 THERE SHALL BE NO SLIPPAGE OF MOVING PARTS.

2408 THERE SHALL BE NO EVIDENCE OF MALFUNCTION.

2410 STOPS STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2410.

2412 STOPS STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-24317.

2414 THE TEST TORQUE SHALL BE 2414 POUND-INCH(S).

2416 THE TEST TORQUE SHALL BE 2416 NEWTON METER(S).

2418 THE DURATION OF THE TEST TORQUE SHALL BE 2418 SECOND(S).

2420 THE DURATION OF THE TEST TORQUE SHALL BE 2420 MINUTE(S).

2422 THE TEST FORCE SHALL BE 2422 POUND(S).

2424 THE TEST FORCE SHALL BE 2424 NEWTON(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STRENGTH OF ACTUATING MEANS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3170
AS FOLLOWS:	3172
NO ELECTRICAL OR MECHANICAL DAMAGE.	3174
MINIMUM STRENGTH (SELECT ONE)	
(POUNDS)	3176
(NEWTONS)	3178
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	3180
PER DOCUMENT (DOC DES)	3182
TEST LOAD (SELECT ONE)	
(POUNDS)	3184
(NEWTONS)	3186
TEST LOAD DURATION (SELECT ONE)	
(SECONDS)	3188
(MINUTES)	3189

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3170	STRENGTH OF ACTUATING MEANS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3170.
3172	STRENGTH OF ACTUATING MEANS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
3174	THERE SHALL BE NO ELECTRICAL OR MECHANICAL DAMAGE.
3176	THE ACTUATING MEANS SHALL BE CAPABLE OF WITHSTANDING A FORCE NOT LESS THAN 3176 POUND(S).
3178	THE ACTUATING MEANS SHALL BE CAPABLE OF WITHSTANDING A FORCE NOT LESS THAN 3178 NEWTON(S).
3180	STRENGTH OF ACTUATING MEANS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3180.
3182	STRENGTH OF ACTUATING MEANS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3182.
3184	THE TEST LOAD SHALL BE 3184 POUND(S).
3186	THE TEST LOAD SHALL BE 3186 NEWTON(S).
3188	THE TEST LOAD DURATION SHALL BE 3188 SECOND(S).
3189	THE TEST LOAD DURATION SHALL BE 3189 Minute

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STRENGTH OF MOUNTING MEANS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	2426
AS FOLLOWS:	2428
NO EVIDENCE OF DAMAGE.	2430
NO LOOSENING AND TWISTING OF BUSHING RELATIVE TO SWITCH.	2432
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2436
PER DOCUMENT (DOC DES)	2438
TEST TORQUE (SELECT ONE)	
(POUND-INCHES)	2440
(NEWTON METERS)	2442
TEMPERATURE, HIGH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	6228
NO EVIDENCE OF PHYSICAL DAMAGE.	6229

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2426	STRENGTH OF MOUNTING MEANS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2426.
2428	STRENGTH OF MOUNTING MEANS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2430	THERE SHALL BE NO EVIDENCE OF DAMAGE.
2432	THERE SHALL BE NO LOOSENING AND TWISTING OF THE BUSHING RELATIVE TO THE SWITCH.
2436	STRENGTH OF MOUNTING MEANS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2436.
2438	STRENGTH OF MOUNTING MEANS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 24380
2440	THE TEST TORQUE SHALL BE 2440 POUND-INCH(S).
2442	THE TEST TORQUE SHALL BE 2442 NEWTON METER(S).
6228	TEMPERATURE? HIGH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6228.
6229	TEMPERATURE, HIGH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, HIGH (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
MAXIMUM CHANGE IN OPERATING FORCE (PERCENT)	3190
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6217
PER DOCUMENT (DOC DES)	3700
PROCEDURE (ROMAN NUMERAL)	6219
STORAGE TEMPERATURE (DEGREES CELSIUS)	6220
STORAGE DURATION (HOURS)	6221
HIGHEST OPERATING TEMPERATURE (DEGREES CELSIUS)	6222
OPERATION TIME (SELECT ONE)	
(MINUTES)	6224
(HOURS)	6225
NUMBER OF OPERATING CYCLES (QUANTITY)	3192
TEMPERATURE, LOW	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6318

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3190	THE CHANGE IN OPERATING FORCE SHALL BE NOT GREATER THAN 3190 PERCENT.
62117	TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6217.
3700	TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3700.
6219	PROCEDURE NUMBER 6219 SHALL APPLY.
6220	STORAGE TEMPERATURE SHALL BE 6220 DEGREES CELSIUS.
62211	STORAGE DURATION SHALL BE 6221 HOUR(S).
6222	HIGHEST OPERATING TEMPERATURE SHALL BE 6222 DEGREES CELSIUS.
6224	OPERATING TIME SHALL BE 6224 Minute
6225	OPERATING TIME SHALL BE 6225 HOUR(S).
3192	THERE SHALL BE 3192 OPERATING CYCLES.
6318	TEMPERATURE? LOW. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6318.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, LOW (CONT)	
REQUIREMENTS (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE.	6319
NO DELAY BETWEEN RELEASE OF ACTUATOR AND OPENING OF NORMALLY OPEN CONTACTS.	3194
NO DELAY BETWEEN RELEASE OF ACTUATOR AND CLOSING OF NORMALLY CLOSED CONTACTS.	3196
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	6231
PER DOCUMENT (DOC DES)	3702
STORAGE TEMPERATURE (DEGREES CELSIUS)	6234
STORAGE DURATION (HOURS)	6235
LOWEST OPERATING TEMPERATURE (DEGREES CELSIUS)	6236
CHAMBER AIR VELOCITY (SELECT ONE)	
(FEET PER SECOND)	6237
(METERS PER SECOND)	6238
OPERATION TIME (SELECT ONE)	
(MINUTES)	6315
(HOURS)	6316

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6319	TEMPERATURE, LOW 1 THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
3194	THERE SHALL BE NO DELAY BETWEEN RELEASE OF ACTUATOR AND OPENING OF NORMALLY OPEN CONTACTS.
3196	THERE SHALL BE NO DELAY BETWEEN RELEASE OF ACTUATOR AND CLOSING OF NORMALLY CLOSED CONTACTS.
6231	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6231,
3702	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 3702.
6234	STORAGE TEMPERATURE SHALL BE 6234 DEGREES CELSIUS.
6235	STORAGE DURATION SHALL BE 6235 HOUR(S).
6236	LOWEST OPERATING TEMPERATURE SHALL BE 6236 DEGREES CELSIUS.
6237	CHAMBER AIR VELOCITY SHALL BE 6237 FEET PER SECOND.
6238	CHAMBER AIR VELOCITY SHALL BE 6238 METERS PER SECOND.
6315	OPERATING TIME SHALL BE 6315 MINUTE(S).
6316	OPERATING TIME SHALL BE 6316 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE RISE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2444
MAXIMUM TEMPERATURE RISE (DEGREES CELSIUS)	2446
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2450
PER MIL-S-8805.	2452
TEST CURRENT (SELECT ONE)	
(PERCENT OF RATED CURRENT)	2454
(AMPERES)	2456
TEST CURRENT APPLICATION DURATION (SELECT ONE)	
(MINuTEs)	2458
(HOURS)	2460
TEST VOLTAGE (SELECT ONE)	
(VOLTS, DC)	2462
(VOLTS, AC)	2464

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2444	TEMPERATURE RISE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2444.
2446	TEMPERATURE RISE. THE TEMPERATURE RISE SHALL BE NOT GREATER THAN 2446 DEGREES CELSIUS.
2450	TEMPERATURE RISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2450.
2452	TEMPERATURE RISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-S-8805.
2454	THE TEST CURRENT SHALL BE 2454 PERCENT OF THE RATED CURRENT.
2456	THE TEST CURRENT SHALL BE 2456 AMPERE(S)-
2458	THE TEST CURRENT APPLICATION DURATION SHALL BE 2458 MINUTE(S).
2460	THE TEST CURRENT APPLICATION DURATION SHALL BE 2460 HOUR(S).
2462	THE TEST VOLTAGE SHALL BE 2462 VOLTS, DC.
2464	THE TEST VOLTAGE SHALL BE 2464 VOLTS, AC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE RISE (CONT)	
PER MIL-S-8805. (CONT)	
NUMBER OF READINGS (QUANTITY)	2466
READING INTERVAL (MINUTES)	2468
TERMINAL STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1418
NO EVIDENCE OF PHYSICAL DAMAGE.	1433
REMAIN WITHIN SPECIFIED TOLERANCE.	6296
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	**1410**
PER MIL-STD-202, METHOD 211.	**1375**
*TEST CONDITIONS	
TEST CONDITION A, APPLIED FORCE (SELECT ONE)	
(POUNDS)	**1411**
(NEWTONS)	**1419**

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2466 THERE SHALL BE 2466 READINGS.

2468 THE READING INTERVAL SHALL BE ~~2468~~ MINUTE(S).

1418 TERMINAL STRENGTH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1418.

1433 TERMINAL STRENGTH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

6296 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

1410 TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT ~~1410.~~

1375 TERMINAL STRENGTH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 211 OF MIL-STD-202.

1411 TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1411 POUND(S).

1419 TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION A. THE APPLIED FORCE SHALL BE 1419 NEWTON(S)-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TERMINAL STRENGTH (CONT)	
TEST CONDITIONS (CONT)	
TEST CONDITION B, BENDS (NUMBER)	1412
TEST CONDITION C, LOAD (SELECT ONE)	
(POUNDS)	1413
(KILOGRAMS)	1420
TEST CONDITION D.	1414
TEST CONDITION E, TORQUE (SELECT ONE)	
(POUND-INCHES)	1416
(NEWTON METERS)	1421
THERMAL SHOCK (TEMPERATURE CYCLING),	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4722
NO EVIDENCE OF PHYSICAL DAMAGE.	4723
REMAIN WITHIN SPECIFIED Tolerance	4726

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1412	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION B. THERE SHALL BE 1412 BEND(S).
1413	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION C. THE LOAD SHALL BE 1413 POUND(S).
1420	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION Co THE LOAD SHALL BE 1420 KILOGRAM(S).
1414	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION Do
1416	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1416 POUND-INCH(S).
1421	TEST SPECIMENS SHALL BE SUBJECTED TO TEST CONDITION E. THE TORQUE SHALL BE 1421 NEWTON METER(S).
4722	THERMAL SHOCK (TEMPERATURE CYCLING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4722.
4723	THERMAL SHOCK (TEMPERATURE CYCLING). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4726	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THERMAL SHOCK (TEMPERATURE CYCLING) (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	2484
(MILLIOHMS)	2486
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2490
NO ELECTRICAL DAMAGE.	2492
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4733
PER MIL-STD-202, METHOD 107.	4714
*TEST CONDITION (LETTER)	4715
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4719
VIBRATION, HIGH FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1455
NO EVIDENCE OF PHYSICAL DAMAGE.	1456

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2484 THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2484 OHM(S).

2486 THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2486 MILLIOHM(S).

2490 THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 2490 MEGOHM(S).

2492 THERE SHALL BE NO ELECTRICAL DAMAGE.

4713 THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENTS EXCEPT 4713.

4714 THERMAL SHOCK (TEMPERATURE CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 107 OF MIL-STD-202.

4715 TEST CONDITION LETTER 4715 SHALL APPLY.

4719 MOUNTING SHALL BE IN ACCORDANCE WITH 4719.

1455 VIBRATION, HIGH FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT ~~1455.~~

1456 VIBRATION, HIGH FREQUENCY THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
DISCONTINUITY (SELECT ONE)	
NO DISCONTINUITY DURING TEST.	1473
MAXIMUM DISCONTINUITY (SELECT ONE)	
(MICROSECONDS)	2493
(MILLISECONDS)	2494
NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.	1552
REMAIN WITHIN SPECIFIED Tolerance	1469
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1446
PER MIL-STD-202, METHOD 204.	1447
*TEST CONDITION (LETTER)	1448
PERCENT RATED LOAD APPLIED (PERCENT)	6200
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4709
NORMAL MOUNTING METHOD.	4708
MOUNT PER DOCUMENT (DOC DES)	4707

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1473	THERE SHALL BE NO DISCONTINUITY DURING TEST.
2493	DISCONTINUITY SHALL BE NOT GREATER THAN ~~2493~~ Microseconds
2494	DISCONTINUITY SHALL BE NOT GREATER THAN ~~2494~~ MILLISECOND(S).
1552	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.
1469	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1446	Vibration HIGH FREQUENCY* TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1446.
1447	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 204 OF MIL-STD-202.
1448	TEST CONDITION LETTER ~~1448~~ SHALL APPLY.
6200	THE LOAD SHALL BE ~~6200~~ PERCENT OF THE RATED LOAD.
4709	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4708	MOUNTING SHALL BE BY THE NORMAL METHOD.
4707	MOUNTING SHALL BE IN ACCORDANCE WITH ~~4707~~,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY (CONT)	
PER MIL-STD-202, METHOD 204. (CONT)	
METHOD OF DETERMINING MECHANICAL RESONANCE (SELECT ONE)	
VISUALLY BY MEANS OF A STROBOTAC.	11533
ELECTRICAL OUTPUT INDICATORS.	1534
MONITOR CONTACT CHATTER IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1442
*TEST CONDITION (LETTER)	1444
VIBRATION, LOW FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1475
NO EVIDENCE OF PHYSICAL DAMAGE.	1476
REMAIN WITHIN SPECIFIED Tolerance	1480

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1533	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE VISUALLY BY MEANS OF A STROBOTAC.
1534	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE BY ELECTRICAL OUTPUT INDICATORS.
1442	MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1442 SHALL APPLY.
1444	TEST CONDITION LETTER 1444 OF METHOD 310 OF MIL-STD-202 SHALL APPLY.
1475	VIBRATION, LOW FREQUENCY THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1475.
1476	VIBRATION, LOW Frequency THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1480	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
NO DISCONTINUITY DURING TEST.	1490
MAXIMUM DISCONTINUITY (SELECT ONE)	
(MICROSECONDS)	2900
(MILLISECONDS)	2902
NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.	1553
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1466
PER MIL-STD-202, METHOD 210.	1467
DURATION OF VIBRATION PER AXIS (HOURS)	1470
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4731
NORMAL MOUNTING MEANS,	4730
MOUNT PER DOCUMENT (DOC DES)	4729
DIRECTION OF MOTION (SELECT ONE)	
PARALLEL TO LONGITUDINAL AXIS.	1535
PERPENDICULAR TO LONGITUDINAL AXIS.	1536

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1490 THERE SHALL BE NO DISCONTINUITY DURING TEST.

2900 DISCONTINUITY SHALL BE NOT GREATER THAN ~~2900~~ Microsecond

2902 DISCONTINUITY SHALL BE NOT GREATER THAN ~~2902~~ MILLISECOND(S).

1553 NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.

1466 VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT ~~1466.~~

1467 VIBRATION, LOW FREQUENCY* TESTINS SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 201 OF MIL-STD-202.

1470 DURATION OF TEST SHALL BE 1470 HOUR(S) PER AXIS.

4731 MOUNTING SHALL BE BY ANY SUITABLE METHOD.

4730 MOUNTING SHALL BE BY THE NORMAL METHOD.

4729 MOUNTING SHALL BE IN ACCORDANCE WITH ~~4729.~~

1535 THE DIRECTION OF MOTION SHALL BE PARALLEL TO THE LONGITUDINAL AXIS,

1536 THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE LONGITUDINAL AXIS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY (CONT)	
DIRECTION OF MOTION (CONT)	
ON THE CENTERLINE OF MOST SENSITIVE AXIS.	4979
90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.	4978
THREE MUTUALLY PERPENDICULAR DIRECTIONS.	1537
MONITOR CONTACT CHATTER IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1491
*TEST CONDITION (LETTER)	1492
PERCENT RATED LOAD APPLIED (PERCENT)	6201
VIBRATION, RANDOM	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1435
NO EVIDENCE OF PHYSICAL DAMAGE.	1436

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4979	THE DIRECTION OF MOTION SHALL BE ON THE CENTERLINE OF THE MOST SENSITIVE AXIS.
4978	THE DIRECTION OF MOTION SHALL BE 90 DEGREES FROM THE CENTERLINE OF THE MOST SENSITIVE AXIS.
1537	THE DIRECTION OF MOTION SHALL BE IN EACH OF THREE MUTUALLY PERPENDICULAR DIRECTIONS.
1491	MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1491 SHALL APPLY.
1492	TEST CONDITION LETTER 1492 OF METHOD 310 OF MIL-STD-202 SHALL APPLY.
6201	THE LOAD SHALL BE 6201 PERCENT OF THE RATED LOAD.
1435	VIBRATION, RANDOM. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1435.
1436	VIBRATION, RANDOM. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERSITIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
NO EVIDENCE OF PHYSICAL DAMAGE. (CONT)	
REMAIN WITHIN SPECIFIED Tolerance	1538
DISCONTINUITY DURING TEST (SELECT ONE)	
NO DISCONTINUITY,	1374
MAXIMUM (MILLISECONDS)	1545
MAXIMUM (MICROSECONDS)	1546
NO LAMP IN TEST CIRCUIT SHALL LIGHT.	1457
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1426
PER MIL-STD-202, METHOD 214.	1427
*TEST CONDITION (ROMAN NUMERAL AND LETTER)	1428
*DURATION OF APPLICATION (SELECT ONE)	
(MINUTES)	1438
(HOURS)	1431

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1538 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

1374 THERE SHALL BE NO DISCONTINUITY DURING TEST.

1545 THE DISCONTINUITY SHALL BE NOT GREATER THAN 1545 MILLISECOND(S),

1546 THE DISCONTINUITY SHALL BE NOT GREATER THAN 1546 Microsecond

1457 NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.

1426 VIBRATION? RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1426.

1427 VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 214 OF MIL-STD-202.

1428 TEST CONDITION NUMBER AND LETTER 1428 SHALL APPLY.

1438 THE DURATION OF THE TEST SHALL BE 1438 MINUTE(S).

1431 THE DURATION OF THE TEST SHALL BE 1431 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
PER MIL-STD-202, METHOD 214. (CONT)	
MONITORING INSTRUMENTATION OF EXCITATION (SELECT ONE)	
ANY SUITABLE SYSTEM.	1452
CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.	1453
CALIBRATED OSCILLOSCOPE.	1459
NUMBER OF VIBRATION MONITORING TEST POINTS (QUANTITY)	1430
LOCATION OF MONITORING POINTS (SELECT ONE)	
ANY SUITABLE LOCATION.	1439
AS CLOSE AS PRACTICAL TO TEST SPECIMEN.	1462
MONITOR CONTACT CHATTER IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1402
*TEST CONDITION (LETTER)	1382

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1452	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE ANY SUITABLE INSTRUMENTATION SYSTEM.
1453	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.
1459	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED OSCILLOSCOPE.
1430	THERE SHALL BE 1430 VIBRATION MONITORING POINT(S).
1439	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE ANY SUITABLE LOCATION.
1462	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE AS CLOSE AS PRACTICAL TO THE TEST SPECIMEN(S).
1402	MONITORING DURING THE TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1402 SHALL APPLY.
1382	TEST CONDITION LETTER 1382 IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
PER MIL-STD-202, METHOD 214. (CONT)	
PERCENT OF RATED LOAD APPLIED (PERCENT)	4678
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4977
NORMAL MOUNTING METHOD.	4976
MOUNT PER DOCUMENT (DOC DES)	4975
PER MIL-STD-167-1.	2908
(TYPES OF VIBRATION REQUIRED (ROMAN NUMERAL)	2910
WATERPROOFNESS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2920
NO EVIDENCE OF WATER LEAKAGE.	2922
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2930
PER MIL-E-13856.	2932

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4678	THE LOAD SHALL BE 4678 PERCENT OF THE RATED LOAD.
4977	MOUNTING SHALL BE BY ANY SUITABLE METHOD*
4976	MOUNTING SHALL BE BY THE NORMAL METHOD.
4975	MOUNTING SHALL BE IN ACCORDANCE WITH 49750
2908	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-167-1.
2910	TESTING SHALL BE PERFORMED IN ACCORDANCE WITH TYPE 2910 Classification
2920	WATERPROOFNESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2920.
2922	WATERPROOFNESS. THERE SHALL BE NO EVIDENCE OF WATER LEAKAGE.
2930	WATERPROOFNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2930.
2932	WATERPROOFNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-E-13856.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WATERPROOFNESS (CONT)	
PER MIL-E-13856. (CONT)	
TYPE (SELECT ONE)	
I.	2934
II.	2936
CLASS (SELECT ONE)	
1.	2938
2.	2940
3.	2942
4.	2944
MOUNTING HARDWARE (SEE TABLE X, DOD-STD-35)	
NOTE : AUTOMATIC WHEN TABLE X IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
c____	7003
D____	7004
E____	7005

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2934	THE SWITCH SHALL BE CLASSIFIED AS TYPE I.
2936	THE SWITCH SHALL BE CLASSIFIED AS TYPE 11.
2938	THE SWITCH SHALL BE CLASSIFIED AS CLASS 1.
2940	THE SWITCH SHALL BE CLASSIFIED AS CLASS 2.
2942	THE SWITCH SHALL BE CLASSIFIED AS CLASS 3.
2944	THE SWITCH SHALL BE CLASSIFIED AS CLASS 4.

MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.

6870	Workmanship WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(c) 7003.
7004	(D) 70040
7005	(E) 7005.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629
ADDITIONAL PART MARKING	
A_____	6991
B_____	6992
c_____	6993
D_____	6994
E_____	6995
DEFINITION OF HERMETIC SEALING	
NOTE: AUTOMATIC WHEN CODE 1584 IS USED TO REQUIRE HERMETIC SEALING	
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6372	PART MARKING* PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B 6992.
6993	(C 6993.
6994	(D 6994.
6995	(E) 6995.

DEFINITION OF HERMETIC SEALING. FOR THE PURPOSE OF THIS DOCUMENT, A HERMETICALLY-SEALED ITEM IS ONE IN WHICH THE ELEMENT IS CONTAINED WITHIN A SEALED ENCLOSURE OR CERAMIC, GLASS OR METAL. OR A Combination THEREOF, WHERE SEALING IS ACCOMPLISHED BY MATERIAL FUSION, WELDING, BRAZING OR SOLDERING.

Custodians:
Army-MI

Review activities:
Army-AT
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

User activity:
Army-MU

Preparing activity:
Army-MI

(Project EDS-A258)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

APPENDIX A


ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

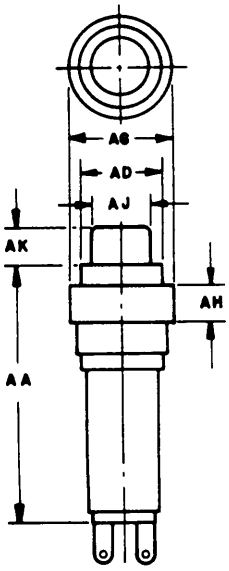


014-08-1

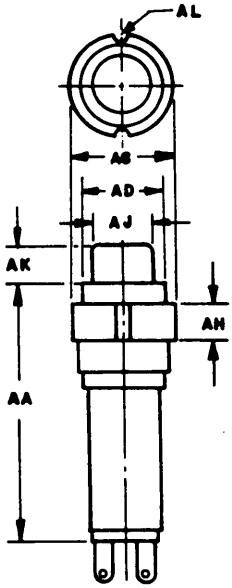


014-08-2

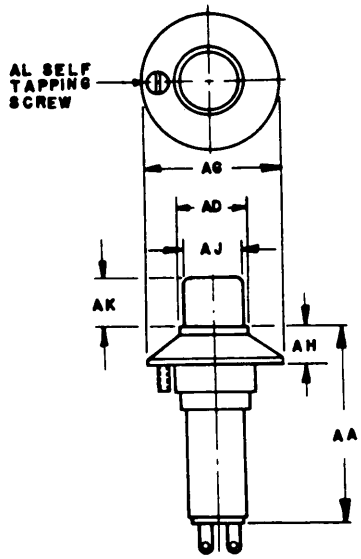

014-08-3

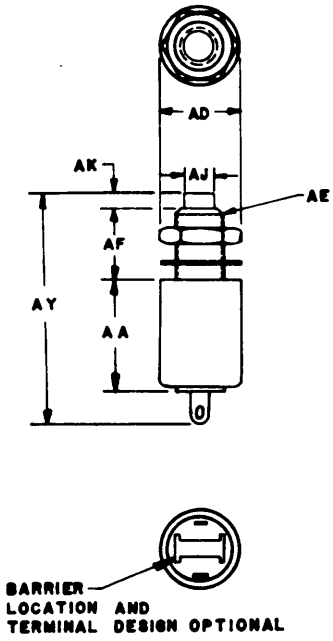


014-08-4

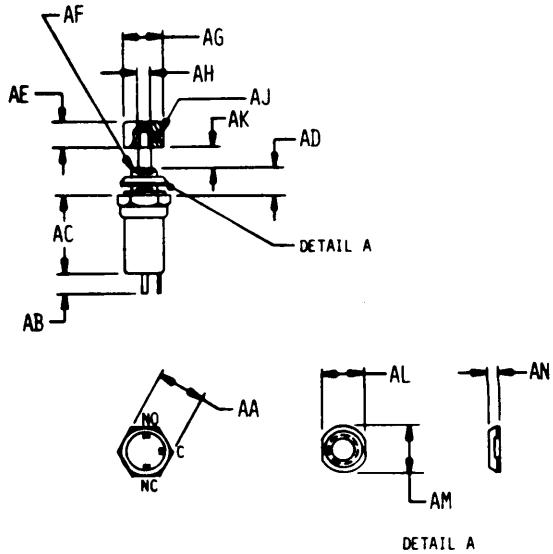


014-08-5


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

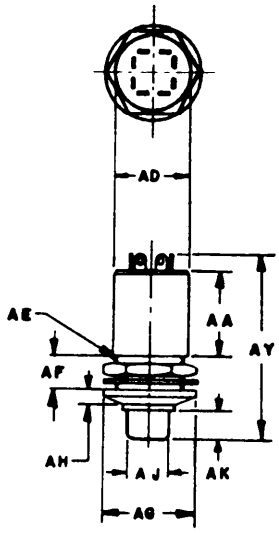


014-09-1

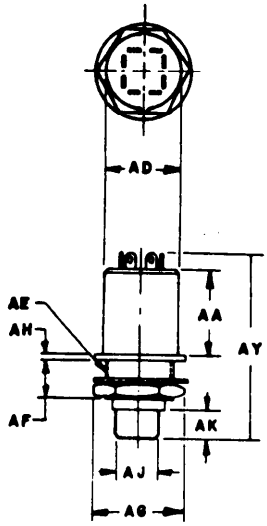

014-09-2

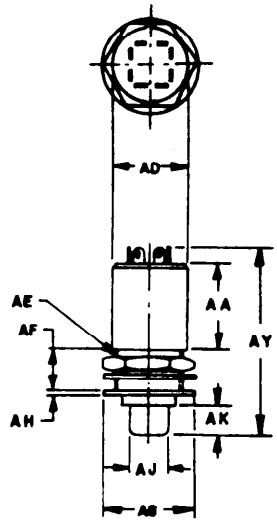


014-09-3

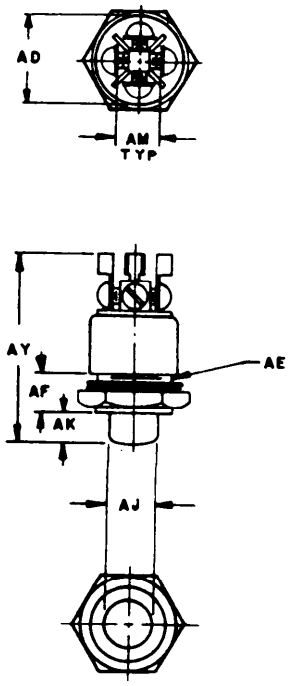


014-09-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

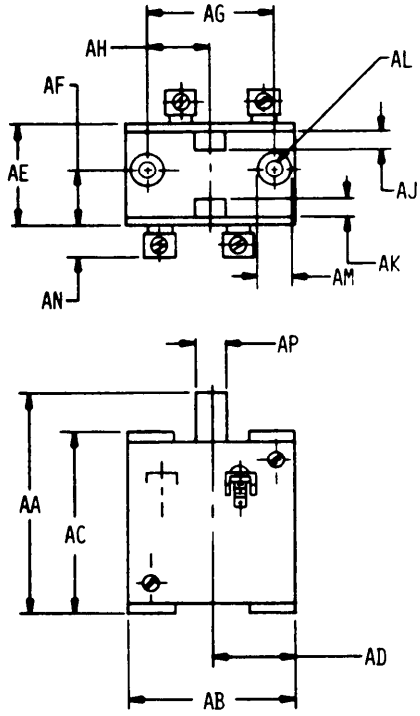


014-09-5

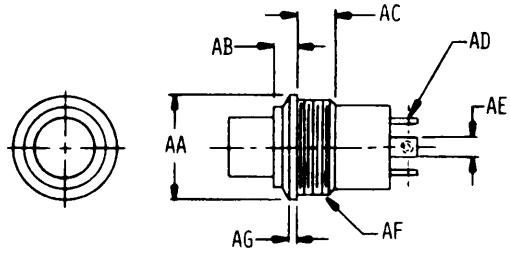


014-09-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

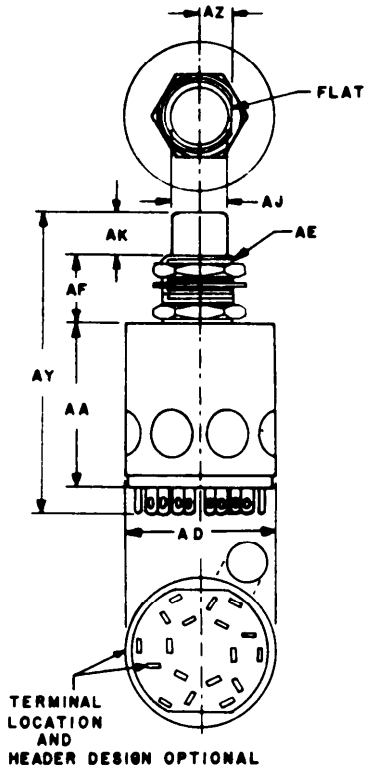


014-10-1

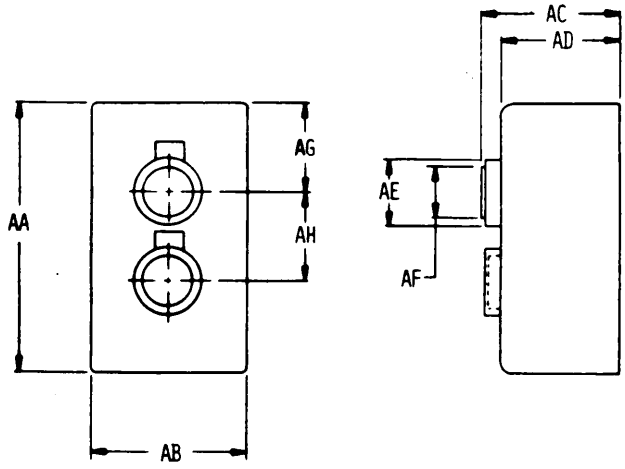


014-10-2


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

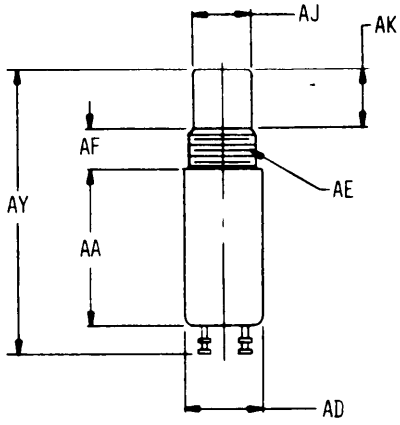


Ø14-11-1

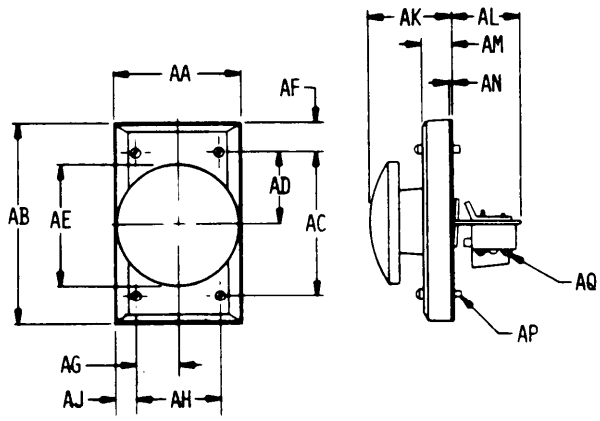

Ø14-11-2

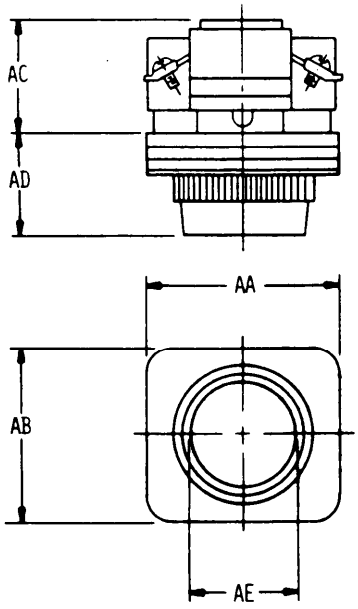


Ø14-11-3

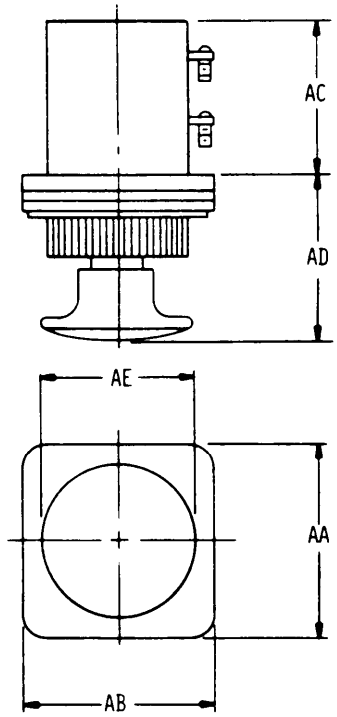


Ø14-11-4

Source: https://assist.dla.mil -- Downloaded: 2026Ø10-26T07:25Z
Check the source to verify that this is the current version before use.

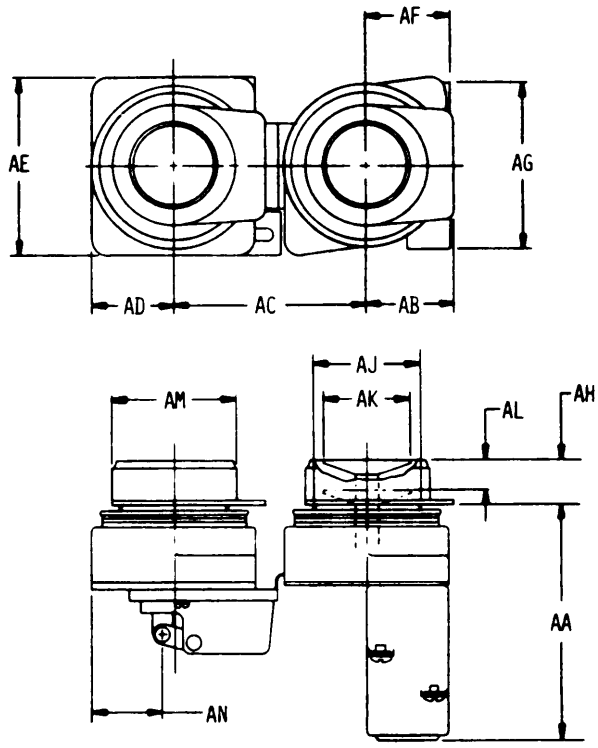


014-11-5


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

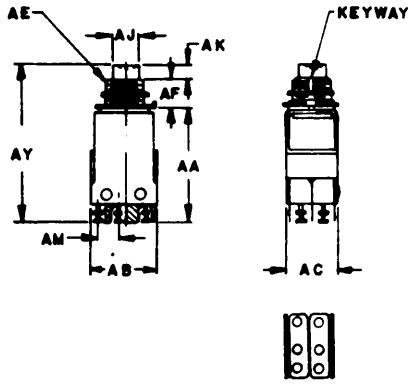


014-12-1

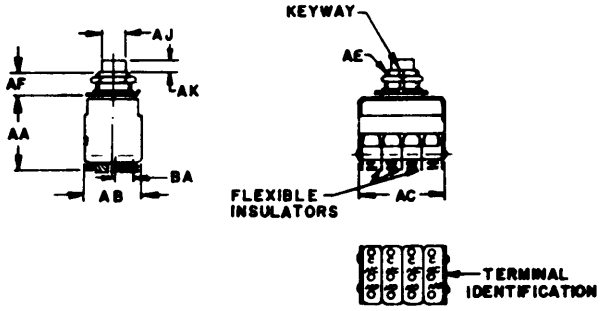


014-12-2

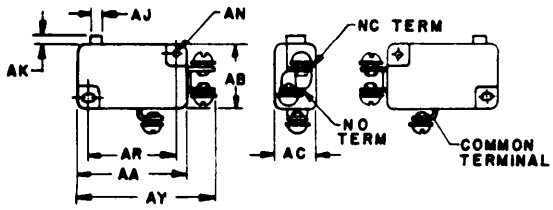


014-12-3

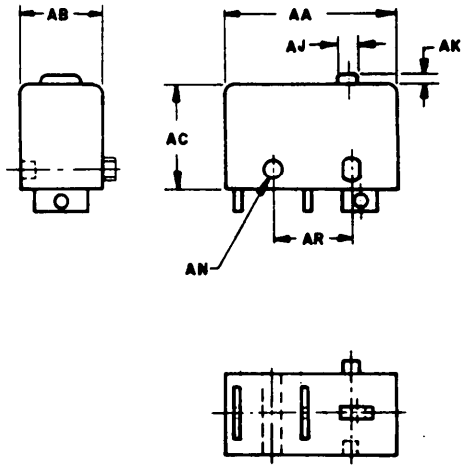


014-12-4

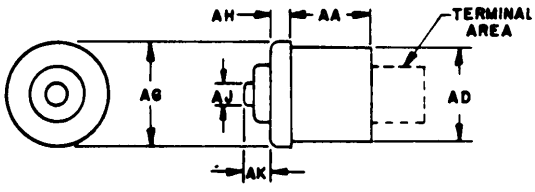


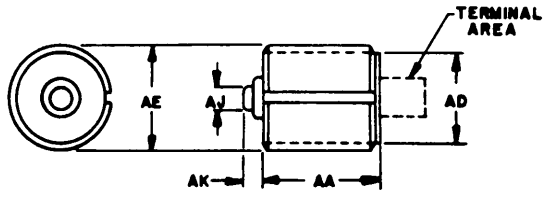


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

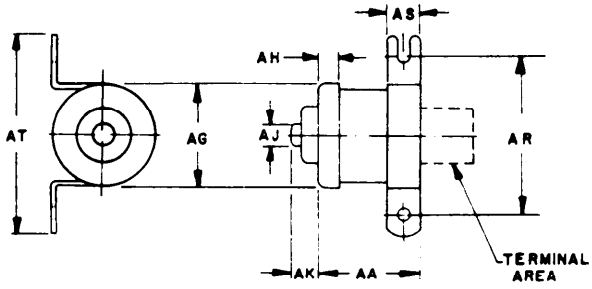


014-12-7

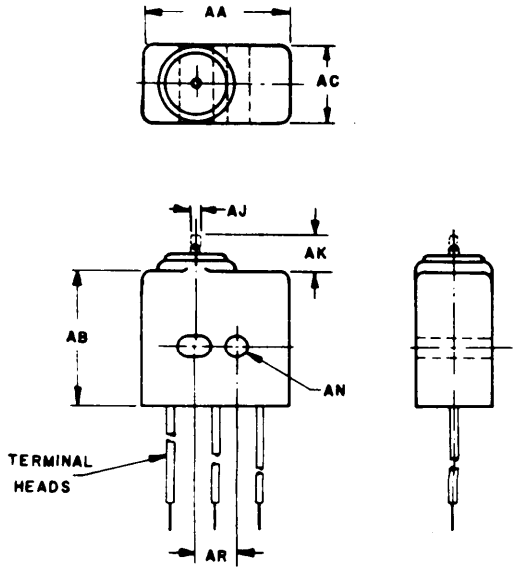


014-12-8

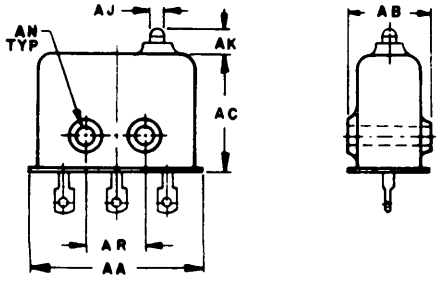




014-12-9

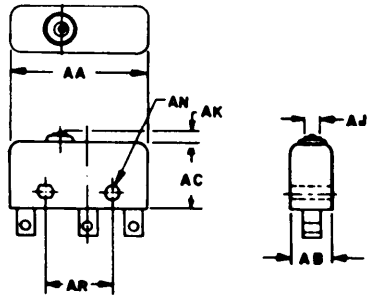


014-12-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

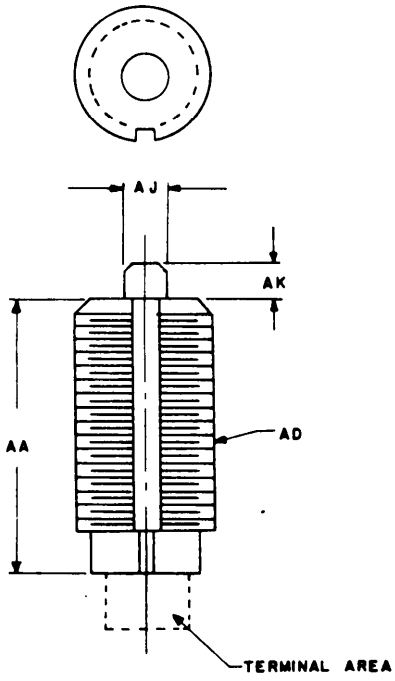


014-12-11

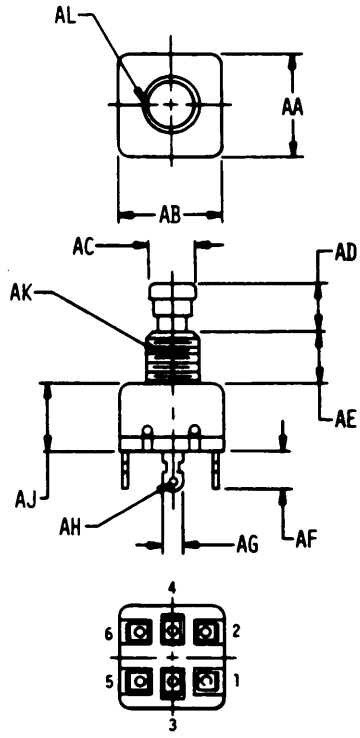


014-12-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

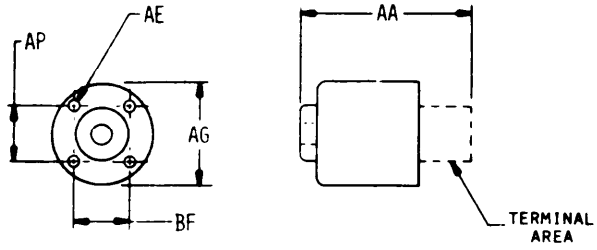


Ø14-12-13

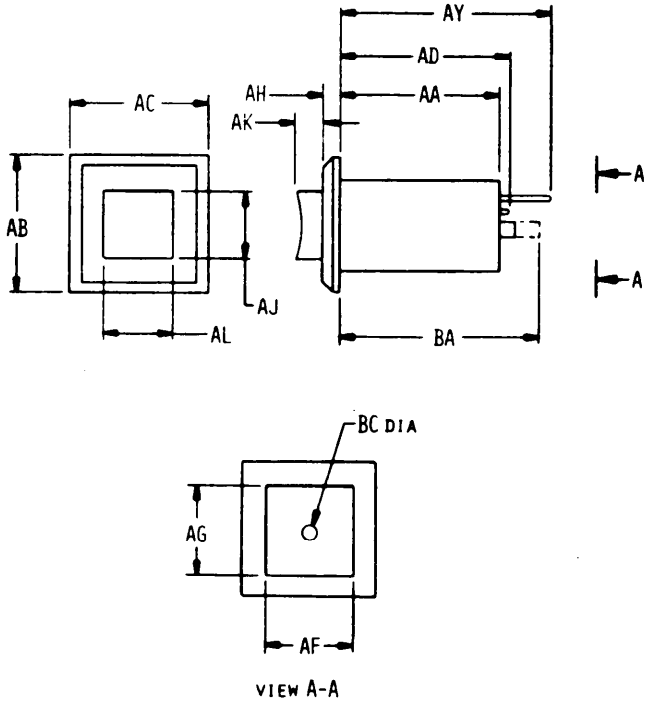


Ø14-12-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

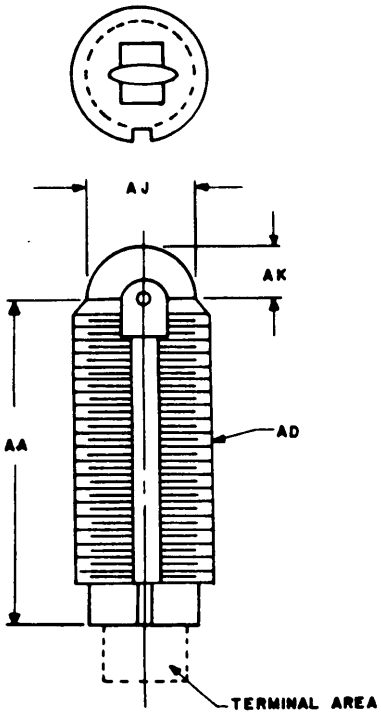


814-13-1

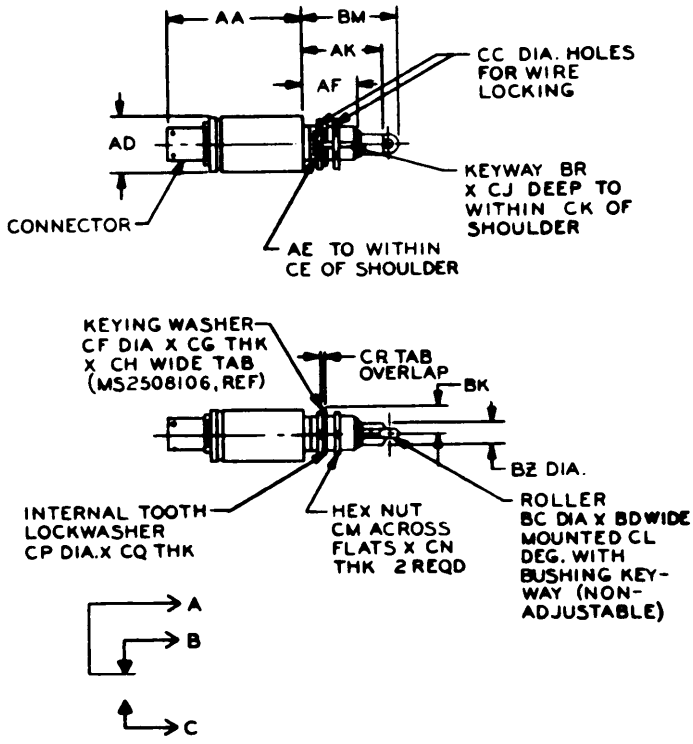


814-13-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

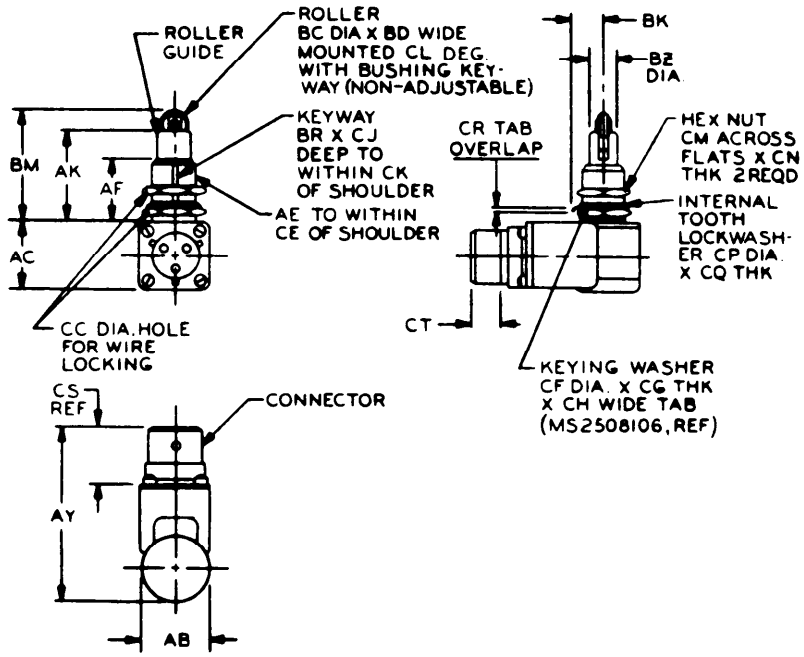


014-13-3

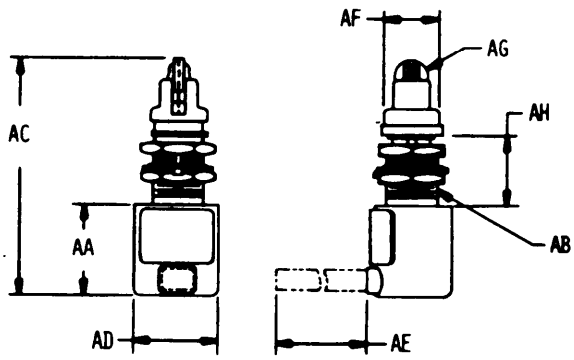


014-13-4


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

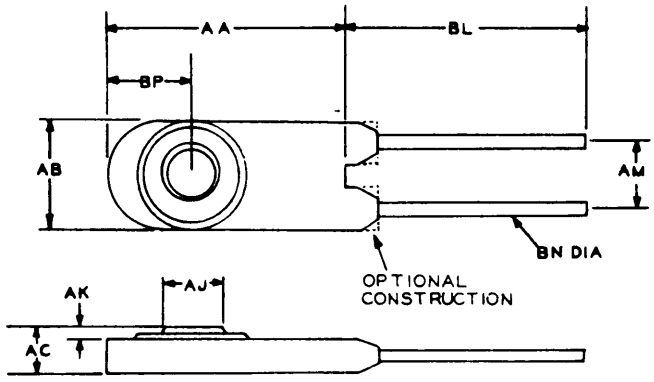


014-14-1

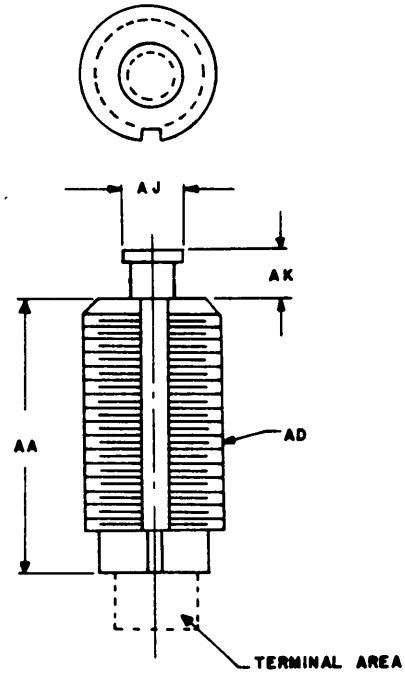

014-15-1

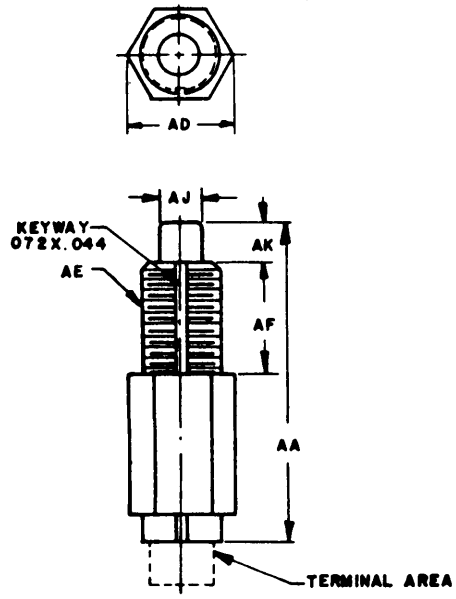


014-15-2

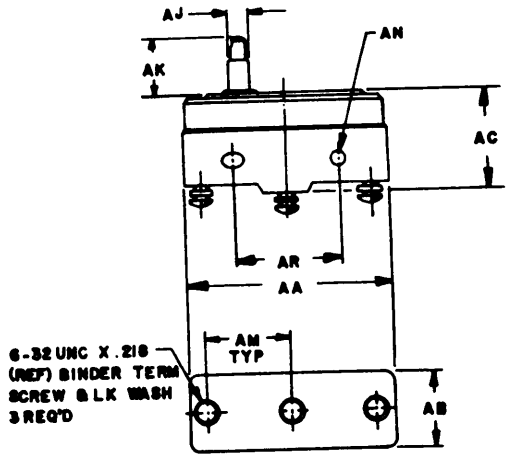


014-15-3


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

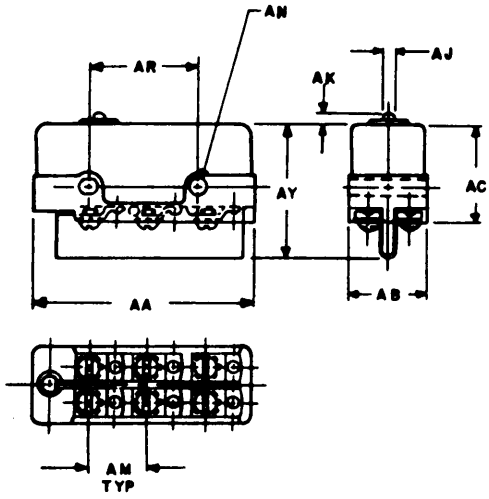


B14-16-1

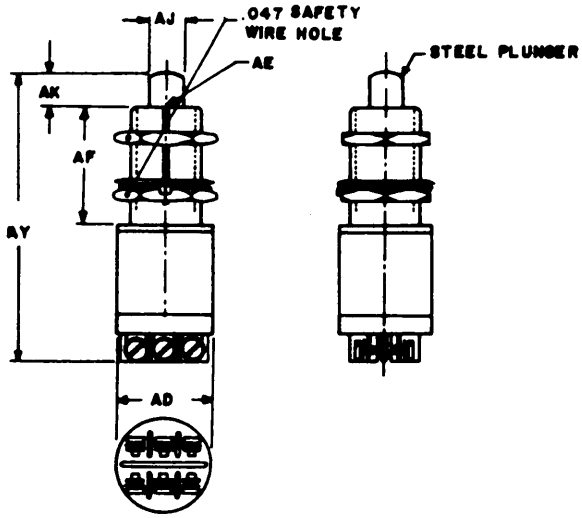

B14-16-2

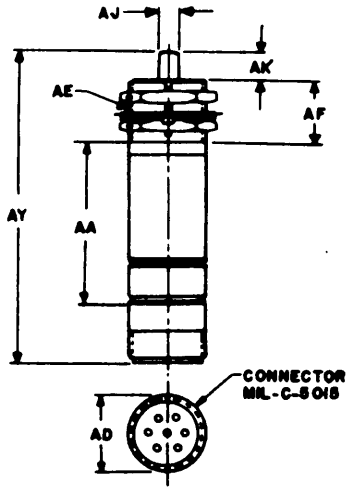


B14-16-3

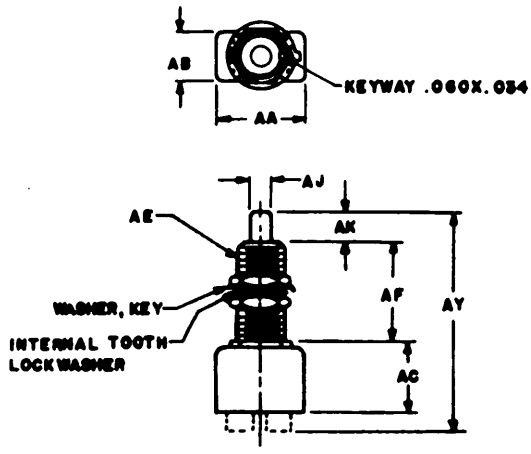


B14-16-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

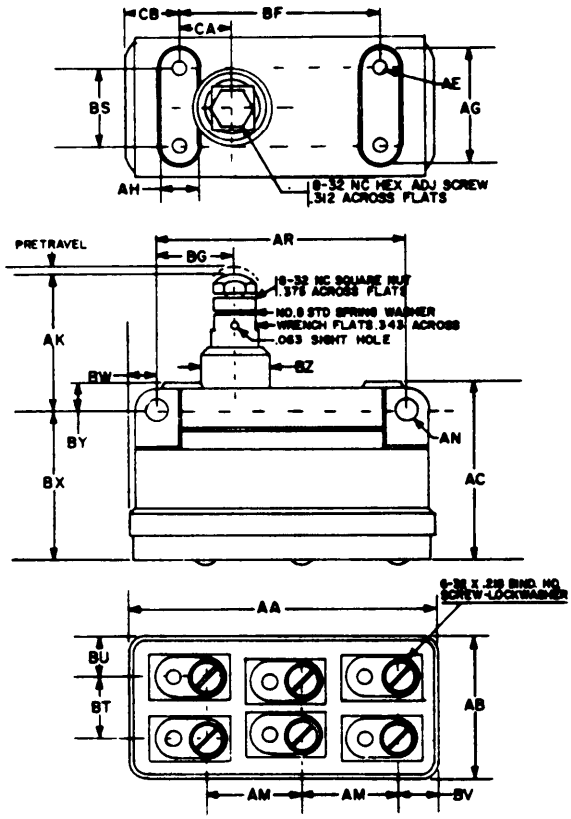


B14-16-6

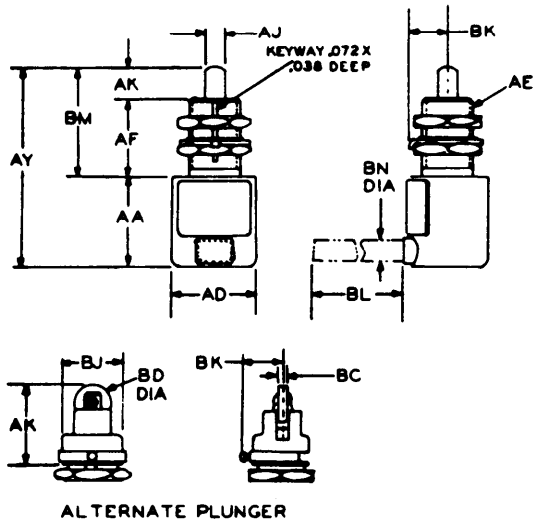

ALTERNATE PLUNGER


B14-16-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

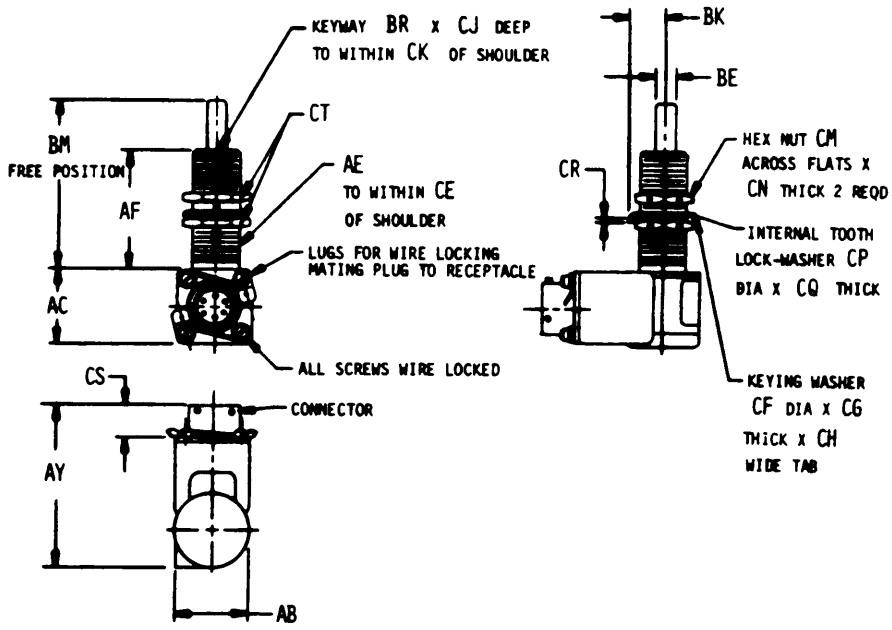


014-16-7


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

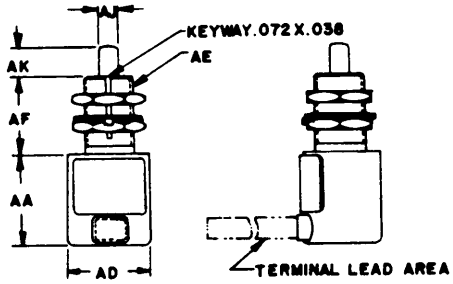

Ø14-17-1

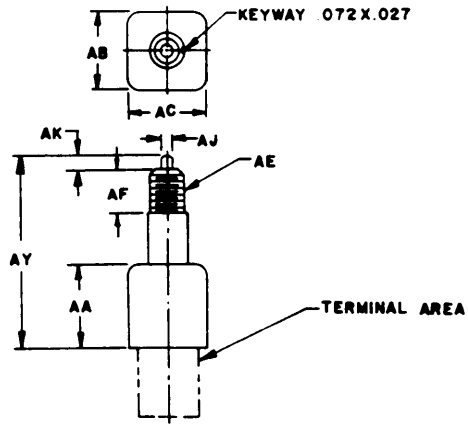


Ø14-17-2

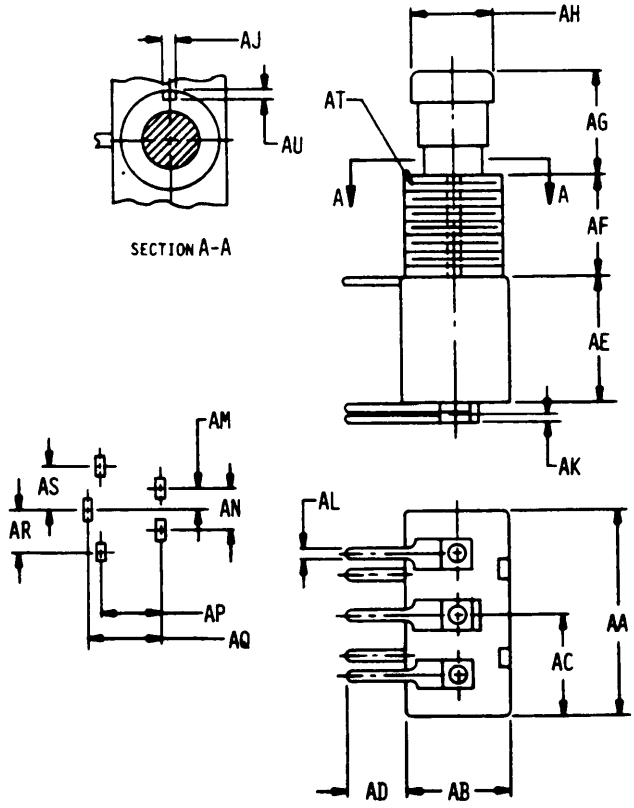


Ø14-17-3


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

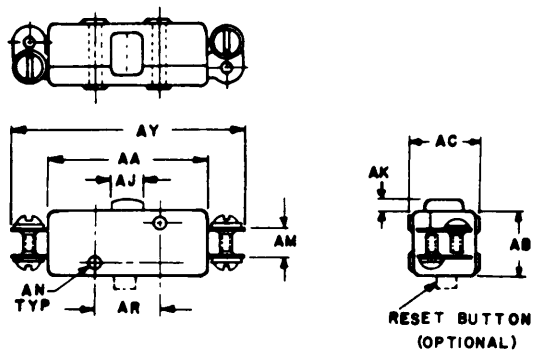

Ø14-18-1

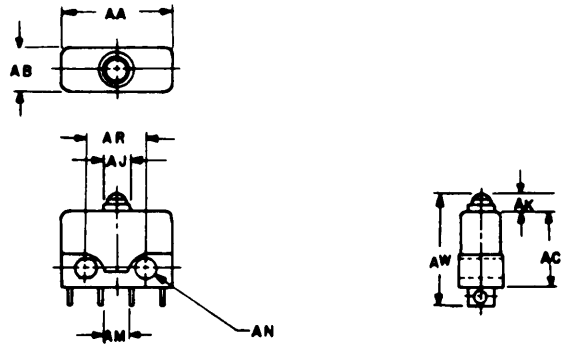


Ø14-18-2

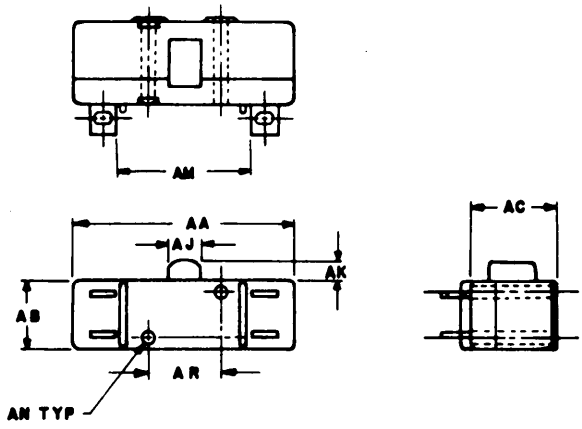


Ø14-18-3

Source: https://assist.dla.mil -- Downloaded: 2026Ø1Ø-26T07:25Z
Check the source to verify that this is the current version before use.

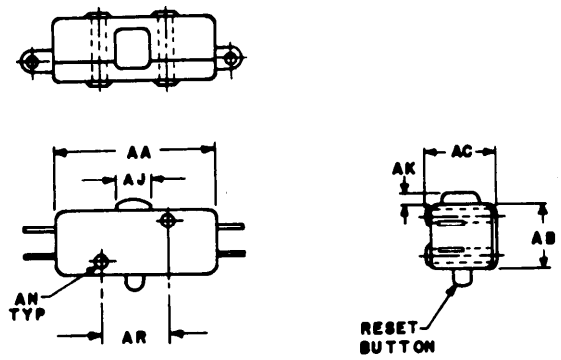


014-18-4

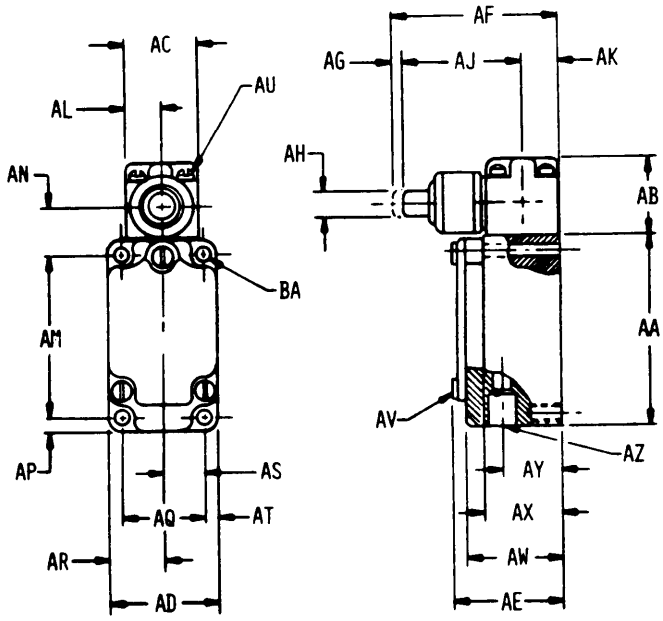


014-18-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

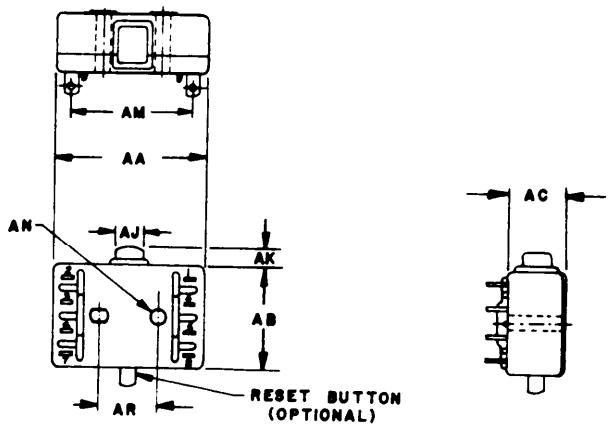


Ø14-19-1

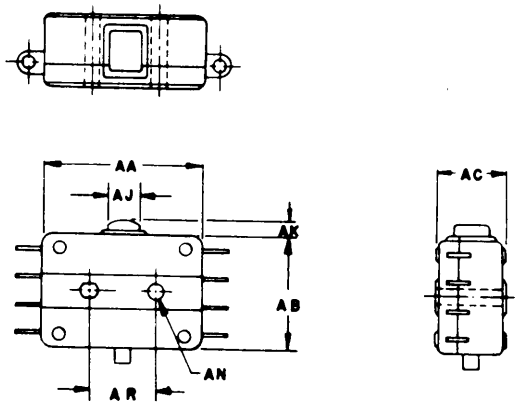


Ø14-19-2

Source: https://assist.dla.mil -- Downloaded: 2026Ø-26T07:25Z
Check the source to verify that this is the currentversion before use.

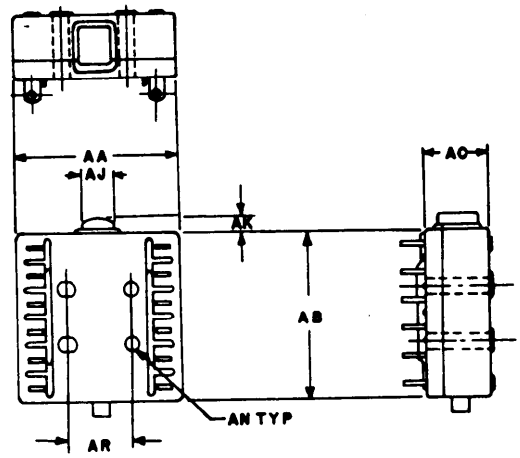


014-20-1

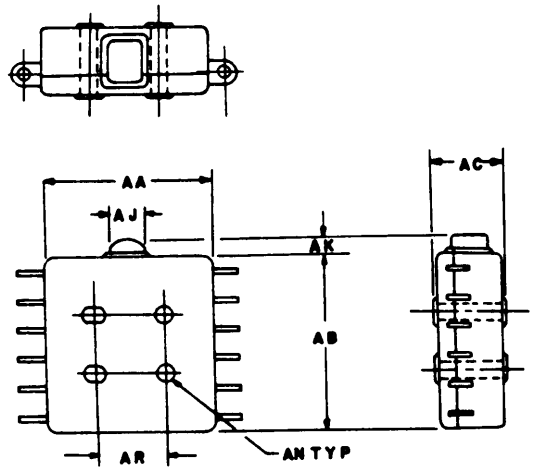


014-20-2


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

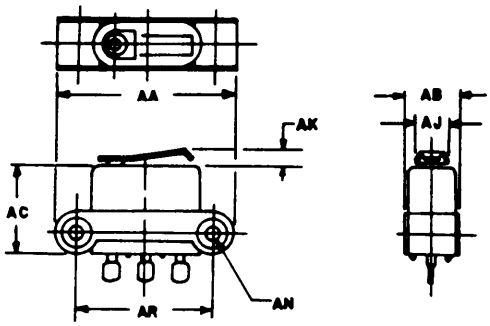


Ø14-21-1

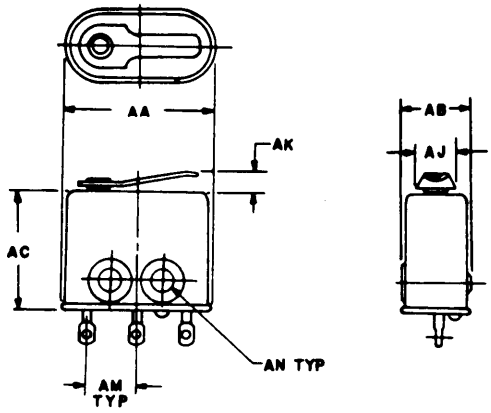

Ø14-21-2

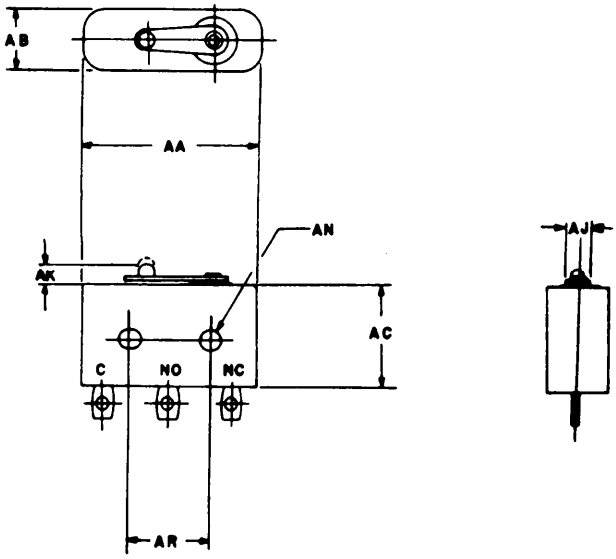


Ø14-21-3

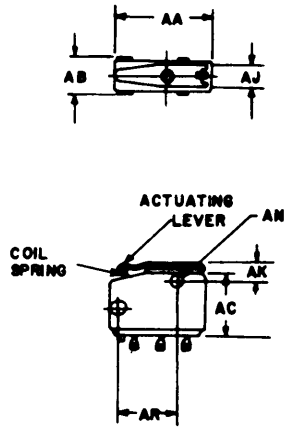


Ø14-21-4


Source: https://assist.dla.mil -- Downloaded: 2026Ø10-26T07:25Z
Check the source to verify that this is the currentversion before use.

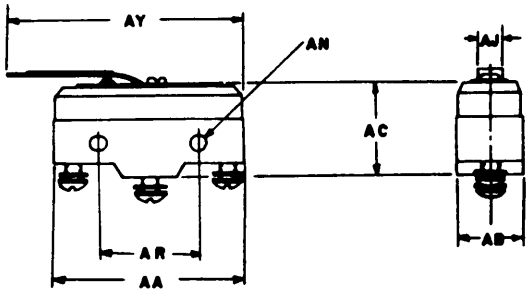


014-21-5

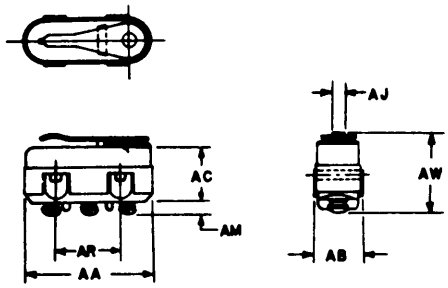


014-21-6

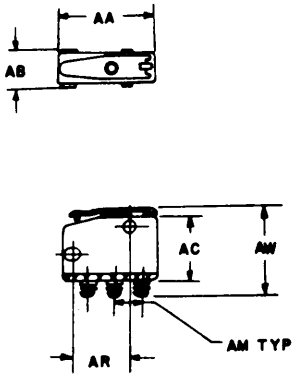

014-21-7

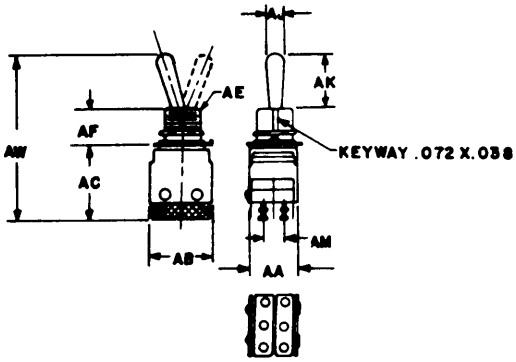


014-22-1

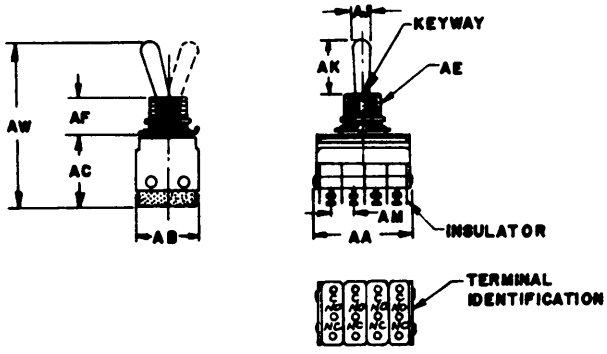


014-23-1


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

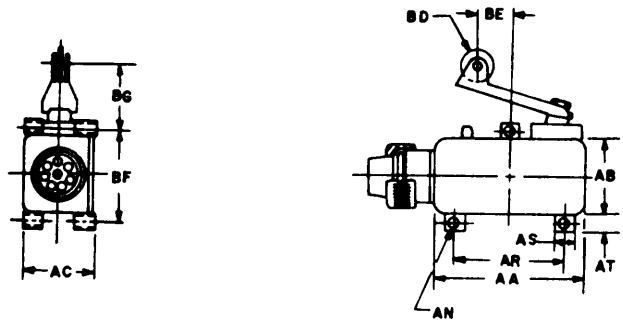

Ø14-24-1

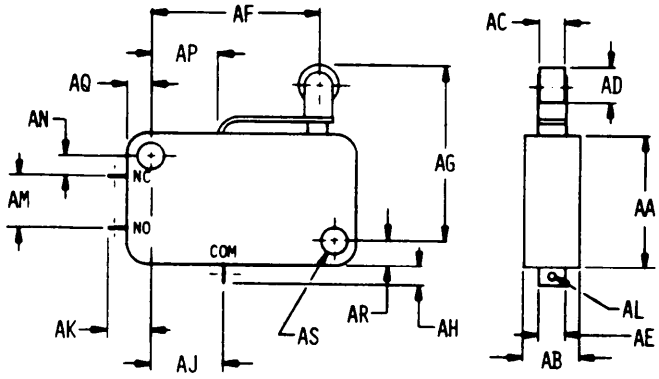


Ø14-24-2

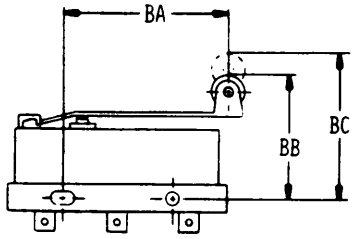


Ø14-24-3


Source: https://assist.dla.mil -- Downloaded: 2026Ø1Ø-26T07:25Z
Check the source to verify that this is the current version before use.

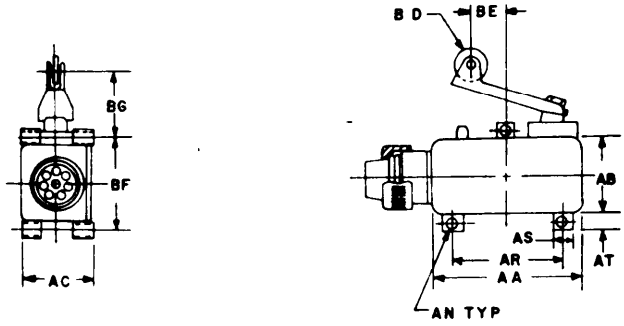


Ø14-25-1

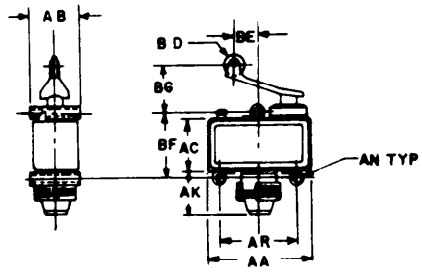

Ø14-25-2

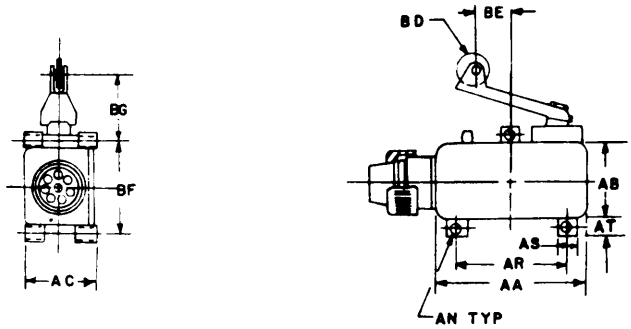


Ø14-26-1

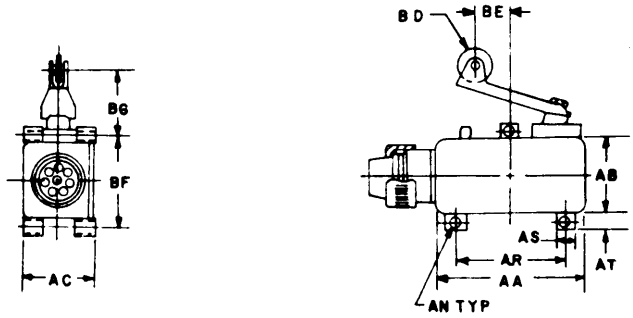


Ø14-27-1


Source: https://assist.dla.mil -- Downloaded: 2026Ø-26T07:25Z
Check the source to verify that this is the current version before use.

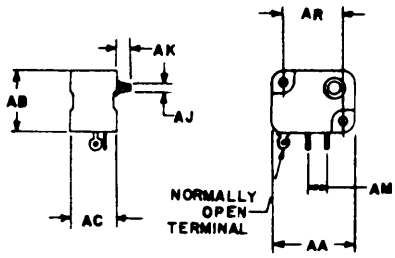



014-28-1

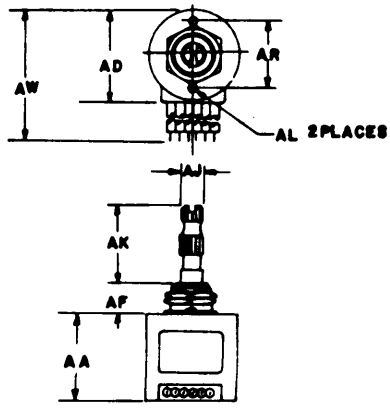

014-29-1








014-30-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.




POSITION - NORMALLY OPEN OR NORMALLY CLOSED

014-31-1




POSITION - NORMALLY CLOSED

014-31-2




POSITION - NORMALLY OPEN

014-31-3




POSITION - 1 NORMALLY CLOSED

014-31-4




POSITION - 2 NORMALLY CLOSED

014-31-5




POSITION - NORMALLY OPEN

014-31-6




POSITION - NORMALLY CLOSED

014-31-7




POSITION - 2 & 5 NORMALLY CLOSED

014-31-8




POSITION - 1 & 2 NORMALLY CLOSED


014-31-9



014-31-10




014-31-11




014-31-12


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.




014-31-13




014-31-14




014-31-15




014-31-16




014-31-17




014-31-18




014-31-19




014-31-20



014-31-21



014-31-22



014-31-23

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	16	1406	114	1467	176	1539	134
0102	16	1407	96	1468	142	1545	180
Q103	16	1410	166	1469	172	1546	180
0104	16	1411	166	1470	176	1547	42
0105	16	1412	168	1471	146	1548	46
0107	18	1413	168	1473	172	1549	46
0108	18	1414	168	1475	174	1550	142
0700	16	1416	168	1476	174	1551	146
0800	16	1418	166	1477	86	1552	172
1003	16	1419	166	1478	142	1553	176
1004	16	1420	168	1479	144	1557	44
1005	16	1421	168	1480	174	1558	44
iOO6	16	1426	180	1482	142	1562	28
1008	16	1427	180	1486	142	1564	28
1009	30	1428	180	1487	144	1565	34
1371	96	1429	112	1488	142	1566	28
1372	98	1430	182	1490	176	1568	34
1373	96	1431	180	1491	178	1570	28
1374	180	1432	114	1492	178	1572	28
1375	166	1433	166	1494	140	1573	178
1376	96	1435	178	1495	140	1574	28
1377	98	1436	178	1497	98	1576	28
1378	96	1438	180	i498	96	1578	28
1380	94	1439	182	1499	148	1580	28
1381	98	1442	174	1500	148	1582	28
1382	182	1444	174	1502	148	1583	32
1383	98	i446	172	15Q3	148	1584	32
1384	96	1447	172	1504	148	1585	32
1386	96	1448	172	1508	146	1586	32
1387	96	1449	116	1509	146	1587	34
1388	96	1451	142	1511	96	1588	34
1391	114	1452	182	1520	98	1589	34
1394	112	1453	182	1522	98	1590	34
1395	114	1455	170	1523	98	i591	34
1396	112	1456	170	1524	98	1592	34
1397	114	1457	160	1533	174	1593	34
1398	112	1459	182	1534	174	1594	34
1400	112	1462	182	1535	176	1595	34
1402	182	1464	142	1536	176	1596	34
1404	114	1466	176	1538	180	1596	36

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1599	36	1708	50	1856	62	1932	82
1600	36	1730	50	1858	64	1934	82
1601	36	1732	50	1860	62	1936	84
1602	36	1736	50	1862	64	1938	84
1603	36	1738	50	1664	64	1940	84
1604	36	1740	50	1866	64	1942	84
1605	36	1742	50	1868	64	1944	84
1606	36	1744	52	1870	64	1946	84
1607	36	1766	52	1872	64	1948	84
1608	36	1784	52	1874	64	1950	84
I609	36	1786	52	1876	64	1952	100
1610	38	1790	52	1877	66	1954	100
1611	38	1792	52	1878	66	1956	100
1612	38	1800	56	1879	66	1958	100
1613	38	1802	56	1880	60	1960	100
1614	38	1804	56	1881	60	1962	100
1660	48	1806	58	1882	69	1964	100
1662	46	1808	58	1883	60	1966	100
1663	48	1810	56	1884	60	1968	100
1664	48	1812	58	1885	64	1970	102
1665	48	1814	58	1886	62	1972	102
1666	46	1816	58	1887	60	1974	102
1668	46	1818	58	1890	62	1976	102
1670	48	1820	58	1892	62	1978	102
1672	46	1822	58	1900	78	1980	102
1674	84	1824	58	1902	78	1982	102
1676	84	1826	58	1904	78	1984	102
1678	48	1828	60	1906	78	1986	102
1680	82	1830	60	1908	78	1988	102
1682	48	1832	60	1910	78	1990	194
1683	64	1834	60	1912	78	1992	104
1684	48	1836	60	1914	78	2000	40
1686	62	1840	60	1916	80	2002	40
1688	48	1842	62	1918	80	2004	40
1690	48	1844	62	1928	80	2006	40
1692	68	1846	62	1922	80	2008	49
1694	48	1848	62	1924	80	2010	40
1696	50	1850	62	1926	80	2012	40
1698	50	1852	64	1928	82	2180	104
1704	56	1854	64	1930	82	2182	104

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2184	104	2274	112	2366	150	2464	164
2185	104	2276	114	2388	150	2466	166
2188	104	2280	122	2390	150	2468	166
2190	104	2282	122	2391	150	2484	170
2192	104	2284	122	2392	150	2486	170
2194	104	2286	122	2393	150	2490	170
2200	106	2288	124	2394	150	2492	170
2202	106	2290	124	2395	150	2493	172
2204	106	2292	124	2396	150	2494	172
2206	106	2294	124	2397	150	2501	27
2208	106	2296	124	2400	154	2502	27
2210	106	2300	124	2402	154	2503	2?
2212	106	2302	124	2404	154	2504	27
2214	106	2304	124	2406	154	2505	27
2216	106	2306	126	2408	154	2506	27
2218	106	2308	126	2410	154	2507	27
2220	108	2310	126	2412	154	2508	27
2222	108	2312	126	2414	154	2509	27
2224	100	2314	126	2416	154	2510	27
2226	108	2316	126	2418	154	2511	27
2230	108	2318	126	2420	154	2512	27
2232	108	2320	116	2422	154	2513	2?
2234	108	2322	116	2424	154	2514	27
2236	108	2328	116	2426	158	2515	27
2236	108	2332	116	2428	158	2516	27
2240	110	2334	116	2430	158	2517	2?
2242	110	2336	118	2432	158	2518	27
2244	110	2340	118	2436	158	2519	27
2250	110	2342	118	2438	158	2520	27
2252	110	2344	122	2440	158	2521	27
2254	110	2346	122	2442	158	2522	27
2256	110	2348	122	2444	164	2523	27
2258	110	2350	122	2446	164	2524	2?
2260	110	2352	122	2450	164	2525	27
2262	110	2358	134	2452	164	2526	27
2264	110	2368	142	2454	164	2527	27
2266	112	2370	142	2456	164	2528	27
2266	112	2374	146	2458	164	2529	27
2270	112	2376	145	2460	164	2530	2?
2272	112	2384	148	2462	160	2531	27

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2532	27	2572	27	2616	27	2708	25
2533	27	2573	2?	2617	27	2709	25
2534	27	2574	27	2618	27	2710	25
2535	27	2575	27	2619	2?	2711	25
2536	27	2576	27	2620	27	2712	25
2537	27	2577	27	2621	27	2713	25
2538	27	2578	27	2622	27	2714	25
2539	27	2579	2?	2623	27	2715	25
2540	27	2580	27	2624	27	2716	25
2541	27	2581	27	2626	27	2717	25
2542	27	2582	27	2627	27	2718	25
2543	27	2583	27	2628	27	2719	25
2544	27	2584	27	2629	27	2720	25
2545	27	2585	27	2630	27	2721	25
2546	27	2586	2?	2631	27	2722	25
2547	27	2587	27	2633	27	2723	25
2548	27	2508	27	2634	27	2724	25
2549	27	2589	27	2635	27	2725	25
2559	27	2590	27	2636	27	2726	25
2551	27	2591	27	2637	27	2727	25
2552	27	2592	27	2638	27	2728	25
2553	27	2593	27	2640	27	2729	25
2554	27	2594	27	2641	27	2730	25
2555	27	2595	27	2642	2?	2731	25
2556	27	2596	27	2643	2?	2732	25
2557	27	2601	27	2644	27	2733	25
2558	27	2602	27	2645	27	2734	25
2559	27	2603	27	2647	27	2735	25
2560	27	2604	27	2648	27	2736	25
2561	27	2605	27	2649	27	2737	25
2562	27	2606	27	2650	27	2738	25
2563	27	2607	27	2651	27	2739	25
2564	27	2608	27	2652	27	2740	25
2565	27	2609	27	2701	25	2741	25
2566	27	2610	27	2702	25	2742	25
2567	27	2611	27	2703	25	2743	25
2560	27	2612	27	2704	2	2744	25
2569	27	2613	27	2705	25	2745	25
2570	27	2614	27	2706	25	2746	25
2571	27	2615	2?	2707	25	2747	25

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2748	25	2788	25	2834	25	3116	120
2749	25	2789	25	2835	25	3110	120
2750	25	2790	25	2836	25	3120	120
2751	25	2791	25	2837	25	3122	120
2752	25	2792	25	2838	25	3124	120
2753	25	2793	25	2840	25	3126	120
2754	25	2794	25	2841	25	3128	120
2755	25	2795	25	2842	25	3130	120
2756	25	2796	25	2843	25	3132	120
2757	25	2801	25	2844	25	3140	128
2758	25	2802	25	2845	25	3142	128
2759	25	2803	25	2847	25	3144	128
2760	25	2804	25	2848	25	3146	128
2761	25	2805	25	2849	25	3150	132
2762	25	2806	25	2850	25	3152	134
2763	25	2807	25	2651	25	3154	134
2764	25	2808	25	2652	2	3158	150
2765	25	2809	25	2900	176	3160	150
2766	25	2810	25	2902	176	3170	156
2767	25	2811	25	2908	184	3172	156
2768	25	2812	25	2910	184	3174	156
2769	25	2813	25	2920	184	3176	156
2770	25	2814	25	2922	184	3178	156
2771	25	2815	25	2930	184	3180	156
2772	25	2816	25	2932	184	3182	156
2773	25	2817	25	2934	186	3184	156
2774	25	2418	25	2936	186	3186	156
2775	25	2819	25	2938	186	3188	156
2776	25	2820	25	2940	186	3189	156
2777	25	2821	25	2942	186	3190	160
2778	25	2822	25	2944	186	3192	160
2779	25	2823	25	3031	38	3194	162
2780	25	2824	25	3100	118	3196	162
2781	25	2826	25	3102	118	3200	52
2782	25	2827	25	3104	118	3202	54
2783	25	2828	25	3106	119	3204	54
2784	25	2829	25	3108	118	3206	54
2785	25	2830	25	3110	118	3210	54
2786	25	2831	25	3112	118	3212	54
2787	25	2833	25	3114	120	3214	54

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHAEACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3216	54	3822	76	4695	128	4756	86
3220	54	3824	76	4698	128	4760	84
3222	56	3826	76	4700	126	4761	86
3224	56	3828	76	4701	126	4762	86
3228	56	3830	76	4703	146	4765	132
3230	56	3832	76	4707	172	4766	132
3232	56	3834	76	4708	172	4770	132
3240	68	4132	144	4709	172	4771	132
3242	74	4133	144	4713	179	4772	132
3244	78	4134	144	4714	170	4773	132
3246	78	4135	144	4715	170	4782	132
3250	80	4136	144	4717	74	4788	88
3252	80	4137	144	4718	128	4790	90
3254	82	4138	144	4719	170	4791	88
3256	82	4139	144	4722	168	4793	90
3260	90	4142	146	4723	168	4795	88
3262	90	4143	144	4726	168	4798	86
3264	92	4146	146	4729	176	4799	86
3266	92	4147	146	4730	176	4803	88
3268	92	4662	152	4731	116	4805	88
3270	92	4663	152	4732	136	4809	94
3272	92	4664	152	4734	136	4810	94
3274	92	4665	152	4735	140	4811	94
3260	100	4666	152	4736	138	4812	94
3282	108	4667	152	4737	136	4613	88
3284	112	4669	128	4738	136	4614	94
3600	60	4671	128	4739	136	4815	88
3602	80	4672	152	4740	138	4819	92
3604	80	4674	152	4741	138	4820	92
3608	80	4675	152	4742	138	4822	94
3610	82	4677	152	4743	140	4825	94
3612	82	4678	184	4745	136	4829	130
3614	82	4683	152	4746	136	4830	130
3616	82	4684	148	4748	136	4031	130
3700	160	4685	148	4749	138	4834	130
3702	162	4686	148	4750	138	4835	130
3810	76	4689	120	4751	140	4836	130
3812	76	4691	128	4752	140	4838	130
3814	76	4692	128	4754	86	4839	130
3820	76	4694	128	4755	86	4842	72

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4844	72	4950	30	6206	90	6311	68
4845	74	4952	136	6207	90	6312	68
4846	74	4956	134	6210	46	6315	162
4847	72	4958	132	6217	160	6316	162
4848	42	4959	134	6219	160	631$	160
4849	68	4960	134	6220	160	6319	162
4850	74	4969	90	6221	160	6320	136
4853	88	4970	90	6222	160	6321	136
4054	72	4971	90	6224	160	6322	136
4855	72	4975	184	6225	160	6323	138
4856	70	4976	184	6226	44	6324	138
4859	68	4977	184	6228	158	6325	138
4861	72	4978	178	6229	158	6326	138
4862	72	4979	176	6230	144	6328	138
4863	44	4980	114	6231	162	6329	140
4864	44	4981	114	6233	44	6330	140
4865	44	4983	116	6234	162	6331	140
4867	74	4984	116	6235	162	6332	140
4868	44	4985	116	6236	162	6333	140
4869	74	4986	116	6237	162	6359	94
4870	74	4989	128	6238	162	6369	16
4872	134	4991	114	6239	44	6370	136
4874	70	5000	74	6250	44	6372	188
4875	72	5046	20	6251	44	6477	42
4878	132	5052	20	6263	46	6870	186
4884	66	5054	20	6264	46	6873	16
4885	68	5064	22	6265	46	6874	18
4890	90	5061	22	6267	74	6941	16
4891	70	5062	22	6269	166	6942	18
4892	44	5063	22	6272	42	6991	188
4893	44	5068	20	6273	42	6993	188
4894	66	5069	20	6279	130	6994	188
4897	74	5070	20	6280	70	6995	188
4900	70	5071	20	6292	68	6996	42
4901	66	5886	68	6293	66	6997	42
4902	70	6200	172	6294	66	6998	42
4904	20	6201	170	6299	134	6999	42
4905	20	6202	90	6300	66	7001	186
4906	66	6204	148	6308	70	7002	186
4908	66	6205	152	6310	70	7003	186

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX (CONT)

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
7004	186						
7005	186						
7021	70						
7022	40						
7023	40						
7024	40						
7345	42						
7572	30						
7573	30						
7574	30						
7576	30						
7577	30						
7578	30						
7500	32						
7629	188						
7630	188						
7631	20						
7632	20						
7632	20						
7645	20						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Acceleration	42
Actuator Lever Type	36
Additional Part Marking	188
Additional Requirements	186
Altitude Rating	22
Aperture Cards Required	18
Applicable Documents	188
Base Document	16
Capacitance	46
Circuit Configuration	50
City, State, Zip	16
Classification	28
Coincidence of Operating and Release Points (Simultaneity)	52
Company Name/Command	16
Configuration	30
Contact Arrangement	40
Contact Bounce	54
Contact Resistance	56
Contract Number/Office Symbol	16
Control, Source	16
Control, Specification	18
Corona at Reduced Barometric Pressure	60
Corona at Sea Level	62
Date	16
Definition of Hermetic Sealing	188
Design and Construction	32
Dielectric Withstanding Voltage at Reduced Barometric Pressure	66
Dielectric Withstanding Voltage at Sea Level	70
Electromagnetic Interference	76
Enclosure	32
Endurance, Electrical	78
Endurance, Mechanical	80
Explosion	82
Finishes	32
Format	16
Fungus	84
Government Design Activity FSCM	16

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Humidity	86
Icing	90
Illustrations	30
Immersion	92
Insulation Resistance	94
Intermediate Current Switching	100
Life, Low Level Switching at Reduced Barometric Pressure	104
Life, Low Level Switching at Sea Level	108
Materials	32
Metals	32
Moisture Resistance	112
Mounting Hardware	186
Nomenclature	188
Notes	188
Operating Characteristics	116
Overload	122
Packaging	188
Part Marking	188
Part Number	18
Part Number Cross Reference	188
Phone Number	16
Plunger Type	36
Power Rating	20
Quality Assurance Provisions	188
Rated Loads	24
Requester FSCM	16
Requester's Name	16
Resistance to Soldering Heat	126
Resistance to Solvents	130
Revision of AEDPS Document (Number)	18
Salt Spray	132
Sand and Dust	132
Scope	18
Seal	136
Shock, High Impact	140

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

Page

Shock, Specified Pulse - 146
Short Circuit- 148
Solderability- 152
Source Table - 18
Stops Strength - 154
Street/Building- 16
Strength of Actuating Means- 156
Strength of Mounting Means - 158
Superseded Document- 188
System Application - 16

Temperature, High- 158
Temperature, Low - 160
Temperature Rating - 20
Temperature Rise - 164
Terminal Strength- 166
Terminals- 38
Thermal Shock (Temperature Cycling)- - - - - - - - - - - - - - - - - - 168
Type of Operation- 34

Units of Measure - 18, 30

Vibration, High Frequency- 170
Vibration, Low Frequency - 174
Vibration, Random- 178

Waterproofness - 184
Weight - 40
Workmanship- 186

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET___ OF ___

*TITLE CODE 1 2 3 4 5 6	*REQUESTER NO. 7 8 9 10 11 12	CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE 20 25 30 35 40 45 50 55 60 65 70 75	LINE NO. 79 80
*REQUESTER'S NAME		Ø 1 Ø 1		
*COMPANY NAME/COMMAND		Ø 1 Ø 2		
*STREET/BUILDING		Ø 1 Ø 3		
*CITY, STATE, ZIP		Ø 1 Ø 4		
*PHONE NO. INCLUDE A/C AUTOVON IF APPLICABLE		Ø 1 Ø 5		
*DATE		1 Ø Ø 3		
*REQUESTER FSCM		1 Ø Ø 4		
*CONTRACT NO./OFFICE SYMBOL		1 Ø Ø 5		
*BASE DOCUMENT		1 Ø Ø 6		
*SYSTEM APPLICATION		1 Ø Ø 8		
*GOVERNMENT DESIGN ACTIVITY FSCM		6 3 6 9		
*FORMAT SIX SECTION DOCUMENT.		Ø 7 Ø Ø		
ONE SECTION DOCUMENT.		Ø 8 Ø Ø		
APERTURE CARDS REQUIRED.		Ø 1 Ø 7		
REVISION OF AEDPS DOCUMENT NO.		Ø 1 Ø 8		
*CONTROL SOURCE.		6 8 7 3		
SPECIFICATION.		6 8 7 4		
*SOURCE TABLE		9 1 5 1		
UNIT OF MEASURE U.S.		6 9 4 1		
SI.		6 9 4 2		

PLEASE SUPPLY THE FOLLOWING:

DASH-NUMBERED PART _____ REV _____ NOTICE # _____

AS A FINAL CHECK, SCAN THE SRS FOR THE FOLLOWING COMMON ERRORS:

- ☐ MANDATORY CHARACTERISTIC CODES AND VALUES NOT SUPPLIED
- ☐ ZERO (Ø) WRITTEN WITHOUT VIRGULE (0)
- ☐ USE OF POUND SIGN (#) WITHOUT ACCOMPANYING CHARACTERISTIC VALUE
- ☐ POUND SIGN (#) OMITTED FROM END OF STATEMENT (CHARACTERISTIC VALUE)
- ☐ CHARACTERISTIC CODE USED MORE THAN ONCE (OTHER THAN MULTILINE STATEMENT)
- ☐ MULTILINE STATEMENT NOT NUMBERED IN COLUMN 80

*MANDATORY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET___OF___

TITLE CODE 1 2 3 4 5 6	REQUESTER NO. 7 8 9 10 11 12	CHAR CODE 13 14 15 16	CHARACTERISTIC VALUE 20 25 30 35 40 45 50 55 60 65 70 75	LINE NO. 79 80

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
DOD STD 35-138

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander,
U.S. Army Missile R & D Command
ATTN: DRDMI-ESD
Redstone Arsenal, Alabama 35809

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:25Z
Check the source to verify that this is the current version before use.