DOD-STD-35-20C(MI)

26 SEPTEMBER 1986

SUPERSEDING
DOD-STD-35-20B(MI)
6 APRIL 1979

MILITARY STANDARD

AUTOMATED ENGINEERING
DOCUMENT PREPARATION SYSTEM

FITTINGS AND COUPLINGS



NO DELIVERABLE DATA
REQUIRED BY THIS DOCUMENT

AREA EDS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL COMMAND
ALEXANDRIA, VA 22333

Fittings and Couplings
Automated Engineering
Document Preparation System

DOD-STD-35-20C(MI)

1. This Military Standard is approved for use by AMC, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Command, ATTN: AMSMI-RD-SE-TD-ST, Redstone Arsenal, Alabama 35898-5270, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-20C(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for Fittings and Couplings.

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY LEFT

BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	36
	2.1	Government Documents	36
	2.1.1	Specifications and Standards	36
	2.2	Other Publications	37
	2.3	Order of Precedence	37
	3.	DEFINITIONS	38
	4.	GENERAL REQUIREMENTS	39
	4.1	Introduction	39
	4.2	Specification Requirement Sheet (SRS)	39
	4.3	Configuration	39
	4.3.1	Dimension	39
	4.3.2	Illustrations	39
	4.4	Units of Measure	39
	5.	DETAILED REQUIREMENTS	40
	5.1	Introduction	40
	5.2	MSE Formats	40
	5.3	Referenced Documents	40
	5.4	Test Matrix	40
	5.5	Tabulation	42
	5.6	Keyword Code Index (KCI) and Standard Paragraphs	44
	5.6.1	Interrelationship of Codes	44
	5.6.2	Automatic MSE Data	45
	5.6.3	DOD-STD-35 Table	45

TABLES

Table	I.	Title Index	2
	II.	Test Matrix	41
	III.	Tabulation Candidates	42

APPENDICES

APPENDIX	A.	Illustrations	188
	B.	Characteristic Code Index	260
		Index	267

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY LEFT

BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for Fittings and Couplings.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate a MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts, have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects applicable to all AEDPS dash-numbered parts and included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specification (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for a MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSEs for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index and entered on a SRS, specifies that the title of the MSE will be the title shown in the Title Index.

Each MSE title, listed in the Title Index, is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference. When more than one document is listed for an MSE title, this information will be useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
ADAPTER, COMPRESSED GAS CYLINDER VALVE CONNECTIONS	202020	MIL-A-16288	GENERAL SPECIFICATION
ADAPTER, PRESSURE FUEL SERVICING	202021	MIL-A-6425	GENERAL SPECIFICATION
		MIL-A-25676	AIRCRAFT
		MIL-A-25896	TYPES A-1
		MS24484	THRU A-6
		MS24476	AIRCRAFT
		MS29515	TYPES A-1 & A-6
ADAPTER, STRAIGHT, FLANGE TO BOSS	202022	AN871	FLANGE TO BOSS
ADAPTER, STRAIGHT, FLANGE TO HOSE	202023	MIL-F-5509	FLARED TUBE
		MS20757	
		MIL-F-52525	COUPLING, HOSE
		MS39353	HYDRAULIC
ADAPTER, STRAIGHT, FLANGE TO PIPE	202024	ANSIB16.5	PIPE FLANGED FITTINGS
		ANSIB16.24	
		WW-N-351	NIPPLE PIPE THREADED
ADAPTER, STRAIGHT, FLANGE TO TUBE	202025	MIL-F-5509	FLARED TUBE
		MS20760	FLARED TUBE
		MS27851	4000 PSI
		MS27854	CRES, THREADED
		MS27856	LOW PRESSURE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
ADAPTER, STRAIGHT, PIPE TO HOSE	202026	AN840	AIR HOSE
		MS39155	MALE, REUSABLE
ADAPTER, STRAIGHT, PIPE TO TUBE	202001	WW-T-725	TUBE FITTINGS, SOLDER END
		MIL-F-1183	FITTINGS, TUBE, SILVER BRAZING
		MIL-F-1224	FITTINGS, TUBE, 45-DEGREE FLARE
		MS39158	MALE PIPE END
		MS39159	FEMALE PIPE END
		MIL-F-6001	FITTINGS, TUBE, SOLDER TYPE
		AN780	
		MIL-F-18866	FITTINGS, 37-DEGREE FLARE AND FLARELESS
		MS39322	FEMALE SWIVEL TO WELD SOCKET
		MS51500	FLARED, MALE
		MS51503	FLARED, FEMALE
		MS51816	FLARELESS, FEMALE PIPE END
		MS51819	FLARELESS, MALE PIPE END
		MIL-F-45911	FITTINGS, BRASS
		MS39179	MALE PIPE END
		MS39181	FEMALE PIPE END
		MIL-F-45968	INVERTED FLARE
		MS51875	MALE PIPE END
		MS51876	FEMALE PIPE END
		MS35869	REFRIGERATION, MALE
		MS35870	REFRIGERATION, CYLINDER
		MS35918	MALE SOLDER JOINT
		MS35919	MALE FLARE TO FEMALE SOLDER JOINT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
ADAPTER, STRAIGHT, PIPE TO TUBE (CONT)	202001 (CONT)	MS35921	FEMALE SOLDER JOINT
		MS39169	MALE, BALL SLEEVE TYPE
		AN816	
ADAPTER, SWIVEL FLANGE TO HOSE	202027	MIL-A-5070	ADAPTER, REUSABLE
		MS27231	NIPPLE ASSEMBLY
		MS27232	ADAPTER ASSEMBLY
		MIL-F-27272	FITTINGS, TFE HOSE
		MS27054	ADAPTER ASSEMBLY
		MS27062	NIPPLE SUB ASSEMBLY
		MIL-F-83798	FITTINGS, RUBBER HOSE
		MS18071	CRES
		MS18088	CRES
		MS28753	SELF SEALING FUEL HOSE
		MS87024	HOSE, MEDIUM PRESSURE
ADAPTER, STRAIGHT, TUBE TO BOSS	202028	MIL-F-5509	FLARED TUBE
		MS24398	EXPANDER
		MS24487	UNIVERSAL
		MIL-F-18280	FLARELESS TUBE
		MS21915	EXPANDER
		MIL-F-18866	37-DEGREE FLARE AND FLARELESS
		MS39324	FLARED
		MS51525	FLARED
		MS51526	LONG, FLARED
		MS51843	FLARELESS
		MS51893	LONG, FLARELESS
		MS9095	AMS 4121
		MS9193	AMS 5639

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
ADAPTER, STRAIGHT, TUBE TO HOSE	202029	MIL-A-5050	ADAPTER, REUSABLE
		MS24587	
		MS24588	3/16 TO 3/4 TUBING SIZE
		MIL-F-5509	FLARED TUBE
		AN807	UNIVERSAL
		MS27404	LOW PRESSURE
		MIL-F-8789	FITTING END HIGH PRESSURE
		MS28760	FLARE TUBE
		MS28761	FLARELESS TUBE
		MIL-A-11610	FILLING, LINE
		MIL-F-27272	FITTINGS, TFE HOSE
		MS27053	FLARED, WITH SWIVEL NUT
		MS27061	FLARED, WITH SWIVEL NUT
		MS27381	FLARELESS, WITH SWIVEL NUT
		MIL-F-83296	FITTINGS, TFE, HOSE
		MS27616	FLARED, SWIVEL NUT
		MS27619	FLARED, SWIVEL NUT
		MS27629	FLARELESS, SWIVEL NUT
		MS27632	FLARELESS, SWIVEL NUT
		MIL-F-83798	FITTINGS, RUBBER HOSE
		MS18081	CRES
		MS18085	SWIVEL NUT
		MS27584	PNEUMATIC
		MS27585	WATER METHANOL
		MS27586	DEMINERALIZING WATER SERVICE
		MS27587	ENGINE OIL
		MS27588	NITROGEN

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
ADAPTER, STRAIGHT, TUBE TO HOSE (CONT)	202029 (CONT)	MS27589	OXYGEN
		MS27590	3/8 INCH
		MS27591	1/4 INCH
		MS27593	NUT
		MS27594	TIRE INFLATING
		MS27607	BODY
		MS27608	9/16 INCH
		MS39156	37-DEGREE FLARE
BEND PIPE, RETURN	202030	WW-P-460	PIPE FITTINGS, BRASS OR BRONZE
		MS14306	
		MIL-F-20236	FITTINGS, TUBE AND PIPE
		MIL-F-23508	FITTINGS AND FLANGES
		MIL-F-24202	FITTINGS, BUTT WELDING
		MIL-F-52618	FITTINGS, PIPE, ALUMINUM
BEND, TUBE, RETURN	202031	MIL-F-1183	FITTINGS, TUBE, SILVER BRAZING
		MIL-F-20236	FITTINGS, TUBE AND PIPE
		MIL-F-23508	FITTINGS, AND FLANGES
BOLT, FLUID PASSAGE	202032	MIL-F-5509	FLARED TUBE
		AN775	UNIVERSAL, FLUID PASSAGE
		MS21949	SINGLE PORT
		MS21950	SINGLE PORT, THROUGH
		MS21951	DOUBLE PORT
		MS24387	PRECISION TYPE
		NAS551	UNIVERSAL
		MIL-F-18280	FLARELESS TUBE
		MS21938	BOLT, CLUSTER FITTING, SINGLE PORT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
BOLT, FLUID PASSAGE (CONT)	202032 (CONT)	MS21939	BOLT, CLUSTER FITTING, SINGLE PORT, THROUGH
		MS21940	BOLT, CLUSTER FITTING, DOUBLE PORT
		MS21941	BOLT, CLUSTER FITTING, DOUBLE PORT, THROUGH
BUSHING, PIPE	202033	WW-P-460	PIPE FITTINGS, BRASS OR BRONZE
		MS14315	250 POUND
		WW-P-471	PIPE FITTINGS, 125 AND 250 POUND
		WW-P-501	PIPE FITTINGS, CAST IRON
		MIL-F-5509 AN912	FLARED TUBE
		MIL-F-52618	FITTINGS, PIPE, ALUMINUM
CAP, LUBRICATION FITTING PROTECTIVE	202034	MIL-C-26516	REUSABLE, NONMETALLIC
		MS24529	
CAP, PIPE	202035	WW-P-460	PIPE FITTINGS, BRASS OR BRONZE
		MS14310	
		WW-P-501	PIPE FITTINGS, CAST IRON
		MIL-P-10388	PIPE FITTINGS, GROOVED ENDS
		MS14304	
		MIL-F-20236	FITTINGS, TUBE AND PIPE
		MIL-F-23508	FITTINGS AND FLANGES
		MIL-F-24202	FITTINGS, BUTT WELDING

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
CAP, PIPE (CONT)	202035 (CONT)	MIL-F-24227	FITTINGS AND FLANGES, SILVER BRAZING
		MIL-A-25676	OIL SERVICING
		MS24480	PRESSURE
		MIL-F-52618	FITTINGS, PIPE, ALUMINUM
CAP, PROTECTIVE, DUST AND MOISTURE SEAL	202036	MIL-C-5501	CAP AND PLUG
CAP, QUICK DISCONNECT	202037	MIL-C-27487	COUPLING HALVES
		MS27028	
		WW-T-725	TUBE FITTINGS, SOLDER END
		MIL-F-1183	TUBE FITTINGS, SILVER BRAZING
		MIL-F-5509	FLARED TUBE
		AN929	PRESSURE SEAL
		MIL-F-18280	FLARELESS TUBE
		MS21914	PRESSURE SEAL
		MIL-F-18866	FITTINGS, 37-DEGREE FLARE AND FLARELESS
		MS51532	FLARED
		MS51890	FLARELESS
		MIL-F-20236	FITTINGS, TUBE AND PIPE
		MIL-F-23508	FITTINGS AND FLANGES
		MS9313	AMS 5646
		MS9314	ASSEMBLY, AMS 5646
		MS9315	ASSEMBLY, AMS 5646 SILVER PLATE
		MS35872	REFRIGERATION, 45-DEGREE FLARE
		MS35924	SOLDER JOINT
CONNECTOR, ELASTIC TUBING, BRANCHED	202039	MS36076	"Y" SHAPED
		MS36600	"T" SHAPED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
CONNECTOR, MULTIPLE, FLUID PRESSURE	202040	MIL-F-5509	FLARED TUBE
		AN776	90-DEGREE ELBOW
		AN777	75-DEGREE ELBOW
		AN778	45-DEGREE ELBOW
		AN779	TEE, CLUSTER FITTING
		MS21946	BODY, ONE WAY
		MS21953	ONE WAY, FLARED
		MS21954	TWO WAY, FLARED 90-DEGREE
		MS21955	TWO WAY, FLARED 180-DEGREE
		MS21956	THREE WAY, FLARED
		MS21958	BODY, TWO WAY, 180-DEGREE
		MS21959	BODY, TWO WAY, 90-DEGREE .
		MS21960	BODY, THREE WAY, BOSS
		MIL-F-18280	FLARELESS TUBE
		MS21942	BODY, ONE WAY
		MS21943	BODY, TWO WAY, 90-DEGREE
		MS21944	BODY, TWO WAY, 180-DEGREE
		MS21945	BODY, THREE WAY
		AN6285	PRESSURE GAGE
		NAS553	15-DEGREE
COUPLING ADAPTER, QUICK DISCONNECT	202041	MIL-C-27487	COUPLING HALVES
		MS39352	MALE TO MALE
COUPLING ASSEMBLY, HOSE	202042	WW-C-624	FIRE, GARDEN, WATER SUCTION
		MS16051	GROUND COOLING

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
COUPLING ASSEMBLY, QUICK DISCONNECT	202043	MIL-C-4109	LOW PRESSURE, AIR HOSE
		MIL-C-7413	AUTOMATIC SHUTOFF
		MIL-C-7942	HOSE, ANTI "G" SUIT
		MS22011	MALE
		MIL-C-19179	FUEL
		MIL-C-21049	LIQUID OXYGEN
		MS22068	
		MIL-C-25427	HYDRAULIC, SELF-SEALING
		MS24333	FLARED
		MS24334	FLARELESS
COUPLING, FIRE HOSE	202044	WW-C-621	WOVEN JACKET
		MIL-C-7580	HIGH PRESSURE
		MIL-F-19488	FITTINGS, HOSE WATER AND STEAM
		MS27386	NIPPLE SUB-ASSY
COUPLING HALF, QUICK DISCONNECT	202045	MIL-C-3486	BOWES TYPE
		MIL-C-4109	LOW PRESSURE
		MIL-C-19179	FUEL
		MS26549	MALE
		MS26550	FEMALE
		MS26552	MALE, OPEN FLOW
		MS26553	MALE, WITH CHECK VALVE
		MIL-C-25162	FLIGHT PRESSURE REFUELING
		MIL-C-25531	PNEUMATIC STARTER
		MS17833	MALE
		MS18039	COUPLING TO FITTING
		MS18040	COUPLING TO MS17833
		MIL-A-25676	LUBRICATING OIL SERVICING

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
COUPLING HALF, QUICK DISCONNECT (CONT)	202045 (CONT)	MS24476	
		MIL-C-27487	COUPLING HALVES
		MS27020	MALE, INTERNAL PIPE THREAD
		MS27021	MALE, HOSE SHANK
		MS27022	MALE, EXTERNAL PIPE THREAD
		MS27023	MALE, FLANGED
		MS27024	FEMALE, PIPE THREAD INTERNAL
		MS27025	FEMALE, HOSE SHANK
		MS27026	FEMALE, PIPE EXTERNAL THREAD
		MS27027	FEMALE, FLANGED
		MS49000	REDUCER
		MS49001	REDUCER
		MS49002	REDUCER
		MS70088	ADAPTER
		MS70091	FEMALE, FLANGED
		MS70095	MALE, INTERNAL STRAIGHT THREAD
		MS70096	FEMALE, EXTERNAL THREAD
		MS70097	REDUCER
		MS70100	ADAPTER
		MIL-C-51703	MASK
		MIL-C-83390	MALE, ANTI-G GARMENT
		MS17834	MALE, PNEUMATIC STARTER DUCT
		MS27755	ANTI-G GARMENT, FEMALE
COUPLING, HOSE	202046	WW-C-633	PNEUMATIC
		MIL-F-19488	FITTINGS, HOSE, WATER AND STEAM
		MIL-C-24356	REFUELING AT SEAHOSE
		MIL-C-38404	REATTACHABLE SCREW-ON

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
COUPLING, HOSE (CONT)	202046 (CONT)	MIL-C-52705	STEAM
		MIL-C-85061	FUEL LINE, FLEX.
COUPLING, PIPE	202047	ANSIB16.11	FITTINGS
		ASTMD2609	FITTINGS, PLASTIC
		WW-P-460	PIPE FITTINGS, BRASS OR BRONZE
		MS14305	125 POUND
		MS14311	250 POUND
		WW-P-501	PIPE FITTINGS, CAST IRON
		WW-P-521	PIPE AND FLANGE FITTINGS
		MS39233	150 POUND
		MIL-F-2808	FITTINGS, AIR HOSE, SALVAGE
		MIL-F-5509	FLARED TUBE
		AN910	FEMALE
		MIL-P-10388	PIPE FITTINGS, GROOVED ENDS
		MS14304	
		MIL-F-23508	FITTINGS AND FLANGES
		MIL-F-24227	FITTINGS AND FLANGES
		MIL-F-52618	FITTINGS, PIPE ALUMINUM
COUPLING, TUBE	202048	WN-T-725	TUBE FITTINGS, SOLDER END
		MIL-F-1183	FITTINGS SILVER BRAZING
		MIL-F-6001	FITTINGS, TUBE, SOLDER TYPE
		AN785	
		MIL-C-22263	COUPLINGS, FUEL LINE
		MIL-F-23508	FITTINGS, AND FLANGES
		MS9381	BRAZING

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
COUPLING, TUBE (CONT)	202048 (CONT)	MS35927	SOLDER JOINT
		NAS424	FLARED, FEMALE
		NAS591	ALUMINUM
		NAS594	CRES
		NAS652	BULKHEAD
CROSS, BOSS	202049	MIL-F-5509	FLARED TUBE
		AN937	FEMALE
CROSS, FLANGE	202050	MIL-F-18180	FLANGES AND FITTINGS, PIPE
CROSS, PIPE	202051	ANSIB16.11	FITTINGS
		ANSIB16.28	FITTINGS
		WW-P-460	PIPE FITTINGS, BRASS OR BRONZE
		MS14305	125 POUND
		MS14311	250 POUND
		MIL-F-5509	FLARED TUBE
		AN918	INTERNAL PIPE THREAD
		MIL-P-10388	PIPE FITTINGS, GROOVED ENDS
		MIL-F-23508	FITTINGS AND FLANGES
		MIL-F-24227	FITTINGS AND FLANGES
		MIL-F-52618	FITTINGS, PIPE, ALUMINUM
CROSS, TUBE	202053	MIL-F-1183	FITTINGS, TUBE, SILVER BRAZING
		MIL-F-5509	FLARED TUBE
		MS24403	PRECISION TYPE
		MIL-F-18280	FLARELESS TUBE
		MS21906	
		MIL-F-18866	37-DEGREE FLARE AND FLARELESS
		MS51517	FLARED
		MS51894	FLARELESS
		MIL-F-23508	FITTINGS AND FLANGES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
DAMPENER, FLUID PRESSURE	202108	MIL-D-2940	GAGE PROTECTION
ELBOW, BOSS	202054	MIL-F-5509 AN939 AN941	FLARED TUBE 90-DEGREE 45-DEGREE
ELBOW, FLANGE	202055	MIL-F-3268 MIL-F-18180	FITTING, PIPE FLANGES AND FITTINGS, PIPE
ELBOW, FLANGE TO HOSE	202056	MIL-F-52525	COUPLINGS AND CLAMP HALVES 45-DEGREE, SINGLE WIRE BRAID HOSE 90-DEGREE, SHORT DROP 90-DEGREE, LONG DROP 45-DEGREE SPIRAL WRAP 90-DEGREE, SHORT DROP 90-DEGREE, LONG DROP 45-DEGREE, DOUBLE WIRE BRAID HOSE 90-DEGREE, SHORT DROP 90-DEGREE, LONG DROP
ELBOW, HOSE	202057	MIL-F-5509 AN846 AN848	FLARED TUBE 45-DEGREE 90-DEGREE
ELBOW, PIPE	202058	ANSIB16.11 ANSIB16.28 ASTMD2609 WW-P-460 MS14305	FITTINGS FITTINGS FITTINGS, PLASTIC PIPE FITTINGS, BRASS OR BRONZE 45-DEGREE, 125 POUND

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
ELBOW, PIPE (CONT)	202058 (CONT)	MS14307	45-DEGREE, 125 POUND
		MS14308	90-DEGREE, 125 POUND, REDUCING
		MS14311	45 AND 90-DEGREE, 250 POUND
		MS14312	90-DEGREE, 250 POUND,REDUCING
		MS51845	90-DEGREE
		MS51952	90-DEGREE, 125 POUND, STREET
		WW-P-501	PIPE FITTINGS, CAST IRON
		WW-P-521	PIPE AND FLANGE FITTINGS AND FLANGES
		MS39230	90-DEGREE, 150 POUND, STREET
		MS39231	45-DEGREE, 150 POUND, STREET
		MIL-F-5509	FLARED TUBE
		AN914	90-DEGREE, MALE AND FEMALE
		AN915	45-DEGREE, MALE AND FEMALE
		AN916	90-DEGREE, FEMALE
		MIL-P-10388	PIPE FITTINGS, GROOVED ENDS
		MIL-F-20236	FITTINGS, TUBE AND PIPE
		MS14303	45- AND 90-DEGREE
		MIL-F-23508	FITTINGS AND FLANGES
		MIL-F-24202	FITTINGS, BUTT WELDING
		MIL-F-24227	FITTINGS AND FLANGES
		MIL-F-52618	FITTINGS, PIPE ALUMINUM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
ELBOW, PIPE TO HOSE	202059	MS24518	45-DEGREE, LOW PRESSURE
		MS24519	90-DEGREE, LOW PRESSURE
		AN844	45-DEGREE
ELBOW, PIPE TO TUBE	202008	MIL-F-1224	FITTINGS, TUBE, BRASS OR BRONZE
		MS39161	FEMALE PIPE END
		MS39162	MALE PIPE END
		MIL-F-5509	FLARED TUBE
		MS20822	90-DEGREE
		MS20823	45-DEGREE
		MIL-F-6001	FITTINGS, TUBE, SOLDER TYPE
		AN791	45-DEGREE
		MIL-F-18866	37-DEGREE FLARE AND FLARELESS
		MS51504	90-DEGREE, MALE PIPE END, FLARED
		MS51506	90-DEGREE, FEMALE PIPE END, FLARED
		MS51508	45-DEGREE, MALE PIPE END, FLARED
		MS51813	90-DEGREE, FEMALE PIPE END, FLARELESS
		MS51815	90-DEGREE, MALE PIPE END, FLARELESS
		MS51817	45-DEGREE, MALE PIPE END, FLARELESS
		MIL-F-45911	FITTINGS, BRASS SPHERICAL SLEEVE
		MS39182	90-DEGREE, MALE PIPE END

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
ELBOW, PIPE TO TUBE (CONT)	202008 (CONT)	MS39184	90-DEGREE, FEMALE PIPE END
		MS39185	45-DEGREE, MALE PIPE END
		MIL-F-45968	INVERTED FLARE, BRASS
		MS51878	45-DEGREE, MALE PIPE
		MS51879	90-DEGREE, MALE PIPE
		MS29538	90-DEGREE EXTERNAL OUTLET
		MS39171	90-DEGREE MALE PIPE, BALL SLEEVE TYPE
		MS39172	90-DEGREE FEMALE PIPE, BALL SLEEVE
ELBOW, SWIVEL FLANGE TO HOSE	202060	MIL-A-5070	ADAPTER, REUSABLE
		MS27227	90-DEGREE
		MS27228	90-DEGREE
		MS27229	45-DEGREE
		MS27230	45-DEGREE
		MIL-F-27272	FITTINGS, TFE HOSE
		MS27056	45-DEGREE
		MS27058	90-DEGREE
		MS27064	45-DEGREE
		MS27066	90-DEGREE
		MIL-F-52525	COUPLINGS AND
		MS39355	90-DEGREE
		MS39356	90-DEGREE
		MIL-F-83798	FITTINGS, RUBBER HOSE
		MS18073	90-DEGREE, CRES
		MS18074	45-DEGREE, CRES
		MS18089	45-DEGREE, CRES
		MS18090	90-DEGREE, CRES
		MS20758	45-DEGREE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
ELBOW, SWIVEL FLANGE TO HOSE (CONT)	202060 (CONT)	MS20759	90-DEGREE
		MS28749	45-DEGREE, REUSABLE
		MS28750	90-DEGREE
ELBOW, SWIVEL FLANGE TO TUBE	202061	MS20761	45-DEGREE, FLARED
		MS20762	90-DEGREE FLARED
ELBOW, TUBE	202062	WW-T-725	TUBE FITTINGS, SOLDER END
		MIL-F-1183	FITTINGS, TUBE, SILVER BRAZING
		MIL-F-1224	FITTINGS, TUBE, BRASS OR BRONZE
		MS39160	90-DEGREE
		MIL-F-5509	FLARED TUBE
		MS24394	90-DEGREE, BULKHEAD
		MS24396	45-DEGREE
		MS24401	90-DEGREE
		MIL-F-18280	FLARELESS TUBE
		MS21904	90-DEGREE
		MS21907	45-DEGREE, UNIVERSAL
		MS21908	90-DEGREE, UNIVERSAL
		MS21925	90-DEGREE, HIGH PROFILE
		MS21926	90-DEGREE, LOW PROFILE
		MS24651	90-DEGREE
		MS24652	90-DEGREE
		MS24654	45-DEGREE
		MIL-F-18866	37-DEGREE FLARE AND FLARELESS
		MS51505	90-DEGREE
		MS51507	90-DEGREE, BULKHEAD
		MS51509	45-DEGREE, BULKHEAD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
ELBOW, TUBE (CONT)	202062 (CONT)	MS51521	90-DEGREE, SWIVEL
		MS51522	45-DEGREE, SWIVEL
		MS51820	90-DEGREE, FLARELESS
		MS51852	90-DEGREE SWIVEL
		MS51855	90-DEGREE, BULKHEAD
		MIL-F-20236	FITTINGS, TUBE AND PIPE
		MIL-F-23508	FITTINGS AND FLANGES
		MIL-F-27272	FITTINGS, TFE HOSE
		MS27082	90-DEGREE, ALUMINUM
		MS27084	45-DEGREE, ALUMINUM
		MS27862	90-DEGREE, ALUMINUM
		MS27866	90-DEGREE, CRES
		MIL-F-45911	FITTINGS, BRASS
		MS39186	90-DEGREE
		MS35917	45-AND 90-DEGREE
		MS35922	90-DEGREE, REDUCING
		MS35928	45- AND 90-DEGREE, STREET
		MS39170	BALL SLEEVE
		NAS1761	45-DEGREE FLARELESS TO SWIVEL
		NAS1762	90-DEGREE FLARELESS TO SWIVEL
ELBOW, TUBE TO BOSS	202063	MIL-F-18866	37-DEGREE FLARE AND FLARELESS
		MS51527	90-DEGREE
		MS51528	45-DEGREE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
ELBOW, TUBE TO BOSS (CONT)	202063 (CONT)	MS51839	90-DEGREE, FLARELESS
		MS51842	45-DEGREE, FLARELESS
		MS9096	90-DEGREE, AMS4135
		MS9097	45-DEGREE, AMS4135
		MS9194	90-DEGREE, AMS5646
		MS9195	45-DEGREE, AMS5646
ELBOW, TUBE TO HOSE	202064	MIL-A-5070	ADAPTER, REUSABLE
		MS27223	90-DEGREE
		MS27224	90-DEGREE, SWIVEL NUT
		MS27225	45-DEGREE
		MS27226	45-DEGREE, SWIVEL NUT
		MIL-F-5509	FLARED TUBE
		AN838	90-DEGREE
		AN839	45-DEGREE
		MIL-F-8789	FITTING END, HIGH PRESSURE HOSE
		MS28780	45-DEGREE
		MS28781	90-DEGREE
		MIL-F-27272	FITTINGS, TFE HOSE
		MS27055	45-DEGREE, FLARED
		MS27057	90-DEGREE, FLARED
		MS27059	45-DEGREE, FLARED, FORGED
		MS27060	90-DEGREE, FLARED, FORGED
		MS27063	45-DEGREE, FLARED
		MS27065	90-DEGREE, FLARED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
ELBOW, TUBE TO HOSE (CONT)	202064 (CONT)	MS27067	45-DEGREE, FLARED, FORGED
		MS27068	90-DEGREE, FLARED, FORGED
		MS27382	45-DEGREE, FLARELESS
		MS27384	45-DEGREE, FLARELESS, FORGED
		MS27385	90-DEGREE, FLARELESS, FORGED
		MS27387	45-DEGREE, FLARELESS
		MS27388	90-DEGREE, FLARELESS
		MS27389	45-DEGREE, FLARELESS, FORGED
		MS27390	90-DEGREE, FLARELESS, FORGED
		MIL-F-52525	COUPLINGS AND CLAMP HALVES
		MS39358	SHORT DROP
		MIL-F-83296	FITTINGS, TFE HOSE
		MS27617	45-DEGREE, FLARED
		MS27618	90-DEGREE, FLARED
		MS27620	45-DEGREE, FLARED
		MS27621	90-DEGREE, FLARED
		MS27630	FLARELESS
		MS27631	90-DEGREE, FLARELESS
		MS27633	45-DEGREE, FLARELESS
		MIL-F-83798	FITTINGS, RUBBER, HOSE
		MS18077	90-DEGREE, CRES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
ELBOW, TUBE TO HOSE(CONT)	202064 (CONT)	MS18078	45-DEGREE, CRES
		MS18086	45-DEGREE, CRES
		MS18087	90-DEGREE, CRES
FERRULE, BRAZING, TUBE FITTING	202065	MS9082	SWIVEL PILOT AMS5645
		MS9483	STRAIGHT, AMS5646
		MS9879	SWIVEL PILOT AMS5646
FITTING END, STANDARD DIMENSIONS FOR	202109	MS33514	FLARELESS AND GASKET SEAL
		MS33515	FLARELESS BULKHEAD
		MS33656	FLARED AND GASKET SEAL
		MS33657	FLARED BULKHEAD
		MS33677	TAPER PIPE THREAD
FITTINGS, FLARED TUBE, FLUID CONNECTION	202112	MIL-F-5509	FLARED, PIPE AND BEADED FITTINGS
		MIL-F-18866	HYDRAULIC OR AIR
FITTINGS, FLARELESS TUBE, FLUID CONNECTION	202111	MIL-F-18280	HYDRAULIC OR AIR
		MIL-F-18866	
FITTING, LUBRICATION	202066	MIL-F-3541	
		MS15001	SURFACE CHECK
		MS15002	SURFACE CHECK
		MS15003	SURFACE CHECK
		MS15004	SURFACE CHECK
		MS15005	SURFACE CHECK OR THROAT
		MS15006	LEAKPROOF
		MS15720	SURFACE CHECK OR THROAT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
FITTING, LUBRICATION (CONT)	202066 (CONT)	MS15721	SURFACE CHECK OR THROAT
FLANGE, PIPE	202067	WW-F-406	FLANGES, CAST IRON AND BRONZE
		MIL-F-18180	FLANGES AND FITTINGS
		MIL-F-20042	BRONZE, SILVER BRAZING
		MIL-F-20670	FLANGES, PIPE
		MIL-F-23508	FITTINGS AND FLANGES
		MIL-F-24227	FITTINGS AND FLANGES
FLANGE, PIPE, BLIND	202068	WW-F-406	FLANGES, CAST IRON AND BRONZE
		MIL-F-18180	FLANGES AND FLANGE FITTING
		MIL-F-23508	FITTINGS AND FLANGES
FLANGE, PIPE, SWIVEL RETAINING	202069	MIL-F-5509	FLARED TUBE
		MS20756	
		MS18076	AMS5639, CRES
LATERAL, FLANGE	202070	MIL-F-18180	FLANGES AND FLANGE FITTINGS
LATERAL, PIPE	202071	ANSIB16.11	FITTINGS
		ANSIB16.28	FITTINGS
		WW-P-460	PIPE FITTINGS, BRASS OR BRONZE
		MS14306	
		MIL-P-10388	PIPE FITTINGS, GROOVED ENDS
		MIL-F-23508	FITTINGS AND FLANGES
		MIL-F-52618	FITTINGS, PIPE, ALUMINUM
LATERAL, TUBE	202072	MIL-F-1183	FITTINGS, TUBE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
LATERAL, TUBE (CONT)	202072 (CONT)	MIL-F-23508	FITTINGS, AND FLANGES
LOCKNUT, PIPE	202073	WW-P-471	PIPE FITTINGS
LOCKNUT, TUBE FITTING	202074	MIL-F-5509 AN924	FLARED TUBE
		MIL-F-18866 MS51860	37-DEGREE FLARE AND FLARELESS
NIPPLE, HOSE	202075	MIL-F-5509 AN849	FLARED TUBE BULKHEAD
NIPPLE, PIPE	202076	WW-N-351	THREADED
		MS51846	STANDARD, BRASS OR COPPER
		MS51872	EXTRA STRONG, BRASS OR COPPER
		MS51873	EXTRA STRONG STEEL
		MS51953	STANDARD, STEEL
		MIL-F-5509 AN911	FLARED TUBE
NIPPLE, TUBE	202077	MIL-F-1224	FITTINGS, TUBE, BRASS OR BRONZE
		MS39157	
		MIL-F-5509	FLARED TUBE
		MS24392	PRECISION TYPE
		MS24393	BULKHEAD, PRECISION TYPE
		MIL-F-18280	FITTINGS, FLARELESS TUBE
		MS21900	FLARELESS TO FLARED
		MS21902	
		MS21923	FLARELESS TO FLARED, BULKHEAD
		MS21924	FLARELESS TO STRAIGHT THREAD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
NIPPLE TUBE (CONT)	202077 (CONT)	MS24405	FLARELESS TO FLARED
		MIL-F-18866	37-DEGREE FLARE TO FLARELESS
		MS51502	REGULAR HEX, LONG
		MS51519	LARGE HEX
		MS51520	BULKHEAD
		MS51812	BULKHEAD, FLARELESS
		MS51814	REGULAR HEX, FLARELESS
		MS51856	LARGE HEX, FLARELESS
		MIL-F-45911	FITTINGS, BRASS SPHERICAL SLEEVE
		MS39187	
		MIL-F-45968	INVERTED FLARE, BRASS
		MS51877	
		MS9383	ALUMINUM
		MS39168	BALL SLEEVE TYPE
NUT, HOSE COUPLING	202078	MIL-A-5070	ADAPTER, REUSABLE
		MS24590	3/16 TO 3/4 INCH TUBING
		MS24591	1 TO 2 INCH TUBING SIZE
		MIL-F-27272	FITTINGS, TFE HOSE
		MS27069	
		MIL-F-83296	FITTINGS, TFE HOSE
		MS27622	
		MS18082	AMS5639,CRES
		MS39135	AIR BRAKE HOSE ADAPTER
NUT, RETAINER, CLUSTER FITTING	202079	MIL-F-5509 AN6289	FLARED TUBE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
NUT, RETAINER, CLUSTER FITTING (CONT)	202079 (CONT)	MIL-F-18280	FLARELESS TUBE
		MS21937	
NUT, TUBE, COUPLING	202013	MIL-F-1224	FITTINGS, TUBE, BRASS OR BRONZE
		MS39166	SHORT
		MIL-A-5070	ADAPTER, REUSABLE
		MIL-F-5509	FLARED TUBE
		AN817	SLEEVE COUPLING
		AN818	COUPLING NUT
		MIL-F-6001	FITTINGS, TUBE, SOLDER TYPE
		AN805	
		MIL-F-18280	FLARELESS TUBE
		MS21921	SLEEVE COUPLING
		MIL-F-18866	37-DEGREE FLARE AND FLARELESS
		MS51531	FLARED
		MS51823	FLARELESS
		MIL-F-45911	SPHERICAL SLEEVE, BRASS
		MS39196	SPHERICAL SLEEVE
		MS9197	AMS5646, SILVER PLATE
		MS9198	AMS5646
		MS9199	ALUMINUM
		MS18079	SWIVEL, CRES
		MS18080	SWIVEL, CRES
		MS35872	REFRIGERATION
		MS39176	BALL SLEEVE TYPE
		NAS593	ALUMINUM,
		NAS596	CRES
OUTLET, PIPE	202082	ANSIB16.11	PIPE FITTINGS
		MIL-F-20236	FITTINGS, TUBE AND PIPE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
PLUG, MACHINE THREAD	202083	MIL-F-5509	FLARED TUBE
		MS24391	PLUG AND BLEEDER
		MIL-F-18866	37-DEGREE FLARE AND FLARELESS
		MS51840	O-RING
		MS9405	AMS5646
		MS9901	AMS5646
		MS9902	AMS5646, DRILLED
		MS9953	AMS4121
		MS9954	AMS4121, DRILLED
		MS18229	O-RING
		MS29522	OIL COOLER
PLUG, MACHINE THREAD MAGNETIC	202084	MIL-P-54001	HEADLESS
		MS49006	
		MS35844	DRAIN
PLUG, PIPE	202085	WW-P-460	PIPE FITTINGS, BRASS OR BRONZE
		MS14314	250 POUND
		WW-P-471	PIPE FITTINGS, 125 AND 150 POUND
		WW-P-501	PIPE FITTINGS CAST IRON
		MIL-F-5509	FLARED TUBE
		AN933	HEX HEAD
		MS20913	SQUARE HEAD
		ANSIB16.11	PIPE FITTINGS
		MIL-F-23508	FITTINGS AND FLANGES
		MIL-F-24227	FITTINGS AND FLANGES
		MIL-F-52618	FITTINGS, PIPE, ALUMINUM
		MS20913	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
PLUG, PROTECTIVE, DUST AND MOISTURE SEAL	202086	MIL-C-5501 MIL-P-18901 MIL-C-27487 MS27029	CAP AND PLUG PLASTIC COUPLING HALVES DUST
PLUG, TUBE FITTING, SOLDER TYPE	202087	WW-T-725 MIL-F-1183 MS35924	TUBE FITTINGS, SOLDER END FITTINGS, TUBE, SILVER BRAZING REFRIGERATION
PLUG, TUBE FITTING, THREADED	202088	MIL-F-5509 MS24404 MIL-F-18280 MS21923 MIL-F-18866	FLARED TUBE PRECISION FLARELESS TUBE 37-DEGREE FLARE AND FLARELESS
PLUG, QUICK DISCONNECT	202114	MS51518 MS51891	FLARED FLARELESS
REDUCER, BOSS	202089	MIL-F-5509 MS24397	FLARED TUBE PRECISION
REDUCER, FLANGE	202090	MIL-F-18180	FLANGES AND FLANGE FITTINGS
REDUCER, PIPE	202091	WW-P-460 MS14306 WW-P-501 WW-P-521 MS39232	PIPE FITTINGS, BRASS OR BRONZE PIPE FITTINGS, CAST IRON PIPE AND FLANGE FITTINGS RIGHT HAND THREAD, 150 POUND

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
REDUCER, PIPE (CONT)	202091 (CONT)	MIL-P-10388	PIPE FITTINGS, GROOVED ENDS
		ANSIB16.11	FITTINGS
		ANSIB16.28	FITTINGS
		MIL-F-20236	FITTINGS, TUBE AND PIPE
		MIL-F-23508	FITTINGS AND FLANGES
		MIL-F-24202	FITTINGS, BUTT WELDING
		MIL-F-24227	FITTINGS AND FLANGES
		MIL-F-52618	FITTINGS, PIPE, ALUMINUM
REDUCER, TUBE	202092	WW-T-725	TUBE FITTINGS, SOLDER END
		MIL-F-1183	FITTINGS, TUBE, SILVER BRAZING
		MIL-F-5509	FLARED TUBE
		MS24399	PRECISION
		MIL-F-18280	FLARELESS TUBE
		MS21916	
		MIL-F-18866	37-DEGREE FLARE AND FLARELESS
		MS39322	FLARED TO WELD SOCKET
		MS39323	FLARED
		MS51534	FLARED
		MS51895	FLARELESS
		MIL-F-20236	FITTINGS, TUBE AND PIPE
		MIL-F-23508	FITTINGS AND FLANGES
		MS9016	PLAIN
		MS9769	AMS5646
		MS17319	PLAIN
		MS35920	MALE TO FEMALE SOLDER JOINT
		MS35923	FEMALE TO FEMALE SOLDER JOINT
		NAS1564	FLARED TUBE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
RESTRICTOR, FLUID FLOW	202110	MIL-F-48212	RESTRICTOR
SLEEVE, CLINCH, TUBE FITTING	202093	MIL-F-5509	FLARED TUBE
		MIL-F-18280	FLARELESS TUBE
		MS21922	
		MIL-F-18866	37-DEGREE FLARE AND FLARELESS
		MS51825	FLARELESS
		MS39177	BALL SLEEVE TYPE
SLEEVE, COMPRESSION, TUBE-HOSE FITTING	202094	MIL-F-18866	37-DEGREE FLARE AND FLARELESS
		MS51533	
		MIL-F-27272	FITTINGS, TFE HOSE
		MS27070	
		MIL-F-45911	FITTINGS, BRASS SPHERICAL SLEEVE
		MIL-F-83296	FITTINGS, TFE HOSE
		MS27623	
		AN876	
		MS39136	AUTOMOTIVE AIR BRAKE HOSE ADAPTER
SLEEVE, FLARED, TUBE FITTINGS	202095	MIL-F-5509	FLARED TUBE
		MS20819	
SPOOL PIECE	202096	MIL-F-3268	FITTINGS, PIPE
STRAINER, SUCTION	202113	MIL-S-12165	STRAINER
		MIL-S-28678	STEAM, BRONZE, 250 PSIG
TEE, BOSS	202097	MIL-F-5509	FLARED TUBE
		AN938	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
TEE, FLANGE	202098	MIL-F-18180	FLANGES AND FLANGE FITTINGS
TEE, HOSE	202099	MS24521	LOW PRESSURE
TEE, PIPE	202100	ASTMD2609	FITTINGS, PLASTIC
		WW-P-460	PIPE FITTINGS, BRASS OR BRONZE
		MS14305	125 POUND
		MS14309	REDUCING, 125 POUND
		MS14311	250 POUND
		MS14313	REDUCING, 250 POUND
		WW-P-501	PIPE FITTINGS, CAST IRON
		WW-P-521	PIPE AND FLANGE FITTINGS
		MS51954	REDUCING, 150 POUND
		MIL-F-5509 AN917	FLARED TUBE FEMALE
		MIL-P-10388	PIPE FITTINGS, GROOVED ENDS
		ANSIB16.11	FITTINGS
		ANSIB16.21	FITTINGS
		MIL-F-20236	FITTINGS, TUBE AND PIPE
		MIL-F-23508	FITTINGS AND FLANGES
		MIL-F-24202	FITTINGS, BUTT WELDING
		MIL-F-24227	FITTINGS AND FLANGES
		MIL-F-52618	FITTINGS, PIPE ALUMINUM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
TEE, PIPE TO TUBE	202101	MIL-F-1224	FITTINGS, TUBE, BRASS OR BRONZE
		MS39163	MALE PIPE ON BRANCH
		MS39164	MALE PIPE ON RUN
		MIL-F-5509	FLARED TUBE
		MS20825	PIPE THREAD ON BRANCH
		MS20826	
		MIL-F-18866	37-DEGREE FLARE AND FLARELESS
		MS51511	MALE PIPE ON RUN
		MS51512	MALE PIPE ON BRANCH
		MS51513	FEMALE PIPE ON BRANCH
		MS51514	FEMALE PIPE ON RUN
		MS51818	MALE PIPE ON BRANCH, FLARELESS
		MS51821	FEMALE PIPE ON BRANCH, FLARELESS
		MS51822	FEMALE PIPE ON RUN, FLARELESS
		MS51824	MALE PIPE ON RUN, FLARELESS
		MIL-F-45911	FITTINGS, BRASS
		MS39189	FEMALE PIPE ON RUN, MALE PIPE ON BRANCH
		MS39190	MALE PIPE ON BRANCH
		MS39191	MALE PIPE ON RUN
		MS39193	FEMALE PIPE ON RUN
		MIL-F-45968	INVERTED FLARE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
TEE, PIPE TO TUBE (CONT)	202101 (CONT)	MS51881	MALE PIPE ON RUN
		MS51882	FEMALE PIPE BRANCH
		MS51883	MALE PIPE BRANCH
		MS35871	REFRIGERATION
		MS39173	MALE PIPE BRANCH, BALL SLEEVE TYPE
		MS39175	MALE PIPE ON RUN, BALL SLEEVE TYPE
TEE, TUBE	202102	WW-T-725	TUBE FITTINGS, SOLDER END
		MIL-F-1183	FITTINGS, TUBE, SILVER BRAZING
		MIL-F-1224	FITTINGS, TUBE, BRASS OR BRONZE
		MS29165	
		MIL-F-5509	FLARED TUBE
		MS24388	INTERNAL THREAD ON BRANCH
		MS24389	INTERNAL THREAD ON RUN
		MS24390	BULKHEAD ON RUN
		MS24395	BULKHEAD AND UNIVERSAL
		MS24402	PRECISION
		MIL-F-6001	FITTINGS, TUBE SOLDER TYPE
		AN795	
		MIL-F-18280	FITTINGS, FLARELESS TUBE
		MS21905	
		MS21909	UNIVERSAL ON BRANCH
		MS21912	BULKHEAD ON RUN
		MIL-F-18866	37-DEGREE FLARE AND FLARELESS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
TEE, TUBE (CONT)	202101 (CONT)	MS51510	
		MS51515	BULKHEAD ON BRANCH
		MS51516	BULKHEAD ON RUN
		MS51523	SWIVEL ON RUN
		MS51524	SWIVEL ON BRANCH
		MS51811	FLARELESS
		MS51853	SWIVEL ON BRANCH
		MS51854	SWIVEL ON RUN
		MIL-F-20236	FITTINGS, TUBE AND PIPE
		MIL-F-23508	FITTINGS AND FLANGES
		MIL-F-45911	FITTINGS, BRASS
		MS39188	
		MIL-F-45968	INVERTED FLARE
		MS51880	
		MS9382	BRAZING
		MS35929	SOLDER JOINT
		MS39174	BALL SLEEVE TYPE
		MS49008	REFRIGERATION
		NAS1763	FLARELESS, SWIVEL ON RUN
		NAS1764	FLARELESS, SWIVEL ON SIDE
TEE, TUBE TO BOSS	202103	MIL-F-5509	FLARED TUBE
		MIL-F-18280	FLARELESS TUBE
		MS21910	BOSS ON BRANCH
		MS21911	BOSS ON RUN
		MIL-F-18866	37-DEGREE FLARE AND FLARELESS
		MS51529	BOSS ON BRANCH
		MS51530	BOSS ON RUN
		MS51841	BOSS ON BRANCH, FLARELESS
		MS51892	BOSS ON RUN, FLARELESS
		MS9196	MALE BOSS ON OUTLET

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
UNION, PIPE	202104	WW-U-516	BRASS AND BRONZE
		WW-U-531	THREADED CONNECTION
		MIL-U-18182	2000, 3000, AND 6000 PSI WOG
		MIL-F-24227	FITTINGS AND FLANGES
UNION, TUBE	202105	MIL-F-1183	FITTINGS, TUBE, SILVER BRAZING
WYE, QUICK DISCONNECT	202106	MIL-C-27487	COUPLING HALVES CAM-LOCKING
		MS49003	
WYE, TRUE, PIPE	202107	MIL-C-27487	COUPLING HALVES CAM-LOCKING
		MS39336	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Government Documents.

2.1.1 Specifications and Standards. Unless otherwise specified, the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-D-2940	Dampener, Fluid Pressure, Gage Protection
MIL-C-7413	Couplings, Quick Disconnect, Automatic Shutoff, General Specification for
MIL-F-18280	Fittings, Flareless Tube, Fluid Connection
MIL-C-25427	Coupling Assembly, Hydraulic, Self-Sealing Quick Disconnect

STANDARD

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-810	Environmental Test Methods and Engineering Guidelines
MIL-STD-1523	Age Control of Age-Sensitive Elastomeric Materials
AND 10064	Fittings - Installation of Flared Tube, Straight Threaded Connectors

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

2.2 Other Publications. The following documents form a part of this standard to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the issue of the DoDISS specified in the solicitation. The issues of documents which have not been adopted shall be those in effect on the date of the cited DoDISS.

ASTME380 Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, PA 19103.)

(Nongovernment standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.

2.3 Order of Precedence. In the event of conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Fittings and Couplings

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare a SRS for Fittings and Couplings, it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Fittings and Couplings.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions, described in DOD-STD-35, are applicable to Fittings and Couplings.

4.3.2 Illustrations. Illustrations, applicable to Fittings and Couplings, are contained in Appendix A to this document.

4.4 Units of Measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE Formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced Documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Test Matrix. A test matrix is supplied as a guide for selecting documents to specify tests (see table II). The test matrix presents documents most applicable for use to satisfy the statement "TEST PER (DOC DES)". Any document listed in the Title Index may be used to satisfy the statement. However, the selected document from the Title Index must contain the desired test. Government test method documents and approved industry standards such as ASTM test methods may also be used to satisfy the statement "TEST PER (DOC DES)".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE II. TEST MATRIX

DOCUMENT	TEST CODE	1744 AIR INCLUSION	1774 CORROSION, ACCELERATED	1820 ENDURANCE	1914 IMPULSE	1974 LEAKAGE	2024 MANUAL OPERATION	2074 OVERTIGHTENING TORQUE	2114 PRESSURE DROP	2184 PRESSURE, HIGH TEMPERATURE BURST	2234 PRESSURE, HIGH TEMPERATURE PROOF	2284 PRESSURE, LOW	2314 PRESSURE, ROOM TEMPERATURE BURST	2364 PRESSURE, ROOM TEMPERATURE PROOF	2414 REPEATED ASSEMBLY	2434 RESISTANCE, CRUSH	2484 RESISTANCE, FLUID	2524 SPILLAGE	2584 STRENGTH, FLEXURAL	2644 STRESS DEGRADATION	2674 SURGE	2754 TEMPERATURE, HIGH	2814 TEMPERATURE, LOW	2854 TENSILE LOAD(LOCKING MECHANISM)	2884 VACUUM	2914 WARMUP, RAPID	
MIL-C-4109						X								X		X								X			
MIL-A-5070					X	X		X					X	X			X						X				
MIL-C-7413		X	X						X			X	X	X				X			X				X		
MIL-F-8789					X	X		X					X	X									X				
MIL-F-18280					X								X		X				X								
MIL-F-18866														X	X												
MIL-C-21049			X		X			X					X	X					--			X					
MIL-C-22263														X			X		X		X						
MIL-C-25427	X		X	X	X	X		X	X	X		X	X								X	X	X		X	X	
MIL-A-25676		X			X			X														X	X				
MIL-F-27272				X	X		X		X			X	X			X			X	X							
MIL-A-38726						X		X				X	X										X				
MIL-C-51234						X			X								X					X	X				
MIL-C-52525				X			X					X	X										X				
MIL-F-83296				X	X		X		X			X	X						X	X							

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

5.5 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table III provides codes for column headings which may be used for Fittings and Couplings characteristics. When different units of measure are available for specifying a characteristic only one of the units may be tabulated; e.g. either ounces or pounds.

TABLE III. TABULATION CANDIDATES

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
4042	END 1 DOC DES	4047	END 2 DOC DES	4052	END 3 DOC DES
4002	END 1 TUBE SIZE INCHES	4016	END 2 TUBE SIZE INCHES	4030	END 3 TUBE SIZE INCHES
4004	END 1 TUBE SIZE MILLIMETER	4018	END 2 TUBE SIZE MILLIMETER	4032	END 3 TUBE SIZE MILLIMETER
4006	END 1 PIPE SIZE INCHES	4020	END 2 PIPE SIZE INCHES	4034	END 3 PIPE SIZE INCHES
4008	END 1 PIPE SIZE MILLIMETER	4022	END 2 PIPE SIZE MILLIMETER	4036	END 3 PIPE SIZE MILLIMETER
4044	END 1 STYLE	4049	END 2 STYLE	4054	END 3 STYLE
4045	END 1 THREAD DES	4050	END 2 THREAD DES	4055	END 3 THREAD DES
4057	END 4 DOC DES	4062	END 5 DOC DES	4067	END 6 DOC DES
4010	END 4 TUBE SIZE INCHES	4058	END 5 TUBE SIZE INCHES	4072	END 6 TUBE SIZE INCHES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES (CONT)

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
4046	END 4 TUBE SIZE MILLIMETER	4038	END 5 TUBE SIZE MILLIMETER	4074	END 6 TUBE SIZE MILLIMETER
4048	END 4 PIPE SIZE INCHES	4012	END 5 PIPE SIZE INCHES	4076	END 6 PIPE SIZE INCHES
4026	END 4 PIPE SIZE MILLIMETER	4014	END 5 PIPE SIZE MILLIMETER	4078	END 6 PIPE SIZE MILLIMETER
4059	END 4 STYLE	4064	END 5 STYLE	4069	END 6 STYLE
4060	END 4 THREAD DES	4065	END 5 THREAD DES	4070	END 6 THREAD DES
2426	MINIMUM OPENING MILLIMETER	2424	MINIMUM OPENING INCHES	3130	TUBE SIZE INCHES
2418	PRESETTING TURNS	3100	MINIMUM OPERATING PRESSURE MEGAPASCAL	3132	TUBE SIZE MILLIMETER
3134	TUBE WALL THICKNESS INCHES	1588	MAX PRESS DROP PSI	3104	NOMINAL OPERATING PRESSURE MEGAPASCAL
3136	TUBE WALL THICKNESS MILLIMETER	1610	MAX PRESS DROP KILOPASCAL	3102	MAXIMUM OPERATING PRESSURE MEGAPASCAL
7583	MAXIMUM OPERATING PRESSURE PSI	7584	MAXIMUM OPERATING PRESSURE KILOPASCAL	3106	MINIMUM PROOF PRESSURE MAGAPASCAL

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES (CONT)

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
7587	MINIMUM PROOF PRESSURE PSI	7588	MINIMUM PROOF PRESSURE KILOPASCAL	3108	MINIMUM BURST PRESSURE MEGAPASCAL
7589	MINIMUM BURST PRESSURE PSI	7590	MINIMUM BURST PRESSURE KILOPASCAL		

5.6 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on a SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword. on the KCI and it's associated code. Enter, on the SRS, the code and the characteristic value required. After the part's unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance, Packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.6.1 Interrelationship of Codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The standard paragraph, of which the code is a part, is shown adjacent to the code on the right-hand page. When a characteristic value, entered with a code, becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact characteristic value entry, as supplied with the code, except for "X" entries.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

5.6.2 Automatic MSE Data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without making additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.6.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in DOD-STD-35. Refer to DOD-STD-35 for general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*REQUESTER'S FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT.	0700
ONE SECTION DOCUMENT.	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6874 THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).

0107

0108 0108.

SCOPE .

SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.

PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.

PART NUMBER. THE PART NUMBER FOR THE ITEMS IS (THE SAME AS THE NUMBER OF THIS DOCUMENT) PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTICS TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.

6941 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.

6942 UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OPERATING PRESSURE RATING	
MINIMUM OPERATING PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	7581
(KILOPASCALS)	7582
(INCHES OF MERCURY)	3000
(MEGAPASCALS)	3100
MAXIMUM OPERATING PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	7583
(KILOPASCALS)	7584
(INCHES OF MERCURY)	1582
(MEGAPASCALS)	3102
NOMINAL OPERATING PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	7585
(KILOPASCALS)	7586
(INCHES OF MERCURY)	3002
(MEGAPASCALS)	3104

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	OPERATING PRESSURE RATING.
7581	THE MINIMUM OPERATING PRESSURE RATING SHALL BE 7581 POUNDS PER SQUARE INCH.
7582	THE MINIMUM OPERATING PRESSURE RATING SHALL BE 7582 KILOPASCALS.
3000	THE MINIMUM OPERATING PRESSURE RATING SHALL BE 3000 INCHES OF MERCURY.
3100	THE MINIMUM OPERATING PRESSURE RATING SHALL BE 3100 MEGAPASCALS.
7583	THE MAXIMUM OPERATING PRESSURE RATING SHALL BE 7583 POUNDS PER SQUARE INCH.
7584	THE MAXIMUM OPERATING PRESSURE RATING SHALL BE 7584 KILOPASCALS.
1582	THE MAXIMUM OPERATING PRESSURE RATING SHALL BE 1582 INCHES OF MERCURY.
3102	THE MAXIMUM OPERATING PRESSURE RATING SHALL BE 3102 MEGAPASCALS.
7585	THE NOMINAL OPERATING PRESSURE RATING SHALL BE 7585 POUNDS PER SQUARE INCH.
7586	THE NOMINAL OPERATING PRESSURE RATING SHALL BE 7586 KILOPASCALS.
3002	THE NOMINAL OPERATING PRESSURE RATING SHALL BE 3002 INCHES OF MERCURY.
3104	THE NOMINAL OPERATING PRESSURE RATING SHALL BE 3104 MEGAPASCALS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PROOF PRESSURE RATING	
MINIMUM PROOF PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	7587
(KILOPASCALS)	7588
(MEGAPASCALS)	3106
BURST PRESSURE RATING	
MINIMUM BURST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	7589
(KILOPASCALS)	7590
(MEGAPASCALS)	3108
TEMPERATURE RATING	
MAXIMUM OPERATING (DEGREES CELSIUS)	5069
MAXIMUM STORAGE (DEGREES CELSIUS)	7302
MINIMUM OPERATING (DEGREES CELSIUS)	5068
MINIMUM STORAGE (DEGREES CELSIUS)	7301
NOMINAL OPERATING (DEGREES CELSIUS)	5046

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	PROOF PRESSURE RATING.
7587	THE MINIMUM PROOF PRESSURE RATING SHALL BE 7587 POUNDS PER SQUARE INCH.
7588	THE MINIMUM PROOF PRESSURE RATING SHALL BE 7588 KILOPASCALS.
3106	THE MINIMUM PROOF PRESSURE RATING SHALL BE 3106 MEGAPASCALS.
	BURST PRESSURE RATING.
7589	THE MINIMUM BURST PRESSURE RATING SHALL BE 7589 POUNDS PER SQUARE INCH.
7590	THE MINIMUM BURST PRESSURE RATING SHALL BE 7590 KILOPASCALS.
3108	THE MINIMUM BURST PRESSURE RATING SHALL BE 3108 MEGAPASCALS.
	TEMPERATURE RATING.
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
7302	THE MAXIMUM STORAGE TEMPERATURE RATING SHALL BE 7302 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
7301	THE MINIMUM STORAGE TEMPERATURE RATING SHALL BE 7301 DEGREES CELSIUS.
5046	THE NOMINAL OPERATING TEMPERATURE RATING SHALL BE 5046 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NOMINAL STORAGE (DEGREES CELSIUS)	5048
FLOW RATE RATING	
FLOW RATE (SELECT ONE)	
(GALLONS PER MINUTE)	1630
(STANDARD CUBIC FEET PER MINUTE)	1636
(POUNDS PER HOUR)	1642
(CUBIC METERS PER MINUTE)	1650
(KILOGRAMS PER HOUR)	1656
INLET PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	1648
(KILOPASCALS)	1662
CLASSIFICATION	
STYLE (DESIGNATION)	3004
CLASS (DESIGNATION)	3006
GRADE (DESIGNATION)	3008
OTHER ____	3010

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
5048	THE NOMINAL STORAGE TEMPERATURE RATING SHALL BE 5048 DEGREES CELSIUS.
	FLOW RATE RATING.
1630	THE FLOW RATE RATING SHALL BE 1630 GALLONS PER MINUTE.
1636	THE FLOW RATE RATING SHALL BE 1636 STANDARD CUBIC FEET PER MINUTE.
1642	THE FLOW RATE RATING SHALL BE 1642 POUNDS PER HOUR.
1650	THE FLOW RATE RATING SHALL BE 1650 CUBIC METERS PER MINUTE.
1656	THE FLOW RATE RATING SHALL BE 1656 KILOGRAMS PER HOUR.
1648	THE FLOW RATE RATING SHALL BE AT AN INLET PRESSURE OF 1648 POUNDS PER SQUARE INCH.
1662	THE FLOW RATE RATING SHALL BE AT AN INLET PRESSURE OF 1662 KILOPASCALS.
	CLASSIFICATION.
3004	THE ITEM(S) STYLE SHALL BE 3004 IN ACCORDANCE WITH THE BASE DOCUMENT.
3006	THE ITEM(S) CLASS SHALL BE 3006 IN ACCORDANCE WITH THE BASE DOCUMENT.
3008	THE ITEM(S) GRADE SHALL BE 3008 IN ACCORDANCE WITH THE BASE DOCUMENT.
3010	3010.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
*UNITS (SELECT ONE)	
INCHES.	7572
CENTIMETERS.	7576
MILLIMETERS.	7577
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.	
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	
MATERIALS (SEE TABLE VI DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VI IS USED.	
FINISHES (SEE TABLE VII DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7576	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN CENTIMETERS OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
METALS.	7580
DESIGN AND CONSTRUCTION	
END CONFIGURATION	
END ONE	
DOCUMENT (DOC DES)	4042
SIZE (SELECT ONE)	
TUBE (SELECT ONE)	
(INCHES)	4002
(MILLIMETERS)	4004
PIPE (SELECT ONE)	
(INCHES)	4006
(MILLIMETERS)	4008
STYLE (LETTER)	4044
THREAD (DES)	4045
END TWO	
DOCUMENT (DOC DES)	4047

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

7580 METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

DESIGN AND CONSTRUCTION.

END ONE.

4042 END ONE SHALL BE IN ACCORDANCE WITH 4042.

4002 END ONE SHALL ACCOMMODATE A TUBE SIZE OF 4002 INCH(S).

4004 END ONE SHALL ACCOMMODATE A TUBE SIZE OF 4004 MILLIMETER(S).

4006 END ONE SHALL ACCOMMODATE A PIPE SIZE OF 4006 INCH(S).

4008 END ONE SHALL ACCOMMODATE A PIPE SIZE OF 4008 MILLIMETER(S).

4044 THE END ONE STYLE SHALL BE 4044.

4045 THE END ONE THREAD SHALL BE 4045.

END TWO.

4047 END TWO SHALL BE IN ACCORDANCE WITH 4047.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SIZE (SELECT ONE)	
TUBE (SELECT ONE)	
(INCHES)	4016
(MILLIMETERS)	4018
PIPE (SELECT ONE)	
(INCHES)	4020
(MILLIMETERS)	4022
STYLE (LETTER)	4049
THREAD (DES)	4050
END THREE	
DOCUMENT (DOC DES)	4052
SIZE (SELECT ONE)	
TUBE (SELECT ONE)	
(INCHES)	4030
(MILLIMETERS)	4032
PIPE (SELECT ONE)	
(INCHES)	4034
(MILLIMETERS)	4036
STYLE (LETTER)	4054

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4016 END TWO SHALL ACCOMMODATE A TUBE SIZE OF 4016 INCH(S).

4018 END TWO SHALL ACCOMMODATE A TUBE SIZE OF 4018 MILLIMETER(S).

4020 END TWO SHALL ACCOMMODATE A PIPE SIZE OF 4020 INCH(S).

4022 END TWO SHALL ACCOMMODATE A PIPE SIZE OF 4022 MILLIMETER(S).

4049 THE END TWO STYLE SHALL BE 4049.

4050 THE END TWO THREAD SHALL BE 4050.

END THREE.

4052 END THREE SHALL BE IN ACCORDANCE WITH 4052.

4030 END THREE SHALL ACCOMMODATE A TUBE SIZE OF 4030 INCH(S).

4032 END THREE SHALL ACCOMMODATE A TUBE SIZE OF 4032 MILLIMETER(S).

4034 END THREE SHALL ACCOMMODATE A PIPE SIZE OF 4034 INCH(S).

4036 END THREE SHALL ACCOMMODATE A PIPE SIZE OF 4036 MILLIMETER(S).

4054 THE END THREE STYLE SHALL BE 4054.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THREAD (DES)	4055
END FOUR	
DOCUMENT (DOC DES)	4057
SIZE (SELECT ONE)	
TUBE (SELECT ONE)	
(INCHES)	4010
(MILLIMETERS)	4046
PIPE (SELECT ONE)	
(INCHES)	4048
(MILLIMETERS)	4026
STYLE (LETTER)	4059
THREAD (DES)	4060
END FIVE	
DOCUMENT (DOC DES)	4062
SIZE (SELECT ONE)	
TUBE (SELECT ONE)	
(INCHES)	4058
(MILLIMETERS)	4038

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4055	THE END THREE THREAD SHALL BE 4055.
	END FOUR.
4057	END FOUR SHALL BE IN ACCORDANCE WITH 4057.
4010	END FOUR SHALL ACCOMMODATE A TUBE SIZE OF 4010 INCH(S).
4046	END FOUR SHALL ACCOMMODATE A TUBE SIZE OF 4046 MILLIMETER(S).
4048	END FOUR SHALL ACCOMMODATE A PIPE SIZE OF 4048 INCH(S).
4026	END FOUR SHALL ACCOMMODATE A PIPE SIZE OF 4026 MILLIMETER(S).
4059	THE END FOUR STYLE SHALL BE 4059.
4060	THE END FOUR THREAD SHALL BE 4060.
	END FIVE.
4062	END FIVE SHALL BE IN ACCORDANCE WITH 4062.
4058	END FIVE SHALL ACCOMMODATE A TUBE SIZE OF 4058 INCH(S).
4038	END FIVE SHALL ACCOMMODATE A TUBE SIZE OF 4038 MILLIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PIPE (SELECT ONE)	
(INCHES)	4012
(MILLIMETERS)	4014
STYLE (LETTER)	4064
THREAD (DES)	4065
END SIX	
DOCUMENT (DOC DES)	4067
SIZE (SELECT ONE)	
TUBE (SELECT ONE)	
(INCHES)	4072
(MILLIMETERS)	4074
PIPE (SELECT ONE)	
(INCHES)	4076
(MILLIMETERS)	4078
STYLE (LETTER)	4069
THREAD (DES)	4070
MEDIA	
SERVICE MEDIA (NAME)	1690
SERVICE MEDIA DOCUMENT (DOC DES)	1692

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4012	END FIVE SHALL ACCOMMODATE A PIPE SIZE OF 4012 INCH(S).
4014	END FIVE SHALL ACCOMMODATE A PIPE SIZE OF 4014 MILLIMETER(S).
4064	THE END FIVE STYLE SHALL BE 4064.
4065	THE END FIVE THREAD SHALL BE 4065.
	END SIX.
4067	END SIX SHALL BE IN ACCORDANCE WITH 4067.
4072	END SIX SHALL ACCOMMODATE A TUBE SIZE OF 4072 INCH(S).
4074	END SIX SHALL ACCOMMODATE A TUBE SIZE OF 4074 MILLIMETER(S).
4076	END SIX SHALL ACCOMMODATE A PIPE SIZE OF 4076 INCH(S).
4078	END SIX SHALL ACCOMMODATE A PIPE SIZE OF 4078 MILLIMETER(S).
4069	THE END SIX STYLE SHALL BE 4069.
4070	THE END SIX THREAD SHALL BE 4070.
	MEDIA.
1690	THE SERVICE MEDIA SHALL BE 1690.
1692	THE SERVICE MEDIA SHALL BE IN ACCORDANCE WITH 1692.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MEDIA TEMPERATURE	
MINIMUM (DEGREES CELSIUS)	1694
MAXIMUM (DEGREES CELSIUS)	1696
LUBRICANT	
(NAME)	1718
DOCUMENT (DOC DES)	1720
UNION SEAT (SELECT ONE)	
INTEGRAL.	1722
INTEGRAL PER (DOC DES)	1724
INSERTED.	1726
INSERTED PER (DOC DES)	1728
CLEANING	
SERVICE ____	1698
DOCUMENT (DOC DES)	1700
HEAT TREATMENT (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4150
HEAT TREATMENT TABLE	
NOTE: SEE HEAT TREATMENT TABLE.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	MEDIA TEMPERATURE.
1694	THE MINIMUM MEDIA TEMPERATURE SHALL BE 1694 DEGREES CELSIUS.
1696	THE MAXIMUM MEDIA TEMPERATURE SHALL BE 1696 DEGREES CELSIUS.
	LUBRICANT.
1718	THE COMPONENT LUBRICANT SHALL BE 1718.
1720	THE COMPONENT LUBRICANT SHALL BE IN ACCORDANCE WITH 1720.
	UNION SEAT.
1722	THE UNION SEAT SHALL BE INTEGRAL.
1724	THE UNION SEAT SHALL BE INTEGRAL IN ACCORDANCE WITH 1724.
1726	THE UNION SEAT SHALL BE INSERTED.
1728	THE UNION SEAT SHALL BE INSERTED IN ACCORDANCE WITH 1728.
	CLEANING.
1698	THE COMPONENT SHALL BE CLEANED FOR 1698 SERVICE.
1700	THE COMPONENT SHALL BE CLEANED IN ACCORDANCE WITH 1700.
4150	HEAT TREATMENT. HEAT TREATMENT SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4150.
	HEAT TREATMENT TABLE. THE HEAT TREATMENT SHALL BE AS SPECIFIED IN THE HEAT TREATMENT TABLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THREADS (SELECT ONE)	
PER (DOC DES)	3110
OTHER ____	3112
PER THREADS TABLE (SELECT ONE)	
MILLIMETERS.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

HEAT TREATMENT TABLE

MATERIAL	STARTING TEMPER	TIME (HOURS)	TEMPERATURE (DEG C)	FINAL TEMPER
4100	4101	4102	4103	4104
4105	4106	4107	4108	4109
4110	4111	4112	4113	4114
4115	4116	4117	4118	4119
4120	4121	4122	4123	4124
4125	4126	4127	4128	4129
4130	4131	4132	4133	4134
4135	4136	4137	4138	4133

NOTE A: 4140.
NOTE B: 4141.
NOTE C: 4142.
NOTE D: 4143.
NOTE E: 4144.

THREADS.

3110 THREADS SHALL BE IN ACCORDANCE WITH 3110.

3112 THREADS SHALL BE 3112.

THE DEPTH OF LAPS, SEAMS, SURFACE IRREGULARITIES, AND DISCONTINUITIES IN ROLLED THREADS SHALL BE SPECIFIED IN THE FOLLOWING TABLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INCHES.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

DEPTH OF LAPS, SEAMS, SURFACE IRREGULARITIES, AND DISCONTINUITIES IN ROLLED THREADS TABLE

FITTING SIZE	MAXIMUM DEPTH MILLIMETER(S)
3201	3202
3203	3204
3205	3206
3207	3208
3209	3210
3211	3212
3213	3214
3215	3216
3217	3218
3219	3220
3221	3222
3223	3224
3225	3226
3227	3228
3229	3230

THE DEPTH OF LAPS, SEAMS, SURFACE IRREGULARITIES, AND DISCONTINUITIES IN ROLLED THREADS SHALL BE SPECIFIED IN THE FOLLOWING TABLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PASSAGES	
DRILL OFFSET	
PER BASE DOCUMENT EXCEPT ____	3180
OTHER ____	3182
WALL THICKNESS	
PER BASE DOCUMENT EXCEPT ____	3184
OTHER ____	3186

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

DEPTH OF LAPS, SEAMS, SURFACE IRREGULARITIES, AND DISCONTINUITIES IN ROLLED THREADS TABLE

FITTING SIZE	MAXIMUM DEPTH INCHES
3301	3302
3303	3304
3305	3306
3307	3308
3309	3310
3311	3312
3313	3314
3315	3316
3317	3318
3319	3320
3321	3322
3323	3324
3325	3326
3327	3328
3329	3330

PASSAGES.

3180 DRILL OFFSET. DRILL OFFSET SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3180.

3182 3182.

3184 WALL THICKNESS. WALL THICKNESS SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3184.

3186 3186.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TUBE SIZE (SELECT ONE)	
(INCHES)	3130
(MILLIMETERS)	3132
TUBING WALL THICKNESS (SELECT ONE)	
(INCHES)	3134
(MILLIMETERS)	3136
WEIGHT/MASS	
MAXIMUM WEIGHT/MASS PER UNIT (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
(GRAMS)	7021
(KILOGRAMS)	7024
NOMINAL WEIGHT/MASS PER UNIT (SELECT ONE)	
(OUNCES)	6996
(POUNDS)	6997

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3130	TUBE SIZE. FITTINGS SHALL BE FOR USE WITH A TUBE SIZE OF 3130 INCH(S).
3132	TUBE SIZE. FITTINGS SHALL BE FOR USE WITH A TUBE SIZE OF 3132 MILLIMETER(S).
3134	TUBING WALL THICKNESS. FITTINGS SHALL BE FOR USE WITH A TUBING WALL THICKNESS OF 3134 INCH(S).
3136	TUBING WALL THICKNESS. FITTINGS SHALL BE FOR USE WITH A TUBING WALL THICKNESS OF 3136 MILLIMETER(S).
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).
7021	MAXIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).
6996	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6996 OUNCE(S).
6997	NOMINAL WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE 6997 POUND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
(GRAMS)	6998
(KILOGRAMS)	6999
AIR INCLUSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1762
AS FOLLOWS:	3012
MAXIMUM AIR INCLUSION (CUBIC CENTIMETERS)	1764
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1742
PER DOCUMENT (DOC DES)	1744
COUPLING AND UNCOUPLING CYCLES (QUANTITY)	1746
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	1748
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	1750
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	1752

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6998	NOMINAL MASS PER UNIT. THE MASS PER UNIT SHALL BE 6998 GRAM(S).
6999	NOMINAL MASS PER UNIT. THE MASS PER UNIT SHALL BE 6999 KILOGRAM(S).
1762	AIR INCLUSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1762.
3012	AIR INCLUSION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1764	THE AIR INCLUSION SHALL BE NOT GREATER THAN 1764 CUBIC CENTIMETER(S).
1742	AIR INCLUSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1742.
1744	AIR INCLUSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1744.
1746	THERE SHALL BE 1746 COUPLING AND UNCOUPLING CYCLES.
1748	THE TEST PRESSURE SHALL BE 1748 POUNDS PER SQUARE INCH.
1750	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 1750 POUNDS PER SQUARE INCH.
1752	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 1752 POUNDS PER SQUARE INCH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
(KILOPASCALS)	1754
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	1756
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	1758
CORROSION, ACCELERATED	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1788
AS FOLLOWS:	3014
NO CORROSION OF ANY PART OF COMPONENT.	1790
NO DEGRADATION OF PERFORMANCE.	1792
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1772
PER DOCUMENT (DOC DES)	1774
SODIUM CHLORIDE QUANTITY IN IMMERSION SOLUTION (PERCENT BY WEIGHT)	1776
COMPONENT HEATED TEMPERATURE	
MINIMUM TEMPERATURE (DEGREES CELSIUS)	1778

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1754	THE TEST PRESSURE SHALL BE 1754 KILOPASCAL(S).
1756	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 1756 KILOPASCAL(S).
1758	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 1758 KILOPASCAL(S).
1788	CORROSION, ACCELERATED. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1788.
3014	CORROSION, ACCELERATED. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1790	THERE SHALL BE NO CORROSION OF ANY PART OF THE COMPONENT.
1792	THERE SHALL BE NO DEGRADATION OF PERFORMANCE.
1772	CORROSION, ACCELERATED. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1772.
1774	CORROSION, ACCELERATED. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1774.
1776	THE COMPONENT SHALL BE IMMERSED IN A SOLUTION CONSISTING OF 1776 PERCENT BY WEIGHT OF SODIUM CHLORIDE IN DISTILLED WATER.
1778	THE COMPONENT SHALL BE HEATED TO A TEMPERATURE OF NOT LESS THAN 1778 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM TEMPERATURE (DEGREES CELSIUS)	1780
MINIMUM HEATING DURATION (HOURS)	1782
HEATING AND IMMERSION CYCLES (QUANTITY)	1784
CORROSION, STRESS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1810
AS FOLLOWS:	3016
NO EVIDENCE OF STRESS CORROSION CRACKING.	1812
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1802
PER MIL-F-18280.	1804
TEST PERIOD (HOURS)	1806
DUST	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4724
NO EVIDENCE OF PHYSICAL DAMAGE.	1510

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1780	THE COMPONENT SHALL BE HEATED TO A TEMPERATURE OF NOT GREATER THAN 1780 DEGREES CELSIUS.
1782	THE COMPONENT SHALL BE HEATED FOR A PERIOD OF NOT LESS THAN 1782 HOUR(S).
1784	THERE SHALL BE 1784 HEATING AND IMMERSION CYCLES.
1810	CORROSION, STRESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1810.
3016	CORROSION, STRESS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1812	THERE SHALL BE NO EVIDENCE OF STRESS CORROSION CRACKING.
1802	CORROSION, STRESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1802.
1804	CORROSION, STRESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-F-18280.
1806	THE TEST PERIOD SHALL BE 1806 HOUR(S).
4724	DUST. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4724.
1510	DUST. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NO EVIDENCE OF DUST PENETRATION.	4801
CAPABLE OF MANUAL DISCONNECTION.	1814
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4895
PER MIL-STD-810, METHOD 510.	4953
TEST SPECIMEN(S) SHALL BE OPERATED DURING TEST STEP(S) (NUMBERS)	4872
*DURATION OF OPERATION (HOURS)	6299
SPECIMEN ORIENTATION SHALL BE CHANGED DURING TEST.	1539
SECOND 6-HOUR TEST IMMEDIATELY FOLLOWING TEMPERATURE STABILIZATION IN STEP 2.	4956
STEP 2 AND STEP 3 TEMPERATURE (DEGREES CELSIUS)	4840
ENDURANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1854
AS FOLLOWS:	3018
MAXIMUM ALLOWABLE INTERNAL LEAKAGE (CUBIC CENTIMETERS PER MINUTE)	1856

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4801	THERE SHALL BE NO EVIDENCE OF DUST PENETRATION.
1814	THE COMPONENT SHALL BE CAPABLE OF MANUAL DISCONNECTION.
4895	DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4895.
4953	DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 510 OF MIL-STD-810.
4872	ITEMS SHALL BE OPERATED DURING STEP(S) 4872.
6299	DURATION OF OPERATION SHALL BE 6299 HOUR(S).
1539	ORIENTATION SHALL BE CHANGED DURING THE TEST.
4956	THE SECOND 6-HOUR TEST SHALL BE PERFORMED IMMEDIATELY AFTER REACHING STABILIZATION IN STEP 2.
4840	THE TEMPERATURE SHALL BE 4840 DEGREES CELSIUS FOR STEPS 2 AND 3.
1854	ENDURANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1854.
3018	ENDURANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1856	THE ALLOWABLE INTERNAL LEAKAGE SHALL BE NOT GREATER THAN 1856 CUBIC CENTIMETER(S) PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM ALLOWABLE EXTERNAL LEAKAGE (CUBIC CENTIMETERS PER MINUTE)	1858
NO EVIDENCE OF EXCESSIVE WEAR.	1860
NO CHANGE IN TORQUE VALUES.	1862
MAXIMUM FLUID LOSS (CUBIC CENTIMETERS)	1864
NO MALFUNCTION.	1866
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1818
PER DOCUMENT (DOC DES)	1820
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	1822
PLUS PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	1824
MINUS PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	1826
(KILOPASCALS)	1828
PLUS PRESSURE TOLERANCE (KILOPASCALS)	1830
MINUS PRESSURE TOLERANCE (KILOPASCALS)	1832

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1858	THE ALLOWABLE EXTERNAL LEAKAGE SHALL BE NOT GREATER THAN 1858 CUBIC CENTIMETER(S) PER MINUTE.
1860	THERE SHALL BE NO EVIDENCE OF EXCESSIVE WEAR.
1862	THERE SHALL BE NO CHANGE IN TORQUE VALUES.
1864	THE FLUID LOSS SHALL BE NOT GREATER THAN 1864 CUBIC CENTIMETER(S).
1866	THERE SHALL BE NO MALFUNCTION.
1818	ENDURANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1818.
1820	ENDURANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1820.
1822	THE TEST PRESSURE SHALL BE 1822 POUNDS PER SQUARE INCH.
1824	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 1824 POUNDS PER SQUARE INCH.
1826	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 1826 POUNDS PER SQUARE INCH.
1828	THE TEST PRESSURE SHALL BE 1828 KILOPASCAL(S).
1830	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 1830 KILOPASCAL(S).
1832	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 1832 KILOPASCAL(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST TEMPERATURE (DEGREES CELSIUS)	1834
PLUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1836
MINUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1838
TEST MEDIA (NAME)	1840
TEST MEDIA DOCUMENT (DOC DES)	1842
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	1844
PLUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1846
MINUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1848
COUPLING AND UNCOUPLING CYCLES (QUANTITY)	1850
ENDURANCE. CONTAMINATED MEDIA	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1902
AS FOLLOWS:	3020
MAXIMUM ALLOWABLE LEAKAGE (CUBIC CENTIMETERS PER MINUTE)	1904
NO DEGRADATION OF PERFORMANCE.	1906

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1834	THE TEST TEMPERATURE SHALL BE 1834 DEGREES CELSIUS.
1836	THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 1836 DEGREES CELSIUS.
1838	THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 1838 DEGREES CELSIUS.
1840	THE TEST MEDIA SHALL BE 1840.
1842	THE TEST MEDIA SHALL CONFORM TO 1842.
1844	THE TEST MEDIA TEMPERATURE SHALL BE 1844 DEGREES CELSIUS.
1846	THE PLUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 1846 DEGREES CELSIUS.
1848	THE MINUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 1848 DEGREES CELSIUS.
1850	THERE SHALL BE 1850 COUPLING AND UNCOUPLING CYCLES.
1902	ENDURANCE, CONTAMINATED MEDIA. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT,. EXCEPT 1902.
3020	ENDURANCE, CONTAMINATED MEDIA. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1904	THE ALLOWABLE LEAKAGE SHALL BE NOT GREATER THAN 1904 CUBIC CENTIMETER(S) PER MINUTE.
1906	THERE SHALL BE NO DEGRADATION OF PERFORMANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1872
PER MIL-C-7413.	1874
FLOW RATE (SELECT ONE)	
(GALLONS PER MINUTE)	1876
PLUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	1878
MINUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	1880
(CUBIC METERS PER MINUTE)	1882
PLUS FLOW RATE TOLERANCE (CUBIC METERS PER MINUTE)	1884
MINUS FLOW RATE TOLERANCE (CUBIC METERS PER MINUTE)	1886
RATED FLOW DURATION (HOURS)	1888
LOW FLOW DURATION (HOURS)	1890
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4760

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1872	ENDURANCE, CONTAMINATED MEDIA. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1872.
1874	ENDURANCE, CONTAMINATED MEDIA. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-7413.
1876	THE FLOW RATE SHALL BE 1876 GALLONS PER MINUTE.
1878	THE PLUS FLOW RATE TOLERANCE SHALL BE 1878 GALLONS PER MINUTE.
1880	THE MINUS FLOW RATE TOLERANCE SHALL BE 1880 GALLONS PER MINUTE.
1882	THE FLOW RATE SHALL BE 1882 CUBIC METERS PER MINUTE.
1884	THE PLUS FLOW RATE TOLERANCE SHALL BE 1884 CUBIC METERS PER MINUTE.
1886	THE MINUS FLOW RATE TOLERANCE SHALL BE 1886 CUBIC METERS PER MINUTE.
1888	THE RATED FLOW DURATION SHALL BE 1888 HOUR(S).
1890	THE LOW FLOW DURATION SHALL BE 1890 HOUR(S).
4760	FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761
NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED.	4762
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4754
PER MIL-STD-810, METHOD 508.	4755
TEST PERIOD (DAYS)	4756
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4798
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	4799
NO DEGRADATION OF PERFORMANCE.	4815
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4788

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

4761 FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH . THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED, THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.

4762 FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH . THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.

4754 FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.

4755 FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.

4756 TEST PERIOD SHALL BE 4756 DAY(S).

4798 HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.

4799 HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.

4815 THERE SHALL BE NO DEGRADATION OF PERFORMANCE.

4788 HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PER MIL-STD-810, METHOD 507.	4871
*PROCEDURE NUMBER (SELECT ONE)	
TEST PROCEDURE I.	4767
EXTREME TEMPERATURE BEFORE TESTING (DEGREES CELSIUS)	4777
*DURATION OF TEMPERATURE EXPOSURE (HOURS)	4778
TEST PROCEDURE II.	6334
CYCLES LIMITED TO 24 HOURS DURATION.	4716
TEST PROCEDURE III.	6335
TEST PROCEDURE IV.	6336
TEST PROCEDURE V.	6337
NUMBER OF CYCLES (NUMBER)	4800
WATER PURITY BY CONDUCTIVITY METHOD.	4764
OPERATION AND MEASUREMENT AT HIGH TEMPERATURE PORTION OF CYCLES (NUMBER)	4916
OPERATION AND MEASUREMENT AT LOW TEMPERATURE PORTION OF CYCLES (NUMBER)	1554

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4871	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 507 OF MIL-STD-810.
4767	PROCEDURE NUMBER I SHALL APPLY.
4777	SPECIMEN(S) SHALL BE EXPOSED TO 4777 DEGREES CELSIUS BEFORE TESTING.
4778	DURATION OF EXPOSURE TO EXTREME TEMPERATURE SHALL BE 4778 HOUR(S).
6334	PROCEDURE NUMBER II SHALL APPLY.
4716	CYCLES SHALL BE LIMITED TO 24 HOURS DURATION.
6335	PROCEDURE NUMBER III SHALL APPLY.
6336	PROCEDURE NUMBER IV SHALL APPLY.
6337	PROCEDURE NUMBER V SHALL APPLY.
4800	THERE SHALL BE 4800 CYCLE(S).
4764	WATER PURITY SHALL BE DETERMINED BY THE CONDUCTIVITY METHOD.
4916	OPERATION AND MEASUREMENTS SHALL BE PERFORMED AT HIGH TEMPERATURE DURING CYCLE(S) 4916.
1554	OPERATION AND MEASUREMENTS SHALL BE PERFORMED AT LOW TEMPERATURE DURING CYCLE(S) 1554.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMPULSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1956
AS FOLLOWS:	3022
MAXIMUM ALLOWABLE INTERNAL LEAKAGE (CUBIC CENTIMETERS PER MINUTE)	1958
MAXIMUM ALLOWABLE EXTERNAL LEAKAGE (CUBIC CENTIMETERS PER MINUTE)	1960
NO EVIDENCE OF EXCESSIVE WEAR.	1962
NO EVIDENCE OF LEAKAGE.	1964
NO RUPTURE OF ANY PARTS.	1966
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1912
PER DOCUMENT (DOC DES)	1914
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	1916
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	1918
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	1920

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1956 IMPULSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1956.

3022 IMPULSE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

1958 THE ALLOWABLE INTERNAL LEAKAGE SHALL BE NOT GREATER THAN 1958 CUBIC CENTIMETER(S) PER MINUTE.

1960 THE ALLOWABLE EXTERNAL LEAKAGE SHALL BE NOT GREATER THAN 1960 CUBIC CENTIMETER(S) PER MINUTE.

1962 THERE SHALL BE NO EVIDENCE OF EXCESSIVE WEAR.

1964 THERE SHALL BE NO EVIDENCE OF LEAKAGE.

1966 THERE SHALL BE NO RUPTURE OF ANY PARTS.

1912 IMPULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1912.

1914 IMPULSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1914.

1916 THE TEST PRESSURE SHALL BE 1916 POUNDS PER SQUARE INCH.

1918 THE PLUS TEST PRESSURE TOLERANCE SHALL BE 1918 POUNDS PER SQUARE INCH.

1920 THE MINUS TEST PRESSURE TOLERANCE SHALL BE 1920 POUNDS PER SQUARE INCH.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
(KILOPASCALS)	1922
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	1924
MINUS TEST PRESSURE TOLERANCE) (KILOPASCALS)	1926
TEST TEMPERATURE (DEGREES CELSIUS)	1928
PLUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1930
MINUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1932
TEST MEDIA (NAME)	1934
TEST MEDIA DOCUMENT (DOC DES)	1936
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	1938
PLUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1940
MINUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1942
TEST DURATION (HOURS)	1944
TEST CYCLES (QUANTITY)	1946
TEST CYCLE RATE (CYCLES PER MINUTE)	1948
PLUS TEST CYCLE RATE TOLERANCE (CYCLES PER MINUTE)	1950

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1922	THE TEST PRESSURE SHALL BE 1922 KILOPASCAL(S).
1924	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 1924 KILOPASCAL(S).
1926	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 1926 KILOPASCAL(S).
1928	THE TEST TEMPERATURE SHALL BE 1928 DEGREES CELSIUS.
1930	THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 1930 DEGREES CELSIUS.
1932	THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 1932 DEGREES CELSIUS.
1934	THE TEST MEDIA SHALL BE 1934.
1936	THE TEST MEDIA SHALL CONFORM TO 1936.
1938	THE TEST MEDIA TEMPERATURE SHALL BE 1938 DEGREES CELSIUS.
1940	THE PLUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 1940 DEGREES CELSIUS.
1942	THE MINUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 1942 DEGREES CELSIUS.
1944	THE TEST DURATION SHALL BE 1944 HOUR(S).
1946	THERE SHALL BE 1946 TEST CYCLES.
1948	THE TEST CYCLE RATE SHALL BE 1948 CYCLES PER MINUTE.
1950	THE PLUS TEST CYCLE RATE TOLERANCE SHALL BE 1950 CYCLES PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MINUS TEST CYCLE RATE TOLERANCE (CYCLES PER MINUTE)	1952
LEAKAGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2014
AS FOLLOWS:	3024
MAXIMUM ALLOWABLE EXTERNAL LEAKAGE (CUBIC CENTIMETERS PER MINUTE)	1672
MAXIMUM ALLOWABLE INTERNAL LEAKAGE (CUBIC CENTIMETERS PER MINUTE)	1670
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1972
PER DOCUMENT (DOC DES)	1974
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	1976
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	1978
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	1980

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1952	THE MINUS TEST CYCLE RATE TOLERANCE SHALL BE 1952 CYCLES PER MINUTE.
2014	LEAKAGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2014.
3024	LEAKAGE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1672	THE ALLOWABLE EXTERNAL LEAKAGE SHALL BE NOT GREATER THAN 1672 CUBIC CENTIMETER(S) PER MINUTE.
1670	THE ALLOWABLE INTERNAL LEAKAGE SHALL BE NOT GREATER THAN 1670 CUBIC CENTIMETER(S) PER MINUTE.
1972	LEAKAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1972
1974	LEAKAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1974.
1976	THE TEST PRESSURE SHALL BE 1976 POUNDS PER SQUARE INCH.
1978	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 1978 POUNDS PER SQUARE INCH.
1980	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 1980 POUNDS PER SQUARE INCH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
(INCHES OF MERCURY)	1988
PLUS TEST PRESSURE TOLERANCE (INCHES OF MERCURY)	1990
MINUS TEST PRESSURE TOLERANCE (INCHES OF MERCURY)	1992
(KILOPASCALS)	1982
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	1984
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	1986
TEST TEMPERATURE (DEGREES CELSIUS)	1994
PLUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1996
MINUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1998
TEST MEDIA (NAME)	2001
TEST MEDIA DOCUMENT (DOC DES)	2002
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	2004
PLUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2006

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1988	THE TEST PRESSURE SHALL BE 1988 INCHES OF MERCURY.
1990	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 1990 INCHES OF MERCURY.
1992	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 1992 INCHES OF MERCURY.
1982	THE TEST PRESSURE SHALL BE 1982 KILOPASCAL(S).
1984	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 1984 KILOPASCAL(S).
1986	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 1986 KILOPASCAL(S).
1994	THE TEST TEMPERATURE SHALL BE 1994 DEGREES CELSIUS.
1996	THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 1996 DEGREES CELSIUS.
1998	THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 1998 DEGREES CELSIUS.
2001	THE TEST MEDIA SHALL BE 2001.
2002	THE TEST MEDIA SHALL CONFORM TO 2002.
2004	THE TEST MEDIA TEMPERATURE SHALL BE 2004 DEGREES CELSIUS.
2006	THE PLUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2006 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MINUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2008
PRESSURE HOLDING DURATION (MINUTES)	2010
MANUAL OPERATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2042
AS FOLLOWS:	3026
MAXIMUM LEAKAGE (CUBIC CENTIMETERS)	2044
NO MALFUNCTION.	2046
NO PHYSICAL DAMAGE.	2048
MAXIMUM TORQUE REQUIRED FOR CONNECTION (SELECT ONE)	
(POUND-INCHES)	2050
(NEWTON-METERS)	2052
MINIMUM TORQUE REQUIRED FOR DISCONNECTION (SELECT ONE)	
(POUND-INCHES)	2054
(NEWTON-METERS)	2056

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2008	THE MINUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2008 DEGREES CELSIUS.
2010	THE PRESSURE HOLDING DURATION SHALL BE 2010 MINUTE(S).
2042	MANUAL OPERATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2042.
3026	MANUAL OPERATION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2044	THE LEAKAGE SHALL BE NOT GREATER THAN 2044 CUBIC CENTIMETER(S).
2046	THERE SHALL BE NO MALFUNCTION.
2048	THERE SHALL BE NO PHYSICAL DAMAGE.
2050	THE TORQUE REQUIRED FOR CONNECTION SHALL BE NOT GREATER THAN 2050 POUND-INCHES.
2052	THE TORQUE REQUIRED FOR CONNECTION SHALL BE NOT GREATER THAN 2052 NEWTON METER(S).
2054	THE TORQUE REQUIRED FOR DISCONNECTION SHALL BE NOT LESS THAN 2054 POUND-INCHES.
2056	THE TORQUE REQUIRED FOR DISCONNECTION SHALL BE NOT LESS THAN 2056 NEWTON METER(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM FORCE REQUIRED FOR CONNECTION (SELECT ONE)	
(POUNDS)	2058
(NEWTONS)	2060
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2022
PER DOCUMENT (DOC DES)	2024
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2026
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2028
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2030
KILOPASCALS)	2032
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2034
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2036
NUMBER OF CONNECT AND DISCONNECT CYCLES (QUANTITY)	2038

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2058	THE FORCE REQUIRED FOR CONNECTION SHALL BE NOT GREATER THAN 2058 POUND(S).
2060	THE FORCE REQUIRED FOR CONNECTION SHALL BE NOT GREATER THAN 2060 NEWTON(S).
2022	MANUAL OPERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2022.
2024	MANUAL OPERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2024.
2026	THE TEST PRESSURE SHALL BE 2026 POUNDS PER SQUARE INCH,
2028	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2028 POUNDS PER SQUARE INCH.
2030	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2030 POUNDS PER SQUARE INCH.
2032	THE TEST PRESSURE SHALL BE 2032 KILOPASCAL(S).
2034	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2034 KILOPASCAL(S).
2036	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2036 KILOPASCAL(S).
2038	THERE SHALL BE 2038 CONNECT AND DISCONNECT CYCLES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OVERTIGHTENING TORQUE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2098
AS FOLLOWS:	3028
NO EVIDENCE OF FAILURE.	2100
NO EVIDENCE OF DEFORMATION.	2102
NO EVIDENCE OF LEAKAGE.	2104
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2072
PER DOCUMENT (DOC DES)	2074
TEST TORQUE	
PERCENTAGE OF MAXIMUM TORQUE FOR GIVEN FITTING SIZE IN AND10064 (PERCENT)	2076
TORQUE CYCLES (QUANTITY)	2078
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2080
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2082

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2098 OVERTIGHTENING TORQUE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2098.

3028 OVERTIGHTENING TORQUE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2100 THERE SHALL BE NO EVIDENCE OF FAILURE.

2102 THERE SHALL BE NO EVIDENCE OF DEFORMATION,

2104 THERE SHALL BE NO EVIDENCE OF LEAKAGE.

2072 OVERTIGHTENING TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2072.

2074 OVERTIGHTENING TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2074.

2076 THE TEST TORQUE SHALL BE 2076 PERCENT OF THE MAXIMUM TORQUE FOR A GIVEN FITTING SIZE AS SPECIFIED IN AND 10064.

2078 THERE SHALL BE 2078 TORQUE CYCLES.

2080 THE TEST PRESSURE SHALL BE 2080 POUNDS PER SQUARE INCH.

2082 THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2082 POUNDS PER SQUARE INCH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2084
(KILOPASCALS)	2086
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2088
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2090
LUBRICANT (TYPE)	2092
LUBRICANT (DOC DES)	2094
PRESSURE DROP	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2176
AS FOLLOWS:	3030
MAXIMUM PRESSURE DROP (SELECT ONE)	
(POUNDS PER SQUARE INCH)	1588
(KILOPASCALS)	1610
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2112

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2084	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2084 POUNDS PER SQUARE INCH.
2086	THE TEST PRESSURE SHALL BE 2086 KILOPASCAL(S).
2088	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2088 KILOPASCAL(S).
2090	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2090 KILOPASCAL(S).
2092	LUBRICANT SHALL BE 2092.
2094	LUBRICANT SHALL BE IN ACCORDANCE WITH 2094.
2176	PRESSURE DROP. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2176.
3030	PRESSURE DROP. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1588	THE PRESSURE DROP SHALL BE NOT GREATER THAN 1588 POUNDS PER SQUARE INCH.
1610	THE PRESSURE DROP SHALL BE NOT GREATER THAN 1610 KILOPASCAL(S).
2112	PRESSURE DROP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2112.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PER DOCUMENT (DOC DES)	2114
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2116
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2118
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2120
(KILOPASCALS)	2122
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2124
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2126
TEST TEMPERATURE (DEGREES CELSIUS)	2128
PLUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2130
MINUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2132
TEST MEDIA (NAME)	2134
TEST MEDIA DOCUMENT (DOC DES)	2136
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	2138

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2114	PRESSURE DROP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2114|
2116	THE TEST PRESSURE SHALL BE 2116 POUNDS PER SQUARE INCH.
2118	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2118 POUNDS PER SQUARE INCH.
2120	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2120 POUNDS PER SQUARE INCH.
2122	THE TEST PRESSURE SHALL BE 2122 KILOPASCAL(S).
2124	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2124 KILOPASCAL(S).
2126	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2126 KILOPASCAL(S).
2128	THE TEST TEMPERATURE SHALL BE 2128 DEGREES CELSIUS.
2130	THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 2130 DEGREES CELSIUS.
2132	THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 2132 DEGREES CELSIUS.
2134	THE TEST MEDIA SHALL BE 2134.
2136	THE TEST MEDIA SHALL CONFORM TO 2136.
2138	THE TEST MEDIA TEMPERATURE SHALL BE 2138 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PLUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2140
MINUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2142
FLOW RATE (SELECT ONE)	
(GALLONS PER MINUTE)	2144
PLUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	2146
MINUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	2148
(STANDARD CUBIC FEET PER MINUTE)	2150
PLUS FLOW RATE TOLERANCE (STANDARD CUBIC FEET PER MINUTE)	2152
MINUS FLOW RATE TOLERANCE (STANDARD CUBIC FEET PER MINUTE)	2154
(POUNDS PER HOUR)	2156
PLUS FLOW RATE TOLERANCE (POUNDS PER HOUR)	2158
MINUS FLOW RATE TOLERANCE (POUNDS PER HOUR)	2160
(CUBIC METERS PER MINUTE)	2162

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2140	THE PLUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2140 DEGREES CELSIUS.
2142	THE MINUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2142 DEGREES CELSIUS.
2144	THE FLOW RATE SHALL BE 2144 GALLONS PER MINUTE.
2146	THE PLUS FLOW RATE TOLERANCE SHALL BE 2146 GALLONS PER MINUTE.
2148	THE MINUS FLOW RATE TOLERANCE SHALL BE 2148 GALLONS PER MINUTE.
2150	THE FLOW RATE SHALL BE 2150 STANDARD CUBIC FEET PER MINUTE.
2152	THE PLUS FLOW RATE TOLERANCE SHALL BE 2152 STANDARD CUBIC FEET PER MINUTE.
2154	THE MINUS FLOW RATE TOLERANCE SHALL BE 2154 STANDARD CUBIC FEET PER MINUTE.
2156	THE FLOW RATE SHALL BE 2156 POUNDS PER HOUR.
2158	THE PLUS FLOW RATE TOLERANCE SHALL BE 2158 POUNDS PER HOUR.
2160	THE MINUS FLOW RATE TOLERANCE SHALL BE 2160 POUNDS PER HOUR.
2162	THE FLOW RATE SHALL BE 2162 CUBIC METERS PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PLUS FLOW RATE TOLERANCE (CUBIC METERS PER MINUTE)	2164
MINUS FLOW RATE TOLERANCE (CUBIC METERS PER MINUTE)	2166
(KILOGRAMS PER HOUR)	2168
PLUS FLOW RATE TOLERANCE (KILOGRAMS PER HOUR)	2170
MINUS FLOW RATE TOLERANCE (KILOGRAMS PER HOUR)	2172
PRESSURE, HIGH TEMPERATURE BURST	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2224
AS FOLLOWS:	3032
MAXIMUM ALLOWABLE LEAKAGE (CUBIC CENTIMETERS PER MINUTE)	2226
NO PERMANENT DEFORMATION OR RUPTURE.	2228
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2182

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2164	THE PLUS FLOW RATE TOLERANCE SHALL BE 2164 CUBIC METERS PER MINUTE.
2166	THE MINUS FLOW RATE TOLERANCE SHALL BE 2166 CUBIC METERS PER MINUTE.
2168	THE FLOW RATE SHALL BE 2168 KILOGRAMS PER HOUR.
2170	THE PLUS FLOW RATE TOLERANCE SHALL BE 2170 KILOGRAMS PER HOUR.
2172	THE MINUS FLOW RATE TOLERANCE SHALL BE 2172 KILOGRAMS PER HOUR.
2224	PRESSURE, HIGH TEMPERATURE BURST. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2224.
3032	PRESSURE, HIGH TEMPERATURE BURST. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2226	THE ALLOWABLE LEAKAGE SHALL BE NOT GREATER THAN 2226 CUBIC CENTIMETER(S) PER MINUTE.
2228	THERE SHALL BE NO PERMANENT DEFORMATION OR RUPTURE.
2182	PRESSURE, HIGH TEMPERATURE BURST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2182.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PER DOCUMENT (DOC DES)	2184
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2188
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2190
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2192
(KILOPASCALS)	2194
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2196
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2198
TEST TEMPERATURE (DEGREES CELSIUS)	2200
PLUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2202
MINUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2204
TEST MEDIA (NAME)	2206
TEST MEDIA DOCUMENT (DOC DES)	2208
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	2210

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2184	PRESSURE, HIGH TEMPERATURE BURST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2184.
2188	THE TEST PRESSURE SHALL BE 2188 POUNDS PER SQUARE INCH.
2190	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2190 POUNDS PER SQUARE INCH.
2192	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2192 POUNDS PER SQUARE INCH.
2194	THE TEST PRESSURE SHALL BE 2194 KILAPASCAL(S).
2196	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2196 KILOPASCAL(S).
2198	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2198 KILOPASCAL(S).
2200	THE TEST TEMPERATURE SHALL BE 2200 DEGREES CELSIUS.
2202	THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 2202 DEGREES CELSIUS.
2204	THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 2204 DEGREES CELSIUS.
2206	THE TEST MEDIA SHALL BE 2206.
2208	THE TEST MEDIA SHALL CONFORM TO 2208.
2210	THE TEST MEDIA TEMPERATURE SHALL BE 2210 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PLUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2212
MINUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2214
PRESSURE HOLDING DURATION (MINUTES)	2216
MAXIMUM TEST PRESSURE APPLICATION RATE (SELECT ONE)	
(POUNDS PER SQUARE INCH PER MINUTE)	2218
(KILOPASCALS PER MINUTE)	2220
PRESSURE, HIGH TEMPERATURE PROOF	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2274
AS FOLLOWS:	3034
MAXIMUM ALLOWABLE LEAKAGE (CUBIC CENTIMETERS PER MINUTE)	2276
NO PERMANENT DEFORMATION OF ANY PART.	2278
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2232

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2212 THE PLUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2212 DEGREES CELSIUS.

2214 THE MINUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2214 DEGREES CELSIUS.

2216 THE PRESSURE HOLDING DURATION SHALL BE 2216 MINUTE(S).

2218 THE TEST PRESSURE APPLICATION RATE SHALL BE NOT GREATER THAN 2218 POUNDS PER SQUARE INCH PER MINUTE.

2220 THE TEST PRESSURE APPLICATION RATE SHALL BE NOT GREATER THAN 2220 KILOPASCAL(S) PER MINUTE.

2274 PRESSURE, HIGH TEMPERATURE PROOF. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2274.

3034 PRESSURE, HIGH TEMPERATURE PROOF. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2276 THE ALLOWABLE LEAKAGE SHALL BE NOT GREATER THAN 2276 CUBIC CENTIMETER(S) PER MINUTE.

2278 THERE SHALL BE NO PERMANENT DEFORMATION OF ANY PART.

2232 PRESSURE, HIGH TEMPERATURE PROOF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2232.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PER DOCUMENT (DOC DES)	2234
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2238
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2240
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2242
(KILOPASCALS)	2244
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2246
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2248
TEST TEMPERATURE (DEGREES CELSIUS)	2250
PLUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2252
MINUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2254
TEST MEDIA (NAME)	2256
TEST MEDIA DOCUMENT (DOC DES)	2258
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	2260

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2234	PRESSURE, HIGH TEMPERATURE PROOF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2234.
2238	THE TEST PRESSURE SHALL BE 2238 POUNDS PER SQUARE INCH.
2240	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2240 POUNDS PER SQUARE INCH.
2242	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2242 POUNDS PER SQUARE INCH.
2244	THE TEST PRESSURE SHALL BE 2244 KILOPASCAL(S).
2246	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2246 KILOPASCAL(S).
2248	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2248 KILOPASCAL(S).
2250	THE TEST TEMPERATURE SHALL BE 2250 DEGREES CELSIUS.
2252	THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 2252 DEGREES CELSIUS.
2254	THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 2254 DEGREES CELSIUS.
2256	THE TEST MEDIA SHALL BE 2256.
2258	THE TEST MEDIA SHALL CONFORM TO 2258.
2260	THE TEST MEDIA TEMPERATURE SHALL BE 2260 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PLUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2262
MINUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2264
PRESSURE HOLDING DURATION (MINUTES)	2266
MAXIMUM TEST PRESSURE APPLICATION RATE (SELECT ONE)	
(POUNDS PER SQUARE INCH PER MINUTE)	2268
(KILOPASCALS PER MINUTE)	2270
PRESSURE, LOW	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2306
AS FOLLOWS:	3036
NO VISIBLE SIGNS OF LEAKAGE.	2308
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2282
PER DOCUMENT (DOC DES)	2284
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2286

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2262	THE PLUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2262 DEGREES CELSIUS.
2264	THE MINUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2264 DEGREES CELSIUS.
2266	THE PRESSURE HOLDING DURATION SHALL BE 2266 MINUTE(S).
2268	THE TEST PRESSURE APPLICATION RATE SHALL BE NOT GREATER THAN 2268 POUNDS PER SQUARE INCH PER MINUTE.
2270	THE TEST PRESSURE APPLICATION RATE SHALL BE NOT GREATER THAN 2270 KILOPASCAL(S) PER MINUTE.
2306	PRESSURE, LOW. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2306.
3036	PRESSURE, LOW. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2308	THERE SHALL BE NO VISIBLE SIGNS OF LEAKAGE.
2282	PRESSURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2282.
2284	PRESSURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2284.
2286	THE TEST PRESSURE SHALL BE 2286 POUNDS PER SQUARE INCH.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2288
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2290
(KILOPASCALS)	2292
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2294
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2296
TEST MEDIA (NAME)	2298
TEST MEDIA DOCUMENT (DOC DES)	2300
PRESSURE HOLDING DURATION (MINUTES)	2302
PRESSURE, ROOM TEMPERATURE BURST	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2354
AS FOLLOWS:	3038
MAXIMUM ALLOWABLE LEAKAGE (CUBIC CENTIMETERS PER MINUTE)	2356
NO PERMANENT DEFORMATION OR RUPTURE.	2358

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2288 THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2288 POUNDS PER SQUARE INCH.

2290 THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2290 POUNDS PER SQUARE INCH.

2292 THE TEST PRESSURE SHALL BE 2292 KILOPASCAL(S).

2294 THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2294 KILOPASCAL(S).

2296 THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2296 KILOPASCAL(S).

2298 THE TEST MEDIA SHALL BE 2298.

2300 THE TEST MEDIA SHALL CONFORM TO 2300.

2302 THE PRESSURE HOLDING DURATION SHALL BE 2302 MINUTE(S).

2354 PRESSURE, ROOM TEMPERATURE BURST. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2354.

3038 PRESSURE, ROOM TEMPERATURE BURST. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2356 THE ALLOWABLE LEAKAGE SHALL BE NOT GREATER THAN 2356 CUBIC CENTIMETER(S) PER MINUTE.

2358 THERE SHALL BE NO PERMANENT DEFORMATION OR RUPTURE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2312
PER DOCUMENT (DOC DES)	2314
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2318
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2320
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2322
(KILOPASCALS)	2324
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2326
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2328
TEST TEMPERATURE (DEGREES CELSIUS)	2330
PLUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2332
MINUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2334
TEST MEDIA (NAME)	2336

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2312	PRESSURE, ROOM TEMPERATURE BURST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2312.
2314	PRESSURE, ROOM TEMPERATURE BURST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2314.
2318	THE TEST PRESSURE SHALL BE 2318 POUNDS PER SQUARE INCH.
2320	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2320 POUNDS PER SQUARE INCH.
2322	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2322 POUNDS PER SQUARE INCH.
2324	THE TEST PRESSURE SHALL BE 2324 KILOPASCAL(S).
2326	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2326 KILOPASCAL(S).
2328	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2328 KILOPASCAL(S).
2330	THE TEST TEMPERATURE SHALL BE 2330 DEGREES CELSIUS.
2332	THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 2332 DEGREES CELSIUS.
2334	THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 2334 DEGREES CELSIUS.
2336	THE TEST MEDIA SHALL BE 2336.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST MEDIA DOCUMENT (DOC DES)	2338
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	2340
PLUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2342
MINUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2344
PRESSURE HOLDING DURATION (MINUTES)	2346
MAXIMUM TEST PRESSURE APPLICATION RATE (SELECT ONE)	
(POUNDS PER SQUARE INCH PER MINUTE)	2348
(KILOPASCALS PER MINUTE)	2350
PRESSURE, ROOM TEMPERATURE PROOF	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2404
AS FOLLOWS:	3040
MAXIMUM ALLOWABLE LEAKAGE (CUBIC CENTIMETERS PER MINUTE)	2406
NO PERMANENT DEFORMATION OF ANY PART.	2409

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2338	THE TEST MEDIA SHALL CONFORM TO 2338.
2340	THE TEST MEDIA TEMPERATURE SHALL BE 2340 DEGREES CELSIUS.
2342	THE PLUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2342 DEGREES CELSIUS.
2344	THE MINUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2344 DEGREES CELSIUS.
2346	THE PRESSURE HOLDING DURATION SHALL BE 2346 MINUTE(S).
2348	THE TEST PRESSURE APPLICATION RATE SHALL BE NOT GREATER THAN 2348 POUNDS PER SQUARE INCH PER MINUTE.
2350	THE TEST PRESSURE APPLICATION RATE SHALL BE NOT GREATER THAN 2350 KILOPASCAL(S) PER MINUTE.
2404	PRESSURE, ROOM TEMPERATURE PROOF. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2404.
3040	PRESSURE, ROOM TEMPERATURE PROOF. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2406	THE ALLOWABLE LEAKAGE SHALL BE NOT GREATER THAN 2406 CUBIC CENTIMETER(S) PER MINUTE.
2408	THERE SHALL BE NO PERMANENT DEFORMATION OF ANY PART.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2362
PER DOCUMENT (DOC DES)	2364
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2368
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2370
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2372
(KILOPASCALS)	2374
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2376
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2378
TEST TEMPERATURE (DEGREES CELSIUS)	2380
PLUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2382
MINUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2384
TEST MEDIA (NAME)	2386
TEST MEDIA DOCUMENT (DOC DES)	2388

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2362	PRESSURE, ROOM TEMPERATURE PROOF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2362.
2364	PRESSURE, ROOM TEMPERATURE PROOF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2364.
2368	THE TEST PRESSURE SHALL BE 2368 POUNDS PER SQUARE INCH.
2370	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2370 POUNDS PER SQUARE INCH.
2372	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2372 POUNDS PER SQUARE INCH.
2374	THE TEST PRESSURE SHALL BE 2374 KILOPASCAL(S).
2376	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2376 KILOPASCAL(S).
2378	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2378 KILOPASCAL(S).
2380	THE TEST TEMPERATURE SHALL BE 2380 DEGREES CELSIUS.
2382	THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 2382 DEGREES CELSIUS.
2384	THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 2384 DEGREES CELSIUS.
2386	THE TEST MEDIA SHALL BE 2386.
2388	THE TEST MEDIA SHALL CONFORM TO 2388.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	2390
PLUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2392
MINUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2394
PRESSURE HOLDING DURATION (MINUTES)	2396
MAXIMUM TEST PRESSURE APPLICATION RATE (SELECT ONE)	
(POUNDS PER SQUARE INCH PER MINUTE)	2398
(KILOPASCALS PER MINUTE)	2400
REPEATED ASSEMBLY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2420
AS FOLLOWS:	3042
NO EVIDENCE OF LEAKAGE.	2422
MINIMUM OPENING (SELECT ONE)	
(INCHES)	2424
(MILLIMETERS)	2426
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2412

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2390	THE TEST MEDIA TEMPERATURE SHALL BE 2390 DEGREES CELSIUS.
2392	THE PLUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2392 DEGREES CELSIUS.
2394	THE MINUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2394 DEGREES CELSIUS.
2396	THE PRESSURE HOLDING DURATION SHALL BE 2396 MINUTE(S).
2398	THE TEST PRESSURE APPLICATION RATE SHALL BE NOT GREATER THAN 2398 POUNDS PER SQUARE INCH PER MINUTE.
2400	THE TEST PRESSURE APPLICATION RATE SHALL BE NOT GREATER THAN 2400 KILOPASCAL(S) PER MINUTE.
2420	REPEATED ASSEMBLY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2420.
3042	REPEATED ASSEMBLY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2422	THERE SHALL BE NO EVIDENCE OF LEAKAGE.
2424	THE MINIMUM OPENING SHALL BE 2424 INCH(S).
2426	THE MINIMUM OPENING SHALL BE 2426 MILLIMETER(S).
2412	REPEATED ASSEMBLY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2412.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PER DOCUMENT (DOC DES)	2414
NUMBER OF ASSEMBLY CYCLES (QUANTITY)	2416
TORQUE (TURN) VALUE	
NOTE: SEE TORQUE (TURN) VALUE TABLE.	
RESISTANCE, CRUSH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2450
AS FOLLOWS:	3044
NO PERMANENT DEFORMATION.	2452
NO DEGRADATION OF PERFORMANCE.	2454

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE | STANDARD PARAGRAPH

2414 REPEATED ASSEMBLY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2414.

2416 THERE SHALL BE 2416 ASSEMBLY CYCLE(S).

THE TORQUE (TURN) VALUES SHALL BE AS SPECIFIED IN THE FOLLOWING TABLE.

TORQUE (TURN) VALUE TABLE

INITIAL INSTALLATION AFTER PRESETTING	TYPE OF CONNECTION	TUBE SIZES	INSTALLATION TORQUE (TURNS)	MAXIMUM OVERTIGHTENING TORQUE (TURNS)
3601	3602	3603	3604	3605
3606	3607	3608	3609	3610
3611	3612	3613	3614	3615
3616	3617	3618	3619	3620
3621	3622	3623	3624	3625
3626	3627	3628	3629	3630

NOTE A: 3641.
NOTE B: 3642.
NOTE C: 3643.
NOTE D: 3644.

2450 RESISTANCE, CRUSH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2450.

3044 RESISTANCE, CRUSH, THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2452 THERE SHALL BE NO PERMANENT DEFORMATION.

2454 THERE SHALL BE NO DEGRADATION OF PERFORMANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2432
PER DOCUMENT (DOC DES)	2434
TEST LOAD (SELECT ONE)	
(POUNDS)	2436
(KILOGRAMS)	2438
LOAD DURATION (SELECT ONE)	
(MINUTES)	2440
(SECONDS)	2442
LOAD APPLICATION RATE (SELECT ONE)	
(INCHES PER MINUTE)	2444
(MILLIMETERS PER MINUTE)	2446
RESISTANCE, ELECTRICAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2468
AS FOLLOWS:	3046
MAXIMUM ELECTRICAL RESISTANCE (OHMS)	2470

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2432	RESISTANCE, CRUSH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2432.
2434	RESISTANCE, CRUSH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2434.
2436	THE TEST LOAD SHALL BE 2436 POUND(S).
2438	THE TEST LOAD SHALL BE 2438 KILOGRAM(S).
2440	THE LOAD DURATION SHALL BE 2440 MINUTE(S).
2442	THE LOAD DURATION SHALL BE 2442 SECOND(S).
2444	THE LOAD APPLICATION RATE SHALL BE 2444 INCH(S) PER MINUTE.
2446	THE LOAD APPLICATION RATE SHALL BE 2446 MILLIMETER(S) PER MINUTE.
2468	RESISTANCE, ELECTRICAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2468.
3046	RESISTANCE, ELECTRICAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2470	THE ELECTRICAL RESISTANCE SHALL BE NOT GREATER THAN 2470 OHM(S).

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2462
PER MIL-C-7413.	2464
RESISTANCE, FLUID	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2512
AS FOLLOWS:	3048
NO EVIDENCE OF LEAKAGE.	2514
NO DEFORMATION.	2516
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2482
PER DOCUMENT (DOC DES)	2484
TEST MEDIA (NAME)	2486
TEST MEDIA DOCUMENT (DOC DES)	2488
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2490
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2492

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2462 RESISTANCE, ELECTRICAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2462.

2464 RESISTANCE, ELECTRICAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-7413.

2512 RESISTANCE, FLUID. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2512.

3048 RESISTANCE, FLUID. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2514 THERE SHALL BE NO EVIDENCE OF LEAKAGE.

2516 THERE SHALL BE NO DEFORMATION.

2482 RESISTANCE, FLUID. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2482.

2484 RESISTANCE, FLUID. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2484.

2486 THE TEST MEDIA SHALL BE 2486.

2488 THE TEST MEDIA SHALL CONFORM TO 2488.

2490 THE TEST PRESSURE SHALL BE 2490 POUNDS PER SQUARE INCH.

2492 THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2492 POUNDS PER SQUARE INCH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2494
(KILOPASCALS)	2496
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2498
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2500
PRESSURE HOLDING DURATION (MINUTES)	2502
TEST TEMPERATURE (DEGREES CELSIUS)	2504
PLUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2506
MINUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2508
RESPONSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	3050
AS FOLLOWS:	3052
MAXIMUM EXCURSION OF DAMPENED PULSATION (SCALE)	3054
NO AFFECT ON ACCURACY.	3056

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2494 THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2494 POUNDS PER SQUARE INCH.

2496 THE TEST PRESSURE SHALL BE 2496 KILOPASCAL(S).

2498 THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2498 KILOPASCAL(S).

2500 THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2500 KILOPASCAL(S).

2502 THE PRESSURE HOLDING DURATION SHALL BE 2502 MINUTE(S).

2504 THE TEST TEMPERATURE SHALL BE 2504 DEGREES CELSIUS.

2506 THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 2506 DEGREES CELSIUS.

2508 THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 2508 DEGREES CELSIUS.

3050 RESPONSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3050.

3052 RESPONSE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

3054 THE TOTAL EXCURSION OF THE DAMPENED PULSATION SHALL BE NOT GREATER THAN 3054 SCALE SUBDIVISION(S) OF THE GAGE.

3056 THE ACCURACY OF THE GAGE SHALL NOT BE AFFECTED BY THE DAMPENER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	3058
PER MIL-D-2940.	3060
SALT FOG	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4998
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.	4999
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4779
PER MIL-STD-810, METHOD 509.	4780
SALT SOLUTION (PERCENT)	4786
EXPOSURE PERIOD (HOURS)	4783
DRYING PERIOD (HOURS)	4775
OPERATE (SELECT ONE)	
OPERATE ONLY AFTER DRYING.	6245
OPERATE ONLY AFTER EXPOSURE.	6246

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
3058	RESPONSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3058.
3060	RESPONSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-D-2940.
4998	SALT FOG. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4998.
4999	SALT FOG. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
4779	SALT FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4779.
4780	SALT FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 509 OF MIL-STD-810.
4786	SOLUTION SHALL BE 4786 PERCENT SALT.
4783	DURATION OF THE TEST SHALL BE 4783 HOUR(S).
4775	DRYING PERIOD SHALL BE 4775 HOUR(S).
6245	ITEM(S) SHALL BE OPERATED ONLY AFTER DRYING.
6246	ITEM(S) SHALL BE OPERATED ONLY AFTER EXPOSURE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OPERATE AFTER EXPOSURE AND AFTER DRYING.	6247
OPERATE AFTER 24 HOURS OF EXPOSURE.	6248
SHOCK	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	7315
NO EVIDENCE OF PHYSICAL DAMAGE.	7316
NO DISCONNECTION OF THE COUPLING.	3090
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	7311
PER MIL-STD-810, METHOD 516.	7312
*PROCEDURE	
PROCEDURE I.	7313
*FIGURE (SELECT ONE)	
FIGURE 516-1 APPLIES.	7317
FIGURE 516-2 APPLIES.	7318
*AMPLITUDE, A OR B (LETTER)	7305
*DURATION, C OR D (LETTER)	7306

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6247	ITEM(S) SHALL BE OPERATED AFTER EXPOSURE AND AFTER DRYING.
6248	ITEM(S) SHALL BE OPERATED AFTER 24 HOURS OF EXPOSURE.
7315	SHOCK. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 7315.
7316	SHOCK. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
3090	THERE SHALL BE NO DISCONNECTION OF THE COUPLING.
7311	SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 7311.
7312	SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 516 OF MIL-STD-810.
7313	PROCEDURE NUMBER I SHALL APPLY.
7317	THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH FIGURE 516-1 OF METHOD 516 OF MIL-STD-810.
7318	THE SHOCK PULSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516-2 OF METHOD 516 OF MIL-STD-810.
7305	AMPLITUDE LETTER 7305 SHALL APPLY.
7306	DURATION LETTER 7306 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PROCEDURE II.	6327
PROCEDURE III.	6338
*FIGURE (SELECT ONE)	
FIGURE 516-1 APPLIES.	6339
FIGURE 516-2 APPLIES.	6340
*AMPLITUDE A OR B (LETTER)	6341
*DURATION C OR D (LETTER)	6342
PROCEDURE IV.	6343
*FIGURE (SELECT ONE)	
FIGURE 516-1 APPLIES.	6344
FIGURE 516-2 APPLIES.	6345
*AMPLITUDE, A OR B (LETTER)	6346
*DURATION, C OR D (LETTER)	6347
PROCEDURE V.	6348
PROCEDURE VI.	6349
TEST TEMPERATURE (DEGREES CELSIUS)	7307
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	7308

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6327	PROCEDURE NUMBER II SHALL APPLY.
6338	PROCEDURE NUMBER III SHALL APPLY.
6339	THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH FIGURE 516-1 OF METHOD 516 OF MIL-STD-810.
6340	THE SHOCK PULSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516-2 OF METHOD 516 OF MIL-STD-810.
6341	AMPLITUDE LETTER 6341 SHALL APPLY.
6342	DURATION LETTER 6342 SHALL APPLY.
6343	PROCEDURE NUMBER IV SHALL APPLY.
6344	THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH FIGURE 516-1 OF METHOD 516 OF MIL-STD-810.
6345	THE SHOCK PULSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516-2 OF METHOD 516 OF MIL-STD-810.
6346	AMPLITUDE LETTER 6346 SHALL APPLY.
6347	DURATION LETTER 6347 SHALL APPLY.
6348	PROCEDURE NUMBER V SHALL APPLY.
6349	PROCEDURE NUMBER VI SHALL APPLY.
7307	THE TEST TEMPERATURE SHALL BE 7307 DEGREES CELSIUS.
7308	THE TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 7308 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SPILLAGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2546
AS FOLLOWS:	3062
MAXIMUM SPILLAGE (SELECT ONE)	
(CUBIC CENTIMETERS)	2548
(MILLIMETERS)	2550
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2522
PER DOCUMENT (DOC DES)	2524
NUMBER OF COUPLING AND UNCOUPLING CYCLES (QUANTITY)	2526
TEST MEDIA (NAME)	2528
TEST MEDIA DOCUMENT (DOC DES)	2530
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2532
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2534
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2536

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2546 SPILLAGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2546.

3062 SPILLAGE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2548 THE SPILLAGE SHALL BE NOT GREATER THAN 2548 CUBIC CENTIMETER(S).

2550 THE SPILLAGE SHALL BE NOT GREATER THAN 2550 MILLIMETER(S).

2522 SPILLAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2522.

2524 SPILLAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2524.

2526 THERE SHALL BE 2526 COUPLING AND UNCOUPLING CYCLES.

2528 THE TEST MEDIA SHALL BE 2528.

2530 THE TEST MEDIA SHALL CONFORM TO 2530.

2532 THE TEST PRESSURE SHALL BE 2532 POUNDS PER SQUARE INCH.

2534 THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2534 POUNDS PER SQUARE INCH.

2536 THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2536 POUNDS PER SQUARE INCH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
(KILOPASCALS)	2538
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2540
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2542
STRENGTH, FLANGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2572
AS FOLLOWS:	3064
NO DAMAGE TO MOUNTING FLANGE.	2574
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2562
PER MIL-C-25427.	2564
TORQUE	
PERCENTAGE OF MAXIMUM TORQUE OF AND10064 FOR A GIVEN TUBE SIZE (PERCENT)	2566
NUMBER OF TORQUE APPLICATIONS (QUANTITY)	2568

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2538 THE TEST PRESSURE SHALL BE 2538 KILOPASCAL(S).

2540 THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2540 KILOPASCAL(S).

2542 THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2542 KILOPASCAL(S).

2572 STRENGTH, FLANGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2572.

3064 STRENGTH, FLANGE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2574 THERE SHALL BE NO DAMAGE TO THE MOUNTING FLANGE.

2562 STRENGTH, FLANGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2562.

2564 STRENGTH, FLANGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-C-25427.

2566 THE TEST TORQUE SHALL BE 2566 PERCENT OF THE MAXIMUM TORQUE FOR A GIVEN FITTING SIZE AS SPECIFIED IN AND10064.

2568 THERE SHALL BE 2568 TORQUE APPLICATIONS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
STRENGTH, FLEXURAL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2628
AS FOLLOWS:	3066
NO EVIDENCE OF LEAKAGE.	2630
NO FAILURE OF COMPONENT.	2632
NO DEFORMATION.	2634
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2582
PER DOCUMENT (DOC DES)	2584
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2586
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2588
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2590
(KILOPASCALS)	2592
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2594

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2628	STRENGTH, FLEXURAL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2628.
3066	STRENGTH, FLEXURAL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2630	THERE SHALL BE NO EVIDENCE OF LEAKAGE.
2632	THERE SHALL BE NO FAILURE OF THE COMPONENT.
2634	THERE SHALL BE NO DEFORMATION.
2582	STRENGTH, FLEXURAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2582.
2584	STRENGTH, FLEXURAL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2584.
2586	THE TEST PRESSURE SHALL BE 2586 POUNDS PER SQUARE INCH.
2588	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2588 POUNDS PER SQUARE INCH.
2590	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2590 POUNDS PER SQUARE INCH.
2592	THE TEST PRESSURE SHALL BE 2592 KILOPASCAL(S).
2594	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2594 KILOPASCAL(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2596
TEST TEMPERATURE (DEGREES CELSIUS)	2598
PLUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2600
MINUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2602
TEST MEDIA (NAME)	2604
TEST MEDIA DOCUMENT (DOC DES)	2606
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	2608
PLUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2610
MINUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2612
FLEXING DURATION (HOURS)	2614
MAXIMUM TEST PRESSURE APPLICATION RATE (SELECT ONE)	
(POUNDS PER SQUARE INCH PER MINUTE)	2616
(KILOPASCALS PER MINUTE)	2618
FLEXING CYCLES (QUANTITY)	2620

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2596	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2596 KILOPASCAL(S).
2598	THE TEST TEMPERATURE SHALL BE 2598 DEGREES CELSIUS.
2600	THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 2600 DEGREES CELSIUS.
2602	THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 2602 DEGREES CELSIUS.
2604	THE TEST MEDIA SHALL BE 2604.
2606	THE TEST MEDIA SHALL CONFORM TO 2606.
2608	THE TEST MEDIA TEMPERATURE SHALL BE 2608 DEGREES CELSIUS.
2610	THE PLUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2610 DEGREES CELSIUS.
2612	THE MINUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2612 DEGREES CELSIUS.
2614	THE FLEXING DURATION SHALL BE 2614 HOUR(S).
2616	THE TEST PRESSURE APPLICATION RATE SHALL BE NOT GREATER THAN 2616 POUNDS PER SQUARE INCH PER MINUTE.
2618	THE TEST PRESSURE APPLICATION RATE SHALL BE NOT GREATER THAN 2618 KILOPASCAL(S) PER MINUTE.
2620	THERE SHALL BE 2620 FLEXING CYCLES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FLEXING RANGE	
*MINIMUM FREQUENCY OF FLEXING (CYCLES PER MINUTE)	2622
*MAXIMUM FREQUENCY OF FLEXING (CYCLES PER MINUTE)	2624
STRESS DEGRADATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2662
AS FOLLOWS:	3068
NO EVIDENCE OF LEAKAGE.	2664
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2642
PER DOCUMENT (DOC DES)	2644
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2646
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2648
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2650

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2622	THE FLEXING FREQUENCY SHALL BE NOT LESS THAN 2622 CYCLES PER MINUTE.
2624	THE FLEXING FREQUENCY SHALL BE NOT GREATER THAN 2624 CYCLES PER MINUTE.
2662	STRESS DEGRADATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2662.
3068	STRESS DEGRADATION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2664	THERE SHALL BE NO EVIDENCE OF LEAKAGE.
2642	STRESS DEGRADATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2642.
2644	STRESS DEGRADATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2644.
2646	THE TEST PRESSURE SHALL BE 2646 POUNDS PER SQUARE INCH.
2648	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2648 POUNDS PER SQUARE INCH.
2650	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2650 POUNDS PER SQUARE INCH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
(KILOPASCALS)	2652
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2654
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2656
MINIMUM PRESSURE HOLDING DURATION (MINUTES)	2658
SURGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2742
AS FOLLOWS:	3070
MAXIMUM ALLOWABLE LEAKAGE (CUBIC CENTIMETERS PER MINUTE)	2744
NO DAMAGE TO COMPONENT PARTS.	2746
NO EVIDENCE OF LEAKAGE.	2748
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2672
PER DOCUMENT (DOC DES)	2674
SURGE PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2678

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2652	THE TEST PRESSURE SHALL BE 2652 KILOPASCAL(S).
2654	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2654 KILOPASCAL(S).
2656	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2656 KILOPASCAL(S).
2658	THE PRESSURE HOLDING DURATION SHALL BE NOT LESS THAN 2658 MINUTE(S).
2742	SURGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2742.
3070	SURGE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2744	THE ALLOWABLE LEAKAGE SHALL BE NOT GREATER THAN 2744 CUBIC CENTIMETER(S) PER MINUTE.
2746	THERE SHALL BE NO DAMAGE TO COMPONENT PARTS.
2748	THERE SHALL BE NO EVIDENCE OF LEAKAGE.
2672	SURGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2672.
2674	SURGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2674.
2678	THE TEST PRESSURE SHALL BE 2678 POUNDS PER SQUARE INCH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PLUS SURGE PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2680
MINUS SURGE PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2682
(KILOPASCALS)	2684
PLUS SURGE PRESSURE TOLERANCE (KILOPASCALS)	2686
MINUS SURGE PRESSURE TOLERANCE (KILOPASCALS)	2688
TEST TEMPERATURE (DEGREES CELSIUS)	2690
PLUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2692
MINUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2694
TEST MEDIA (NAME)	2696
TEST MEDIA DOCUMENT (DOC DES)	2698
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	2700
PLUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2702
MINUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2704
SURGE CYCLES (QUANTITY)	2706

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2680 THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2680 POUNDS PER SQUARE INCH.

2682 THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2682 POUNDS PER SQUARE INCH.

2684 THE TEST PRESSURE SHALL BE 2684 KILOPASCAL(S).

2686 THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2686 KILOPASCAL(S).

2688 THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2688 KILOPASCAL(S).

2690 THE TEST TEMPERATURE SHALL BE 2690 DEGREES CELSIUS.

2692 THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 2692 DEGREES CELSIUS.

2694 THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 2694 DEGREES CELSIUS.

2696 THE TEST MEDIA SHALL BE 2696.

2698 THE TEST MEDIA SHALL CONFORM TO 2698.

2700 THE TEST MEDIA TEMPERATURE SHALL BE 2700 DEGREES CELSIUS.

2702 THE PLUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2702 DEGREES CELSIUS.

2704 THE MINUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2704 DEGREES CELSIUS.

2706 THERE SHALL BE 2706 SURGE CYCLES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SURGE CYCLE DURATION (SECONDS)	2708
SURGE FLOW RATE (SELECT ONE)	
(GALLONS PER MINUTE)	2710
PLUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	2712
MINUS FLOW RATE TOLERANCE (GALLONS PER MINUTE)	2714
(STANDARD CUBIC FEET PER MINUTE)	2716
PLUS FLOW RATE TOLERANCE (STANDARD CUBIC FEET PER MINUTE)	2718
MINUS FLOW RATE TOLERANCE (STANDARD CUBIC FEET PER MINUTE)	2720
(POUNDS PER HOUR)	2722
PLUS FLOW RATE TOLERANCE (POUNDS PER HOUR)	2724
MINUS FLOW RATE TOLERANCE (POUNDS PER HOUR)	2726
(CUBIC METERS PER MINUTE)	2728
PLUS FLOW RATE TOLERANCE (CUBIC METERS PER MINUTE)	2730
MINUS FLOW RATE TOLERANCE (CUBIC METERS PER MINUTE)	2732

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2708	THE SURGE CYCLES DURATION SHALL BE 2708 SECOND(S).
2710	THE FLOW RATE SHALL BE 2710 GALLONS PER MINUTE.
2712	THE PLUS FLOW RATE TOLERANCE SHALL BE 2712 GALLONS PER MINUTE.
2714	THE MINUS FLOW RATE TOLERANCE SHALL BE 2714 GALLONS PER MINUTE.
2716	THE FLOW RATE SHALL BE 2716 STANDARD CUBIC FEET PER MINUTE.
2718	THE PLUS FLOW RATE TOLERANCE SHALL BE 2718 STANDARD CUBIC FEET PER MINUTE.
2720	THE MINUS FLOW RATE TOLERANCE SHALL BE 2720 STANDARD CUBIC FEET PER MINUTE.
2722	THE FLOW RATE SHALL BE 2722 POUNDS PER HOUR.
2724	THE PLUS FLOW RATE TOLERANCE SHALL BE 2724 POUNDS PER HOUR.
2726	THE MINUS FLOW RATE TOLERANCE SHALL BE 2726 POUNDS PER HOUR.
2728	THE FLOW RATE SHALL BE 2728 CUBIC METERS PER MINUTE.
2730	THE PLUS FLOW RATE TOLERANCE SHALL BE 2730 CUBIC METERS PER MINUTE.
2732	THE MINUS FLOW RATE TOLERANCE SHALL BE 2732 CUBIC METERS PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
(KILOGRAMS PER HOUR)	2734
PLUS FLOW RATE TOLERANCE (KILOGRAMS PER HOUR)	2736
MINUS FLOW RATE TOLERANCE (KILOGRAMS PER HOUR)	2738
TEMPERATURE, HIGH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	3072
AS FOLLOWS:	3074
NO EVIDENCE OF LEAKAGE.	2802
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	3076
PER DOCUMENT (DOC DES)	2754
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2756
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2758
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2760

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2734	THE FLOW RATE SHALL BE 2734 KILOGRAMS PER HOUR.
2736	THE PLUS FLOW RATE TOLERANCE SHALL BE 2736 KILOGRAMS PER HOUR.
2738	THE MINUS FLOW RATE TOLERANCE SHALL BE 2738 KILOGRAMS PER HOUR.
3072	TEMPERATURE, HIGH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3072.
3074	TEMPERATURE, HIGH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2802	THERE SHALL BE NO EVIDENCE OF LEAKAGE.
3076	TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3076.
2754	TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2754.
2756	THE TEST PRESSURE SHALL BE 2756 POUNDS PER SQUARE INCH.
2758	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2758 POUNDS PER SQUARE INCH.
2760	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2760 POUNDS PER SQUARE INCH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
(KILOPASCALS)	2762
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2764
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2766
INITIAL HIGH TEMPERATURE TEST TEMPERATURE (DEGREES CELSIUS)	2768
PLUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2770
MINUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2772
TEMPERATURE TO WHICH PART IS COOLED (DEGREES CELSIUS)	2774
PLUS TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2776
MINUS TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2778
SECOND HIGH TEMPERATURE TEST TEMPERATURE (DEGREES CELSIUS)	2780
PLUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2782

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2762	THE TEST PRESSURE SHALL BE 2762 KILOPASCAL(S).
2764	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2764 KILOPASCAL(S).
2766	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2766 KILOPASCAL(S).
2768	THE INITIAL HIGH TEMPERATURE TEST TEMPERATURE SHALL BE 2768 DEGREES CELSIUS.
2770	THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 2770 DEGREES CELSIUS.
2772	THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 2772 DEGREES CELSIUS.
2774	THE PART SHALL BE COOLED TO 2774 DEGREES CELSIUS.
2776	THE PLUS TEMPERATURE TOLERANCE SHALL BE 2776 DEGREES CELSIUS.
2778	THE MINUS TEMPERATURE TOLERANCE SHALL BE 2778 DEGREES CELSIUS.
2780	THE SECOND HIGH TEMPERATURE TEST TEMPERATURE SHALL BE 2780 DEGREES CELSIUS.
2782	THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 2782 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MINUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2784
TEST MEDIA (NAME)	2786
TEST MEDIA DOCUMENT (DOC DES)	2788
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	2790
PLUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2792
MINUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2794
TEMPERATURE, LOW	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT_____	3078
AS FOLLOWS:	3080
NO EVIDENCE OF LEAKAGE.	2848
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT_____	3082
PER DOCUMENT (DOC DES)	2814
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2816

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:23Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
2784	THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 2784 DEGREES CELSIUS.
2786	THE TEST MEDIA SHALL BE 2786.
2788	THE TEST MEDIA SHALL CONFORM TO 2788.
2790	THE TEST MEDIA TEMPERATURE SHALL BE 2790 DEGREES CELSIUS.
2792	THE PLUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2792 DEGREES CELSIUS.
2794	THE MINUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2794 DEGREES CELSIUS.
3078	TEMPERATURE, LOW. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3078.
3080	TEMPERATURE, LOW. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2848	THERE SHALL BE NO EVIDENCE OF LEAKAGE.
3082	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3082.
2814	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2814.
2816	THE TEST PRESSURE SHALL BE 2816 POUNDS PER SQUARE INCH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2818
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2820
(KILOPASCALS)	2822
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2824
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2826
TEST TEMPERATURE (DEGREES CELSIUS)	2828
PLUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2830
MINUS TEST TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2832
TEST MEDIA (NAME)	2834
TEST MEDIA DOCUMENT (DOC DES)	2836
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	2838
PLUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2840
MINUS TEST MEDIA TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2842

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2818	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2818 POUNDS PER SQUARE INCH.
2820	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2820 POUNDS PER SQUARE INCH.
2822	THE TEST PRESSURE SHALL BE 2822 KILOPASCAL(S).
2824	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2824 KILOPASCAL(S).
2826	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2826 KILOPASCAL(S).
2828	THE TEST TEMPERATURE SHALL BE 2828 DEGREES CELSIUS.
2830	THE PLUS TEST TEMPERATURE TOLERANCE SHALL BE 2830 DEGREES CELSIUS.
2832	THE MINUS TEST TEMPERATURE TOLERANCE SHALL BE 2832 DEGREES CELSIUS.
2834	THE TEST MEDIA SHALL BE 2834.
2836	THE TEST MEDIA SHALL CONFORM TO 2836.
2838	THE TEST MEDIA TEMPERATURE SHALL BE 2838 DEGREES CELSIUS.
2840	THE PLUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2840 DEGREES CELSIUS.
2842	THE MINUS TEST MEDIA TEMPERATURE TOLERANCE SHALL BE 2842 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE SHOCK	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	6214
NO EVIDENCE OF PHYSICAL DAMAGE.	6215
REMAIN WITHIN SPECIFIED TOLERANCE.	4726
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	6212
PER MIL-STD-810, METHOD 503.	4710
TENSILE LOAD (LOCKING MECHANISM)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2866
AS FOLLOWS:	3084
NO DEGRADATION OF PERFORMANCE.	2868
COUPLING SHALL NOT RELEASE.	2870
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2852

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

6214 TEMPERATURE SHOCK. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6214.

6215 TEMPERATURE SHOCK. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.

4726 ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.

6212 TEMPERATURE SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6212.

4710 TEMPERATURE SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 503 OF MIL-STD-810.

2866 TENSILE LOAD (LOCKING MECHANISM). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2866.

3084 TENSILE LOAD (LOCKING MECHANISM). THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2868 THERE SHALL BE NO DEGRADATION OF PERFORMANCE.

2870 THE COUPLING SHALL NOT RELEASE.

2852 TENSILE LOAD (LOCKING MECHANISM). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2852.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PER DOCUMENT (DOC DES)	2854
TEST LOAD (SELECT ONE)	
(POUNDS)	2856
(KILOGRAMS)	2858
LOAD DURATION (SELECT ONE)	
(MINUTES)	2860
(SECONDS)	2862
VACUUM	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2902
AS FOLLOWS:	3086
NO VISIBLE SIGNS OF LEAKAGE.	2904
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2882
PER DOCUMENT (DOC DES)	2884
TEST PRESSURE (SELECT ONE)	
(INCHES OF MERCURY)	2886

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

2854 TENSILE LOAD (LOCKING MECHANISM). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2854.

2856 THE TEST LOAD SHALL BE 2856 POUND(S).

2858 THE TEST LOAD SHALL BE 2858 KILOGRAM(S).

2860 THE TEST LOAD DURATION SHALL BE 2860 MINUTE(S).

2862 THE TEST LOAD DURATION SHALL BE 2862 SECOND(S).

2902 VACUUM. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2902.

3086 VACUUM. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

2904 THERE SHALL BE NO VISIBLE SIGNS OF LEAKAGE.

2882 VACUUM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2882.

2884 VACUUM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2884.

2886 THE TEST PRESSURE SHALL BE 2886 INCHES OF MERCURY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PLUS TEST PRESSURE TOLERANCE (INCHES OF MERCURY)	2888
MINUS TEST PRESSURE TOLERANCE (INCHES OF MERCURY)	2890
[PASCALS)	2892
PLUS TEST PRESSURE TOLERANCE (PASCALS)	2894
MINUS TEST PRESSURE TOLERANCE (PASCALS)	2896
TEST DURATION (MINUTES)	2898
VIBRATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4681
NO EVIDENCE OF PHYSICAL DAMAGE.	4682
REMAIN WITHIN SPECIFIED TOLERANCE.	1538
NO DISCONNECTION OF THE COUPLING.	3092
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	1505
PER MIL-STD-810, METHOD 514.	1514

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2888	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2888 INCHES OF MERCURY.
2890	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2890 INCHES OF MERCURY.
2892	THE TEST PRESSURE SHALL BE 2892 PASCAL(S).
2894	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2894 PASCAL(S).
2896	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2896 PASCAL(S).
2898	THE TEST DURATION SHALL BE 2898 MINUTE(S).
4681	VIBRATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4681.
4682	VIBRATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1538	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
3092	THERE SHALL BE NO DISCONNECTION OF THE COUPLING.
1505	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT. EXCEPT 1505.
1514	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 514 OF MIL-STD-810.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*PROCEDURE NUMBER (ROMAN NUMERAL)	1518
EQUIPMENT (CATEGORY)	1540
CURVE (LETTERS)	1525
APPLICABLE TABLE (NUMBER)	1532
APPLICABLE FIGURE (NUMBER)	1559
OPERATION NOT REQUIRED.	1424
TEMPERATURE (DEGREES CELSIUS)	1542
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	1543
DURATION AT TEMPERATURE (HOURS)	1544
WARMUP, RAPID	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2944
AS FOLLOWS:	3088
NO STICKING OR MALFUNCTION.	2946
MAXIMUM FLUID LOSS (CUBIC CENTIMETERS)	2948

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1518	PROCEDURE NUMBER 1518 SHALL APPLY.
1540	THE EQUIPMENT CATEGORY SHALL BE 1540 IN ACCORDANCE WITH METHOD 514 OF MIL-STD-810.
1525	CURVE 1525 SHALL APPLY.
1532	PROCEDURE AND TIME SCHEDULE SHALL BE AS SHOWN ON TABLE 1532 OF METHOD 514 OF MIL-STD-810.
1559	TEST CURVES ARE AS SHOWN IN FIGURE 1559 OF METHOD 514 OF MIL-STD-810.
1424	OPERATING DURING THE TEST IS NOT REQUIRED.
1542	VIBRATION TEST SHALL BE PERFORMED AT A TEMPERATURE OF 1542 DEGREES CELSIUS.
1543	TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 1543 DEGREES CELSIUS.
1544	THE TEMPERATURE TIME DURATION SHALL BE 1544 HOUR(S).

2944	WARMUP, RAPID. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2944.
3088	WARMUP, RAPID. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2946	THERE SHALL BE NO STICKING OR MALFUNCTION.
2948	THE FLUID LOSS SHALL BE NOT GREATER THAN 2948 CUBIC CENTIMETER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	2912
PER DOCUMENT (DOC DES)	2914
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	2916
PLUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2918
MINUS TEST PRESSURE TOLERANCE (POUNDS PER SQUARE INCH)	2920
(KILOPASCALS)	2922
PLUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2924
MINUS TEST PRESSURE TOLERANCE (KILOPASCALS)	2926
INITIAL TEMPERATURE (DEGREES CELSIUS)	2928
PLUS TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2930
MINUS TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2932

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2912	WARMUP, RAPID. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2912.
2914	WARMUP, RAPID. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2914.
2916	THE TEST PRESSURE SHALL BE 2916 POUNDS PER SQUARE INCH.
2918	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2918 POUNDS PER SQUARE INCH.
2920	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2920 POUNDS PER SQUARE INCH.
2922	THE TEST PRESSURE SHALL BE 2922 KILOPASCAL(S).
2924	THE PLUS TEST PRESSURE TOLERANCE SHALL BE 2924 KILOPASCAL(S).
2926	THE MINUS TEST PRESSURE TOLERANCE SHALL BE 2926 KILOPASCAL(S).
2928	THE INITIAL TEMPERATURE SHALL BE 2928 DEGREES CELSIUS.
2930	THE PLUS TEMPERATURE TOLERANCE SHALL BE 2930 DEGREES CELSIUS.
2932	THE MINUS TEMPERATURE TOLERANCE SHALL BE 2932 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
WARMUP TEMPERATURE (DEGREES CELSIUS)	2934
PLUS TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2936
MINUS TEMPERATURE TOLERANCE (DEGREES CELSIUS)	2938
NUMBER OF CONNECT AND DISCONNECT CYCLES (QUANTITY)	2940
STORAGE CONDITIONS	
(YEARS)	1529
CERTIFY MAXIMUM CURE DATE TO DELIVERY (QUARTERS)	4942
CERTIFY MINIMUM SHELF LIFE AFTER DELIVERY (QUARTERS)	4943
AGE LIMITATION PER MIL-STD-1523.	5209
WORKMANSHIP (SELECT ONE)	
(DOC DES)	6870
PER BASE DOCUMENT EXCEPT _____	3120
OTHER _____	3122

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2934	THE WARMUP TEMPERATURE SHALL BE 2934 DEGREES CELSIUS.
2936	THE PLUS TEMPERATURE TOLERANCE SHALL BE 2936 DEGREES CELSIUS.
2938	THE MINUS TEMPERATURE TOLERANCE SHALL BE 2938 DEGREES CELSIUS.
2940	THERE SHALL BE 2940 CONNECT AND DISCONNECT CYCLES.
	STORAGE CONDITIONS.
1529	ITEMS SHALL WITHSTAND 1529 YEARS OF STORAGE WHEN PROPERLY PRESERVED, PACKAGED AND MECHANICALLY PROTECTED WITHOUT REQUIRING MAJOR REPAIR.
4942	MANUFACTURER SHALL CERTIFY THAT THE CURE DATE SHALL BE NOT GREATER THAN 4942 QUARTER(S) PRIOR TO DELIVERY DATE.
4943	MANUFACTURER SHALL CERTIFY THAT THERE SHALL BE NOT LESS THAN 4943 QUARTER(S) OF SHELF LIFE AFTER DELIVERY.
5209	AGE LIMITATIONS OF THE FINISHED PRODUCT SHALL BE IN ACCORDANCE WITH MIL-STD-1523.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
3120	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 3120.
3122	WORKMANSHIP. 3122.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADDITIONAL REQUIREMENTS	
A _____	7001
B _____	7002
C _____	7003
D _____	7004
E _____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-130.	7629
ADDITIONAL PART MARKING	
A _____	6991
B _____	6992
C _____	6993
D _____	6994
E _____	6995

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(C) 7003.
7004	(D) 7004.
7005	(E) 7005.

6372 PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.

7629 PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.

ADDITIONAL PART MARKING.

6991 (A) 6991.

6992 (B) 6992.

6993 (C) 6993.

6994 (D) 6994.

6995 (E) 6995.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.


APPENDIX A

ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

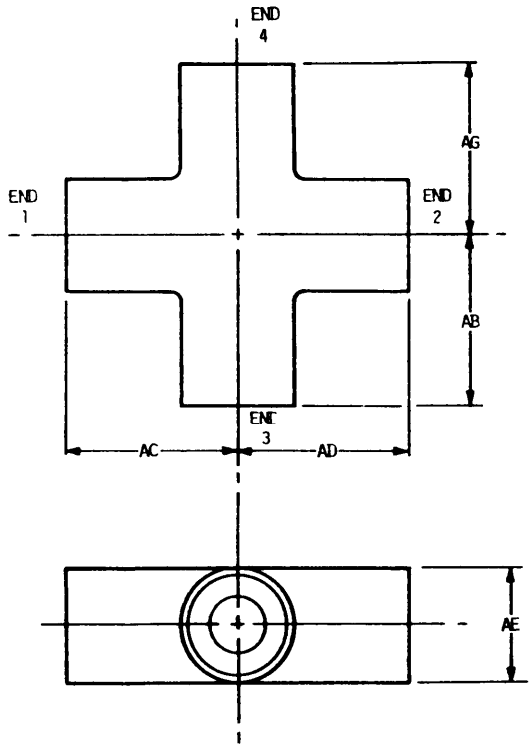


202-01-1

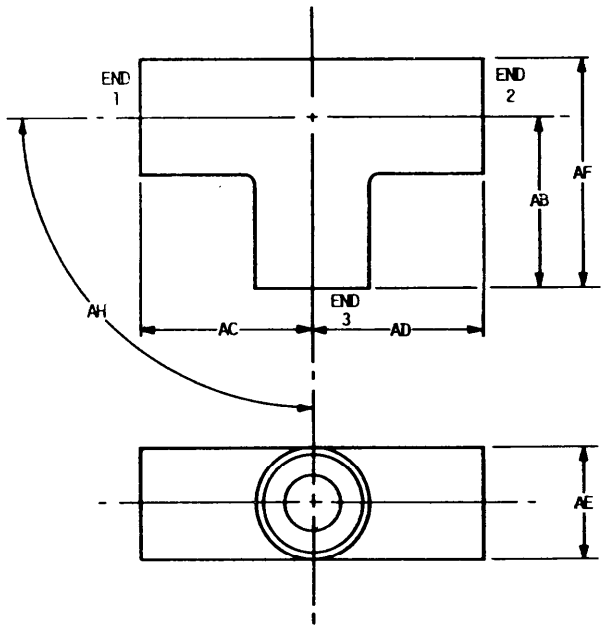


202-01-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

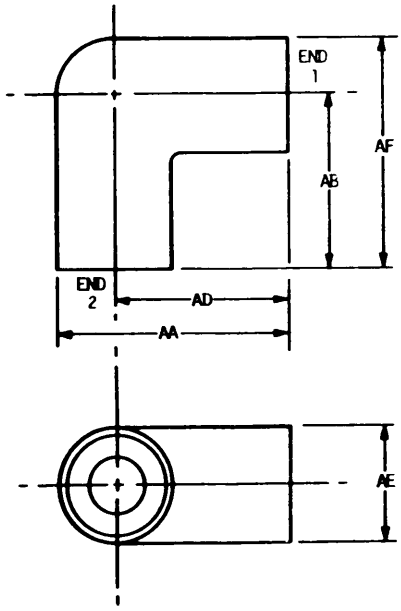


202-01-3

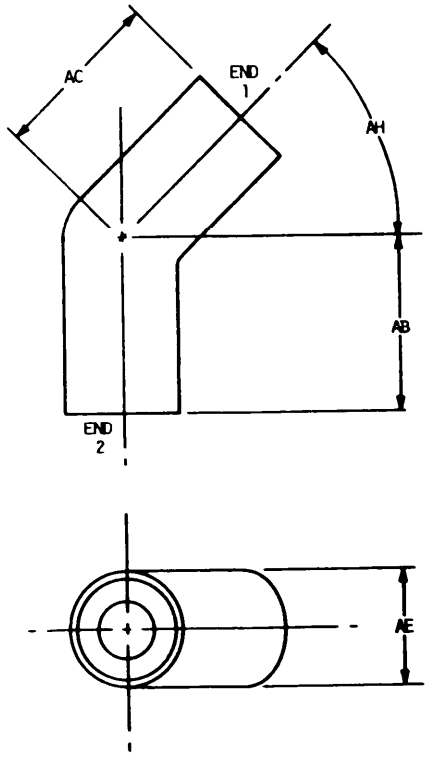


202-01-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

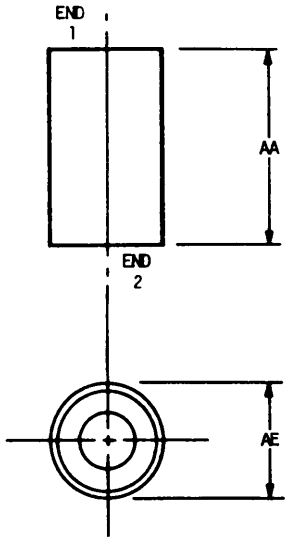


202-01-5

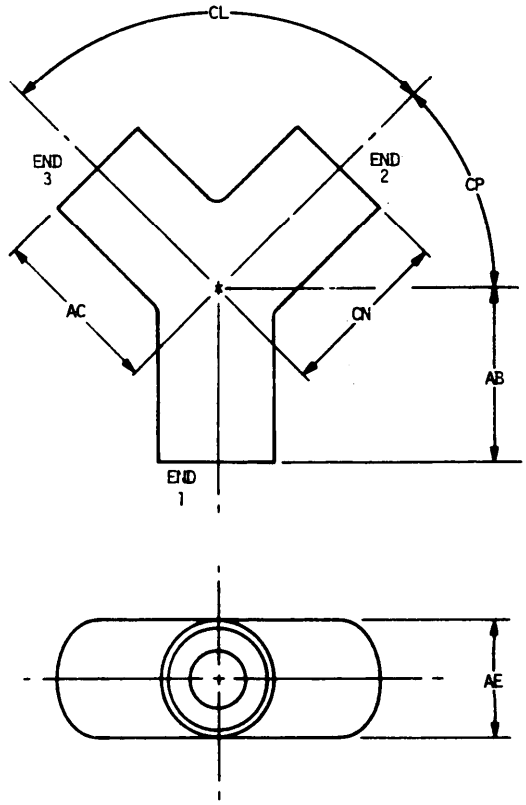


202-01-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

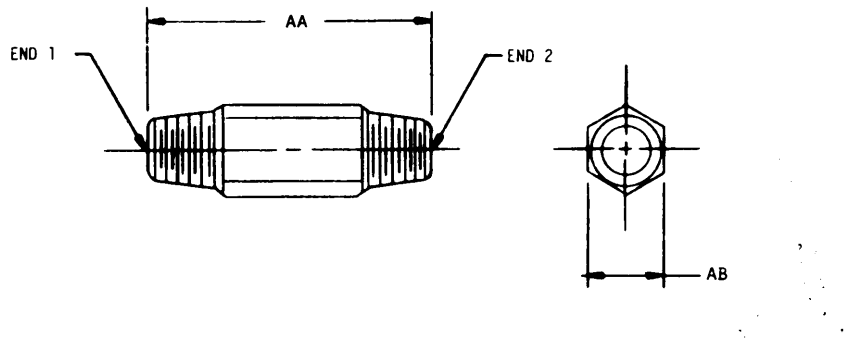


202-01-7

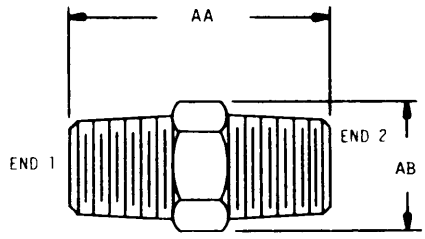


202-01-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

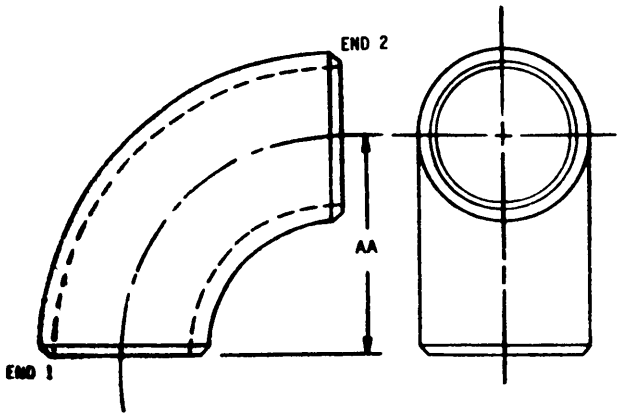


202-01-9

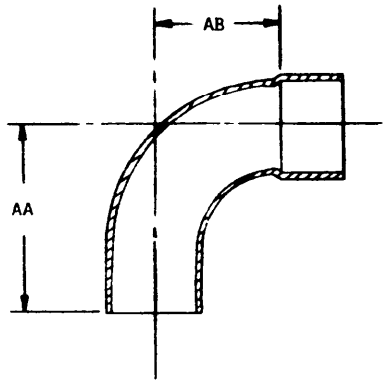


202-01-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

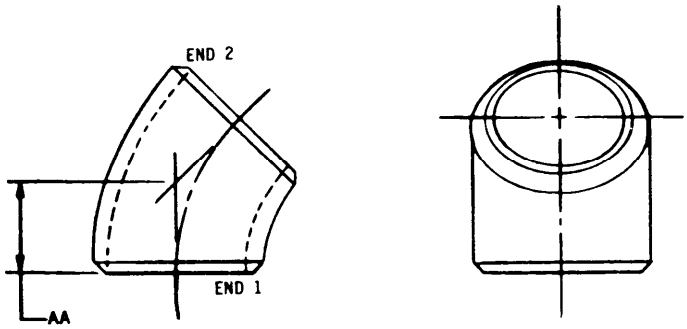

202-01-11

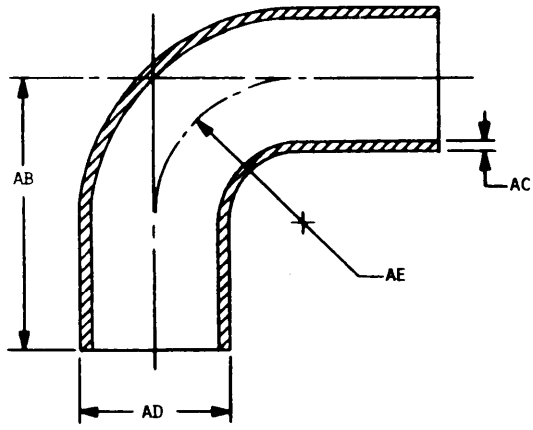


202-01-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.




STYLE G

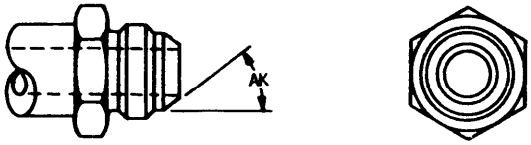


STYLE E

REFERENCE MS24385
MS33656
MS35873

202-02-1

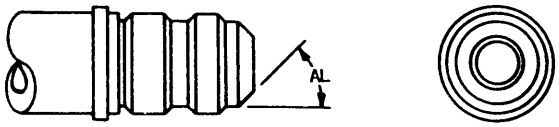

STYLE S

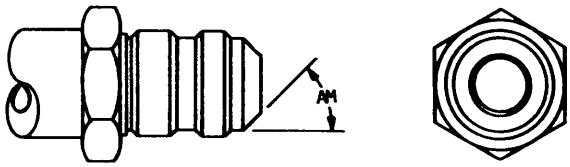


STYLE E

REFERENCE MS24386
MS33657


202-02-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

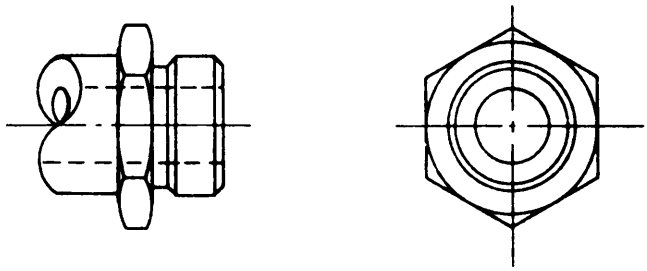


REFERENCE SAE STANDARDS (J514)

202-02-3

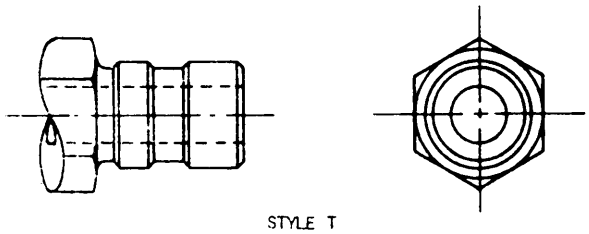

STYLE T

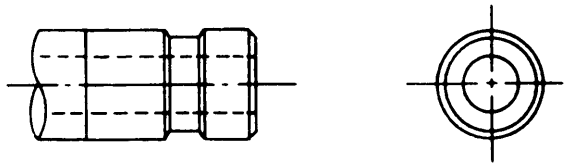

STYLE S


REFERENCE SAE STANDARDS (J514)

202-02-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.




STYLE G

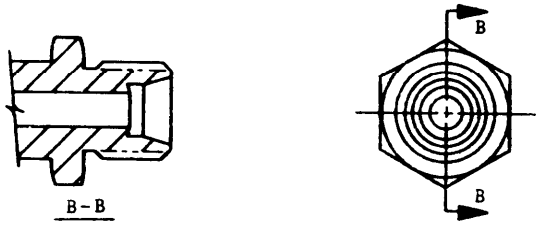


STYLE E

REFERENCE MS33514

202-02-5

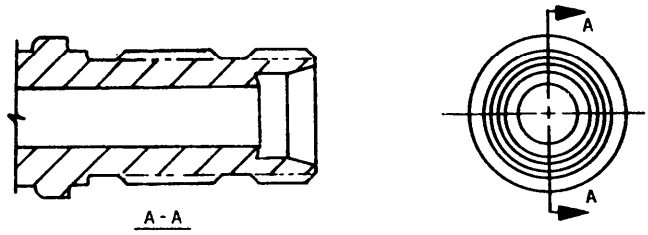

STYLE S

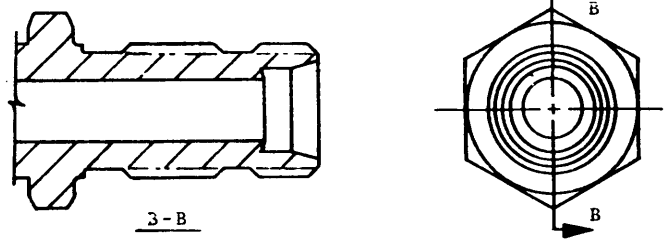


STYLE E

REFERENCE MS33515


202-02-6


Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:23Z
Check the source to verify that this is the currentversion before use.




REFERENCE MS33658


202-02-7





STYLE A






STYLE C


REFERENCE AND10052
MS33677
MS35868

202-02-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

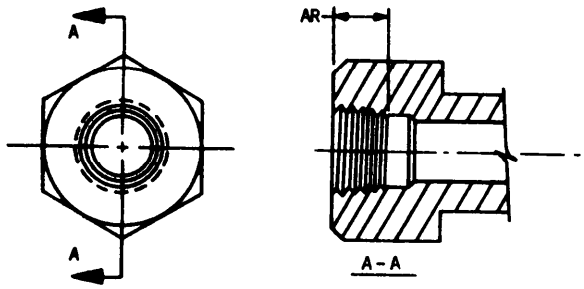


STYLE A
REFERENCE MS35926

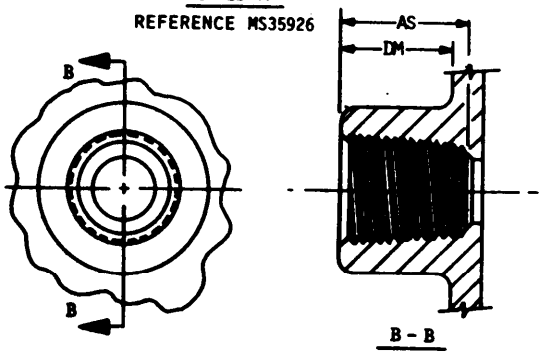


STYLE B
REFERENCE AND10053

202-02-9

REFERENCE MS33649




STYLE A
REFERENCE MS33649



STYLE B
REFERENCE MS16142

202-02-10


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

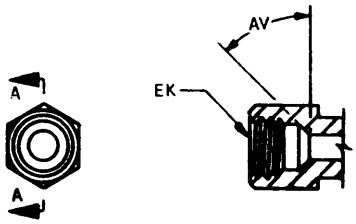


A-A

REFERENCE MS35867


202-02-11



STYLE A



STYLE B




STYLE C


REFERENCE MS35925

202-02-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

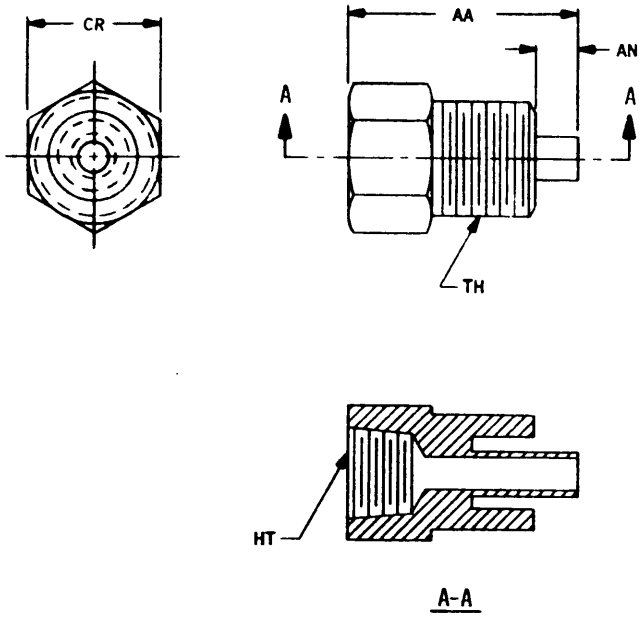


202-02-13

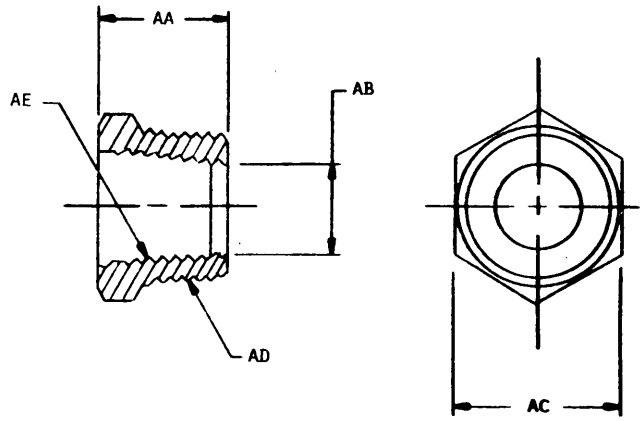


202-02-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

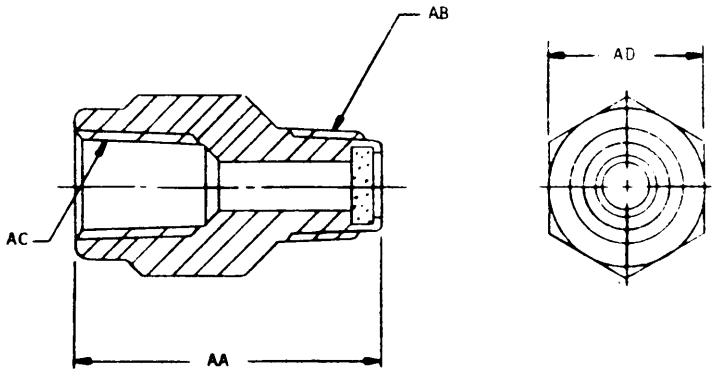


202-02-15

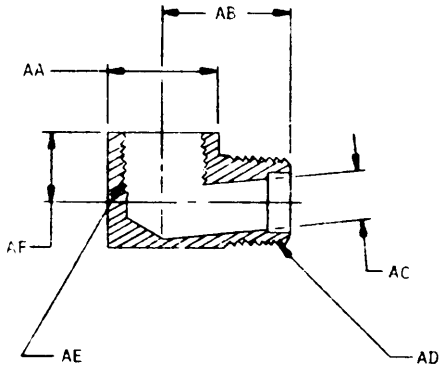


202-02-16

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

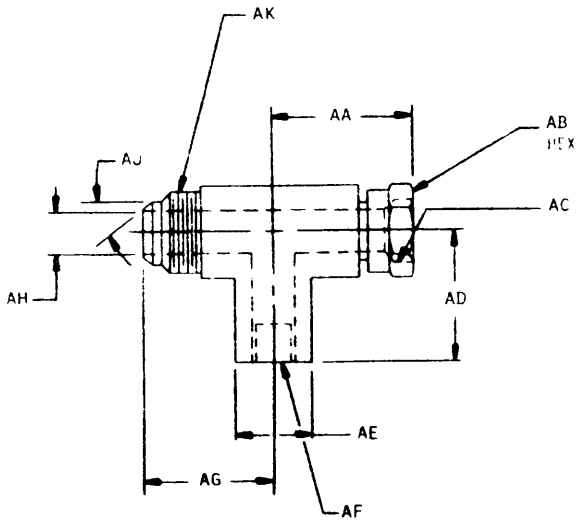


202-02-17

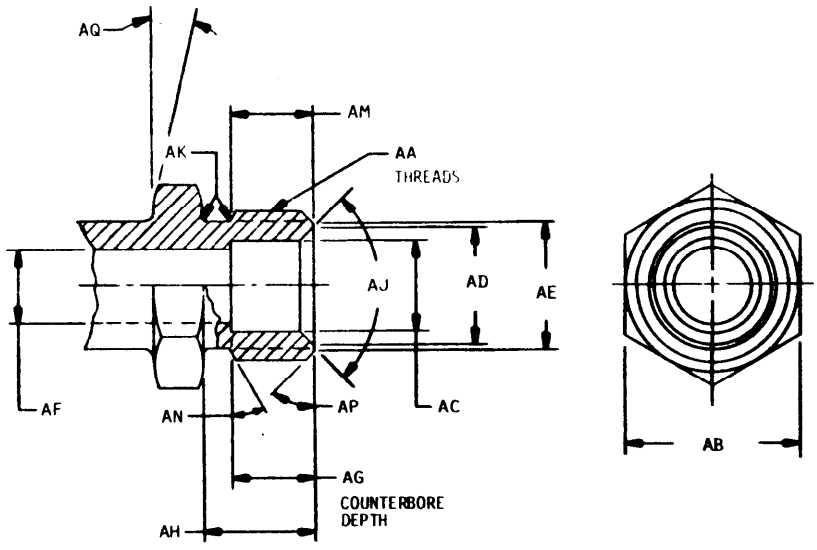


202-02-18

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

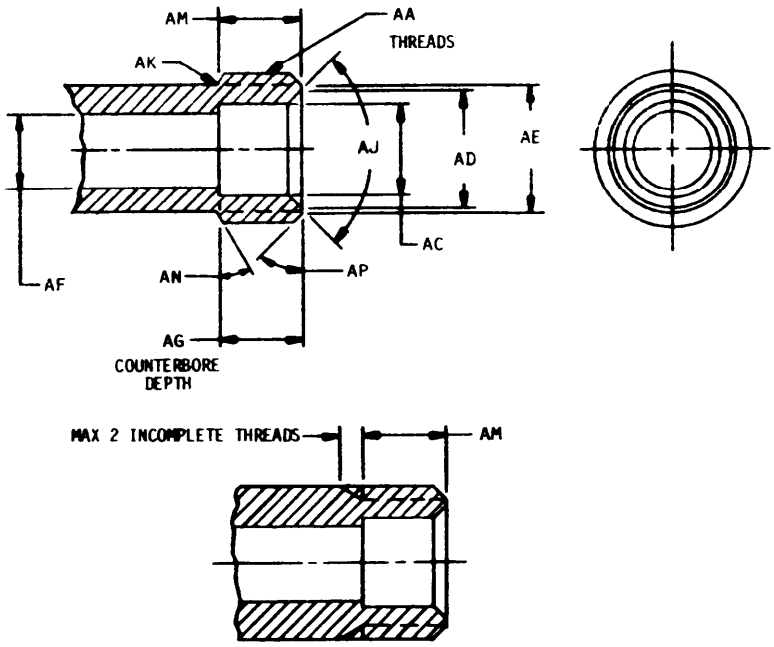


202-02-19

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

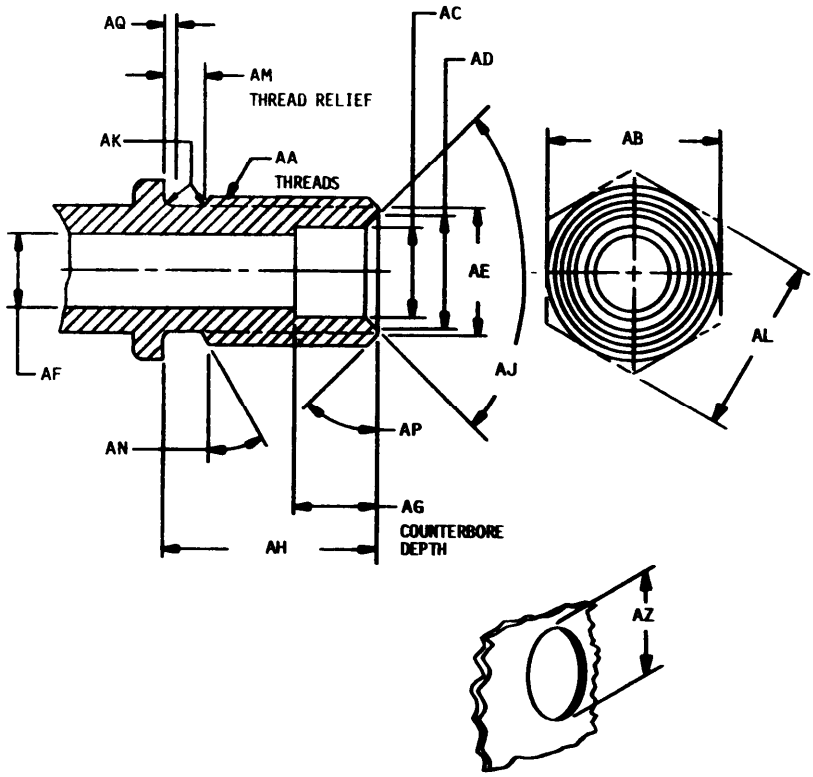


202-02-20


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

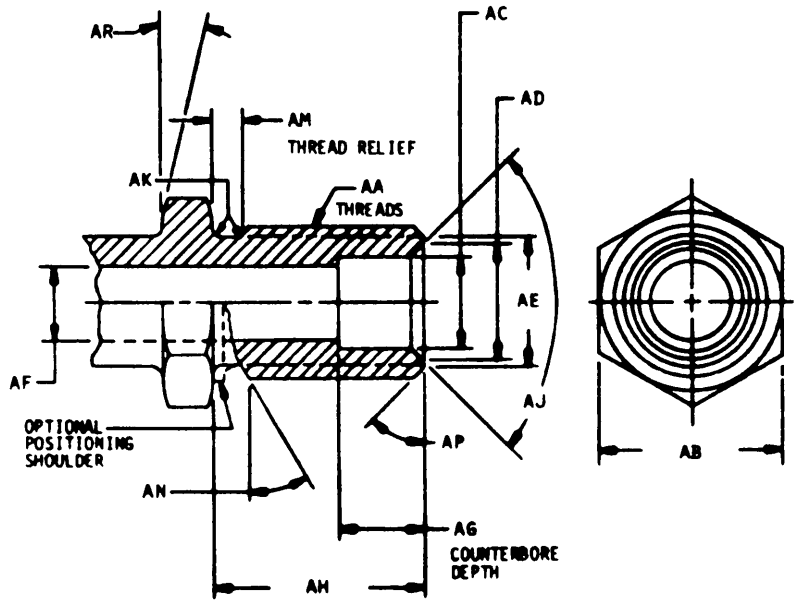

202-02-21

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

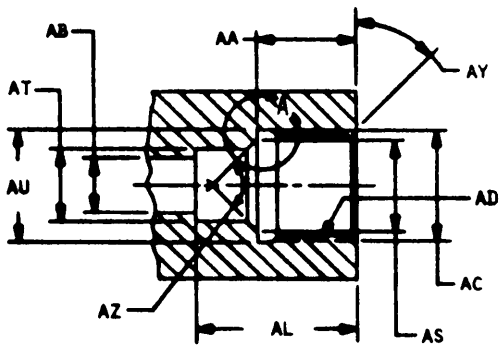





DETAIL A

202-02-22

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

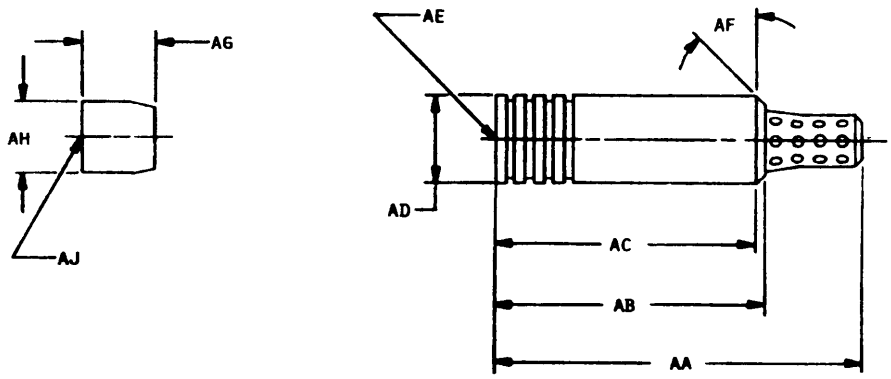


202-02-23

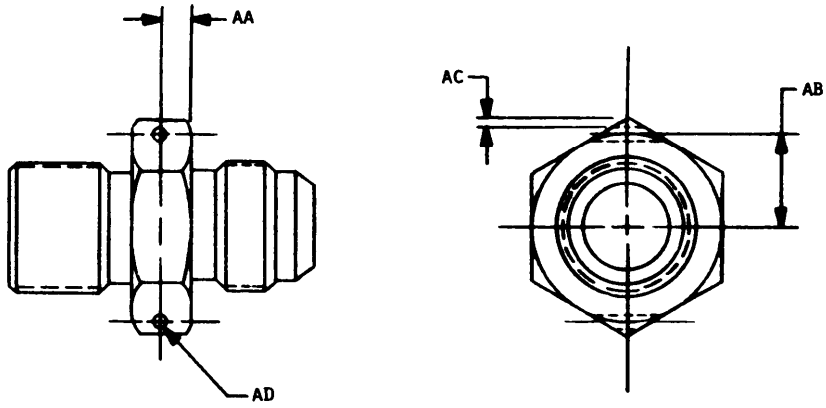


202-02-24

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

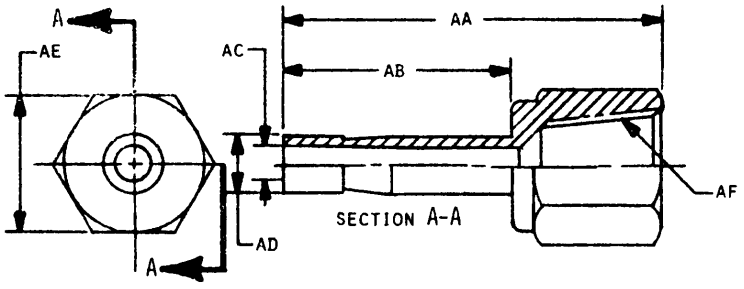


202-02-25

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

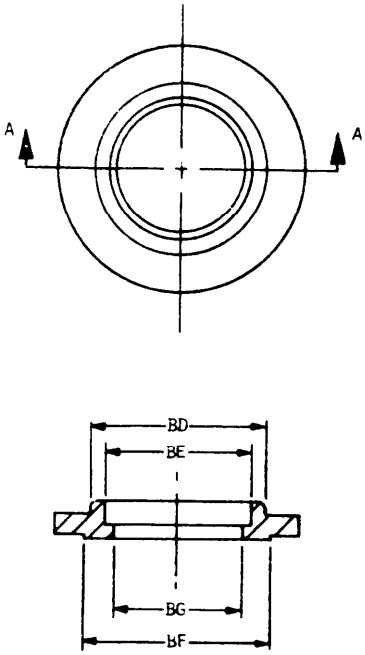

REFERENCE ANSI STANDARD B16


202-03-1

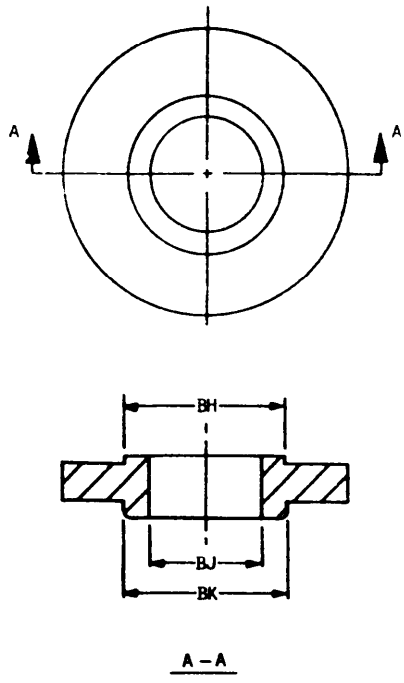

REFERENCE ANSI STANDARD B18


202-03-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

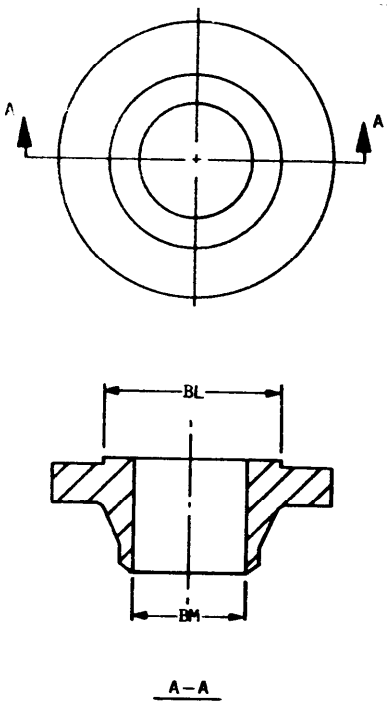

REFERENCE ANSI STANDARD B16


202-03-3

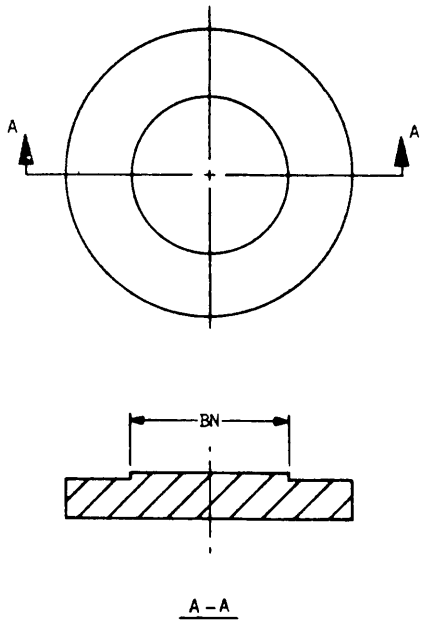

REFERENCE ANSI STANDARD B16


202-03-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

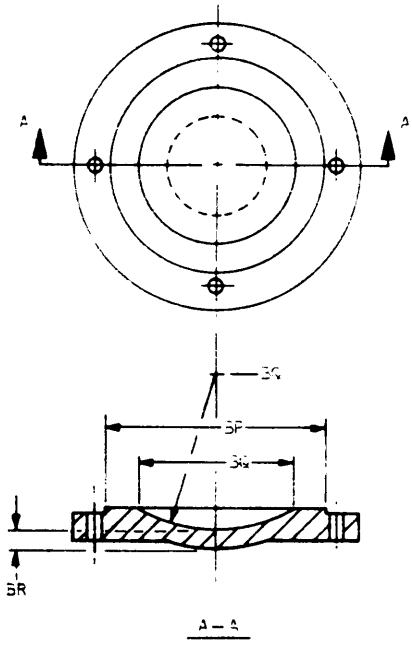

REFERENCE ANSI STANDARD B16


202-03-5

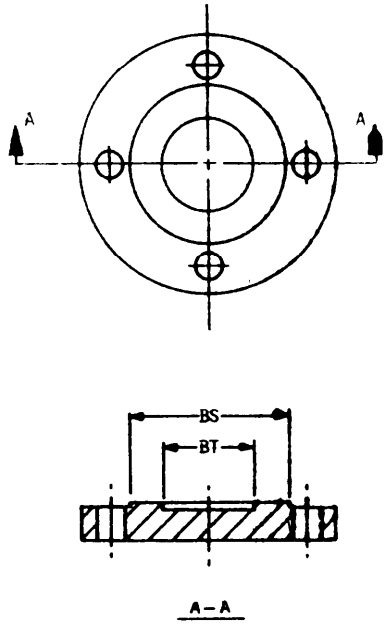

REFERENCE ANSI STANDARD B16


202-03-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

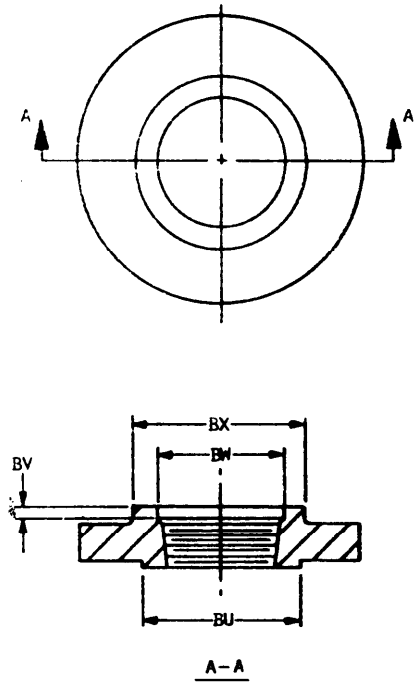

REFERENCE ANSI STANDARD B16


202-03-7

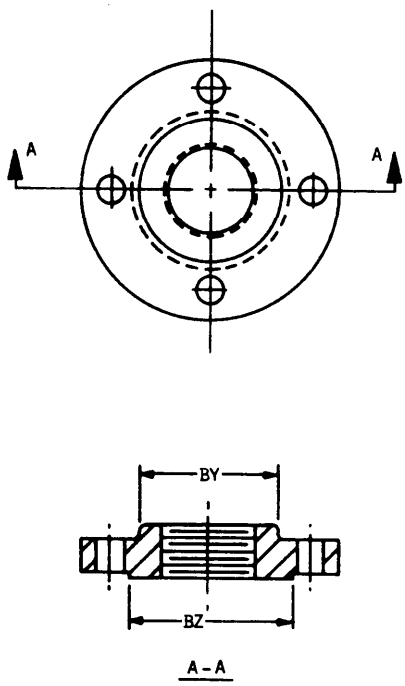

REFERENCE ANSI STANDARD B16


202-03-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

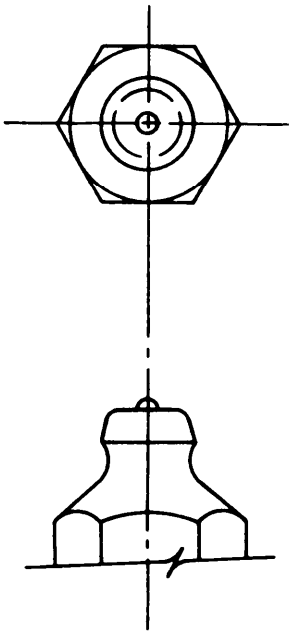

REFERENCE MS15000


202-04-1

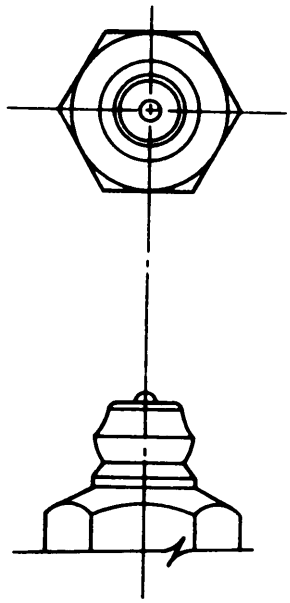

REFERENCE MS15000


202-04-2


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

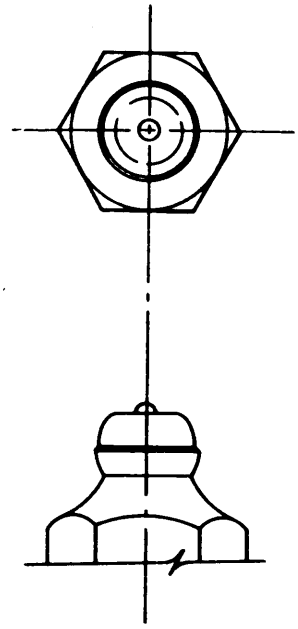

REFERENCE MS15000


202-04-3






202-04-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

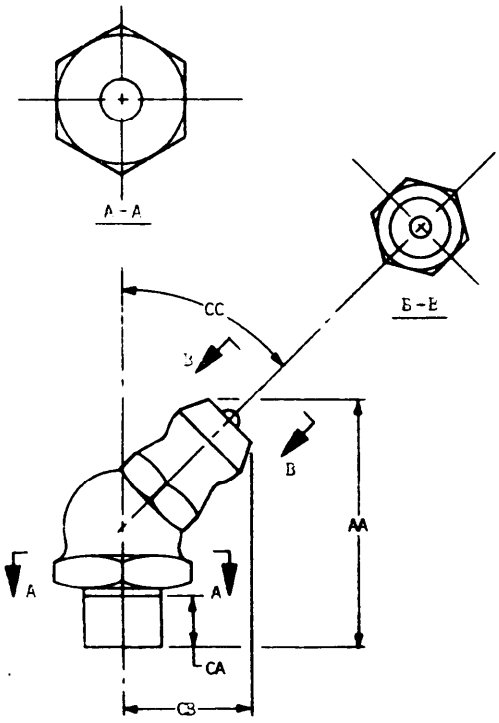


202-04-5

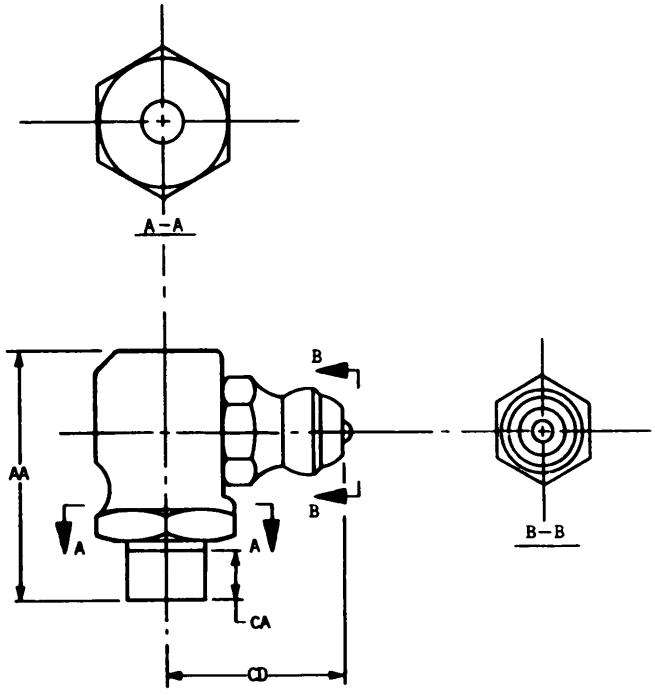


202-04-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

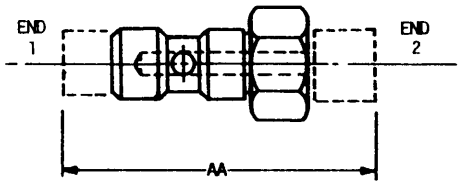


REFERENCE MS21932
MS21933

202-05-1

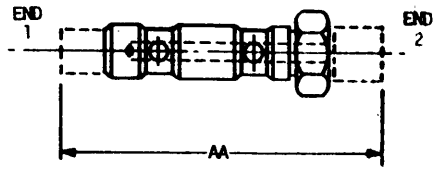


REFERENCE MS21934
MS21935

202-05-2



REFERENCE MS21936


202-05-3

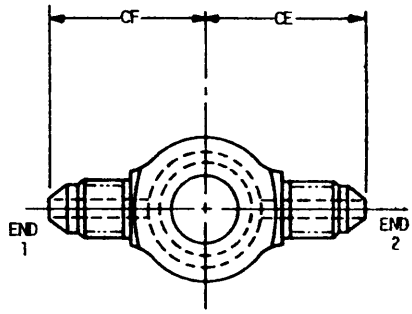

REFERENCE MS21936


202-05-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

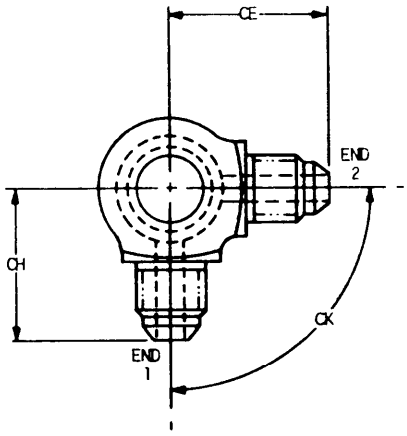


REFERENCE MS21936

202-05-5

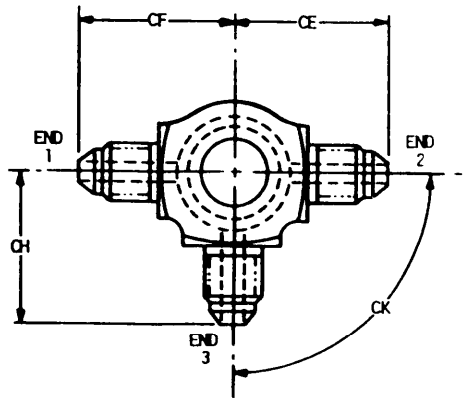


REFERENCE MS21936

202-05-6

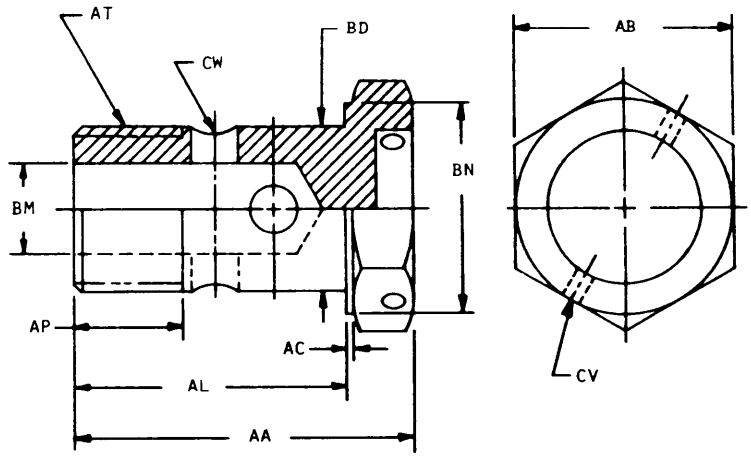



202-05-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

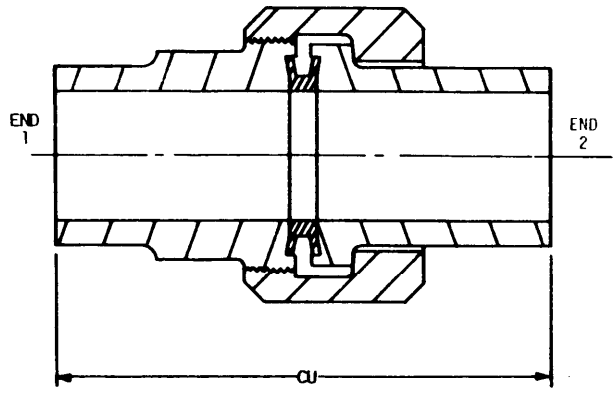


202-07-1

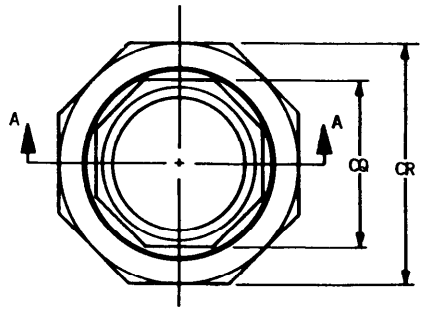

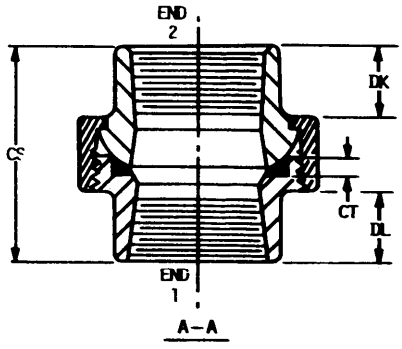


202-07-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

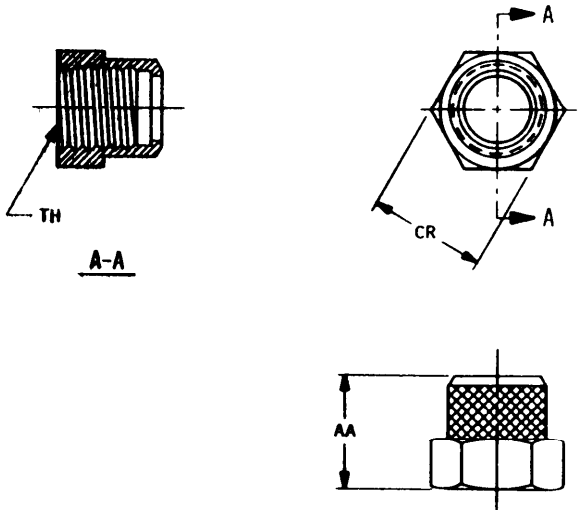


202-08-1

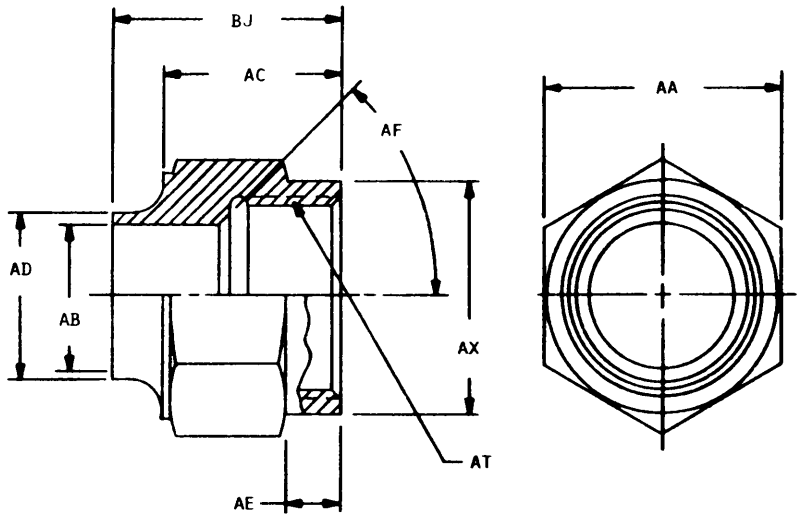


202-08-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

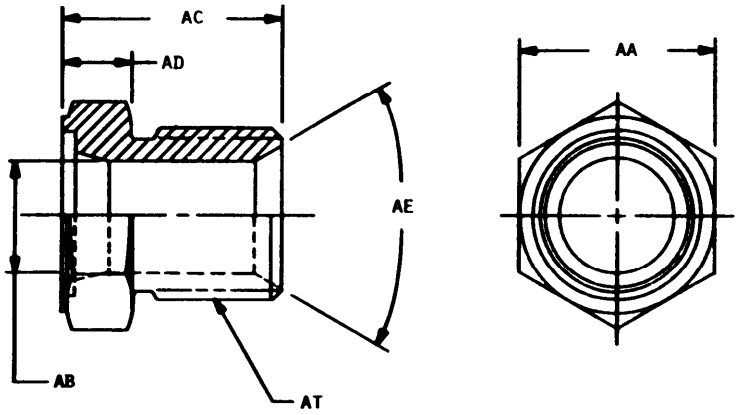


202-08-3

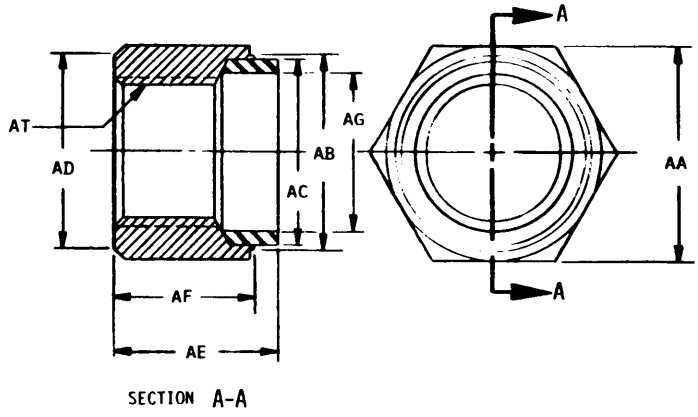


202-08-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

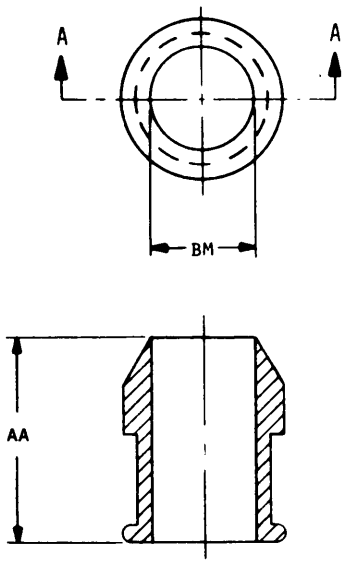


A-A

202-09-1

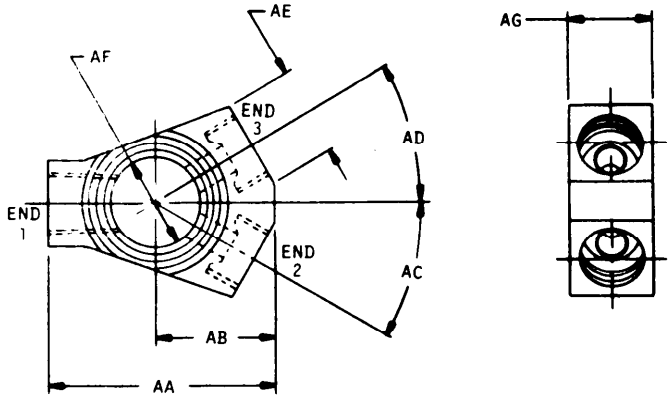


202-09-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

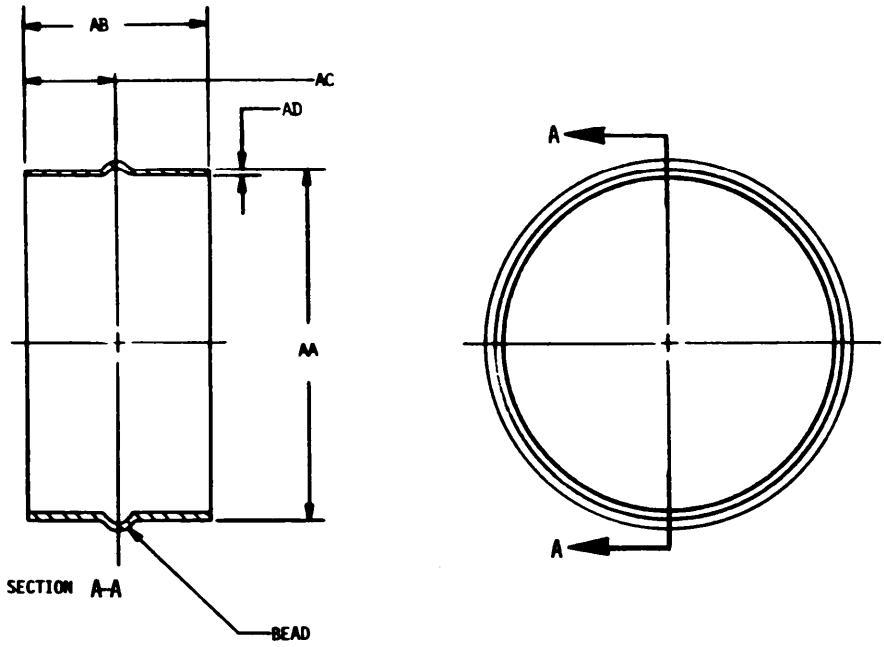


202-09-3

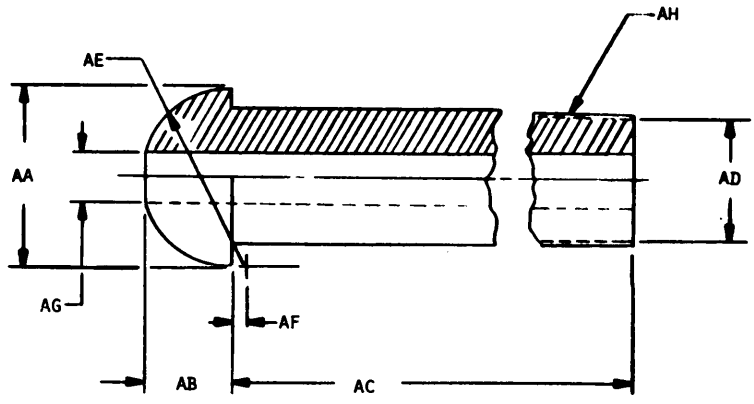


202-09-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

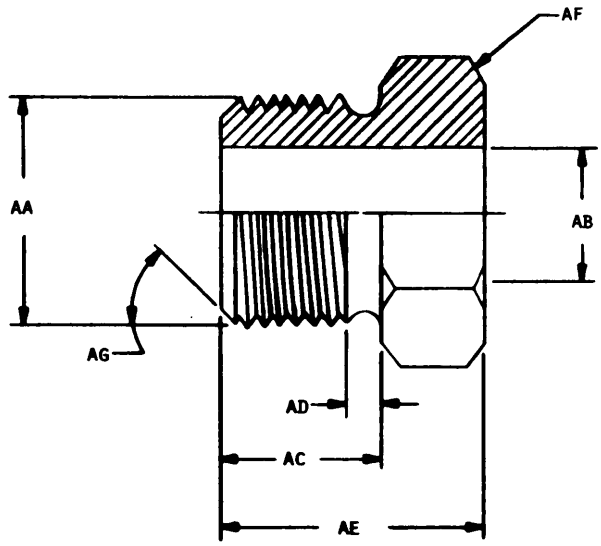

2802-89-5


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

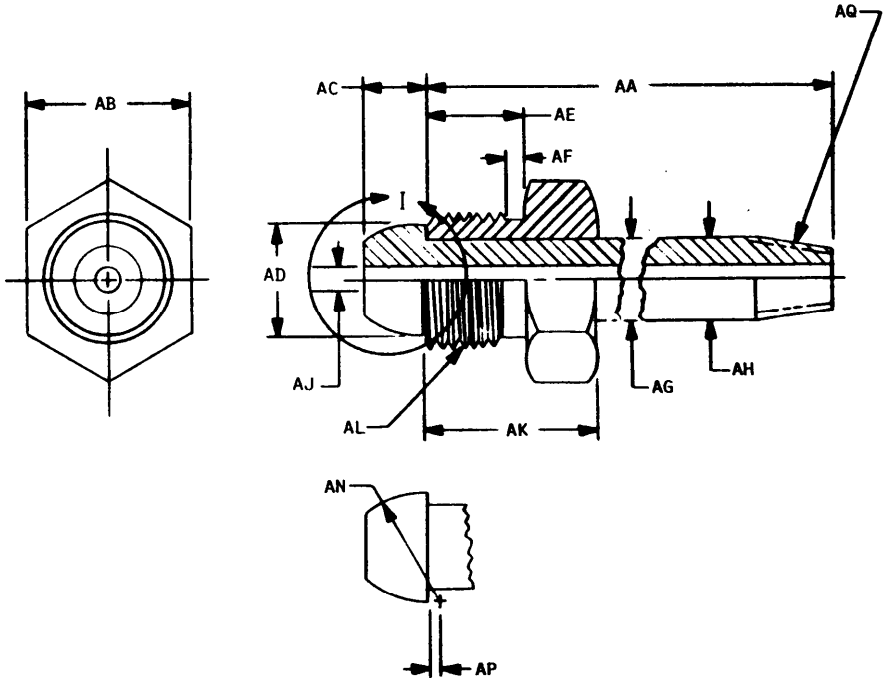


DETAIL I

202-09-6


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.




202-10-1



202-10-2

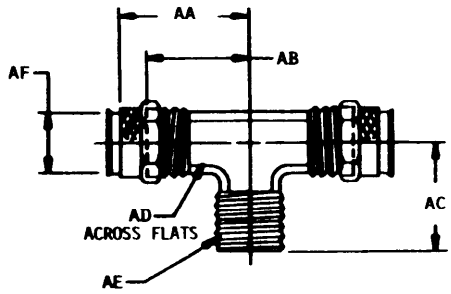


202-10-3

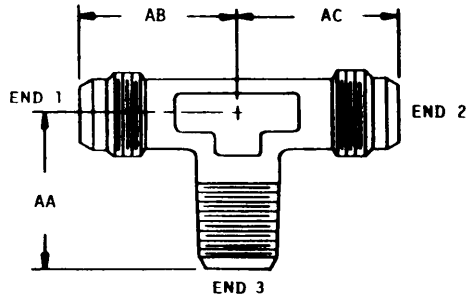


202-10-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

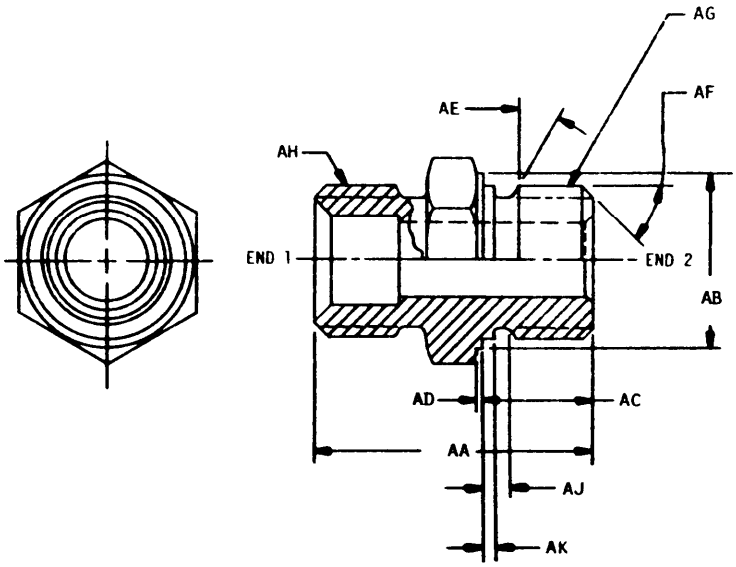


202-10-5

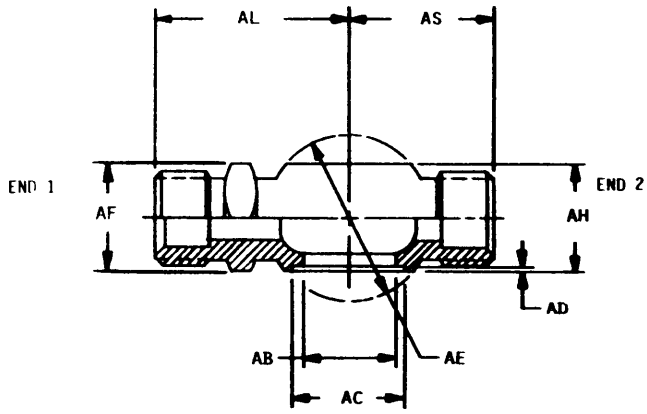


202-10-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

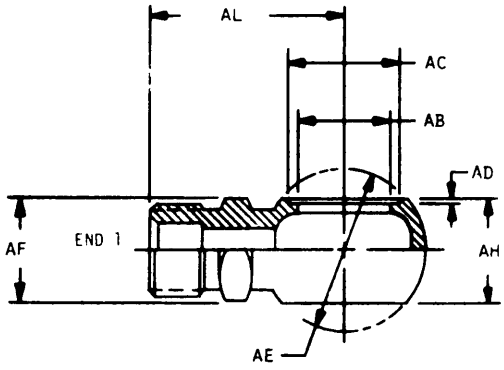


202-10-7

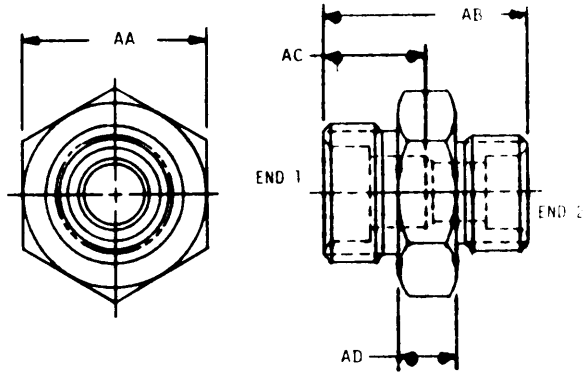


202-10-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

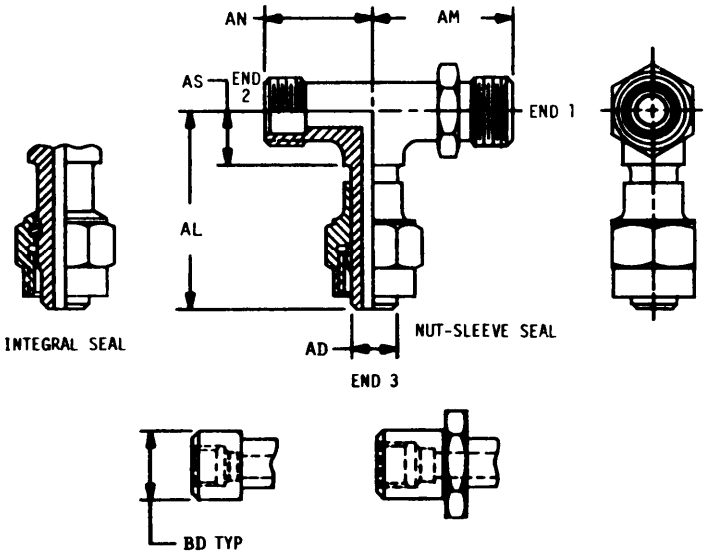

PORT WITH INTERNAL THREADS


202-10-9

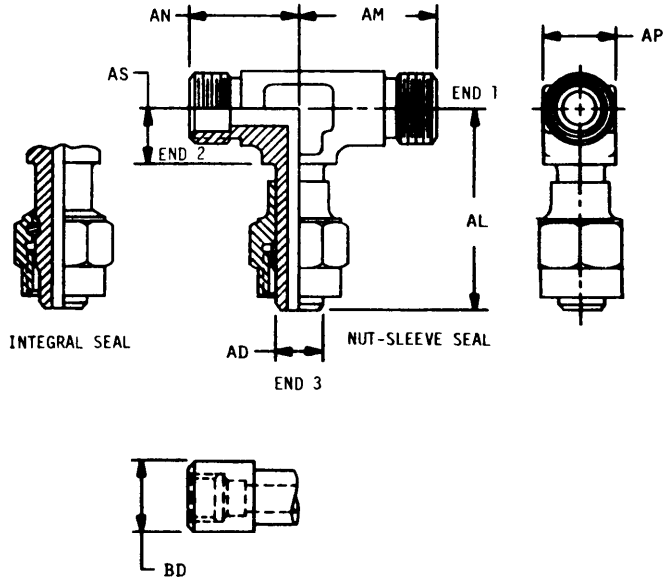


PORT WITH INTERNAL THREADS

202-10-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

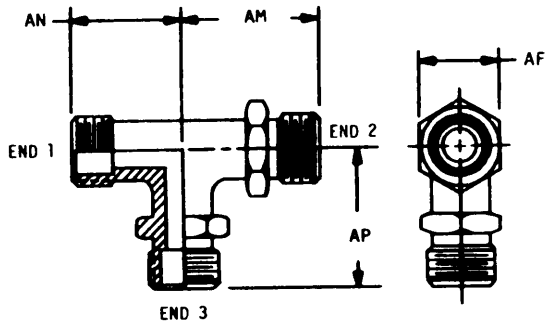


202-10-11

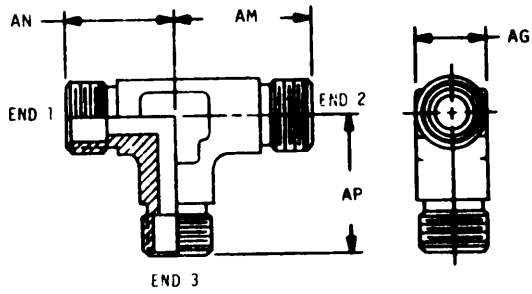


202-10-12


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

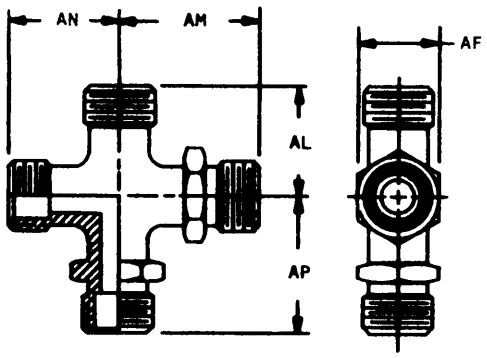

202-10-13

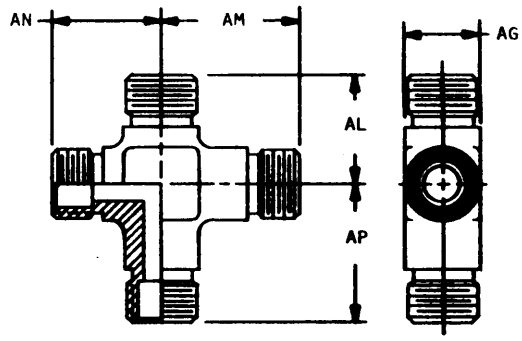


202-10-14

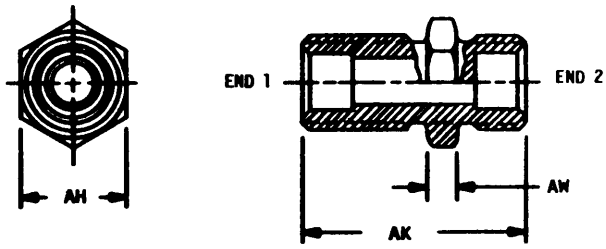



202-10-15

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

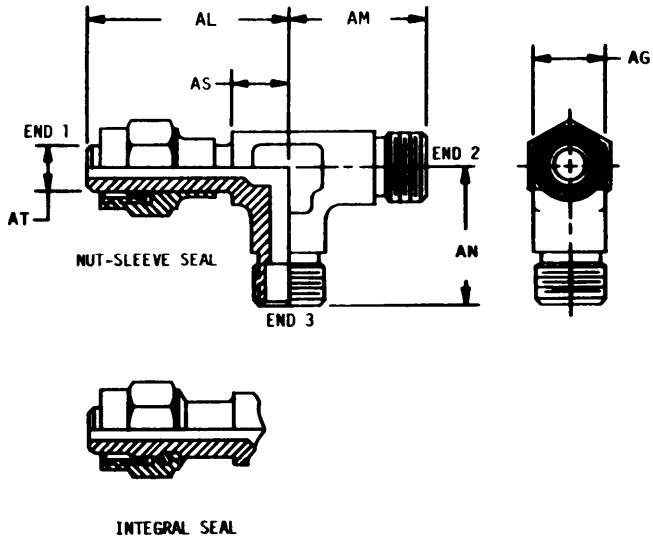


202-10-16



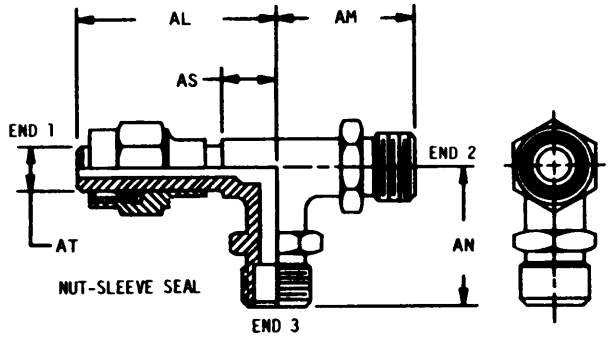


202-10-17

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

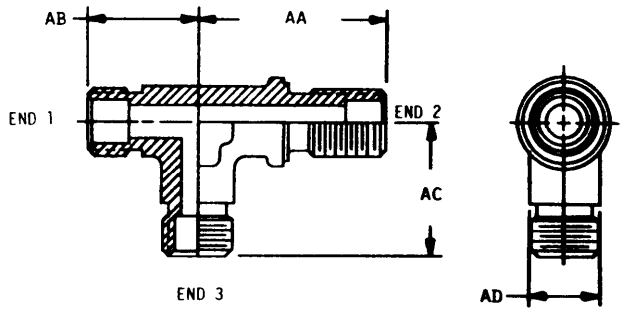


202-10-18

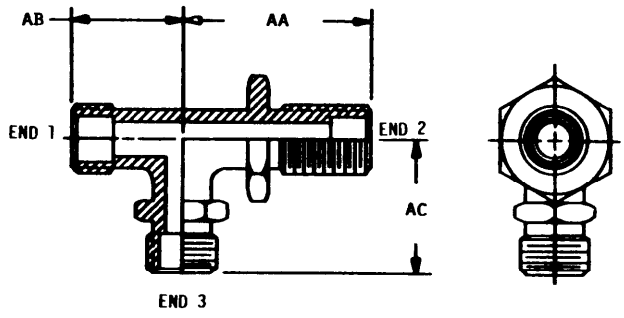


202-10-19

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

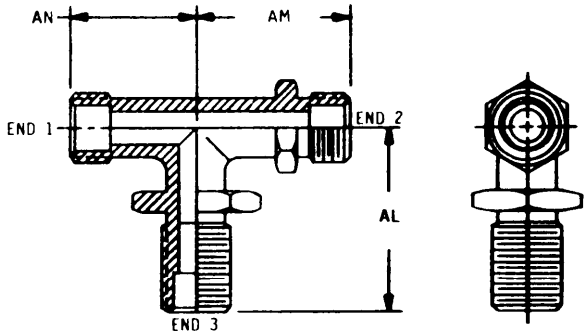


202-10-20

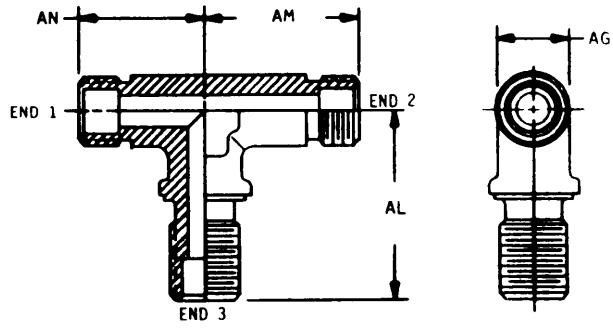


202-10-21

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

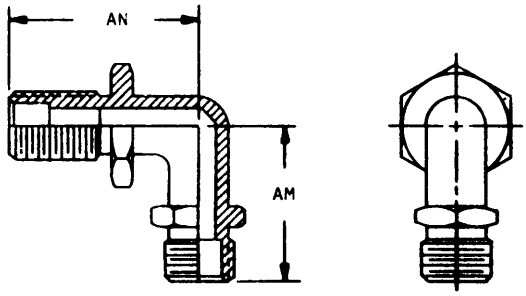



202-10-22

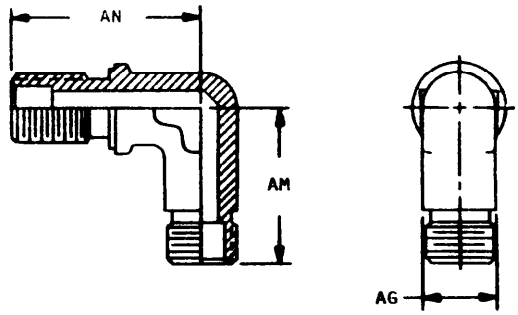

202-10-23


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

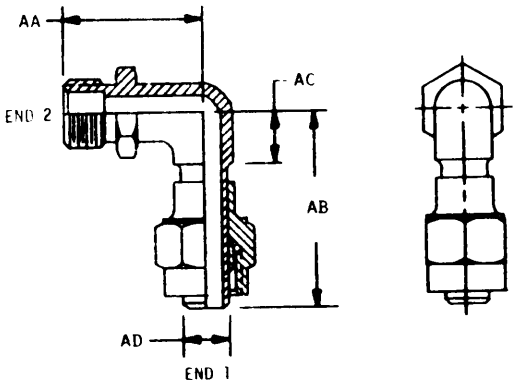




INTEGRAL SEAL CONSTRUCTION

202-10-24

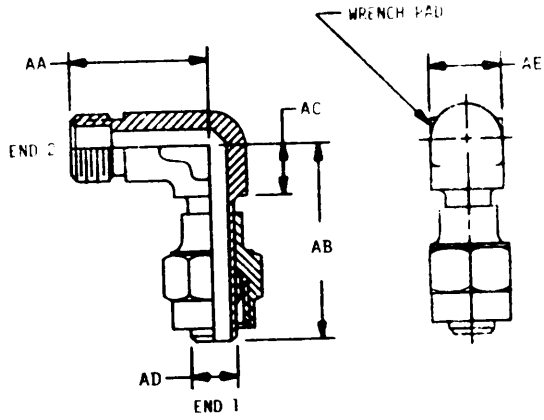




INTEGRAL SEAL CONSTRUCTION


202-10-25

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

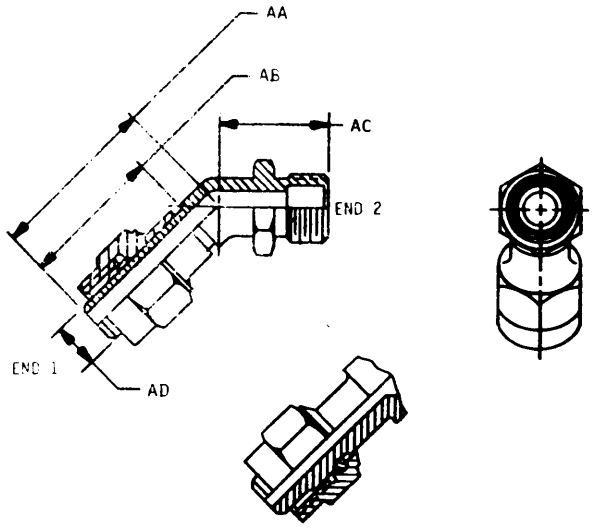

INTEGRAL SEAL CONSTRUCTION


202-10-26

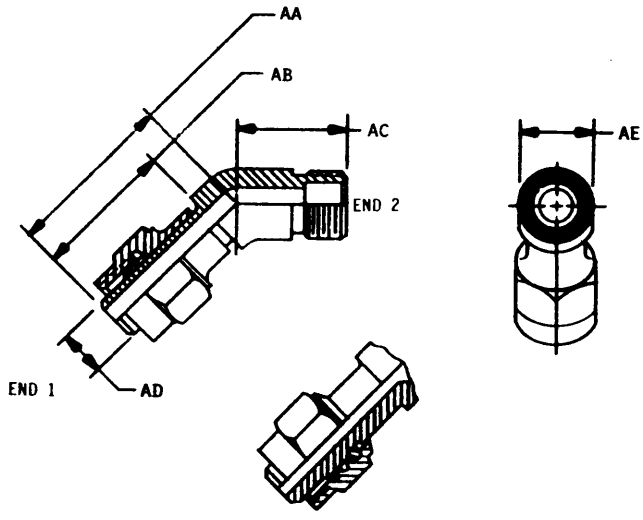


INTEGRAL SEAL CONSTRUCTION

202-10-27

Source: https://assist.dla.mil -- Downloaded: 20261O-26T07:23Z
Check the source to verify that this is the current version before use.

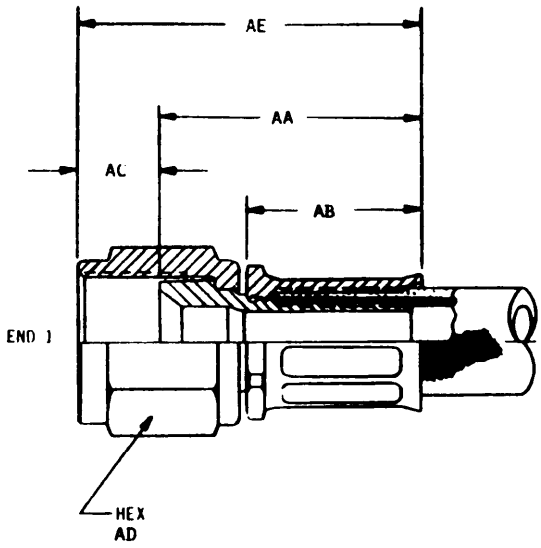


202-10-28

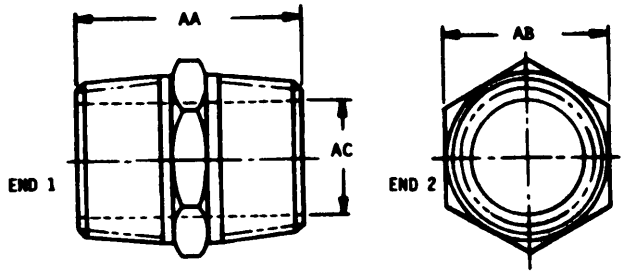


202-10-29

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

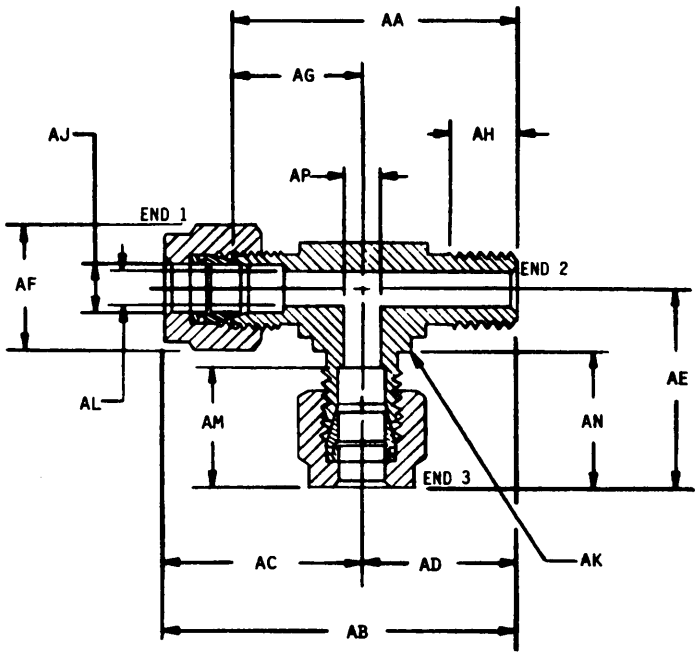


202-10-30

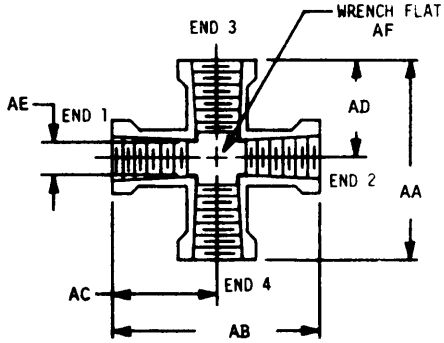


202-10-31

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

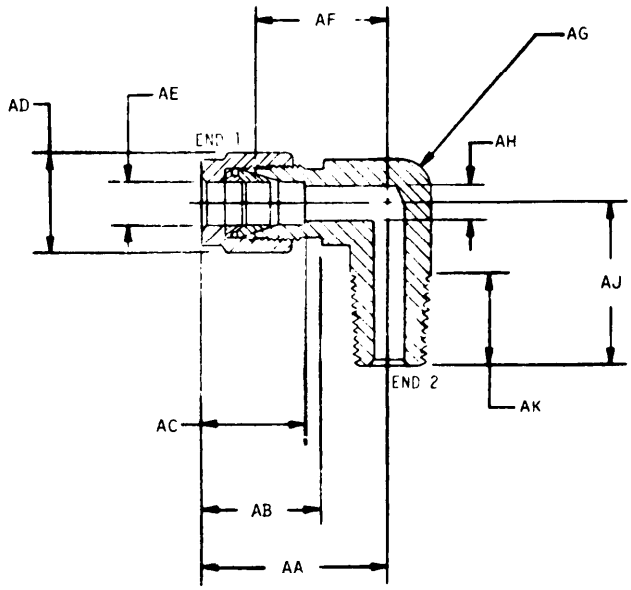


202-10-32

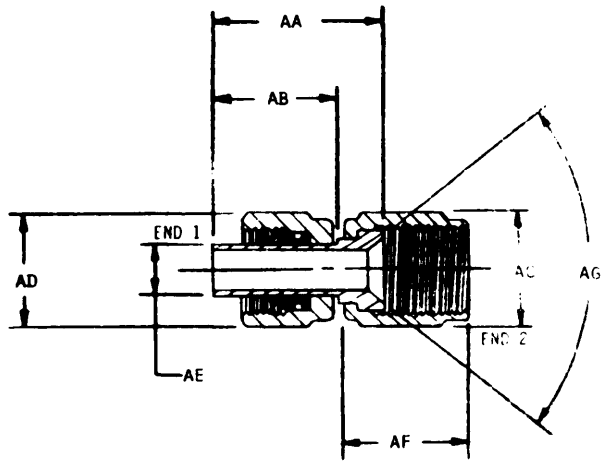


202-10-33


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

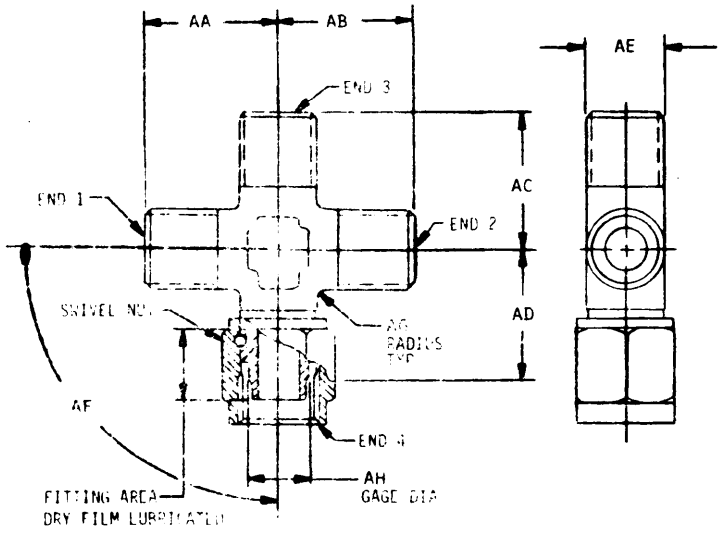

202-10-34


Source: https://assist.dla.mil -- Downloaded: 20261O-26T07:23Z
Check the source to verify that this is the current version before use.

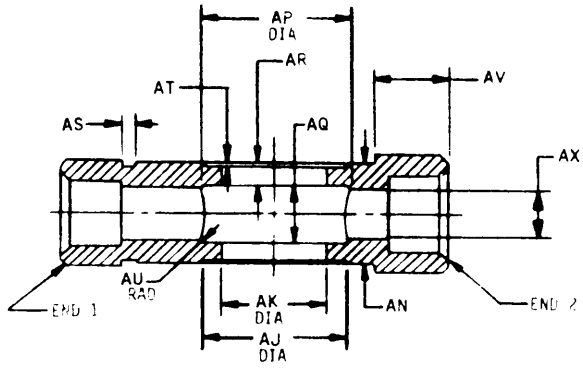

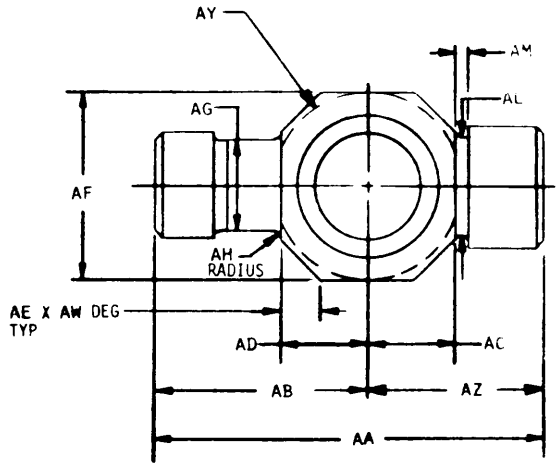


202-10-35

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

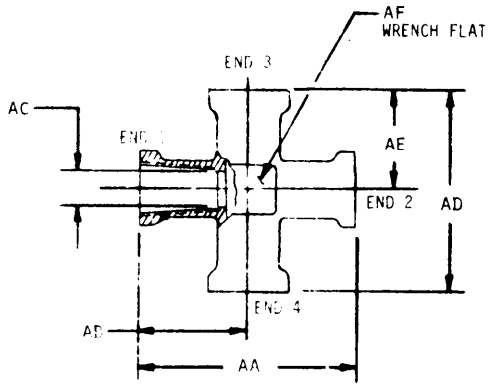


202-10-36

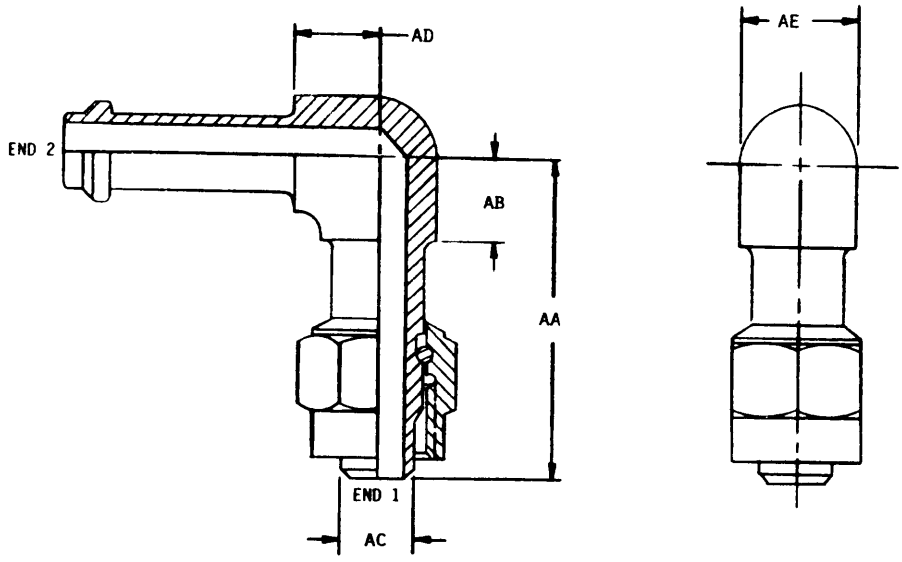


202-10-37

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

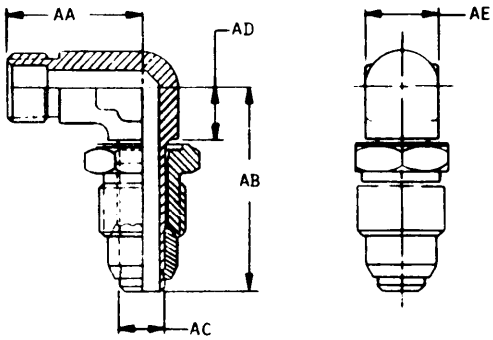


202-10-38

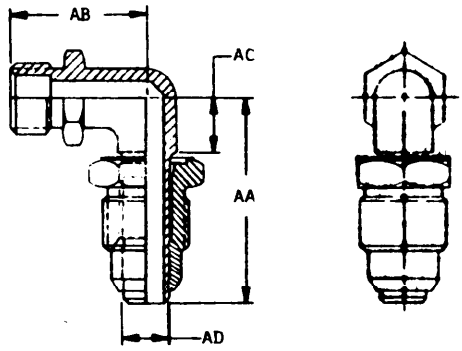


202-10-39

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

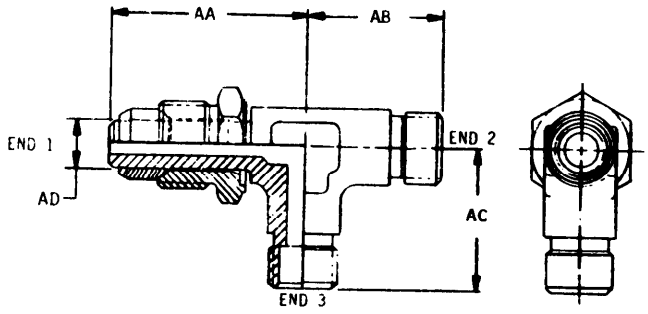


202-10-40

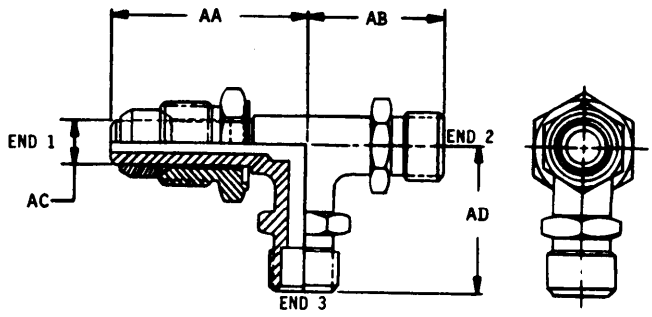


202-10-41

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

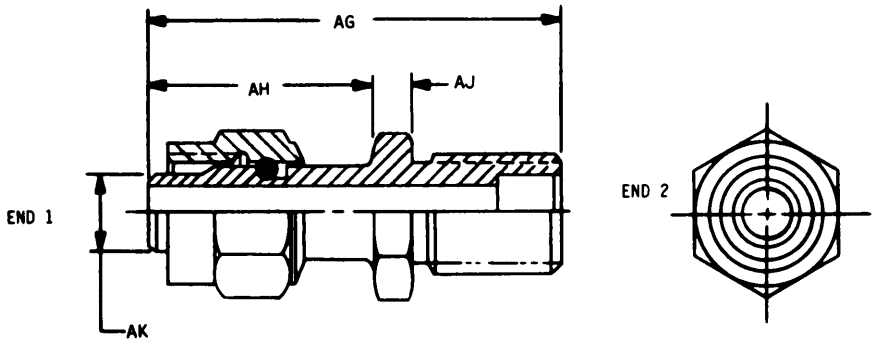


202-10-42

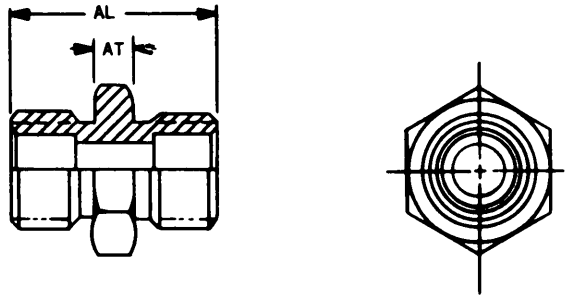


202-10-43

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

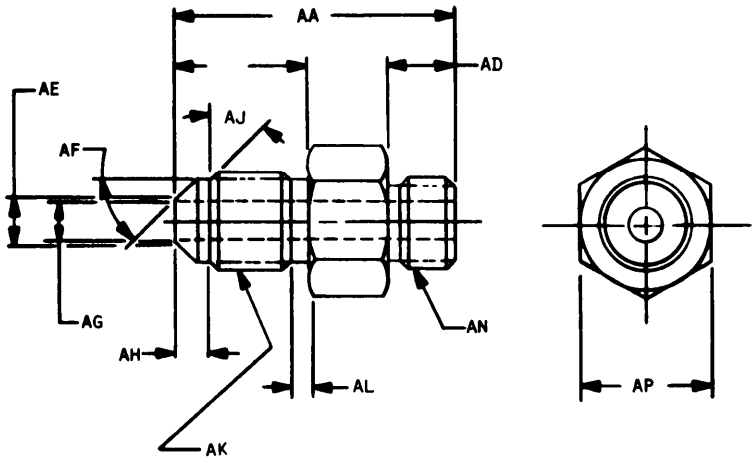


202-10-44

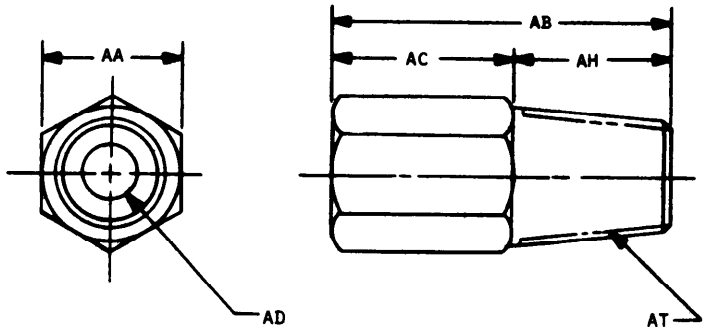


202-10-45

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

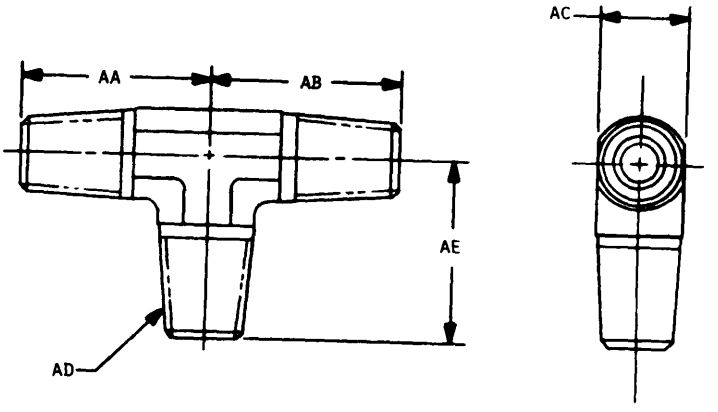


202-10-46

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:23Z
Check the source to verify that this is the current version before use.

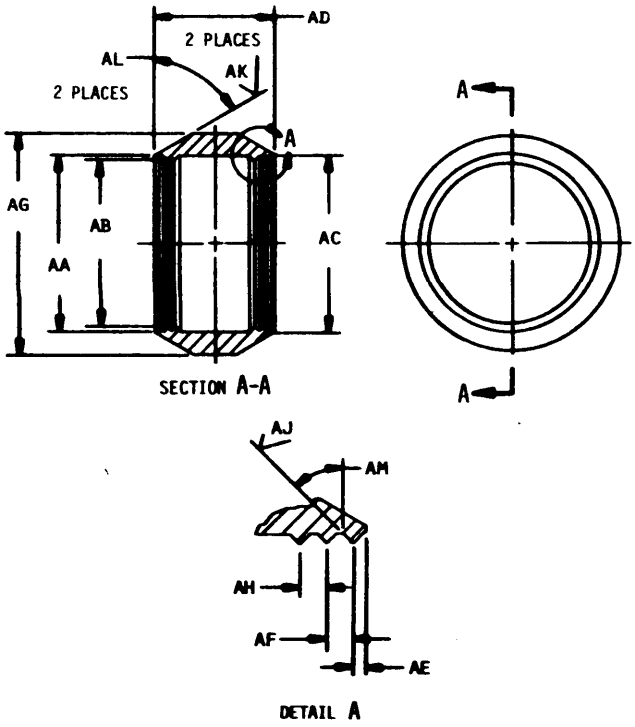


202-11-1

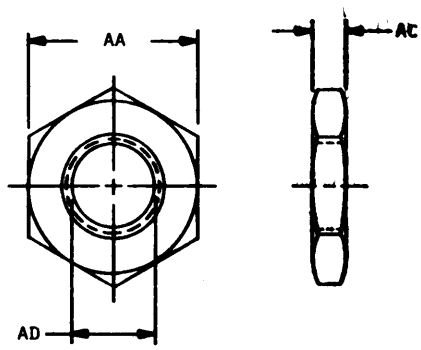


202-11-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

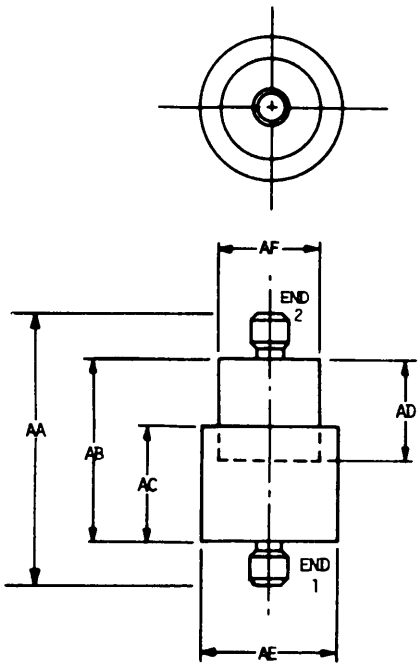


202-20-1

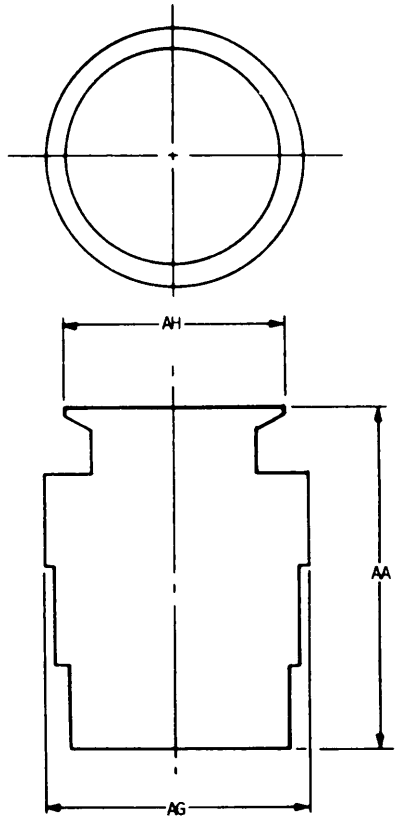


202-20-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

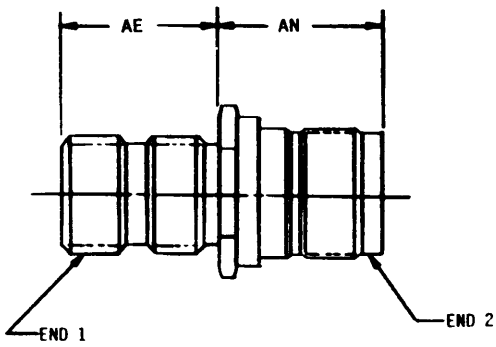


202-20-3

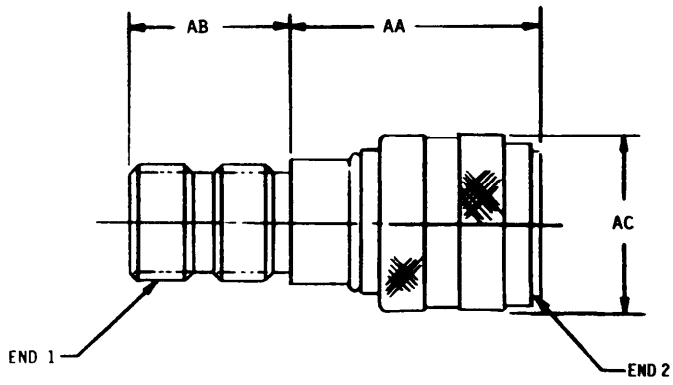


202-20-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

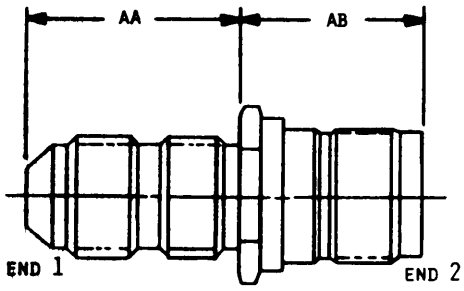


202-20-5

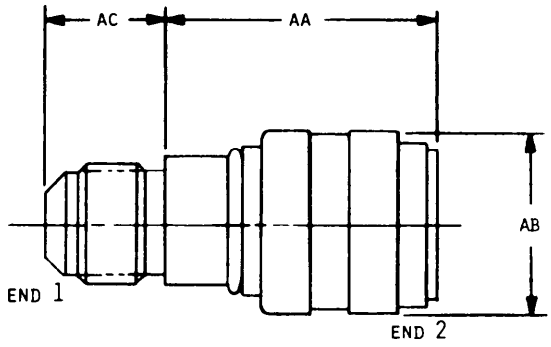


202-20-6


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

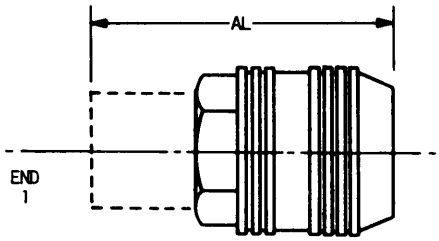

202-21-1

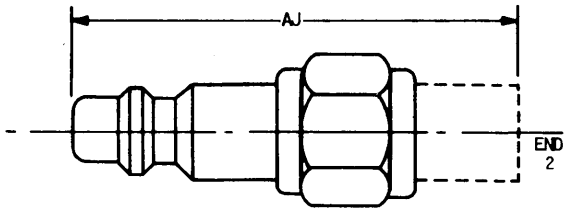


STYLE A

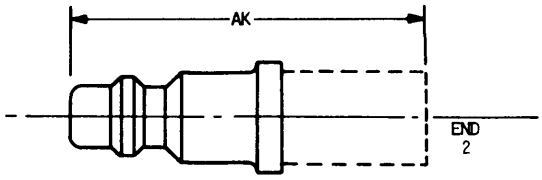


STYLE B

202-21-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.








A – A

REFERENCE MS27019

202-21-3








A – A

STYLE A




B – B

STYLE B


REFERENCE MS27019

202-21-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

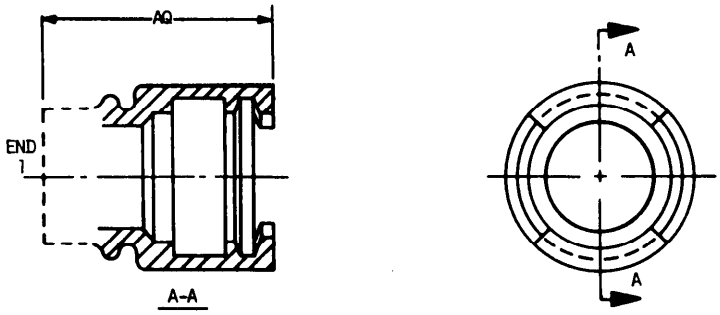


STYLE A

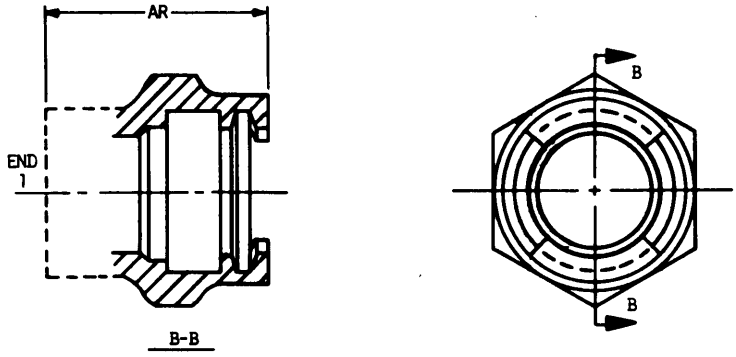


STYLE B

202-21-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

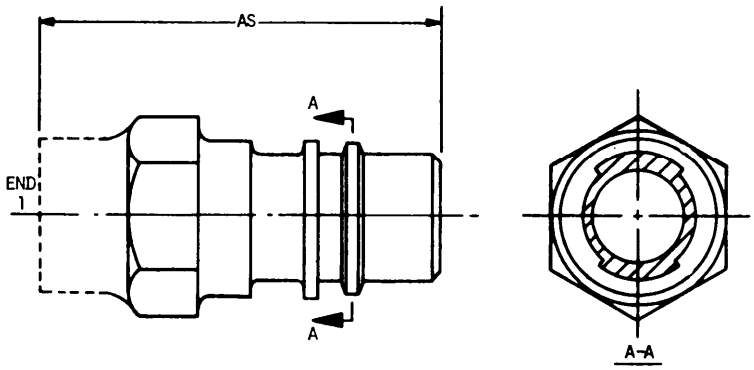


STYLE A

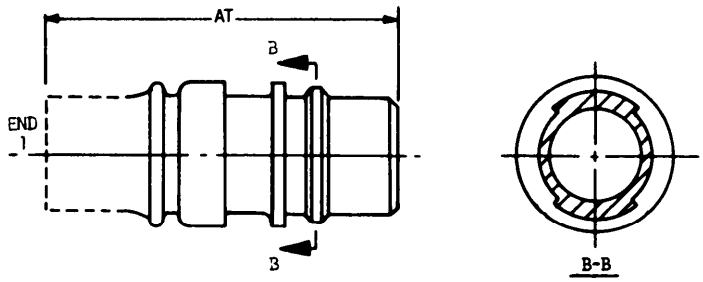


STYLE B

202-21-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

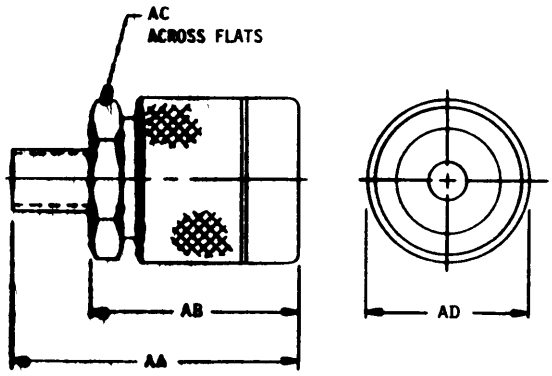


202-21-7

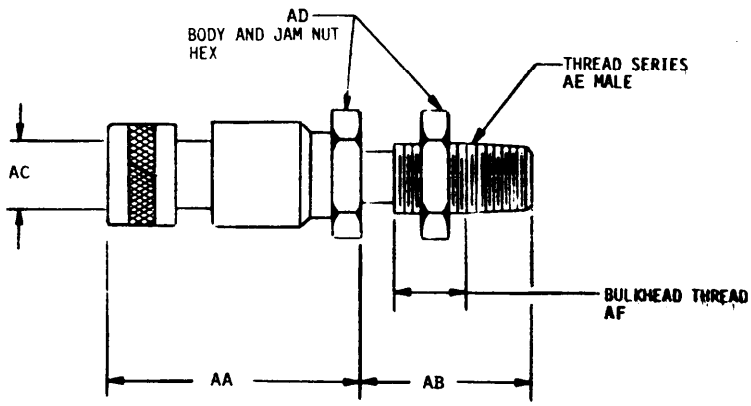


202-21-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

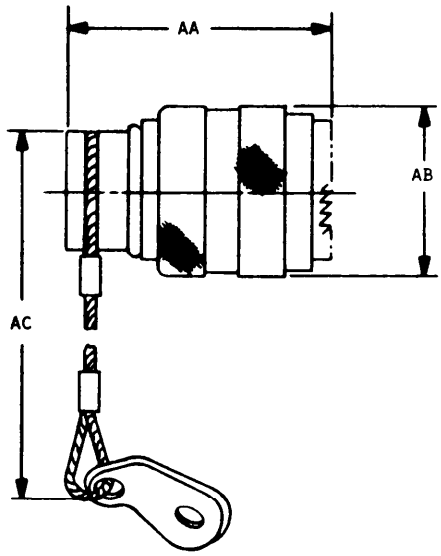


202-22-1

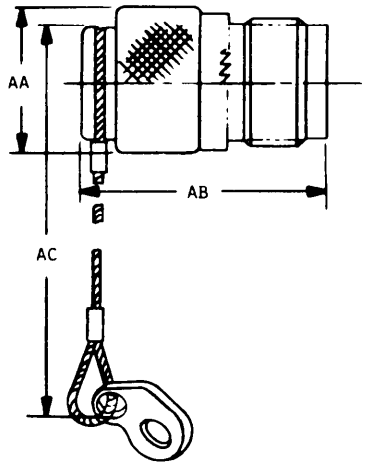

202-22-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

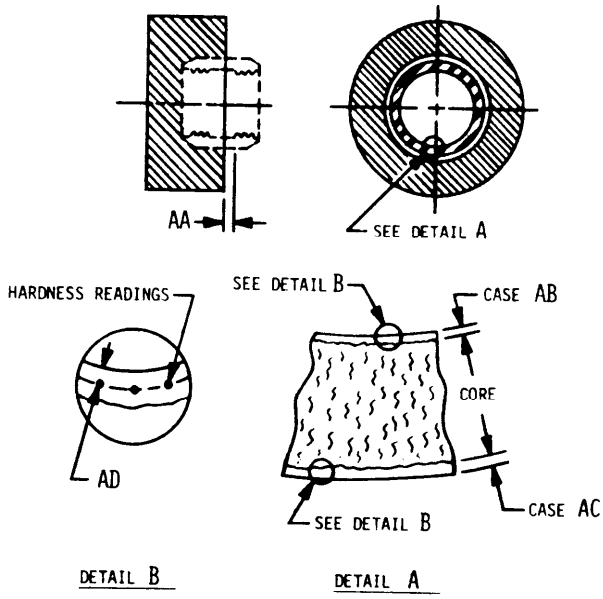

202-30-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	46	1670	98	1814	82	1916	94
0102	46	1672	98	1818	84	1918	94
0103	46	1690	64	1820	84	1920	94
0104	46	1692	64	1822	84	1922	96
0105	46	1694	66	1824	84	1924	96
0107	48	1696	66	1826	84	1926	96
0108	48	1698	66	1828	84	1928	96
0700	46	1700	66	1830	84	1930	96
0800	46	1718	66	1832	84	1932	96
1004	46	1720	66	1834	86	1934	96
1005	46	1722	66	1836	86	1936	96
1006	46	1724	66	1838	86	1938	96
1008	46	1726	66	1840	86	1940	96
1009	56	1728	66	1842	86	1942	96
1424	178	1742	76	1844	86	1944	96
1505	176	1744	76	1846	86	1946	96
1510	80	1746	76	1848	86	1948	96
1514	176	1748	76	1850	86	1950	96
1518	178	1750	76	1854	82	1952	98
1525	178	1752	76	1856	82	1956	94
1529	182	1754	78	1858	84	1958	94
1532	178	1756	78	1860	84	1960	94
1538	176	1758	78	1862	84	1962	94
1539	82	1762	76	1864	84	1964	94
1540	178	1764	76	1866	84	1966	94
1542	178	1772	70	1872	88	1972	98
1543	178	1774	78	1874	88	1974	98
1544	178	1776	78	1876	88	1976	98
1554	92	1778	78	1878	88	1978	98
1559	178	1780	80	1880	88	1980	98
1582	50	1782	80	1882	88	1982	100
1588	108	1784	80	1884	88	1984	100
1610	108	1788	78	1886	88	1986	100
1630	54	1790	78	1888	88	1988	100
1636	54	1792	78	1890	88	1990	100
1642	54	1802	80	1902	86	1992	100
1648	54	1804	80	1904	86	1994	100
1650	54	1806	80	1906	86	1996	100
1656	54	1810	80	1912	94	1998	100
1662	54	1812	80	1914	94	2001	100

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2002	100	2104	106	2198	116	2288	124
2004	100	2112	108	2200	116	2290	124
2006	100	2114	110	2202	116	2292	124
2008	102	2116	110	2204	116	2294	124
2010	102	2118	110	2206	116	2296	124
2014	98	2120	110	2208	116	2298	124
2022	104	2122	110	2210	116	2300	124
2024	104	2124	110	2212	118	2302	124
2026	104	2126	110	2214	118	2306	122
2028	104	2128	110	2216	118	2308	122
2030	104	2130	110	2218	118	2312	126
2032	104	2132	110	2220	118	2314	126
2034	104	2134	110	2224	114	2318	126
2036	104	2136	110	2226	114	2320	126
2038	104	2138	110	2228	114	2322	126
2042	102	2140	112	2232	118	2324	126
2044	102	2142	112	2234	120	2326	126
2046	102	2144	112	2238	120	2328	126
2048	102	2146	112	2240	120	2330	126
2050	102	2148	112	2242	120	2332	126
2052	102	2150	112	2244	120	2334	126
2054	102	2152	112	2246	120	2336	126
2056	102	2154	112	2248	120	2338	128
2058	104	2156	112	2250	120	2340	128
2060	104	2158	112	2252	120	2342	128
2072	106	2160	112	2254	120	2344	128
2074	106	2162	112	2256	120	2346	128
2076	106	2164	114	2258	120	2348	128
2078	106	2166	114	2260	120	2350	128
2080	106	2168	114	2262	122	2354	124
2082	106	2170	114	2264	122	2356	124
2084	108	2172	114	2266	122	2358	124
2086	108	2176	108	2268	122	2362	130
2088	108	2182	114	2270	122	2364	130
2090	108	2184	116	2274	118	2368	130
2092	108	2188	116	2276	118	2370	130
2094	108	2190	116	2278	118	2372	130
2098	106	2192	116	2282	122	2374	130
2100	106	2194	116	2284	122	2376	130
2102	106	2196	116	2286	122	2378	130

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2380	130	2490	138	2596	154	2694	160
2382	130	2492	138	2598	154	2696	160
2384	130	2494	140	2600	154	2698	160
2386	130	2496	140	2602	154	2700	160
2388	130	2498	140	2604	154	2702	160
2390	132	2500	140	2606	154	2704	160
2392	132	2502	140	2608	154	2706	160
2394	132	2504	140	2610	154	2708	162
2396	132	2506	140	2612	154	2710	162
2398	132	2508	140	2614	154	2712	162
2400	132	2512	138	2616	154	2714	162
2404	128	2514	138	2618	154	2716	162
2406	128	2516	138	2620	154	2718	162
2408	128	2522	148	2622	156	2720	162
2412	132	2524	148	2624	156	2722	162
2414	134	2526	148	2628	152	2724	162
2416	134	2528	148	2630	152	2726	162
2420	132	2530	148	2632	152	2728	162
2422	132	2532	148	2634	152	2730	162
2424	132	2534	148	2642	156	2732	162
2426	132	2536	148	2644	156	2734	164
2432	136	2538	150	2646	156	2736	164
2434	136	2540	150	2648	156	2738	164
2436	136	2542	150	2650	156	2742	158
2438	136	2546	148	2652	158	2744	158
2440	136	2548	148	2654	158	2746	158
2442	136	2550	148	2656	158	2748	158
2444	136	2562	150	2658	158	2754	164
2446	136	2564	150	2662	156	2756	164
2450	134	2566	150	2664	156	2758	164
2452	134	2568	150	2672	158	2760	164
2454	134	2572	150	2674	158	2762	166
2462	138	2574	150	2678	158	2764	166
2464	138	2582	152	2680	160	2766	166
2468	136	2584	152	2682	160	2768	166
2470	136	2586	152	2684	160	2770	166
2482	138	2588	152	2686	160	2772	166
2484	138	2590	152	2688	160	2774	166
2486	138	2592	152	2690	160	2776	166
2488	138	2594	152	2692	160	2778	166

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2780	166	2894	176	3034	118	3132	74
2782	166	2896	176	3036	122	3134	74
2784	168	2898	176	3038	124	3136	74
2786	168	2902	174	3040	128	3180	72
2788	168	2904	174	3042	132	3182	72
2790	168	2912	180	3044	134	3184	72
2792	168	2914	180	3046	136	3186	72
2794	168	2916	180	3048	138	3201	71
2802	164	2918	180	3050	140	3202	71
2814	168	2920	180	3052	140	3203	71
2816	168	2922	180	3054	140	3204	71
2818	170	2924	180	3056	140	3205	71
2820	170	2926	180	3058	142	3206	71
2822	170	2928	180	3060	142	3207	71
2824	170	2930	180	3062	148	3208	71
2826	170	2932	180	3064	150	3209	71
2828	170	2934	182	3066	152	3210	71
2830	170	2936	182	3068	156	3211	71
2832	170	2938	182	3070	158	3212	71
2834	170	2940	182	3072	164	3213	71
2836	170	2944	178	3074	164	3214	71
2838	170	2946	178	3076	164	3215	71
2840	170	2948	178	3078	168	3216	71
2842	170	3000	50	3080	168	3217	71
2848	168	3002	50	3082	168	3218	71
2852	172	3004	54	3084	172	3219	71
2854	174	3006	54	3086	174	3220	71
2856	174	3008	54	3088	178	3221	71
2858	174	3010	54	3090	144	3222	71
2860	174	3012	76	3092	176	3223	71
2862	174	3014	78	3100	50	3224	71
2866	172	3016	80	3102	50	3225	71
2868	172	3018	82	3104	50	3226	71
2870	172	3020	86	3106	52	3227	71
2882	174	3022	94	3108	52	3228	71
2884	174	3024	98	3110	68	3229	71
2886	174	3026	102	3112	68	3230	71
2888	176	3028	106	3120	182	3301	73
2890	176	3030	108	3122	182	3302	73
2892	176	3032	114	3130	74	3303	73

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
3304	73	3614	134	4045	58	4117	69
3305	73	3615	135	4046	62	4118	69
3306	73	3616	135	4047	58	4119	69
3307	73	3617	135	4048	62	4120	69
3308	73	3618	135	4049	60	4121	69
3309	73	3619	135	4050	60	4122	69
3310	73	3620	135	4052	60	4123	69
3311	73	3621	135	4054	60	4124	69
3312	73	3622	135	4055	62	4125	69
3313	73	3623	135	4057	62	4126	69
3314	73	3624	135	4058	62	4127	69
3315	73	3625	135	4059	62	4128	69
3316	73	3626	135	4060	62	4129	69
3317	73	3627	135	4062	62	4130	69
3318	73	3628	135	4064	64	4131	69
3319	73	3629	135	4065	64	4132	69
3320	73	3630	135	4067	64	4133	69
3321	73	3641	135	4069	64	4134	69
3322	73	3642	135	4070	64	4135	69
3323	73	3643	135	4072	64	4136	69
3324	73	3644	135	4074	64	4137	69
3325	73	4002	58	4076	64	4138	69
3326	73	4004	58	4078	64	4139	69
3327	73	4006	58	4100	69	4140	69
3328	73	4008	58	4101	69	4141	69
3329	73	4010	62	4102	69	4142	69
3330	73	4012	64	4103	69	4143	69
3601	135	4014	64	4104	69	4144	69
3602	135	4016	60	4105	69	4150	66
3603	135	4018	60	4106	69	4681	176
3604	135	4020	60	4107	69	4682	176
3605	135	4022	60	4108	69	4710	172
3606	135	4026	62	4109	69	4716	92
3607	135	4030	60	4110	69	4724	80
3608	135	4032	60	4111	69	4726	172
3609	135	4034	60	4112	69	1754	90
3610	135	4036	60	4113	69	4755	90
3611	135	4038	62	4114	69	4756	90
3612	135	4042	58	4115	69	4760	88
3613	135	4044	58	4116	69	4761	90

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.
4762	90
4764	92
4767	92
4775	142
4777	92
4778	92
4779	142
4780	142
4783	142
4786	142
4788	90
4798	90
4799	90
4800	92
4801	82
4815	90
4840	82
4871	92
4872	82
4895	82
4916	92
4942	182
4943	182
4950	56
4953	82
4956	82
4998	142
4999	142
5046	52
5048	54
5068	52
5069	52
5209	182
6212	172
6214	172
6215	172
6245	142
6246	142
6247	144
6248	144
6299	82
6327	146
6334	92
6335	92
6336	92
6337	92
6338	146
6339	146
6340	146
6341	146
6342	146
6343	146
6344	146
6345	146
6346	146
6347	146
6348	146
6349	146
6369	46
6372	184
6870	182
6873	46
6874	48
6941	48
6942	48
6991	184
6992	184
6993	184
6994	184
6995	184
6996	74
6997	74
6998	76
6999	76
7001	184
7002	184
7003	184
7004	184
7005	184
7021	74
7022	74
7023	74
7024	74
7301	52
7302	52
7305	144
7306	144
7307	146
7308	146
7311	144
7312	144
7313	144
7315	144
7316	144
7317	144
7318	144
7572	56
7576	56
7577	56
7580	58
7581	50
7582	50
7583	50
7584	50
7585	50
7586	50
7587	52
7588	52
7589	52
7590	52
7629	184

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Additional Part Marking	184
Additional Requirements	184
Air Inclusion	76
Aperture Cards Required	48
Applicable Documents	186
Base Document	46
Burst Pressure Rating	52
City, State, Zip	46
Classification	54
Company Name/Command	46
Configuration	56
Contract Number/Office Symbol	46
Control, Source	46
Control, Specification	48
Corrosion, Accelerated	78
Corrosion, Stress	80
Design and Construction	58
Dust	80
Endurance	82
Endurance, Contaminated Media	86
Finishes	56
Flow Rate Rating	54
Format	46
Fungus	88
Government Design Activity FSCM	46
Humidity	90
Illustrations	56
Impulse	94
Leakage	98
Manual Operation	102
Materials	56
Metals	58

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Nomenclature	186
Notes	186
Operating Pressure Rating	50
Overtightening Torque	106
Packaging	186
Part Marking	184
Part Number	48
Part Number Cross-Reference	186
Phone Number	46
Pressure Drop	108
Pressure, High Temperature Burst	114
Pressure, High Temperature Proof	118
Pressure, Low	122
Pressure, Room Temperature Burst	124
Pressure, Room Temperature Proof	128
Proof Pressure Rating	52
Quality Assurance Provisions	186
Repeated Assembly	132
Requester's FSCM	46
Requester's Name	46
Resistance, Crush	134
Resistance, Electrical	136
Resistance, Fluid	138
Response	140
Revisions of AEDPS Document (Number)	48
Salt Fog	142
scope	48
Shock	144
Source Table	48
Spillage	148
Storage Conditions	182
Street/Building	46
Strength, Flange	150
Strength, Flexural	152
Stress Degradation	156
Superseded Document	186
Surge	158
System Application	46

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Tabulated Characteristics	56
Temperature, High	164
Temperature, Low	168
Temperature Rating	52
Temperature Shock	172
Tensile Load (Locking Mechanism)	172
Units of Measure	48
Vacuum	174
Vibration	176
Warmup, Rapid	178
Weight/Mass	74
Workmanship	182

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:23Z
Check the source to verify that this is the current version before use.

SRS CONTROL NO.	
*TITLE CODE (1 2 3 4 5 6)	*REQUESTER NO. (7 8 9 10 11 12)

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET___OF___

	CHAR CODE			
*REQUESTER'S NAME	Ø	1	Ø	1
*COMPANY NAME/COMMAND	Ø	1	Ø	2
*STREET/BUILDING	Ø	1	Ø	3
*CITY, STATE, ZIP	Ø	1	Ø	4
*PHONE NO. INCLUDE A/C AUTOVON IF APPLICABLE	Ø	1	Ø	5
*REQUESTER FSCM	1	Ø	Ø	4
*CONTRACT NO./OFFICE SYMBOL	1	Ø	Ø	5
*BASE DOCUMENT	1	Ø	Ø	6
*SYSTEM APPLICATION	1	Ø	Ø	8
*GOVERNMENT DESIGN ACTIVITY FSCM	6	3	6	9
*FORMAT: SIX SECTION DOCUMENT.	Ø	7	Ø	Ø
OR				
ONE SECTION DOCUMENT.	Ø	8	Ø	Ø
REVISION OF AEDPS DOCUMENT NO.	Ø	1	Ø	8
*CONTROL: SOURCE.	6	8	7	3
OR				
SPECIFICATION.	6	8	7	4
UNIT OF MEASURE: U.S.	6	9	4	1
OR				
SI.	6	9	4	2
*SOURCE TABLE	9	A	A	B

CHARACTERISTIC VALUE

1 5 10 15 20 25 30 35 40 45 50 55 60

PLEASE SUPPLY THE FOLLOWING:
DASH-NUMBERED PART___REV___NOTICE#___

AS A FINAL CHECK, SCAN THE SRS FOR THE FOLLOWING COMMON ERRORS:

- ☐ MANDATORY CHARACTERISTIC CODES AND VALUES NOT SUPPLIED
- ☐ ZERO (Ø) WRITTEN WITHOUT VIRGULE (O)
- ☐ CHARACTERISTIC CODE USED MORE THAN ONCE (CHARACTERS Ø, S̄, I, Z CORRECTLY WRITTEN)

*MANDATORY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

SRS CONTROL NO.

*TITLE CODE						*REQUESTER NO.					
1	2	3	4	5	6	7	8	9	10	11	12

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET____OF_____

CHAR CODE	CHARACTERISTIC VALUE
	1 5 10 15 20 25 30 35 40 45 50 55 60

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
U.S. Army Missile Command
ATTN: AMSMI-RD-SE-TD-ST
Redstone Arsenal, AL 35898-5276

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
DOD STD 35-20C	

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:23Z
Check the source to verify that this is the current version before use.